


GE Zoneline® vertical packaged terminal air conditioners

Home products and services



Appearance

All the benefits of PTAC with the aesthetics and versatility of central air.

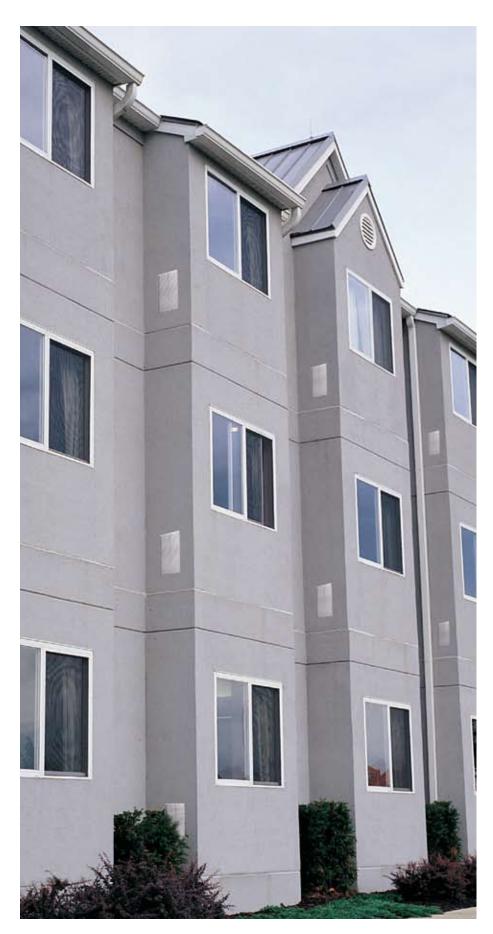



- Zoneline® vertical units provide a more home-like appearance.
- Versatile design optimizes floor space.
- The entire unit can be easily concealed in closet with an outside wall.
- Ideal for use in hotels, motels, office buildings, schools and apartments.
- Specifically designed for quiet operation.

Inside story

Zoneline vertical units are easy to install and even easier to service.

Simplicity

Unique Sleeve Design

• Makes units easy to install.

Three-Way, Slide-Out Chassis
• Specially designed case makes maintenance and service quick and easy.

Accessories

Model #	Description	Size			
RAVAL1	Exterior Grille	19-3/4" W x 32" H			
RAVRG1	Access Panel (in lieu of door)	28 " W x 48" H Cutout			
RAVRG2	Return Air Grille	20-3/8" W x 20-3/8" H Cutout			
RAVRMS	Freeze Sentinel TM /Temperature Limiting Room Sensor				
RAK164D1	Solid State Digital Thermostat				
	(5 connection wires required)				
RAK164P1	Solid State Digital Programmable Thermostat				
	(5 connection wires required)				
RAK148D1	Solid State Digital Heat Pump Thermostat				
	(6 connection wires required)				
RAK148P1	Solid State Digital Programmable Heat Pump Thermostat				
	(6 connection wires required)				
RAVHW1	Hydronic heating kit – 1 row				
RAVHW2	Hydronic heating kit – 2 rows				
RAVHW3	Hydronic heating kit – 3 rows				



Plenum Sizes

RAVWP6 Plenum

19-3/4" W x 32" H (up to 6" Wall Thickness)

RAVWP8 Plenum

19-3/4" W x 32" H (up to 8" Wall Thickness)

RAVWP12 Plenum

19-3/4" W x 32" H (up to 12" Wall Thickness)

RAVWP15 Plenum

19-3/4" W x 32" H (up to 15" Wall Thickness)

Minimum Clearances

Front


 Allow 4 inches in front of unit. When determining closet depth, note that plenum may protrude into closet, depending on wall depth.

Sides

- Allow 3 inches on each side of unit.
- For side-access closets only. Allow 5 inches on the side where access is required and 5 inches in front of unit.

Platform

• An 8" – 12"-high, field-supplied platform is recommended for drain access.



Vertical View

Vertical Zoneline Unit for Hydronic Applications

GE offers a cool only vertical Zoneline unit for Hydronic applications where a hot water heating loop is available. GE offers one-, two- or threerow Hydronic kits, ranging from 17,000 to 39,000 BTU* output.

*BTU ratings are based upon tested values of input/output water temps and inlet air temps.



Hydronic kit

Power connection kits are required on all vertical Zoneline chassis (see chart below).

The correct kit for the installation is determined by the voltage and amperage of the electrical circuit and the means of connecting the unit to the building wiring. If the unit is to be plugged into a receptacle, a power cord kit would be used; if the unit is to be permanently connected, a direct connect kit would be used.

230/208 volt	Line cord connected units				
Power Connection Kit	RAK3152	RAK3202	RAK3302		
Heater KW	2.55/2.09	3.45/2.82	5.00/4.09		
Min. circuit amps	15	20	30		
Recommended	15 Amp time-delay	20 amp time-delay	30 amp time-delay		
protective device	fuse or breaker fuse or breaker		fuse or breaker		
230/208 volt	Direct connected units				
Power Connection Kit	RAK4157	RAK4207	RAK4307		
Heater KW	2.55/2.09	3.45/2.82	5.00/4.09		
Min. circuit amps	15	20	30		
- 1 1			70 1: 1.1		
Recommended	15 Amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	fuse or breaker		

265/277-volt units and line cord kits available by special order



RAK3152/3202/3302 230/208-volt cord connection kit **Power connection kits**See specification sheet for heater KW and branch circuit ampacity.

Performance

Quiet operation. Home-like appearance. Versatile room design.



Electronic Temperature Limiting*

Prevents expensive overheating and overcooling.

Year-Round Comfort

Individual heating and cooling temperature controls.

Heat/Cool Multiple Rooms

Ducting allows a single unit to serve multiple rooms.

Remote Installation

All Zoneline® units are compatible with GE wall-mounted remote controls.



Energy Management Feature Central Desk Control

All Zoneline units are compatible with central desk ON/OFF controls, including many computerized control systems. Infrared sensor and door switch capability provide maximum efficiency.



Freeze Sentinel™*

Provides protection against damage caused by freezing temperatures in unoccupied rooms, regardless of unit setting.



Full Corrosion Treatment


Special treatments are placed on the outdoor coil and other components to extend the life of the unit. (Standard)

^{*}Requires RAVRMS Kit.

Specifications

	AZ75E09DAC	AZ75E12DAC	AZ75E18DAC	AZ75H09DAC	AZ75H12DAC	AZ75H18DAC	
	Ele	ectric resistance he	eat	Heat pumps			
Features							
BTUH	9,500/9,300	11,700/11,500	17,500/17,200	9,500/9,300	11,700/11,500	17,500/17,200	
E.E.R. (BTUH/Watt)	10.5/10.5	10.7/10.7	10.0/10.0	10.5/10.5	10.7/10.7	10.0/10.0	
Dehumidification (pints/hr.)	2.7	3.6	5.0	2.7	3.6	5.0	
Universal Heater (kW)	2.55/3.45/5.0	2.55/3.45/5.0	2.55/3.45/5.0	2.55/3.45/5.0	2.55/3.45/5.0	2.55/3.45/5.0	
Heating Cap (BTUH)				8,400/8,200	10,900/10,700	15,700/15,500	
COP @ 47°				3.6	3.3	3.1	
Voltage (V)	230/208	230/208	230/208	230/208	230/208	230/208	
Unit Width (in.)	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8	
Unit Depth (in.)	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8	23-1/8	
Unit Height (in.)	32-1/4	32-1/4	32-1/4	32-1/4	32-1/4	32-1/4	
Indoor CFM (Hi/Med/Low)	310/260/230	375/315/250	550/475/440	310/260/230	375/315/250	550/475/440	

Overall Unit Dimensions



ZVAC Hydronic Kit Specifications

	RAVHW1		RAVHW2			RAVHW3	
Performance specifications for hydronic heating kits appli	ed to AZ75W-series	s ZVAC models: The	ZVAC hydronic heat	kits are matched up	o (applied) to the AZ	75W-series models	as shown below:
	RAVHW1 (1-Row Kit) RAVHW2 (2-Row Kit))	RAVHW3 (3-Row Kit)		
ZVAC cool-only PTAC model—matched to hydronic kit as shown	AZ75W09DAC	AZ75W12DAC	AZ75W09DAC	AZ75W12DAC	AZ75W18DAC	AZ75W12DAC	AZ75W18DAC
Voltage (60 Hertz)	230/208	230/208	230/208	230/208	230/208	230/208	230/208
Heating capacity designed to meet standard ARI rating conditions of 200°F water entering temp/180°F water exiting temp/70°F entering air temp	17,300/16,200	20,200/19,100	25,900/23,500	29,400/27,600	34,700/32,900	33,200/31,100	39,600/37,300
External static pressure	0.25"	0.25"	0.25"	0.25"	0.25"	0.25" (Max.)	0.25" (Max.)
Air flow (SCFM)	297/256	385/344	297/256	364/328	470/430	362/330	467/426
Water flow rate (GPM)	1.8/1.7	2.1/2.0	2.7/2.4	3.0/2.8	3.5/3.3	3.4/3.2	4.1/3.8
Water press drop* (ft. of water)	2.7/2.4	3.6/3/3	3.7/3.1	5.0/4.3	6.7/6.0	6.5/5.7	9.2/7.9
Face velocity (ft./min.)	238/205	308/275	238/205	291/262	376/262	290/264	374/341
Heat exchanger fin height (in.)	12	12	12	12	12	12	12
Heat exchanger finned length (in.)	15	15	15	15	15	15	15
Heat exchanger – fin per inch	11	11	11	11	11	10	10
Heat exchanger – fin material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Weight/Dimensions for hydronic kits:							
Hydronic heat kit model #	c heat kit model # RAVHW1		RAVHW2		RAVHW3		
Hydronic heat kit height, inches	13-5/8		13-5/8		13-5/8		
Hydronic heat kit width, inches	19		19		19		
Hydronic heat kit depth, inches	22		22			22	
Shipping weight, pounds	32		35			38	
Net weight, pounds	27		30			33	

Vertical Zoneline® warranty*

What is covered

Limited one-year warranty

One year from the date of the original purchase, GE will replace any part of the air conditioner which fails due to a defect in materials or workmanship. During this limited one-year warranty, GE will provide, free of charge, all labor and related service costs to replace the defective part.

Limited five-year warranty

Five years from the date of the original purchase, GE will replace Sealed Refrigerating System, if any part of the Sealed Refrigerating System (the compressor, condenser, evaporator, and all connecting tubing) should fail due to a defect in materials or workmanship. During this limited five-year warranty, GE will provide, free of charge, all labor and related service costs to replace the defective part.

Limited second through fifth year parts warranty

For the second through the fifth year from the date of the original purchase, GE will replace Fan Motors, Switches, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing, if any of these parts should fail due to a defect in materials or workmanship. During this additional four-year limited warranty, you will be responsible for any labor and related service costs.

*See written warranty for details

For GE appliance service in the U.S., call 1-800-GE CARES. In Canada, call 1-888-209-0999.

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2009 GE Company Pub. No. 20-S099 PC58439

