

DISHWASHERS

INTRODUCING THE GE TRITON™ DISHWASHER



HOME PRODUCTS AND SERVICES



We bring good things to life.

ONLY GE HAS 3 WASH ARMS FOR CLEANER DISHES.



NO PRE-RINSING, SOAKING OR SCRUBBING!

Only GE has three wash arms for improved coverage. Every spot on every dish receives a powerful spray. Eliminate recirculating food particles with 100% Triple Water Filtration and Dual Pumps. Food particles are pulverized by the Piranha™ Hard Food Disposer.

“The cleanest wash you

YOU WANT CLEAN AND QUIET?



GE TRITON™ DISHWASHERS DELIVER BOTH!

Now, you don't have to choose between clean and quiet, because the GE Triton™ Dishwasher delivers both! Thanks to GE's advanced technology and TriClean™ design, you get more than clean, you get a quiet kind of clean. By redirecting the spray jets, more water hits the dishes and less hits the tub and door, keeping more of the noise inside the dishwasher. Combined with the ActiveVent™, PermaTuf® Tub and a blanket of insulation, this dishwasher is quieter than ever—so quiet, you will be talking about it, not over it.

ou never heard.”™

SANIWASH. IT MORE THAN CLEANS—IT SANITIZES.



GE Triton™ with SaniWash, an NSF-certified sanitization cycle, reduces 99.999% of the bacteria found on dishes. It's ideal for sanitizing baby bottles and cutting boards, as well as glasses and dishes.

SPEEDWASH™ AND SPEED DRY™. CLEAN DISHES 30 MINUTES FASTER!



When dinner's almost ready and the dishes are still dirty, use GE Triton Speed cycles. SpeedWash™ and Speed Dry™ cycles cut a full half-hour off GE's standard normal cycles. Thirty minutes can make a big difference when everyone's hungry and you're in a hurry.

GE TRITON™ DISHWASHERS

These models include • TriClean™ Wash System • 3 Wash Arms • 100% Triple Water Filtration with Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • CleanSensor • Electronic Controls • SaniWash • SpeedWash™ and Speed Dry™ • China/Crystal Cycle* • 8-Hour Delay Start • Quiet Power III Package • GE Profile™ QuietMotor • ActiveVent • Quiet Water Valve • Trimless appearance • Child lock • Super Capacity Plus Silverware Basket with 2 cell covers

Note: bold = feature upgrade from previous model

ONLY GE HAS IT!



TriClean™ Wash System has 3 Wash Arms that provide complete coverage eliminating pre-rinsing, soaking and scrubbing.

ONLY GE HAS IT!



100% Triple Water Filtration with Dual Pumps eliminates recirculating food particles.

ONLY GE HAS IT!



Piranha™ Anti-Jamming Hard Food Disposer grinds and pulverizes food particles.



SaniWash cycle reduces 99.999% of the bacteria found on dishes.

*Developed in consultation with Lenox,® the leading manufacturer of fine china.

Not all features available on all models.



GE Profile Performance Series™

Triton™ Dishwasher with TriClean™ Wash System

GSD5940DSS Stainless steel exterior

• Variable cycles/options • 3 wash arms • 100% Triple Water Filtration with Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • **Power Pre-Soak option** • **Super upper rack with 2 rows of fold down tines** • **SmartShelf with StemSafe** • **Super lower rack with 4 rows of fold-down tines**

GSD5950DCC Bisque (not shown)

GSD5930DWW White on white (not shown)

GSD5920DBB Black on black (not shown)

GSD5910DAA Almond on almond (not shown)



GE Profile Performance Series™

Triton™ Dishwasher with TriClean™ Wash System

GSD5630DWW White on white

• Variable cycles/options • 3 wash arms • 100% Triple Water Filtration with Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • **CleanSensor** • **SaniWash** • **SpeedWash™** and **Speed Dry™** • **QuietPower™ III** • **Quiet Water Valve** • **Super Capacity Plus Silverware Basket with 2 cell covers**

GSD5650DCC Bisque (not shown)

GSD5620DBB Black on black (not shown)

GSD5610DAA Almond on almond (not shown)



GE TRITON™ DISHWASHERS

These models include: TriClean™ Wash System • 3 Wash Arms • 100% Triple Water Filtration with Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • Electronic Controls • Pots & Pans Cycle • China/Crystal Cycle* • Hi-Temp Rinse option • Hi-Temp Wash option • Delay Start • SmartShelf • Super Capacity Silverware Basket • GE Profile™ QuietMotor • Trimless appearance **Note: bold = feature upgrade from previous model**

ONLY GE HAS IT!



TriClean™ Wash System has 3 Wash Arms that provide complete coverage eliminating pre-rinsing, soaking and scrubbing.

ONLY GE HAS IT!



100% Triple Water Filtration with Dual Pumps eliminates recirculating food particles.

ONLY GE HAS IT!



Piranha™ Anti-Jamming Hard Food Disposer eliminates the need to pre-rinse dishes.



GE Profile™ QuietMotor is quieter and more energy efficient.

*Developed in consultation with Lenox,® the leading manufacturer of fine china.

Not all features available on all models.



GE Profile™

Triton™ Dishwasher with TriClean™ Wash System

GSD5330DWW White on white

• 5 cycles/34 options • 3 wash arms • 100% Triple Water Filtration with Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • **Light Wash** • **QuietPower™ III package** • **ActiveVent** • **Super lower rack with 2 rows of fold down tines** • **Super Capacity Silverware Basket with 2 cell covers**

GSD5350DCC Bisque (not shown)

GSD5320DBB Black on black (not shown)

GSD5310DAA Almond on almond (not shown)



GE Profile™

Triton™ Dishwasher with TriClean™ Wash System

GSD5130DWW White on white

• 4 cycles/26 options • **TriClean™ Wash System** • **100% Triple Water Filtration with Dual Pumps** • Piranha™ Anti-Jamming Hard Food Disposer • **Super racks** • QuietPower™ II package • **8-hour Delay Start option** • **Super Capacity Silverware Basket with 1 cell cover**

GSD5120DBB Black on black (not shown)

GSD5110DAA Almond on almond (not shown)



BUILT-IN DISHWASHERS

These models include: SureClean™ Wash System • Normal Wash cycle • Short Wash cycle (on dial) • Heated Dry On/Off option • Trimless appearance • Rinse Only/Hold (on dial) **Note: bold = feature upgrade from previous model**

ONLY GE HAS IT!



SureClean™ Wash System cleans dishes completely.

ONLY GE HAS IT!




Piranha™ Anti-Jamming Hard Food Disposer eliminates the need to pre-rinse dishes.



Dual Filtration System eliminates the need to pre-rinse dishes.



PermaTuf® Tub won't chip, peel, crack or rust under normal use and is backed by a full lifetime warranty*.

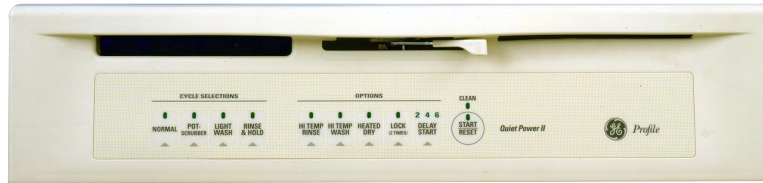

GSD4030ZWW
White on white (not shown)

GSD4020ZBB
Black on black (not shown)

GE Profile™

HPS Exclusive Built-In Dishwasher
GSD4010ZAA
Almond on almond
• 4 cycles/26 options
• **Electronic controls • Dual Filtration • Piranha™ Hard Food Disposer • Deluxe Plus upper rack • Light Wash • Deluxe lower rack • Deluxe Split silverware basket • QuietPower™ II package • 6-hour Delay Start option • High Temp Rinse**



GSD3620ZBB
Black on black (not shown)

GSD3610ZAA
Almond on almond (not shown)

GE

HPS Exclusive Built-In Dishwasher
GSD3630ZWW
White on white
• 6 cycles/18 options • 3 wash levels • **QuickClean controls • Deluxe sound insulation package • Rinse Aid Dispenser with indicator • POTSCRUBBER Cycle • Plate Warmer cycle (on dial) • Hi-Temp Wash option • Deluxe rack system • Deluxe silverware basket**



GSD3230ZWW
White on white (not shown)

GSD3220ZBB
Black on black (not shown)

GE

Built-In Dishwasher
GSD3210ZAA
Almond on almond
• 5 cycles/14 options • **3 wash levels • POTSCRUBBER Cycle • Water Saver • Plate Warmer cycle • Hi-Temp Wash option • Deluxe rack system • Deluxe silverware basket • PermaTuf® Tub**



GSD2220ZBB Black on black (not shown)

GSD2200ZWH White front panels/black control panel (not shown)

GSD2200ZAD Almond front panels/black control panel (not shown)

GE

HPS Exclusive Built-In Dishwasher
GSD2230ZWW
White on white
• 5 cycles/8 options • 2 wash levels • **POTSCRUBBER Cycle • Plate Warmer cycle (on dial) • Heated Dry On/Off • Deluxe silverware basket • Deluxe lower rack**



GSD2020ZBB Black on black (not shown)

GSD2000ZWH White front panels/black control panel (not shown)

GSD2000ZAD Almond front panels/black control panel (not shown)

GE

Built-In Dishwasher
GSD2030ZWW
White on white
• 4 cycles/7 options • 2 wash levels • **Heavy Wash cycle (on dial) • Standard upper rack • Deluxe lower rack • Deluxe silverware basket • PermaTuf® Tub**

*See written warranty for details.

Not all features available on all models.

CONVERTIBLE DISHWASHERS

These models include: SureClean™ Wash System • POTSCRUBBER Cycle • Normal Wash cycle • Short Wash cycle (on dial) • Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial) • Heated Dry On/Off option • Hi-Temp Wash option • 3 wash levels • Deluxe rack system • Trimless appearance **Note: bold = feature upgrade from previous model**

ONLY GE HAS IT!



SureClean™ Wash System cleans dishes completely.

ONLY GE HAS IT!




Piranha™ Anti-Jamming Hard Food Disposer eliminates the need for pre-rinse dishes.



PORTABLE NOW



BUILT-IN LATER




POTSCRUBBER Cycle



GE Convertible Dishwasher
GSC3430ZWW/GSC3400ZBL

• 6 cycles/19 options • 3 wash levels • Light Wash cycle • **Dual Filtration** • 6-hour Delay Start Option (on dial) • **Piranha™ Anti-Jamming Hard Food Disposer** • **GE QuietMotor** • **Deluxe silverware basket with 1 cell cover** • **QuietPower™ I Package** • Rinse Aid dispenser with indicator



Hi-Temp Wash Option



GE Convertible Dishwasher
GSC3200ZBL/GSC3230ZWW

• 5 cycles/14 options • 3 wash levels • Deluxe silverware basket • Standard Quiet Package • Deluxe upper rack

GE SPACEMAKER®: UNDERSINK



SINGLE SINK BOWL



OFFSET INSTALLATION FOR USE WITH DISPOSER



GE
GSM2100ZAD/WH
• 5 cycles/8 options • POTSCRUBBER Cycle • Normal Wash cycle • Short Wash cycle (on dial) • Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial)
• 2 wash levels • Spacemaker® upper rack • Deluxe lower rack • Deluxe silverware basket • PermaTuf® Tub

Note: Undersink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

GE SPACEMAKER®: 18" BUILT-IN



GE
GSS1800Z
• 4 cycles/6 options • 2 wash levels • Pots & Pans cycle • Normal Wash cycle (on dial) • Light Wash cycle (on dial) • Standard silverware basket • Heated Dry On/Off option • Reversible color panels Black/Harvest, Almond/White

DISPOSERS

These models include: Dishwasher drain connector • Polyester drain housing • Stainless steel flange • Sink stopper • Manual reset protector • Dual swivel impellers • Precutter



GFC1000Y



GFC800Y



GFC700Y/GFC705Y



GFC300Y/GFC305Y



GFC290Y/GFC295Y



GFB1050V

GE Continuous Feed Models

GFC1000Y

- Rugged 3/4-horsepower motor • 8000 RPM grinding action
- Super Deluxe sound insulation • Power Boost feature for heavy loads • Fast Mount installation • Removable splash guard

GFC800Y

- 1/2-horsepower motor • 8000 RPM grinding action
- Deluxe sound insulation • Fast Mount installation
- Removable splash guard

GFC700Y

- 1/2-horsepower motor • 8000 RPM grinding action • Standard sound insulation • Fast Mount installation • Removable splash guard

GFC705Y

Similar to GFC700Y but has attached line cord.

GFC300Y

- 1/2-horsepower motor • 8000 RPM grinding action
- Fast Mount installation • Removable splash guard

GFC305Y

Similar to GFC300Y but has attached line cord.

GFC290Y

- 1/3-horsepower motor • 8000 RPM grinding action
- Fast Mount installation • Removable splash guard

GFC295Y

Similar to GFC290Y but has attached line cord.

GE Batch Feed Model

GFB1050V

- Rugged 3/4-horsepower motor • 2700 RPM grinding action
- Super Deluxe sound insulation • Twist Mount installation

Where local codes permit, any GE Dishwasher and any GE Disposer may be connected to a single 20-amp circuit.

White and Almond flanges are available: GPF71 (White) and GPF72 (Almond).

COMPACTORS

ALL MODELS INCLUDE: 1/3-horsepower • Removable key lock



GE

GCG1530ZWW

- White on white • Optional toe pedal opener kit • Rear wheels allow easy movement and installation • Heavy-gauge steel construction

GCG1520ZBB

- Black on black

GCG1550DCC

- Bisque



GE

GCG950T


- Lock/start control with removable key • Bag storage compartment above compactor drawer
- Replaces standard 12-inch base cabinet

GE TRITON™ BUILT-IN DISHWASHERS


Features	GE Profile Performance Series™		GE Profile™	
	GSD5950DCC GSD5940DSS GSD5930DWW GSD5920DBB GSD5910DAA	GSD5650DCC GSD5630DWW GSD5620DBB GSD5610DAA	GSD5350DCC GSD5330DWW GSD5320DBB GSD5310DAA	GSD5130WW GSD5120BB GSD5110AA
Wash System				
TriClean™ Wash System	●	●	●	●
Dual Pumps	●	●	●	●
3 wash arms – 5 levels	●	●	●	●
Triple Water Filtration system	100%	100%	100%	100%
Piranha™ Hard Food Disposer	●	●	●	●
CleanSensor	●	●	●	●
Cycles	Variable	Variable	5	4
Pots & Pans	●	●	●	●
Normal Wash	●	●	●	●
Light Wash	●	●	●	●
China/Crystal	●	●	●	●
SpeedWash™	●	●	●	●
SaniWash	●	●	●	●
Rinse only	●	●	●	●
Options	Variable	Variable	34	26
Child Lock Option	●	●	●	●
Delay Start	2-4-8-Hour	2-4-8-Hour	2-4-8-Hour	4-6-8-Hour
Heated Dry On/Off	●	●	●	●
Speed Dry™	●	●	●	●
Hi-Temp Wash	●	●	●	●
Hi-Temp Rinse	●	●	●	●
Power Pre-Soak	●	●	●	●
Racks, shelf & basket				
Upper Rack	Super w/2 Rows of Fold-Down Tines	Super	Super	Super
Lower Rack	Super w/4 Rows of Fold-Down Tines	Super w/2 Rows of Fold-Down Tines	Super w/2 Rows of Fold-Down Tines	Super
SmartShelf	with StemSafe	●	●	●
Silverware Basket	Super Capacity Plus w/2 cell covers	Super Capacity Plus w/2 cell covers	Super Capacity w/1 cell covers	Super Capacity w/1 cell cover
Control type	Electronic	Electronic	Electronic	Electronic
Cycle progress indicators	6 LEDs	6 LEDs	1 "Clean"	1 "Clean"
Touchpads	11	10	11	10
Rinse Aid dispenser	with Indicator	with Indicator	with Indicator	with Indicator
1, 2, 5-yr. and lifetime warranty	●	●	●	●
Economical & Quiet				
Quiet				
Sound insulation package	QuietPower™ III	QuietPower™ III	QuietPower™ III	QuietPower™ II
PermaTuf™ Tub and door liner	●	●	●	●
GE Profile™ QuietMotor	●	●	●	●
Tub collar trim	●	●	●	●
ActiveVent	●	●	●	●
Quiet Water Valve	●	●	●	●
Appearance				
Colors available*	CC, SS, WW, BB, AA	CC, WW, BB, AA	CC, WW, BB, AA	WW, BB, AA
Color panels—Door & Access	Trimless	Trimless	Trimless	Trimless
Weights & Dimensions				
Approx. shipping weight (lbs.)	100	100	100	100
Height w/legs retracted (in.)	34	34	34	34
Overall width (in.)	24	24	24	24
Overall depth (in.)	24-3/4	24-3/4	24-3/4	24-3/4
Accessories				
Requires kit for 1/4" panel capability with trim	GPF425C/W/B/A	GPF425C/W/B/A	GPF425C/W/B/A	GPF425W/B/A
Requires kit for trimless 3/4" panel capability	GPF475	GPF475	GPF475	GPF475

All GE Profile Performance™ and GE Profile™ Dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.
 *Colors available: CC = Bisque, SS = Stainless Steel, WW = White on white, BB = Black on black, AA = Almond on almond.

Built-In Dishwasher Dimensions (in inches)

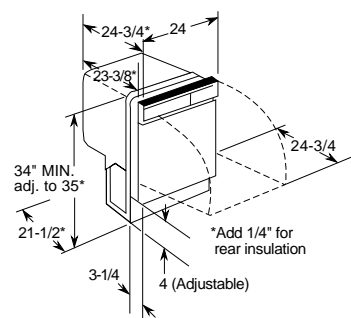

Built-In Dishwasher Installation Information (in inches)

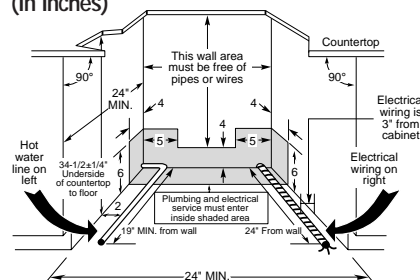

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Note: If a flush look is needed, a 25" base cabinet needs to be used.

DISHWASHER ACCESSORIES

Dishwasher Panel Kits and Accessories:

GE Profile™ models: GSD5300 and 5100 Series.
 GE Profile Performance™ models: GSD5900 and 5600 Series.

GPF400C/S/W/B/A—panel kit
 GPF600C/W/B/A—trimless door panel


GE Profile Performance™ and GE Profile™
 (all above listed models):

GPF700C/W/B/A—trimless access panel

Note: C = Bisque, S = Stainless Steel, W = White, B = Black, A = Almond.

Wood Panel Capability:

GPF475—GE Profile Performance™ and GE Profile™
 3/4" trimless panel kit (door and access
 [GPF100—heavy-duty spring kit included])
 GPF425A/B/W/C—GE Profile Performance™ and GE
 Profile™
 1/4" panel trim kit (door and access)

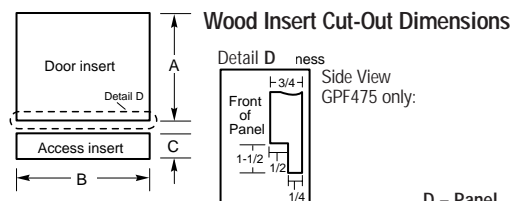

Models/Kit	A	B	C	D – Panel Thickness
GE Profile Performance™ and GE Profile™ models/GPF425	19-3/4"	23-9/16"	3-11/16"	1/4"
GE Profile Performance™ and GE Profile™ models/GPF475	19-7/8"	23-5/8**	4-1/4" to 3-11/16**	3/4"

*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)

**Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

Warranty Information*

1, 2, 5-year and lifetime warranty package:
 Full one-year warranty on entire dishwasher.
 Limited second-year parts warranty on entire dishwasher.
 Limited five-year rack/electronic control board warranty.
 Full lifetime tub/door liner warranty.

*See written warranty for details.



Listed by
 Underwriters
 Laboratories

Electrical Rating

Voltage AC120
 Hertz.....60
 Total connected load amperage.....8.6
 Calrod® heater watts500
 For use on adequately wired 120-volt,
 15-amp circuit having 2-wire service with
 a separate ground wire. This appliance
 must be grounded for safe operation.

GE CONVERTIBLE/PORTABLE DISHWASHERS

	GE	
	GSC3430ZWW GSC3400ZBL	GSC3230ZWW GSC3200ZBL
Features		
Wash System		
SureClean™ Wash System	•	•
Wash levels	3	3
Filtration System	Dual	
Piranha™ Hard Food Disposer	•	
Cycles	6	5
POTSCRUBBER	•	•
Normal Wash	•	•
Light Wash	•	
Short Wash	Dial	Dial
Plate Warmer	Dial	Dial
Rinse Only/Hold	Dial	Dial
Options	19	14
Delay Start	1-6-Hour	
Heated Dry On/Off	•	•
Hi-Temp Wash	•	•
Racks (upper/lower)	Deluxe	Deluxe
Silverware basket	Deluxe w/ 1 cell cover	Deluxe
Cycle progress indicator	1 "Cycle On"	Dial
Pushbuttons	7	6
Rinse Aid dispenser	with Indicator	•
1, 2, 10-yr. warranty*	•	•
Economical/Quiet		
Quiet		
Sound insulation package	QuietPower™ I	Standard
PermaTuf™ Tub and door liner	•	•
GE QuietMotor	•	
GE Motor		•
Sealed toekick	•	
Appearance		
Colors available**	WW, BL	WW, BL
Color panels—Door & Access	Trimless	Trimless
Decorative wood laminate top	Grey/Woodgrain	Grey/Woodgrain
Weights & Dimensions		
Approx. shipping wt (lbs.)	147	147
Overall height w/legs extended (in.)	36-1/8*	36-1/8*
Overall width (in.)	24-3/4	24-3/4
Overall depth (in.)	27	27


*See written warranty for details.

**Colors available: WW = White on white BL = Black control panel and front panels w/almond side panels.

Dimensions (in inches)


GSC3230ZWW, GSC3200ZBL, GSC3430ZWW and GSC3400ZBL

Portable

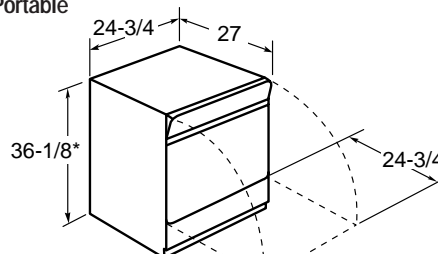

*Includes top and wheels

Built-In

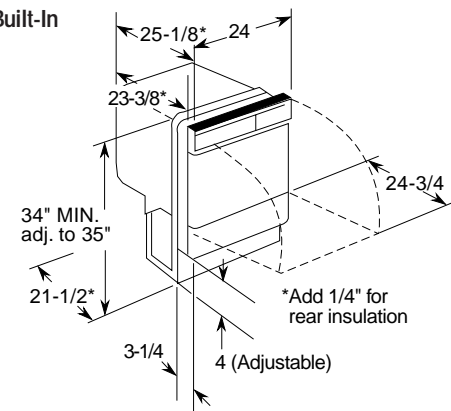

Important Note: GE kit number WD35M34 needed when adapting GE convertible dishwasher to a built-in installation. Contains built-in dishwasher water valve, hardware and complete instructions for changing a GE convertible dishwasher for under-the-counter installation.


GE SPACEMAKER® BUILT-IN 18" DISHWASHER

	GE	
	GSS1800Z	
Features		
Wash System		
Wash levels	2	
Cycles	4	
Pots & Pans	Dial	
Normal Wash	Dial	
Light Wash	Dial	
Rinse Only/Hold	Dial	
Options	6	
Heated Dry On/Off	Rocker	
Racks (upper/lower)	Standard	
Silverware basket	Standard	
Control type	Turn-To-Start	
Cycle progress indicator	Dial	
Rinse Aid dispenser	●	
120°F @ inlet water capability	●	
Leveling screws	●	
1, 10-yr. warranty*	●	
Economical/Quiet		
Tub Insulation	Standard	
Appearance		
Colors available	Black/Almond/White	
Color panels	2 Reversible:	
Door & Access	Black/Harvest: Almond/White	
Weights & Dimensions		
Approx. shipping weight (lbs.)	70	
Height w/legs retracted (in.)	34-1/8	
Overall width (in.)	17-13/16	
Overall depth (in.)	23-3/4	

*See written warranty for details.

Note: For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order Pub. No. 5-A007.

Dimensions (in inches)

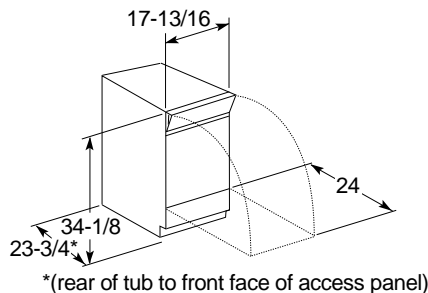

Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with the installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

Figure 1


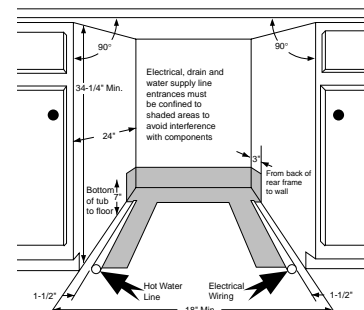


Figure 2



GE SPACEMAKER® UNDERSINK DISHWASHER


GE	
GSM2100ZAD/WH	
Features	
Wash System	
Wash levels	2
Cycles	5
POTSCRUBBER	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only/Hold	Dial
Options	8
Heated Dry On/Off	●
Racks, shelf & basket	
Upper Rack	Spacemaker™
Lower Rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-To-Start
Cycle progress indicator	Dial
Pushbuttons	4
Rinse Aid dispenser	●
1. 2. 10-yr. warranty*	●
Economical/Quiet	
PermaTuf™ Tub and door liner	●
GE Motor	●
Appearance	
Colors available**	AD, WH
Door	Trimless
Color Panels Access	Trimless
Weights & Dimensions	
Approx. shipping weight (lbs.)	100
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	24

*See written warranty for details.

**Colors available: AD = Black control panel with almond front panels.
WH = Black control panel with white front panels.

Note: Undersink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Cabinet Cut-Out for Sink



Cabinet cut-outs for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.

Stainless Steel Sinks Single and Double Compartment Models (Dimensions in Inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2\" Radius Corners		No. Of 1-1/2\" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2

Note: Drain opening size is 3-1/2\".


Above models are fully sound deadened.

*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.



Wood Insert

Cut-Out Dimensions (in inches)




Inserts must not exceed 1/4\" thickness within 5/16\" of edge around full circumference. Order GPF325 kit.

Cabinet Rough-In

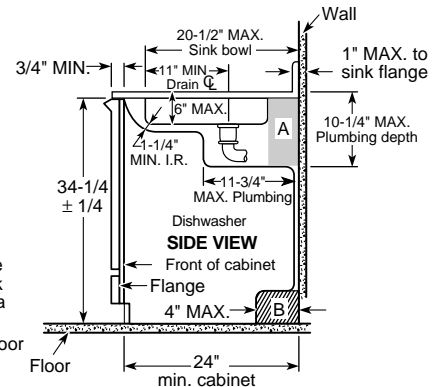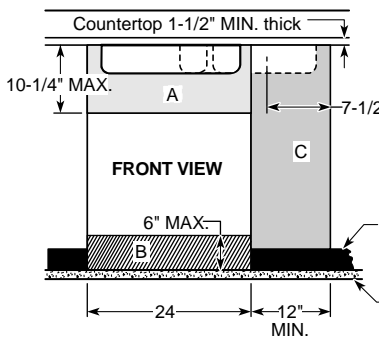


Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2\" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12\" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2\"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2\" max. specified distance from the wall, or if the base cabinet is less than the 24\" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Rough-In for Installation with Disposer

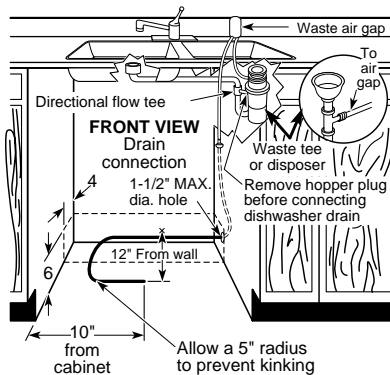


A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2\" I.D. drain hose, 78\" long. If using copper tubing, 2\" length of 1/2\" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8\" I.D. dishwasher drain connector.

Rear View Plumbing Arrangement

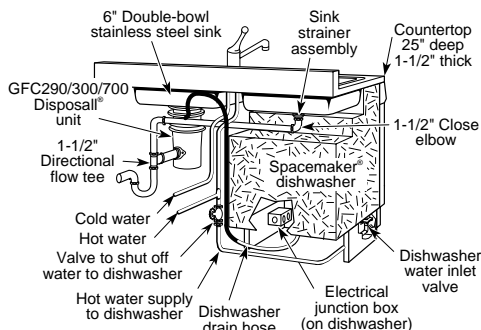

Plumbing/Electrical Rough-In

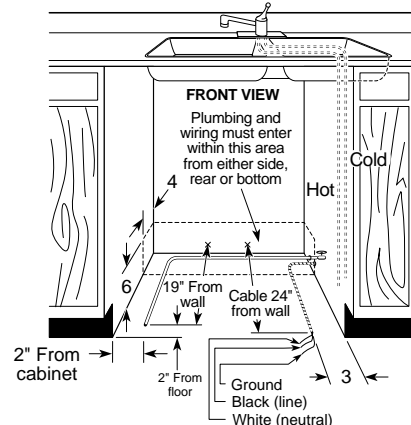

Plumbing: Hot Water Only: Use 3/8\" O.D. copper tubing or 1/2\" O.D. plastic tubing min. inlet line. Water valve has 3/8\" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 8.6. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.


Specifications: Inlet Water Temperature Recommended: Minimum 120°F. at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

DISPOSERS

	GE								
	Continuous Feed Models								Batch Feed Model
	GFC1000Y	GFC800Y	GFC705Y	GFC700Y	GFC305Y	GFC300Y	GFC295Y	GFC290Y	GFB1050V
Features									
Motor horsepower	3/4	1/2	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Stopper
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch
Power connection	Direct Wire	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Direct Wire
Power Boost	●								
Impellers									
Dual swivel	●	●	●	●	●	●	●	●	●
Jam resistant	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●
Stainless steel sink flange	●	●	●	●	●	●	●	●	●
Mounting type	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Twist Top
Precuttor	●	●	●	●	●	●	●	●	●
Splash guard	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Non-Removable
Sink stopper	●	●	●	●	●	●	●	●	●
Dishwasher drain connector	●	●	●	●	●	●	●	●	●
Manual reset overload protector	●	●	●	●	●	●	●	●	●
Permanently lubricated bearing	●	●	●	●	●	●	●	●	●
Plastic drain elbow	●	●	●	●	●	●	●	●	●
Turntable	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Polyester drain housing	●	●	●	●	●	●	●	●	●
Grinding speed (RPM's)	8000	8000	8000	8000	8000	8000	8000	8000	2700
Hopper	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Nylon
Hopper liner and grinding ring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Full warranty*	5-Year	4-Year	2-Year	2-Year	1-Year	1-Year	1-Year	1-Year	5-Year
Economical/Quiet									
Sound insulation wrapper	Super Deluxe	Deluxe	Standard	Standard					Super Deluxe
Weights & Dimensions									
Approx. shipping weight (lbs.)	12.5	10.0	9.8	9.8	8.4	8.4	8.4	8.4	14.0
Net weight (lbs.)	11	8.8	8.6	8.6	7.6	7.6	7.6	7.6	12.5
(A)	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	16-9/16
(B)	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	5-1/2
(C)	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	6-1/2
(D)	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	9-5/16
(E)	8-1/8	8-1/8	8-1/8	8-1/8	6-3/8	6-3/8	6-3/8	6-3/8	8-5/8
Dishwasher inlet diameter (in.)	7/8	7/8	7/8	7/8	7/8	7/8	7/8	7/8	1
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
Accessories									
White sink flange & stopper	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71
Almond sink flange & stopper	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72
Bisque sink flange & stopper	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73

*See written warranty for details.

Disposers




Disposer Accessories:
GPF75 Clamp nut kit

COMPACTORS

	GE	
	GCG1550DCC GCG1530ZWW GCG1520ZBB	GCG950T
Features		
Cycle time	27 seconds max., 14 seconds min.	70 seconds max., 12 seconds min.
Motor horsepower	1/3	1/3
Compression ratio (average)	75% reduction of volume	75% reduction of volume
Ram force (lb.) (max.)	2,300	5,000
Lock/start control w/removable key	●	●
Bag storage	●	●
Full 1-yr. warranty*	●	●
Appearance		
Color appearance	CC; WW; BB	BB
Door panels included	Bisque; White/Black; Black/White	Black/Almond
Heavy-gauge steel construction	●	●
1/4" panel capability	●	●
Weights & Dimensions		
Total appliance weight (lbs.)	146	134
Overall height (in.)	34-1/4	34-1/2
Overall width (in.)	15	12
Overall depth (in.)	24-1/4	20-1/4
Clearance for drop-down drawer side	6" or more on right side	
Drawer extension for removal	23" or more in front of appliance	22" or more
Custom panel size H x W (in.)	22-15/16 x 14-5/8	20-7/8 x 11-11/16
Accessories		
Compactor bags	WC60X5017	WC60X5015
Optional toe pedal opener kit		GSA85

*See written warranty for details.

GCG1550DCC, GCG1530ZWW, GCG1520ZBB, GCG950T Convertible Compactors



Compactor Accessories:
GPF80 White/Black Panel
for GCG1530
GPF81 Black/Almond Panel
for GCG1520

GE TRITON™. CLEAN AND QUIET.



TriClean™ Wash System eliminates pre-rinsing, soaking and scrubbing!

Improved wash coverage provided by the exclusive 3 level wash. Eliminate recirculating food particles with 100% Triple Water Filtration and Dual Pumps. Pulverizes food particles with Piranha™ Hard Food Disposer.



QuietPower™ III—The quietest dishwasher available in the industry.

Redirected spray jets hit the dishes; not the tub and door. Sound is deadened with insulation blanket, sound cushioning and PermaTuf® Tub. ActiveVent, an intelligent air vent system closes during wash cycle, opens during dry cycle to contain noise.



SaniWash for peace of mind.

With SaniWash cycle, your dishes, cutting boards and baby bottles are beyond clean—they're sanitized—reducing bacteria by 99.999%.



Speed cycles save time.

Forget to run the dishwasher? Speed cycles cut 30 minutes off GE's standard normal cycles.

“The cleanest wash you never heard.”™



GE Appliances

General Electric Company
Louisville, Kentucky 40225
www.geappliances.com



Pub. No. 5-S149
PC20596