



dishwashers

New product introductions—October 2005

GE Profile™ dishwashers with SmartDispense™ technology



Profile™



Think outside the bottle!



Introducing the new
GE Profile™ dishwasher
with SmartDispense™
technology

Finally, a dishwasher that unloads
itself (the detergent, that is).



PDW9980LSS shown

GE Profile™ dishwashers quick pitch

Your life. Your style. GE just reinvented the dishwasher to fit both.



America's smartest dishwasher

It's simply genius! The **SmartDispense™ reservoir** holds an entire 45-oz. bottle's worth of liquid dishwasher detergent, automatically dispensing just the right amount for every load.



GE's quietest ever

Shhh...that's the sound of silence. With the advanced **QuietPower™7 sound package**, this dishwasher is as quiet as a library.



Simply brilliant performance

It's easy to see the difference. The **BrilliantClean™ towerless wash system** with **CleanSensor™** senses details about each load, adjusting cycle time and water temperature as necessary to get dishes remarkably clean.



Ultimate flexibility

Angled Rack Dry™ system securely holds mugs and cups at an angle so water won't pool on top. **Single Rack Wash™ selection** saves time and energy by washing up to five place settings in the top rack only.

What's new: GE Profile™ dishwashers with SmartDispense™ technology

Your life. Your style. GE just reinvented the dishwasher to fit both.



SmartDispense technology

- It's the only dishwasher ever to hold the contents of an entire 45 oz. bottle of liquid or gel dishwasher detergent.
- Sensors determine the amount of detergent needed for each load based on how dirty the dishes are.
- The SmartDispense system is the only dishwasher to automatically dispense just the right amount of detergent based on the home's water hardness into the main wash cycle and every pre-wash to get dishes clean.



Angled Rack Dry™ system

- It's easy to adjust the rack tines to hold dishes securely at any angle.
- Water drains right off cups and mugs.




Single Rack Wash™ selection

- This convenient cycle washes up to five place settings in the upper rack in a fraction of the time, using as little as 3-1/2 gallons of water.
- Perfect for smaller loads or for washing glassware.



GE's quietest dishwasher ever!

- Did you hear? At just 47dBA, it's as quiet as the neighborhood library.
- The new QuietPower™7 sound package includes a concealed ActiveVent, a blanket of sound-deadening bitumen, a stainless steel tub, sound-blocking toe-kick insulation and mechanical enclosures for our quietest operation ever.

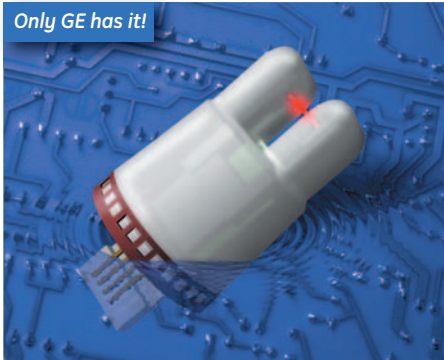

Only dishwasher with three sensors!

- CleanSensor™ monitors water temperature and soil content and adjusts cycle length, to get dishes clean every time.
- FillSmart™ sensor senses water levels and how much water is needed to prime the pump, helping reduce water usage and control noise.
- Low-detergent sensor signals when it's time to refill the detergent reservoir — before it runs out!



GE Profile stainless sculptured handle

- Stunning sculptured handle was developed to coordinate beautifully with other GE Profile appliances to create kitchens with a designer look.
- Each handle is crafted of luxurious stainless steel for beauty and endurance.



Only dishwasher with 3 pumps

Along with the QuietMotor,™ one pump circulates water throughout the wash system and the second removes soil as water drains away. The third pump dispenses detergent based on water hardness and soil level.

Only dishwasher to dispense detergent in all pre-washes

Improves wash performance by providing just the right amount of detergent throughout all pre-washes and the main wash cycle.

Only dishwasher to clean based on soil levels and water hardness


No need to use a full dispenser cup of detergent when a tablespoon would be enough! Dishwashers with SmartDispense technology use sophisticated sensors to monitor water temperature and soil level, then release just the right amount of detergent based on water hardness for optimal wash performance.

Feature gallery



SmartDispense™ technology

Holds an entire bottle of liquid or gel dishwasher detergent, automatically dispensing just the right amount throughout every load (including pre-washes) for cleaner dishes.

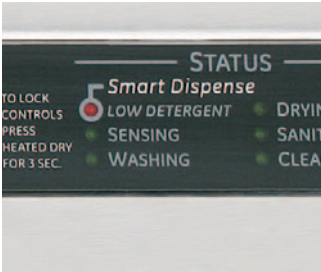

Low-detergent LED

Signals three to seven loads remaining before the reservoir must be refilled. Makes it easy to know with a glance when it's time to fill with another bottle of detergent.



Angled Rack Dry™ system

Mugs and cups can be secured at an angle so water runs right off, virtually eliminating the need for dish towel drying.



Single Rack Wash™ selection

Washes only the upper rack of dishes, using less time, water and energy than required for a full load. Perfect for smaller loads of up to five place settings.



Contour door with sculptured handle and hidden controls

Lends a beautiful designer appearance, hiding the controls inside the top edge of the dishwasher door.



Giant tub with maximum capacity nylon Pearlescent™ racks and StemSafe™

Washes up to 16 place settings at once, holding stemware and dishes securely with durable racks that enhance the stainless interior.



PDW9980LSS





Plastics cycle

Protects plastics and dries them fully by optimizing washing and drying temperatures.



QuietPower™7 sound package with concealed ActiveVent

Features quieter-than-ever components, sound-deadening materials and a hidden vent that seals in sound during the wash cycle for our quietest dishwasher.



100% fold-down tines and adaptable bowl tines in lower rack

Flip up to hold bowls, or flip down for loading flexibility in the lower rack.



Four-position adjustable/removable upper rack

Remove completely or move up, down or diagonally for maximum capacity.



6-level BrilliantClean™ wash system with CleanSensor™

Scrubs dishes clean with three full-sized wash arms, six levels of wash action and a sensor that continually monitors and adjusts the wash cycle for a superior clean.



Countdown display with 1-24-hour Delay Start

Signals remaining cycle time with an added feature that starts the dishwasher when no one's home or during the hours when utilities are at reduced rates.



The inside story

1 Bright annealed stainless steel interior

Adds a lustrous finish and lasting beauty that resists stains and corrosion.

2 GE Profile upper and lower rack handles

Slide racks out gently for loading and unloading.

3 Light-touch electronic controls

Engage with only a gentle touch and provide a smooth, sleek surface that wipes clean.

4 SpeedCycle™ selection

Washes and dries lightly soiled dishes in 45 minutes, about half the time of a normal cycle.

5 Audible end-of-cycle signal

Emits an audible signal to indicate the cycle has ended. If consumer prefers, signal can be easily disengaged.

6 Maximum-capacity three-piece silverware basket and ExtraBasket™

Provides extra room for washing silverware, measuring spoons and other utensils.





7 Cutlery tray

Protects flatware and allows space underneath for more dishes.

8 100% triple water filtration

Filters water three times during each load. When water stays clean, just-washed dishes do, too!

9 Fan-assist dry

Uses a quiet fan to help dry dishes quickly and efficiently.

10 Quiet water valve

Features a new design to reduce water flow noise.

11 Dual pumps and motors

Improve performance by circulating water throughout the wash system, then removing food soil as water drains.

12 Heat-bonded bitumen

Deadens sound with a high-quality, asphalt-type material baked onto the stainless steel tub.

Dare to compare

America's smartest dishwasher!



GE Profile™ dishwashers with SmartDispense™ technology

- GE Profile dishwashers with SmartDispense technology are America's smartest dishwashers, based on the comparison of "smart" features seen in the chart below.

Competitive comparison

| | GE Profile | Bosch | Maytag | Kenmore | KitchenAid |
|-------------------------|------------|-------|--------|---------|------------|
| SmartDispense | Yes | No | No | No | No |
| FillSmart™ sensing | Yes | No | No | No | No |
| Detergent level sensor | Yes | No | No | No | No |
| Water hardness test kit | Yes | No | No | No | No |
| Single Rack Wash™ | Yes | Yes | No | No | No |
| Temperature sensor | Yes | Yes | Yes | Yes | Yes |
| Turbidity sensor | Yes | Yes | Yes | Yes | Yes |
| Delayed start | Yes | Yes | Yes | Yes | Yes |
| Last cycle memory | Yes | Yes | Yes | Yes | Yes |

Angled Rack Dry™ system



GE Profile dishwashers with Angled Rack Dry system



Bosch

- No more worrying about pools of water left in cups and bowls after each load. These innovative tines can be tilted at various angles up to 45 degrees, positioning cups and mugs so water runs off. GE is the only manufacturer to improve drying performance with the Angled Rack Dry system.
- No one else offers this feature.

Competitive comparison—DryIndex

| | GE Profile models PDW9980L PDW9900L PDW9700L | GE Profile models PDW8980L PDW8900L | Bosch models |
|-------------------------------|---|---|--------------|
| Angled Rack Dry system | Yes | Yes | No |
| ActiveVent | Yes | Yes | No |
| Fan-assist dry | Yes | No | No |
| Convection air flow | Yes | Yes | No |
| Multi-wattage heating element | Yes | Yes | Yes |

Dare to compare

Single Rack Wash™



GE Profile™ dishwashers

- Enjoy all the benefits of a full-sized dishwasher with the convenience of a dish drawer. The Single Rack Wash selection washes up to five place settings in just the upper rack, saving time, water and energy.



Fisher & Paykel™ dish drawer

- Why miss out on all the innovative GE Profile features?

GE Profile dishwasher



Full dishwasher with 16 place setting capacity



SmartDispense™ technology



Removable upper rack—accommodates a 20-gallon stock pot!

Competitive comparison

| | GE | Fisher Paykel |
|---------------------------|--------------------------|-----------------------|
| Place settings | 16 | 12 |
| | (5 in upper rack) | (6 per drawer) |
| SmartDispense technology | Yes | No |
| Angled Rack Dry™ system | Yes | No |
| ActiveVent | Yes | No |
| Fully integrated controls | Yes | No |
| Stainless Interior | Yes | No |

Quiet



GE Profile dishwashers

- Operating at an average of only 47 decibels, state of the art technology makes this GE's quietest dishwasher ever.

Competitive comparison

| | GE Profile models | | | | |
|------------|-------------------|-------------|------------------|---------------|--------------|
| | PDW9980L | | | | |
| | PDW9900L | Bosch model | KitchenAir model | JennAir model | Maytag model |
| | PDW9700L | SHY56A05 | KUDS01FL | JDB2100A | MDB9700A |
| dBA levels | 47 | 47 | 55 | 59 | 61 |

Data source: Owens-Corning IEC-60704 lab testing, 2005.

Show and tell

SmartDispense™ technology



Just empty an entire bottle of detergent into the dishwasher reservoir and it automatically dispenses the right amount into each load's pre-wash and main wash cycles. One bottle will last up to two or three months.*



Detergent loading convenience

Filling with detergent is simple. Push down on the SmartDispense cap and then twist the cap off. Squeeze the entire 45-oz bottle of liquid or gel detergent into the reservoir. It's that easy.

For added flexibility, consumers who prefer powder dishwashing detergent may use it in the standard detergent cup, filling it prior to each load the same as a standard dishwasher.




Water hardness setting

The dishwasher adjusts detergent amounts based on the home's water hardness level. Consumers can quickly and easily set the dishwasher one time for optimal performance using a test strip (included) to test their home's water hardness.

*Based on running the dishwasher four times per week on average in a home with moderate water hardness.

Angled Rack Dry™ system

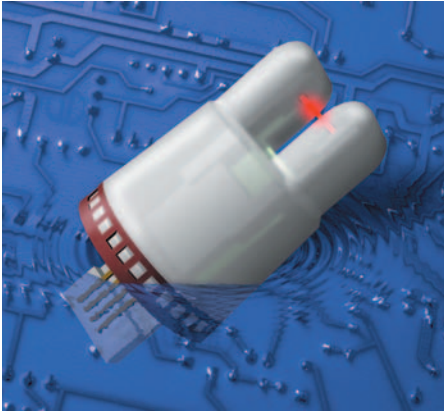


Three sensors

1. CleanSensor™ continually monitors water temperature and soil levels, adjusting to get dishes remarkably clean.
2. FillSmart™ sensor determines how much water is needed to prime the pump, minimizing water and energy needs.
3. Detergent sensor measures how much is left in the reservoir and signals when it's time to refill.



Low-detergent LED

A red LED on the control panel lights up when three to seven loads of detergent remain in the reservoir.

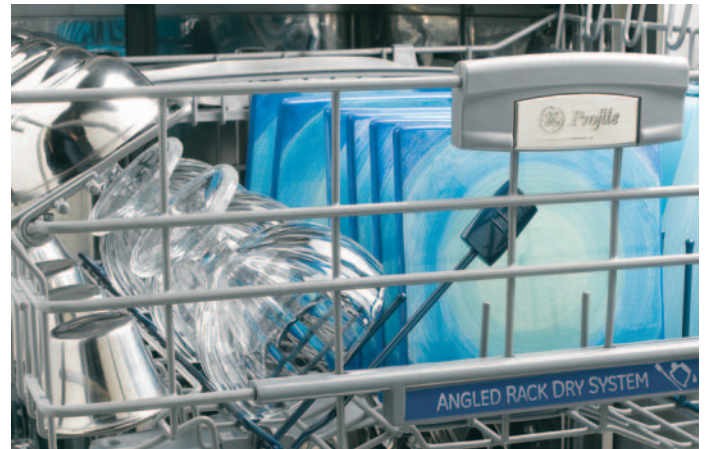

Dishes get drier now that water runs right off cups and mugs, instead of pooling and puddling. The rack design makes it easy to tilt the rack tines at 35° and 45° angles, holding dishes securely. No more puddle dumping!

Show and tell



SmartDispense™ — control demo with kit 5-D543

Front control models—Select “Demo” mode by pressing “Normal” and “Added Heat” keys at the same time and holding down for five (5) seconds.

Top control models—Select “Demo” mode by pressing “Down” and “Added Heat” keys at the same time and holding down for five (5) seconds.

When the dishwasher is in “Demo” mode, the “Normal” and “Added Heat” LEDs will blink for three seconds and the ActiveVent will close.

- Press any button and the corresponding LED will light up.
- Example: Select a wash cycle and see the cycle length in the three-digit LED display, or press the “Delay Hours” key and see the number of hours delayed in the LED display.



Demonstrate how quiet this dishwasher is

Press the “Start” key to demonstrate actual sound level. The dishwasher will:

1. Display a countdown on the 3-digit LED starting with “999”.
2. The main pump will run for 20 seconds. During this time, the LED for each wash selection will light up for three seconds with the remaining time displayed.
3. The demo will end by lighting up the “Normal” and “Heated Dry” LEDs, displaying the appropriate cycle time.

Note: The dishwasher will not try to pump out when the “Demo” mode is complete.



Show how easy it is to adjust for water hardness

Explain that the dishwasher should be set for individual water hardness so it always dispenses the right amount of detergent.

Tell customers that the user bag containing the Owner’s Manual also includes a water hardness test strip and instructions are listed on the package to make testing easy.

Point out the control panel and demonstrate the following steps:

On top control models, hold down the “Up” arrow pad and “Delay Hours” pad at the same time for three (3) seconds.

On front control panels, hold down the “Cookware” and “Normal” pads to change the hardness level.

Once in water hardness setting mode, the three-digit display will show a number from 1 to 5. Use the “Up” or “Down” arrow to change the number on the display to the corresponding results from the test strip.

Press the “Start/Reset” pad to return to standby mode and end programming.



Displays



Dishwasher
two-over-two display
82"H x 57-7/8"W x 30"D
Pub. No. 5-D259



Dishwasher
one-over-one
display
82"H x 33-7/8"W
x 30-3/4"D
Pub. No. 5-D261



Dishwasher
single unit display
61-59/64"H x 26"W
x 23-3/8"D
Pub. No. 5-D269



PDW9700LII custom
cherry wood panel
and handle
Pub. No. 5-D563

P.O.P.

SmartDispense
exterior door P.O.P.
Pub. No. 5-D275

SmartDispense
interior feature P.O.P.
Pub. No. 5-D285

Angled Rack
Dry™ system
interior P.O.P.
Pub. No. 5-D295

Single
Rack Wash™
selection interior P.O.P.
Pub. No. 5-D305

Control panel demo kit



Pub. No. 5-D543

GE Profile™ built-in dishwashers

Available new models



GE Profile stainless interior dishwasher
with hidden controls
PDW9980L

- Stainless contour door with stainless sculptured handle and hidden controls
- **SmartDispense™ technology**
- **Angled Rack Dry™ system**
- **Single Rack Wash™ selection**
- Giant tub with maximum capacity nylon Pearlescent™ racking
- Plastics cycle with fan-assist dry
- **QuietPower™ 7 sound package** with concealed ActiveVent
- Available in stainless steel, white on white and black on black



GE Profile stainless interior dishwasher
with hidden controls
PDW9800L

- **Contour door with sculptured handle and hidden controls**
- Giant tub with maximum capacity nylon Pearlescent racking
- Countdown display with 1-24-hour Delay Start
- Four-position adjustable/removable upper rack
- 3 nylon-coated Pearlescent metal utility shelves with StemSafe™ in upper rack
- 100% fold-down tines and adaptable bowl tines in lower rack
- Plastics cycle with fan-assist dry
- Available in stainless steel, white on white and black on black



GE Profile stainless interior dishwasher
with hidden controls
PDW9700L

- Fully integrated door for custom panels*
- SmartDispense technology
- Angled Rack Dry system
- Single Rack Wash selection
- Giant tub with maximum capacity nylon Pearlescent racking
- 100% fold-down tines and adaptable bowl tines in lower rack
- Four-position adjustable/removable upper rack



GE Profile stainless interior dishwasher
with hidden controls
PDW9200L

- Contour door with sculptured handle and hidden controls
- 6-level BrilliantClean™ towerless wash system with CleanSensor™
- Giant tub with maximum capacity nylon racking
- Removable upper rack
- 2/4/8-hour Delay Start
- QuietPower⁶ sound package with concealed ActiveVent
- Audible end-of-cycle signal
- Available in stainless steel, white on white and black on black

*Requires custom panel and handle; not provided.

GE Profile™ built-in dishwashers

Available new models



GE Profile stainless interior built-in dishwasher
PDW8980L

- Giant tub with maximum capacity nylon Pearlescent™ racking
- 6-level BrilliantClean™ towerless wash system with CleanSensor™
- **SmartDispense™ technology**
- **Angled Rack Dry™ system**
- **Single Rack Wash™ selection**
- Plastics cycle
- Countdown display with 1-24-hour Delay Start
- Available in stainless steel, white on white and black on black

GE Profile stainless interior built-in dishwasher
PDW8800L

- One-piece color wrap contour door
- Giant tub with maximum capacity nylon Pearlescent racking
- Countdown display with 1-24-hour Delay Start
- Four-position adjustable/ removable upper rack
- 100% fold-down tines and adaptable bowl tines in lower rack
- QuietPower™5 sound package
- Plastics cycle
- Available in stainless steel, white on white and black on black



GE Profile stainless interior built-in dishwasher
PDW8700L

- Full-length flat door (CustomStyle™ panel trim kit available)
- 6-level BrilliantClean towerless wash system with CleanSensor
- Giant tub with maximum capacity nylon Pearlescent racking
- Countdown display with 1-24-hour Delay Start
- 100% fold-down tines and adaptable bowl tines in lower rack
- QuietPower⁵ sound package
- Plastics cycle
- Available in white on white and black on black



GE Profile™ stainless interior dishwashers with hidden controls

| Features | GE Profile | | | |
|---|--|---|---|---|
| | ENERGY STAR® PDW9980LSS PDW9900LWW PDW9900LBB | ENERGY STAR PDW9880LSS PDW9800LWW PDW9800LBB | ENERGY STAR PDW9700LII | ENERGY STAR PDW9280LSS PDW9200LWW PDW9200LBB |
| SmartDispense™ technology | ● | | ● | |
| Stainless steel | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| Giant tub | ● | ● | ● | ● |
| Front appearance | Contour door | Contour door | Panel-ready door | Contour door |
| Upscale flush design | ● | ● | ● | ● |
| Full-length door design | Fully integrated | Fully integrated | Fully integrated | Fully integrated |
| Wash system | BrilliantClean™ | BrilliantClean | BrilliantClean | BrilliantClean |
| Wash arms | 3 direct-feed | 3 direct-feed | 3 direct-feed | 3 direct-feed |
| Wash levels | 6-towerless | 6-towerless | 6-towerless | 6-towerless |
| Water filtration | 100% triple w/ExtraFine™ filter | 100% triple w/ExtraFine filter | 100% triple w/ExtraFine filter | 100% triple w/ExtraFine filter |
| Dual pumps and motors | ● | ● | ● | ● |
| Hard food disposer | Piranha™ | Piranha | Piranha | Piranha |
| Sensor | CleanSensor™ | CleanSensor | CleanSensor | CleanSensor |
| Automatic temp. control | ● | ● | ● | ● |
| Rinse aid dispenser | w/indicator and adjustment | w/indicator and adjustment | w/indicator and adjustment | w/indicator and adjustment |
| Electronic controls | Light-touch, hidden controls | Light-touch, hidden controls | Light-touch, hidden controls | Light-touch, hidden controls |
| Cycle progress indicators | Countdown display with 6 status lights | Countdown display with 6 status lights | Countdown display with 6 status lights | 1 "Clean" light, 1 "Sanitized" light |
| Touchpads | Top controls | Top controls | Top controls | Top controls |
| Selections/Enhancements | Variable* | Variable* | Variable* | Variable* |
| Last cycle memory | ● | ● | ● | ● |
| Audible end-of-cycle signal | ● | ● | ● | ● |
| Selections | | | | |
| Single Rack Wash™ | ● | | ● | |
| Anti-bacterial (NSF**) | ● | ● | ● | ● |
| Cookware | ● | ● | ● | ● |
| Normal Wash | ● | ● | ● | ● |
| China/Crystal | ● | ● | ● | ● |
| Plastics Cycle | ● | ● | ● | ● |
| SpeedCycle™ (wash & dry) | ● | ● | ● | ● |
| Rinse Only | ● | ● | ● | ● |
| Enhancements | | | | |
| Delay Start | 1-24-hour | 1-24-hour | 1-24-hour | 2/4/8-hour |
| Hi-Temp Wash | Added heat | Added heat | Added heat | Added heat |
| Hi-Temp Rinse | Auto w/added heat | Auto w/added heat | Auto w/added heat | Auto w/added heat |
| PreWash | ● | ● | ● | ● |
| Heated Dry | ● | ● | ● | ● |
| HotStart™ | Automatic | Automatic | Automatic | Automatic |
| Child lock | ● | ● | ● | ● |
| Racking | | | | |
| Maximum capacity nylon racking | Pearlescent™ | Pearlescent | Pearlescent | Color-matched |
| Adjustable upper rack with CleanTip tines | 4-position | 4-position | 4-position | |
| Removable upper rack† | Nylon deep-tiered | Nylon deep-tiered | Nylon deep-tiered | Nylon deep-tiered |
| Upper rack handle | ● | ● | ● | ● |
| Lower rack handle | ● | ● | ● | ● |
| Fold-down tine flexibility | Angled Rack Dry; 100% and adaptable bowl tines, lower | 4 sets with 2 multi-position, upper; 100% and adaptable bowl tines, lower | Angled Rack Dry; 100% and adaptable bowl tines, lower | 2 lower |
| Utility shelves | 3 Pearlescent metal StemSafe™ upper | 3 Pearlescent metal StemSafe upper | 3 Pearlescent metal StemSafe upper | 2 upper |
| Silverware basket | Maximum capacity 3-pc. with ExtraBasket™ | Maximum capacity 3-pc. with ExtraBasket | Maximum capacity 3-pc. with ExtraBasket | 1-pc. super capacity with 3 cell covers |
| Cutlery tray | ● | ● | ● | ● |
| Hard countertop installation | Included | Included | Included | Included |
| Door handle | Sculptured | Sculptured | Handle required | Sculptured |
| DryIndex | | | | |
| Calrod® heating element | Multi-wattage | Multi-wattage | Multi-wattage | Multi-wattage |
| Convection airflow | ● | ● | ● | ● |
| Fan-assist dry | ● | ● | ● | ● |
| Angled Rack Dry™ system | ● | ● | ● | ● |
| Quiet | | | | |
| Sound insulation package | QuietPower7 | QuietPower6 | QuietPower7 | QuietPower6 |
| Tub insulation | Thininstall™ Plus with heat-bonded bitumen | Thininstall with heat-bonded bitumen | Thininstall Plus with heat-bonded bitumen | Thininstall with heat-bonded bitumen |
| Door insulation | Bitumen and foam | Bitumen | Bitumen and foam | Bitumen |
| QuietPower™ motor | ● | ● | ● | ● |
| ActiveVent system | Concealed | Concealed | Concealed | Concealed |
| Tub collar trim | ● | ● | ● | ● |
| Quiet water valve | ● | ● | ● | ● |
| Appearance | | | | |
| Colors available*** | SS, WW, BB | SS, WW, BB | Panel required | SS, WW, BB |
| Weights and Dimensions | | | | |
| Height w/legs retracted (in.) | 34 | 34 | 34 | 34 |
| Height w/legs removed (in.) | 33-13/16 | 33-13/16 | 33-13/16 | 33-13/16 |
| Overall width (in.) | 24 | 24 | 24 | 24 |
| Overall depth (in.) | 24-3/4†† | 24-3/4†† | 24†† | 24-3/4†† |
| Approx. shipping wt. (lbs.) | 105 | 105 | 105 | 105 |
| Accessories | | | | |
| Requires kit for trimless 3/4" panel capability | N/A | N/A | Panel ready‡ | N/A |

*Sensor controlled.
 **Certified by National Sanitation Foundation.
 ***SS = Stainless steel, WW = White on white, BB = Black on black.
 †For best results, use shower nozzle attachment when upper rack is removed.
 ††Add 1/2" for deepest part of contour door. Allow an additional 2 inches for the handle.
 †††Add 3/4" for custom panel and additional room for custom handle.
 ‡The most common panel dimensions are 30-1/4"H x 23-3/4"W. See template Pub. No. 5-X063 supplied with dishwasher for details on other custom sizes.

GE Profile stainless interior dishwashers

| | GE Profile | | | | |
|---|---|--|---|--|--|
| | ENERGY STAR | ENERGY STAR | ENERGY STAR | ENERGY STAR | ENERGY STAR |
| | PDW8980LSS PDW8900LWW PDW8900LBB | PDW8880LSS PDW8800LWW PDW8800LBB | PDW8700LWW PDW8700LBB | PDW8480JSS PDW8400JWW PDW8400JBB | PDW8280JSS PDW8200JWW PDW8200JCC PDW8200JBB |
| Features | | | | | |
| SmartDispense technology | ● | | | | |
| Tub and door liner | Stainless steel | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| Giant tub | ● | ● | ● | ● | ● |
| Front appearance | Contour door | Contour door | Flat door | Contour door | Contour door |
| Upscale flush design | ● | ● | ● | ● | ● |
| Full-length door design | One-piece color wrap | One-piece color wrap | ● | One-piece color wrap | One-piece color wrap |
| Wash system | BrilliantClean | BrilliantClean | BrilliantClean | BrilliantClean | BrilliantClean |
| Wash arms | 3 direct-feed | 3 direct-feed | 3 direct-feed | 3 direct-feed | 3 direct-feed |
| Wash levels | 6-towerless | 6-towerless | 6-towerless | 6-towerless | 6-towerless |
| Water filtration | 100% triple with ExtraFine filter | 100% triple with ExtraFine filter | 100% triple with ExtraFine filter | 100% triple with ExtraFine filter | 100% triple with ExtraFine filter |
| Dual pumps and motors | ● | ● | ● | ● | ● |
| Hard food disposer | Piranha | Piranha | Piranha | Piranha | Piranha |
| Sensor | CleanSensor | CleanSensor | CleanSensor | CleanSensor | CleanSensor |
| Automatic temperature control | ● | ● | ● | ● | ● |
| Rinse aid dispenser | w/indicator & adjustment | w/indicator & adjustment | w/indicator & adjustment | w/indicator & adjustment | w/indicator & adjustment |
| Electronic controls | Light-touch | Light-touch | Light-touch | Light-touch | Light-touch |
| Cycle progress indicators | Countdown display with 6 status lights | Countdown display with 6 status lights | Countdown display with 6 status lights | Countdown display with 6 status lights | 1 "Clean" light, 1 "Sanitized" light |
| Touchpads | 12 | 12 | 12 | 11 | 9 |
| Selections/Enhancements | Variable* | Variable* | Variable* | Variable* | Variable* |
| Last cycle memory | ● | ● | ● | ● | ● |
| Selections | | | | | |
| Single Rack Wash | ● | | | | |
| Anti-bacterial (NSF**) | ● | ● | ● | ● | ● |
| Cookware | ● | ● | ● | ● | ● |
| Normal Wash | ● | ● | ● | ● | ● |
| China/Crystal | ● | ● | ● | ● | ● |
| Glasses Cycle | | | | | |
| Plastics Cycle | ● | ● | ● | | |
| SpeedCycle (wash & dry) | ● | ● | ● | ● | |
| Rinse Only | ● | ● | ● | ● | ● |
| Enhancements | | | | | |
| Delay Start | 1-24-hour | 1-24-hour | 1-24-hour | 1-9-hour | 2/4/8-hour |
| Hi-Temp Wash | Added heat | Added heat | Added heat | Added heat | Added heat |
| Hi-Temp Rinse | Auto w/added heat | Auto w/added heat | Auto w/added heat | Auto w/added heat | Auto w/added heat |
| PreWash | ● | ● | ● | ● | |
| Heated Dry | ● | ● | ● | | ● |
| HotStart | Automatic | Automatic | Automatic | Automatic | Automatic |
| Child lock | ● | ● | ● | ● | ● |
| Racking | | | | | |
| Maximum capacity nylon racking | Pearlescent | Pearlescent | Pearlescent | Pearlescent | Color-matched |
| Adjustable upper rack with CleanTip tines | 4-position | 4-position | 4-position | 4-position | |
| Removable upper rack† | Nylon deep-tiered | Nylon deep-tiered | Nylon deep-tiered | Nylon deep-tiered | Nylon deep-tiered |
| Upper rack handle | ● | ● | ● | | |
| Lower rack handle | ● | | | | |
| Fold-down tine flexibility | Angled Rack Dry; 100% and adaptable bowl tines, lower | 4 sets w/2 multi-position, upper; 100% and adaptable bowl tines, lower | 4 sets w/2 multi-position upper; 100% and adaptable bowl tines, lower | 2 sets w/1 multi-position upper; 2 lower | 2 lower |
| Utility shelves | 3 Pearlescent metal StemSafe upper | 3 Pearlescent metal StemSafe upper | 3 Pearlescent metal StemSafe upper | 2 with StemSafe upper | 2 upper |
| Silverware basket | Maximum capacity 3-pc. with ExtraBasket | Maximum capacity 3-pc. with ExtraBasket | Maximum capacity 3-pc. with ExtraBasket | Super capacity 3-pc. with 3 cell covers | Super capacity 1-pc. with 3 cell covers |
| Cutlery tray | ● | ● | ● | | |
| Hard countertop installation | Included | Included | Included | Included | Included |
| Latch | Squeeze | Squeeze | Squeeze | Squeeze | Squeeze |
| DryIndex | | | | | |
| Calrod heating element | Multi-wattage | Multi-wattage | Multi-wattage | Multi-wattage | Multi-wattage |
| Convection airflow | ● | ● | ● | | ● |
| Angled Rack Dry system | ● | | | | |
| Quiet | | | | | |
| Sound insulation package | QuietPower5 | QuietPower5 | QuietPower5 | QuietPower5 | QuietPower5 |
| Tub insulation | Thinstall with heat-bonded bitumen | Thinstall with heat-bonded bitumen | Thinstall with heat-bonded bitumen | Thinstall with heat-bonded bitumen | Thinstall with heat-bonded bitumen |
| Door insulation | With bitumen | With bitumen | With bitumen | With bitumen | With bitumen |
| QuietPower motor | ● | ● | ● | ● | ● |
| ActiveVent system | ● | ● | ● | ● | ● |
| Tub collar trim | ● | ● | ● | ● | ● |
| Electronic control system | ● | ● | ● | ● | ● |
| Quiet water valve | ● | ● | ● | ● | ● |
| Appearance | | | | | |
| Colors available*** | SS, WW, BB | SS, WW, BB | WW, BB | SS, WW, BB | SS, WW, CC, BB |
| Weights & Dimensions | | | | | |
| Height w/legs retracted (in.) | 34 | 34 | 34 | 34 | 34 |
| Height w/legs removed (in.) | 33-13/16 | 33-13/16 | 33-13/16 | 33-13/16 | 33-13/16 |
| Overall width (in.) | 24 | 24 | 24 | 24 | 24 |
| Overall depth (in.) | 24-3/4†† | 24-3/4†† | 24-3/4 | 24-3/4†† | 24-3/4†† |
| Approx. shipping weight (lbs.) | 105 | 105 | 105 | 105 | 105 |
| Accessories | | | | | |
| Requires kit for 1/4" panel capability w/trim | N/A | N/A | GPF825W/B | N/A | N/A |
| Requires kit for trimless 3/4" panel capability | N/A | N/A | GPF875W/B | N/A | N/A |

*Sensor controlled.
 **Certified by National Sanitation Foundation.
 ***SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.
 †For best results, use shower nozzle attachment when upper rack is removed.
 ††Add 1/2" for deepest part of contour door.

Electrical rating 120 Volts AC, 60 Hertz, 9.1 Amps total connected load 875 Watt Calrod heater. For use on adequately wired 120 volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

GE Profile™ built-in dishwashers

| | GE Profile | |
|---|--|--|
| | ENERGY STAR® | ENERGY STAR |
| | PDW7880JSS PDW7800JWW PDW7800JCC PDW7800JBB | PDW7380JSS PDW7300JWW PDW7300JCC PDW7300JBB |
| Features | | |
| Tub and door liner | PermaTuf® | PermaTuf |
| Giant tub | ● | ● |
| Front appearance | Contour door | Contour door |
| Upscale flush design | ● | ● |
| Full-length door design | One-piece color wrap | One-piece color wrap |
| Wash system | BrilliantClean™ | BrilliantClean |
| Wash arms | 3 direct-feed | 3 direct-feed |
| Wash levels | 6-towerless | 6-towerless |
| Water filtration | 100% triple with ExtraFine™ filter | 100% triple with ExtraFine filter |
| Dual pumps and motors | ● | ● |
| Hard food disposer | Piranha™ | Piranha |
| Sensor | CleanSensor™ | CleanSensor |
| Automatic temperature control | ● | ● |
| Rinse aid dispenser | w/indicator & adjustment | w/indicator & adjustment |
| Electronic controls | Light-touch | Light-touch |
| Cycle progress indicators | Countdown display with 6 status lights | Countdown display with 6 status lights |
| Touchpads | 12 | 11 |
| Selections/Enhancements | Variable* | Variable* |
| Last cycle memory | ● | ● |
| Selections | | |
| Anti-bacterial (NSF**) | ● | ● |
| Cookware | ● | ● |
| Normal Wash | ● | ● |
| China/Crystal | ● | ● |
| Glasses Cycle | ● | |
| SpeedCycle™ (wash & dry) | ● | ● |
| Rinse Only | ● | ● |
| Enhancements | | |
| Delay Start | 1-9-hour | 1-9-hour |
| Hi-Temp Wash | Added heat | Added heat |
| Hi-Temp Rinse | Auto w/added heat | Auto w/added heat |
| PreWash | ● | ● |
| Heated Dry | ● | ● |
| HotStart™ | Automatic | Automatic |
| Child lock | ● | ● |
| Racking | | |
| Maximum capacity nylon racking | Color-matched | Color-matched |
| Adjustable upper rack with CleanTip tines | 4-position deep-tiered | 4-position deep-tiered |
| Fold-down tine flexibility | 4 sets w/2 multi-position, upper; 100% lower | 2 sets w/1 multi-position upper; 2 lower |
| Utility shelves | 4 w/StemSafe™ upper | 4 w/StemSafe upper |
| Silverware basket | Maximum capacity 3-pc. with ExtraBasket™ | Maximum capacity 3-pc. w/3 cell covers |
| Hard countertop installation | Included | Included |
| Latch | Squeeze | Squeeze |
| DryIndex | | |
| Calrod® heating element | Multi-wattage | Multi-wattage |
| Convection airflow | ● | ● |
| Quiet | | |
| Sound insulation package | QuietPower ⁴ | QuietPower ⁴ |
| Tub insulation | Thinstall™ Plus | Thinstall Plus |
| Door insulation | Mastic and insulation | Mastic and insulation |
| QuietPower™ motor | ● | ● |
| ActiveVent system | ● | ● |
| Tub collar trim | ● | ● |
| Electronic control system | ● | ● |
| Quiet water valve | ● | ● |
| Appearance | | |
| Colors available*** | SS, WW, CC, BB | SS, WW, CC, BB |
| Weights & Dimensions | | |
| Height w/legs retracted (in.) | 34 | 34 |
| Height w/legs removed (in.) | 33-13/16 | 33-13/16 |
| Overall width (in.) | 24 | 24 |
| Overall depth (in.) | 24-3/4† | 24-3/4† |
| Approx. shipping weight (lbs.) | 90 | 90 |

*Sensor controlled.


**Certified by National Sanitation Foundation.

***SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

†Add 1/2" for deepest part of contour door.

Electrical rating 120 Volts AC, 60 Hertz, 9.1 Amps total connected load 875 Watt Calrod heater. For use on adequately wired 120 volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Dishwasher nomenclature

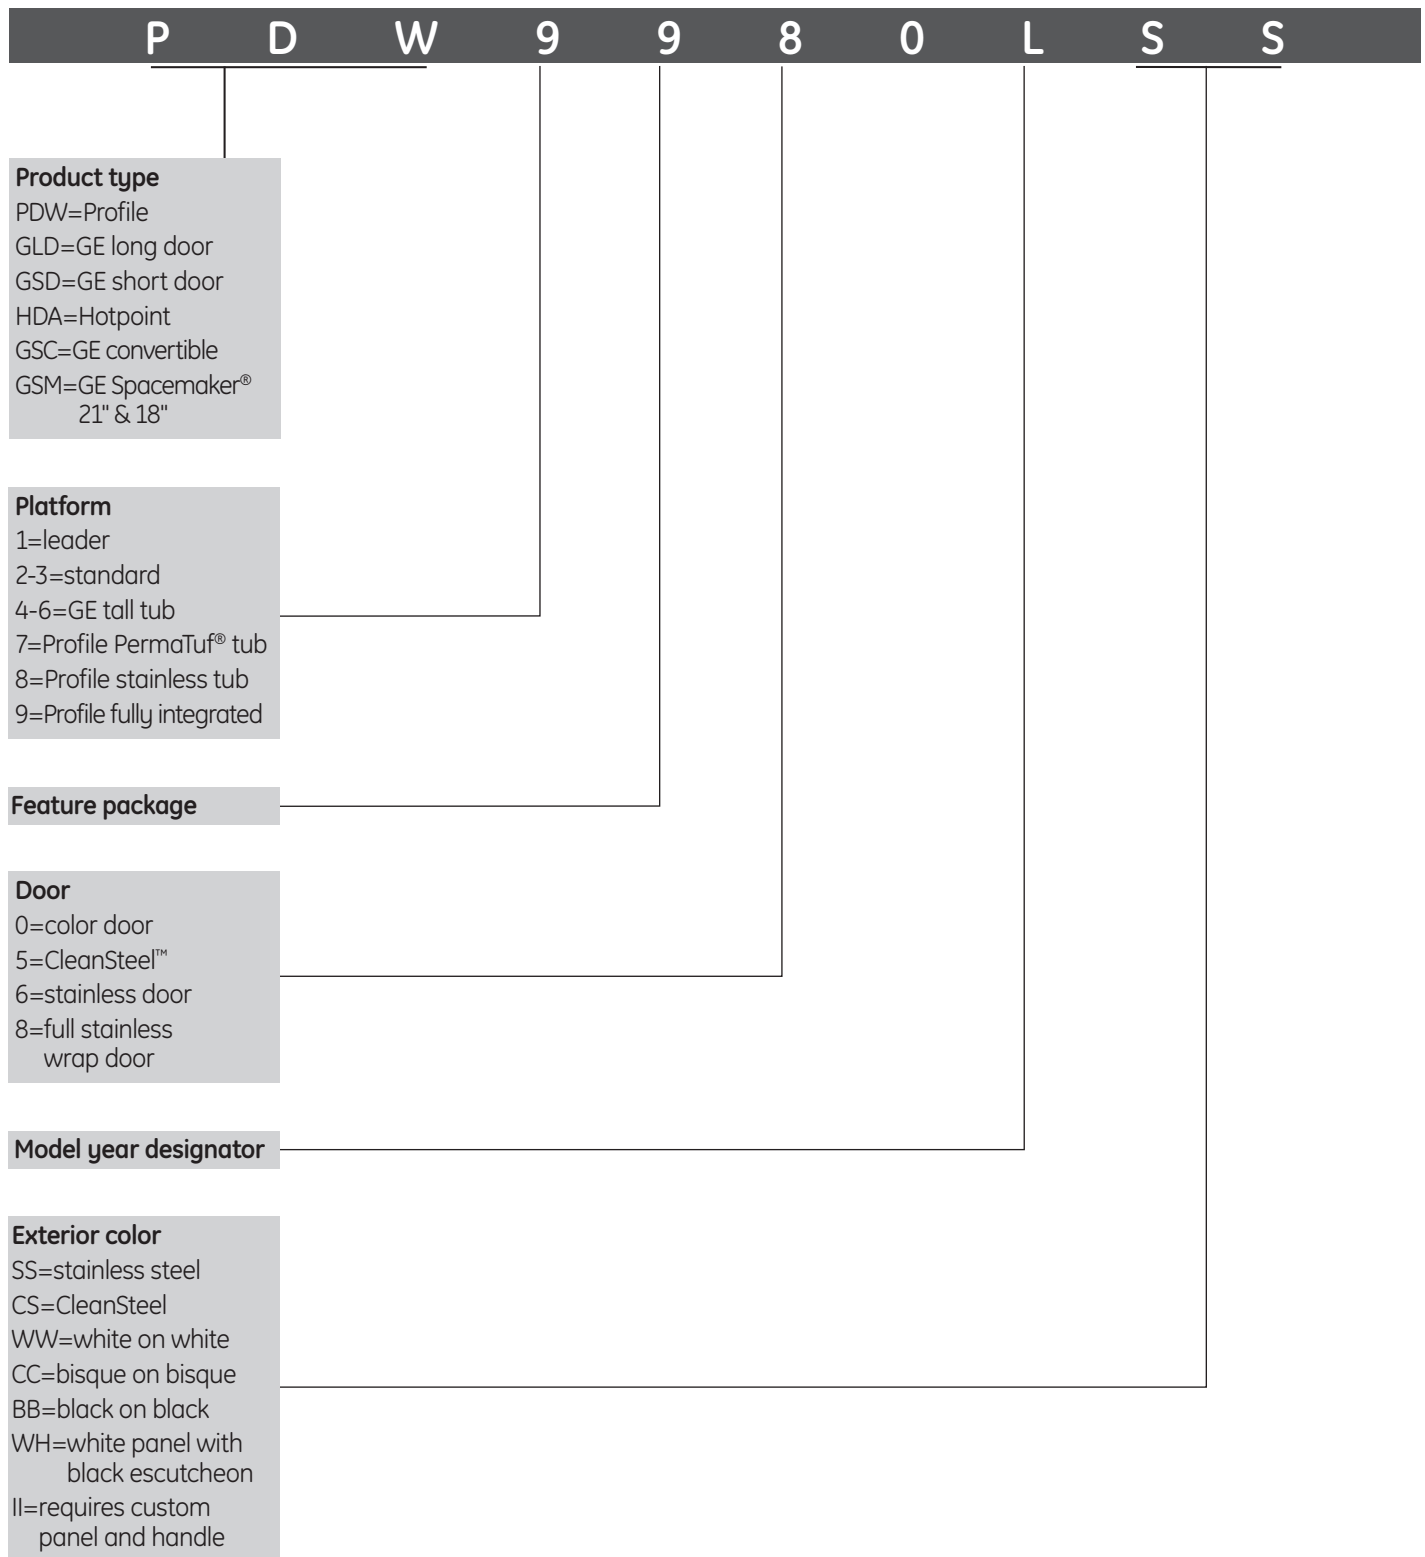



America's smartest dishwasher

It's simply genius! The **SmartDispense™ reservoir** holds an entire 45-oz. bottle's worth of liquid dishwasher detergent, automatically dispensing just the right amount for every load.



GE's quietest ever

Shhh...that's the sound of silence. With the advanced **QuietPower™7 sound package**, this dishwasher is as quiet as a library.



Ultimate flexibility

Angled Rack Dry™ system securely holds mugs and cups at an angle so water won't pool on top. **Single Rack Wash™ selection** saves time and energy by washing up to five place settings in the top rack only.

a product of
ecomaginationSM



A century of quality and innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

GE Consumer & Industrial
Appliances
General Electric Company
Louisville, KY 40225
ge.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2005 GE Company
Pub. No. 5-X075 PC40536