



• remarkable efficiency • better clothes care • [2004 product specifications](#) • first washer that communicates with the dryer

## GE Profile™ and GE® Clothes Care

imagination at work



Presenting the largest capacity pair available.







The new GE Profile Harmony™ clothes care system **has**  
**frontload wash performance with topload convenience.**

The HydroWash™ system provides thorough, yet **gentle,**  
**cleaning action.** And the DuoDry™ system delivers  
**unmatched drying performance.** What's more, with  
spacious **stainless steel interiors,** the Harmony  
clothes care system is the **largest capacity** pair  
available. There's simply nothing quite like it.



# Feature Gallery



## Washer features



**Only GE has it!**

### HydroWash™ System

Achieves frontload wash performance with topload convenience. It gently and thoroughly cleans almost all types of clothes, without agitation.



**Only GE has it!**

### Stain Inspector™ system

Treats more than 65 common stains, from grass stains to grease. It's the best stain removal system available.\*

\*Based on a number of stains treated with automatic settings matching soil, fabric type and garment color.



### Flow-thru™ dispenser system

Releases the cleaning solution, fabric softener, additives and bleach at just the right time to improve performance and save you time.



### 4.0 cu. ft.\*\* King-size stainless steel basket

Makes room for more items which means less time doing the laundry.



### ENERGY STAR®-qualified

As an ENERGY STAR partner, GE has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

## Dryer features



**Only GE has it!**

### Communication

The washer communicates electronically with the dryer, which then presets dry cycles for better clothes care, increased time savings and greater convenience.



**Only GE has it!**

### DuoDry™ system

Uses dual motors and dual thermistors to quickly and consistently dry clothes. It's the fastest premium dryer you can buy.



**Only GE has it!**

### Dual electronic thermistors

Continually monitor air temperatures to provide even heat for optimal drying performance. And a variable heater delivers constant heat, eliminating extreme temperature changes.



### King-size stainless steel drum

Handles king-size items and family-size loads, which means fewer loads per week.



### Adaptive cool-down

Warm air is gradually exhausted from the drum while clothes are gently tumbled with cool air to reduce wrinkling.

\*\*Washes equivalent amount of clothes as 4.0 cu. ft. agitator machine, per IEC ratios.




# Clothes Care System



## WPGT9350C

### GE Profile Harmony™ 4.0 cu. ft.\* King-Size Capacity Washer

- Full electronic controls with touchscreen
- Direct-drive motor with adaptive spin speed combinations
- HydroWash™ system with Infusor™
- Flow-Thru™ dispensing system
- Stain Inspector™ system
- Stainless steel basket
- Adaptive water levels
- 1010-RPM spin speed

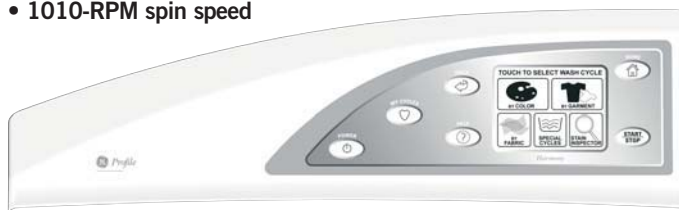

● WPGT9350CPL

○ WPGT9350CWW



## DPGT750EC/GC

### GE Profile Harmony 7.3 cu. ft. King-Size Capacity Dryer

- Full electronic controls with touchscreen
- DuoDry™ System
- Delicate Cycle with extra-low heat setting
- Stainless steel drum
- 5 heat selections
- Adaptive cool-down
- Wrinkle care extended tumble
- Venting capability of up to 150 ft. of equivalent ducting



● DPGT750ECPL (Electric)

DPGT750GCPL (Gas)

○ DPGT750ECWW (Electric)

DPGT750GCWW (Gas)

● Platinum ○ White

# Washers and Dryers



## WPRB9220D

### GE Profile 3.5 cu. ft. King-Size Capacity Washer

- Stainless steel basket
- **Full electronic controls with Adaptive Logic System™ with user-friendly icons**
- Variable speed motor
- **35 wash/spin speed combinations**
- Multiple wash cycles
- Stain wash cycle
- Speed Wash
- **800-RPM spin speed**



WPRB9220DWW



WPRB9220DCC



## WPRB9110D

### GE Profile 3.5 cu. ft. King-Size Capacity Washer

- Stainless steel basket
- Full electronic controls with Adaptive Logic System and LED readout
- **Variable speed motor**
- **10 wash/spin speed combinations**
- Multiple wash cycles
- **Stain wash cycle**
- **Speed Wash**
- **Ultra handwash cycle**



WPRB9110DWW



WPRB9110DCC



## WPRB8050D

### GE Profile 3.5 cu. ft. King-Size Capacity Washer


- Stainless steel basket
- **Full electronic controls with Adaptive Logic System and LED readout**
- 6 wash/spin speed combinations
- **Multiple wash cycles**
- **Handwash cycle**
- **PerfecTemp Plus**
- **Presoak cycle**
- **Auto 2nd rinse**



WPRB8050DWW



WPRB8050DCC

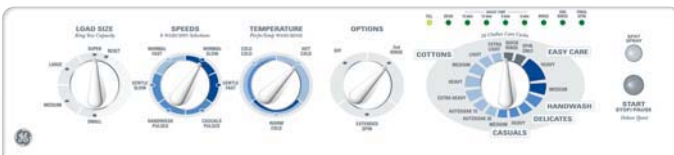

## WWRE6260D

### GE 3.5 cu. ft. King-Size Capacity Washer

- Stainless steel basket
- Rotary electronic controls with cycle status lights
- 6 wash/spin speed combinations
- 26 wash cycles
- Handwash cycle
- PerfecTemp
- Bleach and fabric softener dispensers
- 4 water levels



WWRE6260DWW





WWRE6260DCC

○ White    ○ Bisque

# Washers and Dryers





-  WHRE5260EWW
-  WHRE5260ECC

## WHRE5260E

GE 3.5 cu. ft. King-Size Capacity Washer

- Rotary electronic controls with cycle status lights
- 5 wash/spin speed combinations
- 26 cycles
- PerfectTemp
- Bleach and fabric softener dispensers
- 4 water levels





-  WWRE5240DWW
-  WWRE5240DCC

## WWRE5240D

GE 3.5 cu. ft. King-Size Capacity Washer

- Stainless steel basket
- **Rotary electronic controls with cycle status lights**
- 5 wash/spin speed combinations
- 24 wash cycles
- PerfectTemp
- Bleach and fabric softener dispensers
- 4 water levels



-  WJRR4170EWW
-  WJRR4170ECC



## WJRR4170E

GE 3.5 cu. ft. King-Size Capacity Washer

- **Stainless steel basket**
- Rotary electromechanical controls
- 4 wash/spin speed combinations
- 17 wash cycles
- Bleach and fabric softener dispensers
- 4 water levels
- Auto Soak (locked)
- Auto 2nd rinse

Available May 2004





-  WWSE5240DWW
-  WWSE5240DCC

## WWSE5240D

GE 3.2 cu. ft. Super Capacity Plus Washer

- Rotary electronic controls with cycle status lights
- 5 wash/spin speed combinations
- 24 wash cycles
- PerfectTemp
- Bleach and fabric softener dispensers
- 4 water levels
- Optional auto soak



-  WHSE5240DWW
-  WHSE5240DCC

## WHSE5240D

GE 3.2 cu. ft. Super Capacity Plus Washer



- **Energy-Star qualified**
- **Rotary electronic controls with cycle status lights**
- 5 wash/spin speed combinations
- 24 wash cycles
- PerfectTemp
- Bleach and fabric softener dispensers
- 4 water levels



 White  Bisque







-  **WJSR4160DWW**
-  **WJSR4160DCC**

## WJSR4160D

GE 3.2 cu. ft. Super Capacity Plus Washer

- Rotary electromechanical controls
- **4 wash/spin speed combinations**
- **16 wash cycles**
- Bleach and fabric softener dispensers
- **4 water levels**
- **Auto Soak (locked)**
- Auto 2nd rinse





-  **WBSR3140DWW**
-  **WBSR3140DCC**

## WBSR3140D

GE 3.2 cu. ft. Super Capacity Plus Washer

- Rotary electromechanical controls
- **3 wash/spin speed combinations**
- **14 wash cycles**
- Bleach and **fabric softener** dispensers
- 3 water levels
- **GentlePower™ agitator**
- Rinse and Spin





-  **WDSR2080DWW**
-  **WDSR2080DCC**

## WDSR2080D

GE 3.2 cu. ft. Super Capacity Washer

- Rotary electromechanical controls
- 2 pulse wash/spin speed combinations
- 8 wash cycles
- Bleach dispenser
- 3 water levels
- FlexCare™ agitator
- Spin Only option






-  **WBXR2090DWW**
-  **WBXR2090DCC**

## WBXR2090D

GE 2.7 cu. ft. Extra-Large Capacity Washer

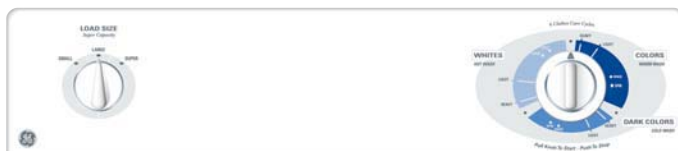- Rotary electromechanical controls
- **2 pulse wash/spin speed combinations**
- **9 wash cycles**
- 3 water levels
- FlexCare agitator
- Quiet-By-Design™
- Color lid instructions



-  **WVSR1060DWW**
-  **WVSR1060DCC**

## WVSR1060D

GE 3.2 cu. ft. Super Capacity Washer

- Rotary electromechanical controls
- 1 wash/spin speed combination
- 6 wash cycles
- FlexCare agitator
- 3 water levels
- 3 wash/rinse temperatures
- Quiet-By-Design
- Color lid instructions





# Washers and Dryers



## DPSB620EC/DPSB620GC

### GE Profile 7.0 cu. ft. King-Size Capacity Dryer

- Stainless steel drum
- **Perfect Dry™ system**
- **Dual-thermistor heat management**
- Full electronic controls with Adaptive Logic System with **user-friendly icons**
- **Delicate cycle with extra-low heat setting**
- **Speed Dry**
- 5 heat selections





-  **DPSB620ECWW** (Electric)
-  **DPSB620GCWW** (Gas)
-  **DPSB620ECCC** (Electric)
-  **DPSB620GCCC** (Gas)



## DPSB619ED/GD

### GE Profile 7.0 cu. ft. Super Capacity Dryer

- Stainless steel drum
- Sensor Dry Plus
- Full electronic controls with Adaptive Logic System and LED readout
- **Speed Dry**
- 5 heat selections
- Interior dryer light
- Multiple dry cycles, **including custom options**
- **Antibacterial cycle**
- Luxury quiet performance





-  **DPSB619EDWW** (Electric)
-  **DPSB619GDWW** (Gas)
-  **DPSB619EDCC** (Electric)
-  **DPSB619GDCC** (Gas)



## DPSB613ED/GD

### GE Profile 7.0 cu. ft. Super Capacity Dryer

- Stainless steel drum
- Sensor Dry Plus
- Full electronic controls with Adaptive Logic System and LED readout
- 5 heat selections
- Interior dryer light
- **Multiple dry cycles**
- **Luxury quiet performance**
- **Variable end-of-cycle signal**

-  **DPSB613EDWW** (Electric)
-  **DPSB613GDWW** (Gas)
-  **DPSB613EDCC** (Electric)
-  **DPSB613GDCC** (Gas)



## DWSR405EB/GB

### GE 7.0 cu. ft. Super Capacity Dryer

- Sensor Dry
- Delicate cycle with extra-low heat setting
- DuraDrum™
- 4 heat selections
- Wrinkle care extended tumble
- Interior dryer light
- **10 dry cycles**

-  **DWSR405EBWW** (Electric)
-  **DWSR405GBWW** (Gas)
-  **DWSR405EBCC** (Electric)
-  **DWSR405GBCC** (Gas)

 White  Bisque



## DWXR485EB/GB

GE 6.0 cu. ft. Extra- Large Capacity Dryer

- **Sensor Dry Plus**
- DuraDrum
- 4 heat selections
- Wrinkle care extended tumble
- Interior dryer light
- 8 dry cycles
- Deluxe quiet performance



**DWXR485EBWW** (Electric)  
**DWXR485GBWW** (Gas)  
**DWXR485EBCC** (Electric)  
**DWXR485GBCC** (Gas)



## DRSR483ED/GD

GE 7.0 cu. ft. Super Capacity Dryer

- **Stainless steel drum**
- Auto Dry
- 4 heat selections
- Wrinkle care extended tumble
- Interior dryer light
- 8 dry cycles
- Variable end-of-cycle signal



**DRSR483EDWW** (Electric)  
**DRSR483GDWW** (Gas)  
**DRSR483EDCC** (Electric)  
**DRSR483GDCC** (Gas)



## DWSR483EB/GB

GE 7.0 cu. ft. Super Capacity Dryer

- Auto Dry
- DuraDrum
- 4 heat selections
- Wrinkle care extended tumble
- Interior dryer light
- 8 dry cycles
- Variable end-of-cycle signal
- Available as a long vent version model DLSR483EE/GE



**DWSR483EBWW** (Electric)  
**DWSR483GBWW** (Gas)  
**DWSR483EBCC** (Electric)  
**DWSR483GBCC** (Gas)



## DWXR483EB/GB

GE 6.0 cu. ft. Extra-Large Capacity Dryer

- Auto Dry
- DuraDrum interior
- 4 heat selections
- **Wrinkle care extended tumble**
- Interior dryer light
- **8 dry cycles**
- Quiet-By-Design™




**DWXR483EBWW** (Electric)  
**DWXR483GBWW** (Gas)  
**DWXR483EBCC** (Electric)  
**DWXR483GBCC** (Gas)

○ White ○ Bisque





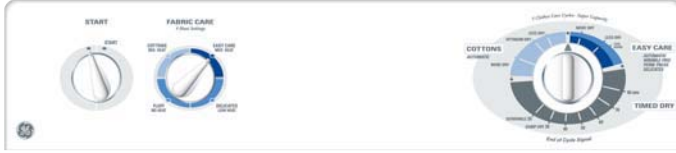

# Washers and Dryers




## DBSR453ED/GD

GE 7.0 cu. ft. Super Capacity Dryer

- Auto Dry
- DuraDrum™ interior
- 4 heat selections
- Interior dryer light
- 5 dry cycles
- Quiet-By-Design™
- Fixed end-of-cycle signal

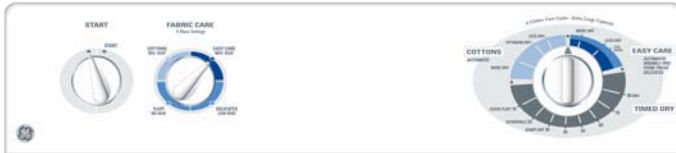


 **DBSR453EDWW** (Electric)  
 **DBSR453GDWW** (Gas)  
 **DBSR453EDCC** (Electric)  
 **DBSR453GDCC** (Gas)




## DBXR463ED/GD

GE 6.0 cu. ft. Extra-Large Capacity Dryer

- Auto Dry
- DuraDrum interior
- **4 heat selections**
- Interior dryer light
- **6 dry cycles**
- Quiet-By-Design
- **Fixed end-of-cycle signal**



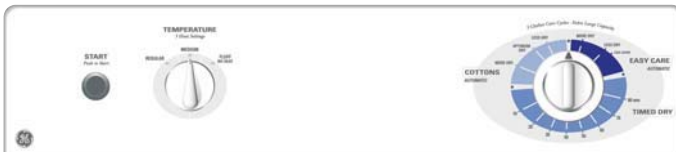

 **DBXR463EDWW** (Electric)  
 **DBXR463GDWW** (Gas)  
 **DBXR463EDCC** (Electric)  
 **DBXR463GDCC** (Gas)



## DBLR333EE/GE

5.8 cu. ft. Extra-Large Capacity Dryer

- Auto Dry
- DuraDrum interior
- **3 heat selections**
- **3 dry cycles**
- Quiet-By-Design
- Reverse-A-Door
- Upfront lint filter

 **DBLR333EEWW** (Electric)  
 **DBLR333GEWW** (Gas)  
 **DBLR333EECC** (Electric)  
 **DBLR333GECC** (Gas)

Available July 2004



## DVLR223EE/GE

GE 5.8 cu. ft. Extra-Large Capacity Dryer

- Auto Dry
- **DuraDrum interior**
- 2 heat selections
- 2 dry cycles
- Quiet-By-Design
- Reverse-A-Door
- Upfront lint filter

 **DVLR223EEWW** (Electric)  
 **DVLR223GEWW** (Gas)  
 **DVLR223EECC** (Electric)  
 **DVLR223GECC** (Gas)

Available July 2004

 White
  Bisque



## WPXH214A

### GE Profile™ Front-Loading Washer

- 3.1 IEC extra-large capacity
- Adaptive water levels
- Timed dispensers
- **14 wash cycles**
- **950-RPM spin speed**
- Fixed end-of-cycle signal
- Auto 2nd rinse
- Delicate cycle



WPXH214AWW



WPXH214ACC



## DPXH46EA/GA

### GE Profile Front-Loading Dryer

- 5.7 cu. ft. extra-large capacity dryer
- Rotary controls **with Sensor Dry**
- Under-the-counter and stacked installation options
- Painted steel drum interior
- **6 dry cycles**
- Fixed end-of-cycle signal
- **Optional wrinkle care**



DPXH46EAWW (Electric)  
DPXH46GAWW (Gas)



DPXH46EACC (Electric)  
DPXH46GACC (Gas)



## WSXH208A

### GE Front-Loading Washer

- 3.1 IEC extra-large capacity
- Adaptive water levels
- Timed dispensers
- 8 wash cycles
- Adjustable end-of-cycle signal
- Auto 2nd rinse
- Delicate cycle



WSXH208AWW



## DSXH43EA/GA

### GE Front-Loading Dryer

- 5.7 cu. ft. extra-large capacity dryer
- Rotary controls
- Under-the-counter and stacked installation options
- Painted steel drum interior
- 3 dry cycles
- Adjustable end-of-cycle signal
- 4 temperature options



DSXH43EAWW (Electric)  
DSXH43GAWW (Gas)

○ White    ○ Bisque

# Washers and Dryers



## WSLP1100D

GE 120V Portable  
Topload Washer

- **2.5 cu. ft. extra-large capacity**
- **Stainless steel basket**
- **Electronic one-touch controls with LED read-out**
- **One-touch load sensing**
- **10 wash cycles**
- 3 wash/rinse temperatures
- 1 wash/spin speed
- 4 water levels

○ WSLP1100DWW

## WSLS1100D

Similar to the WSLP1100D,  
except is a stationary model.

○ WSLS1100DWW



## WSKS2060W

GE 120V Stationary  
Topload Washer

- 2.0 cu. ft. large capacity
- 2 wash/spin speeds
- 6 wash cycles
- 3 wash/rinse temperatures
- 4 water levels
- Bleach dispenser
- Quiet pump
- PermaTuf® II basket

◐ WSKS2060WWH



## DSKS433EB

GE 240V  
Stationary Dryer

- 3.6 cu. ft. capacity
- Auto dry
- **4 heat selections**
- 3 dry cycles
- Rotary controls
- Upfront lint filter

○ DSKS433EBWW

◐ DSKS433EBWH



## DSKP333EC

GE 120V  
Portable Dryer


- 3.6 cu. ft. capacity
- 3 dry cycles
- 3 heat selections (Timer)
- DuraDrum™ interior
- Quiet-By-Design
- Portable model

○ DSKP333ECWW

## DSKS333EC

Similar to the DSKP333EC,  
except is a stationary model and  
controls are located at bottom of  
unit for rack or wall installation.

○ DSKS333ECWW



## DSDR24D

GE Stack Rack

For use with portable or stationary Spacemaker  
washers and stationary dryers.

○ DSDR24D

○ White    ◐ White with black controls





### WSM2700D

GE® Full-Size 27"  
Unitized Washer/Dryer

- **2.7 cu. ft. extra-large capacity**
- 1 wash/spin speed
- 3 wash cycles
- 3 wash/rinse temperatures
- 3 water levels
- Electromechanical controls



**WSM2700DWW** (Electric)  
**WSM2780DWW** (Gas)



**WSM2700DCC** (Electric)



### WSM2420D

GE 24" Unitized  
Washer/Dryer

- 1.9 cu. ft. large capacity
- 2 wash/spin speed combinations
- 3 wash cycles
- 3 wash/rinse temperatures
- 3 water levels
- Electromechanical controls



**WSM2420DWW** (Electric)  
**WSM2480DWW** (Gas)



**WSM2420DCC** (Electric)

# GE Profile™ Washers



	GE Profile			
	WPGT9350C	WPRB9220D	WPRB9110D	WPRB8050D
<b>Capacity</b>				
Capacity cu. ft.	4.0* King-size	3.5 King-size	3.5 King-size	3.5 King-size
<b>Energy</b>				
ENERGY STAR®	●	●	●	●
<b>Controls</b>				
Electronic	LCD touchscreen display	With icons	●	●
Status indicators	LCD display	LED	LED	LED
Cycle countdown	LCD	LED	●	●
Adaptive capabilities	Water levels	Cycle time	Cycle time	Cycle time
Water temp system	RightTemp	PerfecTemp Plus	PerfecTemp Plus	PerfecTemp Plus
Wash/rinse temps	4	3	3	3
Water levels	Adaptive fill	5	4	4
Spot spray			●	●
<b>Wash System</b>				
Wash basket	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Wash mechanism	Infusor™	GentlePower™ Agitator	GentlePower Agitator	GentlePower Agitator
Wash/spin combinations	Multiple	Multiple	10	6
<b>Drive System</b>				
Variable-speed motor	Direct drive	●	●	
Transmission		Steel	Steel	Steel
Maximum spin speed	1010 RPM	800 RPM	630 RPM	630 RPM
<b>Dispensers</b>				
Bleach	Flow-Thru™ timed	●	●	●
Fabric softener	Flow-Thru timed	●	●	●
Detergent	Flow-Thru timed			
Wash Boost	Flow-Thru timed			
<b>Signals</b>				
End-of-cycle	Variable	Variable	Variable	●
Add bleach	Variable	Variable	Variable	
<b>Wash Cycles</b>				
Number of cycles	Multiple	Multiple	Multiple	Multiple
Custom cycles	6	2	2	
<b>Cycle Selections</b>				
Whites	●	●	●	●
Colors	●	●	●	●
Dark colors	●	●	●	●
Easy care	●	●	●	●
Handwash	●	Ultra	Ultra	Pulsed
Specialty cycles	Multiple			Casuals - pulsed
<b>Program Options</b>				
Stain wash	Stain Inspector™	●	●	
Extra heavy soil	Super Clean			
Heavy soil	●	●	●	●
Medium soil	●	●	●	●
Light soil	●	●	●	●
Extra light soil	●			●
<b>Special Cycles</b>				
Delay start	●	●	●	
Speed wash	Quick Clean	●	●	
Prewash	●		●	●
2nd rinse	●	●	●	●
Extended spin	●		●	●
Rinse and spin	●	●	●	●
Spin only	●	●	●	●
<b>Additional Features</b>				
Quiet performance	Supreme	Luxury	Luxury	Luxury
Color lid instructions	●	●	●	●
<b>Appearance</b>				
Colors available**	PL, WW	WW, CC	WW, CC	WW, CC
<b>Weights &amp; Dimensions</b>				
Approx. shipping weight (lbs.)	155	175	175	175

\*Washes equivalent amount of clothes as 4.0 cu. ft. agitator machine per IEC ratios.



\*\*PL = Dark Platinum, WW = White on white, CC = Bisque on bisque.

## Washer Dimensions (in inches)

### GE Profile Harmony™ Washer



### Washer Dimensions (in inches)



## Washer Specifications

### Circuit Requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

### Electrical Rating:

115V, 60Hz, 10A


### Washer Note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

## GE® Washers

	GE										
	WWRE6260D	WHRE5260E	WWRE5240D	WJRR4170E	WWSE5240D	WHSE5240D	WJSR4160D	WBSR3140D	WDSR2080D	WBXR2090D	WVSR1060D
<b>Capacity</b>											
Capacity cu. ft.	3.5 King-size	3.5 King-size	3.5 King-size	3.5 King-size	3.2 Super Plus	3.2 Super Plus	3.2 Super Plus	3.2 Super Plus	3.2 Super	2.7 Extra-large	3.2 Super
<b>Controls</b>											
Rotary electronic	●	●	●	Rotary	●	●	Rotary	Rotary	Rotary	Rotary	Rotary
Status indicators	Status lights	Status lights	Status lights		Status lights	Status lights					
Water temp system	PerfecTemp	PerfecTemp	PerfecTemp		PerfecTemp	PerfecTemp					
Wash/rinse temps	3	3	3	3	3	3	3	3	3	3 locked	3 locked
Water levels	4	4	4	4	4	4	4	3	3	3	3
Spot spray	●										
<b>Wash System</b>											
Wash basket	Stainless steel	Stainless steel	Stainless steel	Stainless steel	ExtraAction™	ExtraAction	ExtraAction	ExtraAction	PermaTuf™ II	PermaTuf II	PermaTuf II
Wash mechanism	GentlePower™ Agitator	GentlePower Agitator	GentlePower Agitator	GentlePower Agitator	GentlePower Agitator	GentlePower Agitator	GentlePower Agitator	GentlePower Agitator	FlexCare™ Agitator	FlexCare Agitator	FlexCare Agitator
Wash/spin combinations	6	5	5	4	5	5	4	3	2-pulsed	2-pulsed	1
<b>Drive System</b>											
Transmission	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
Maximum spin speed	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM
<b>Dispensers</b>											
Bleach	●	●	●	●	●	●	●	●	●		
Fabric softener	●	●	●	●	●	●	●	●	●		
<b>Wash Cycles</b>											
Number of cycles	26	26	24	17	24	24	16	14	8	9	6
<b>Cottons Regular</b>	●	●	●	●	●	●	●	●	Whites	Whites	Whites
Auto soak (30 min.)	●			●			●	●			
Auto soak (15 min.)	●	●		●			●	●			
Extra heavy soil	●	●	●		●	●		●			
Heavy soil	●	●	●	●	●	●	●	●	●	●	●
Medium soil	●	●	●	●	●	●	●	●	●	●	●
Light soil	●	●	●	●	●	●	●	●	●	●	●
Extra light	●			●							
<b>Easy Care</b>	●	●	●	●	●	●	●	●		Dark colors	Colors
Auto soak (15 min.)		●		●			●	●			
Heavy soil	●	●	●	●	●	●	●	●		●	●
Medium soil	●	●	●	●	●	●	●	●		●	●
Light soil		●	●	●	●	●	●	●		●	●
Extra light soil				●			●	●			
<b>Casuals - Pulsed</b>	●	●	●		●	●			●	●	
Heavy soil	●	●	●		●	●			●	●	
Medium soil	●	●	●		●	●			●	●	
Light soil									●	●	
<b>Delicate</b>	●	●	●	●	●	●					Dark colors
Heavy soil											●
Medium soil	●	●	●		●	●					
Light soil			●	●	●	●	●	●			●
<b>Handwash - Pulsed</b>	●										
Medium soil	●										
<b>Hang to Dry/Prewash</b>		●	●		●	●					
<b>Special Cycles</b>											
Prewash			●	●			●				
2nd rinse	●	●	●	●	●	●	●	●			
Soak option			●		●	●					
Extended spin	●	●									
Rinse & spin (Quick rinse)	●	●	●	●	●	●	●	●	●		
Spin only	●	●	●	●	●	●	●	●	●		
<b>Additional Features</b>											
Quiet performance	Deluxe	Quiet-By-Design™	Quiet-By-Design	Quiet-By-Design	Quiet-By-Design	Quiet-By-Design	Quiet-By-Design	Quiet-By-Design	Quiet-By-Design	Quiet-By-Design	Quiet-By-Design
Color lid instructions	●	●	●	●	●	●	●	●	●	●	●
<b>Appearance</b>											
Colors available*	WW, CC	WW, CC	WW, CC	WW, CC	WW, CC	WW, CC	WW, CC	WW	WW, CC	WW	WW
<b>Weights &amp; Dimensions</b>											
Approx. shipping weight (lbs.)	175	160	175	160	160	160	160	160	160	160	160

\*WW = White on white, CC = Bisque on bisque.

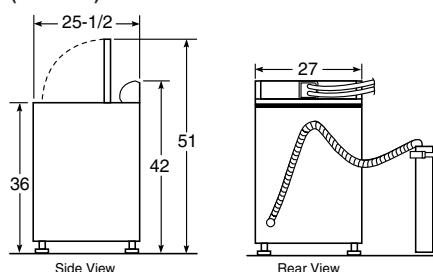Washer Dimensions  
(in inches)

## Washer Specifications

## Circuit Requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

## Electrical Rating:

115V, 60Hz, 10A

## Washer Note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.



# GE Profile™ Dryers

	GE Profile			
	Electric	DPSB620EC	DPSB619ED	DPSB613ED
Gas	DPSB620GC	DPSB619GD	DPSB613GD	
<b>Capacity</b>				
Capacity cu. ft.	7.3 King-size	7.0 King-size	7.0 Super	7.0 Super
<b>Controls</b>				
Electronic	●	●	●	●
Status indicators	LCD	LED	LED	LED
Cycle countdown	LCD	LED	LED	LED
Adaptive logic	●	●	●	●
Heat selections	5	5	5	5
<b>Dry System</b>				
Clothing moisture sensor	DuoDry™	Sensor Dry Plus	Sensor Dry Plus	Sensor Dry Plus
Temperature sensor	Thermistors	Thermistors	Thermostat	Thermostat
Dryer drum	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Drum baffles	Dark Platinum	White	White	White
Dual motors	●			
<b>Signals</b>				
End-of-cycle	Variable	Variable	Variable	Variable
Damp dry		Variable	Variable	
<b>Dry Cycles</b>				
Number of cycles	Multiple	Multiple	Multiple	Multiple
Custom cycles	6	2	2	
<b>Cycle Selections</b>				
Cottons	●	●	●	●
Mixed loads	●	●	●	●
Easy care	●	●	●	●
Knits sweaters	●	●	●	●
Delicates	●	●	●	●
Specialty cycles	Multiple			
<b>Program Options</b>				
More dry	●	●	●	●
Dry	●	●	●	●
Less dry	●	●	●	●
Damp dry	●	●	●	●
<b>Timed Dry</b>				
Time control	Electronic	Electronic	Electronic	Electronic
<b>Special Cycles</b>				
Speed dry		●	●	
Antibacterial cycle		●	●	
Dryer® cycle	●	●	●	
Delay start	●	●	●	
Add time option	●	●	●	●
Dewrinkle	●	●	●	●
Quick Fluff (no heat)	●	●		
Warm up	●		●	
<b>Additional Features</b>				
Quiet performance	Supreme	Luxury	Luxury	Luxury
Quiet drum	●	●	●	
Deluxe dryer rack	●	●	●	●
Dryer interior light	●	●	●	●
Extended venting capability	Up to 150 ft.			
Clean lint filter reminder	●	●	●	●
<b>Appearance</b>				
Colors available*	PL, WW	WW, CC	WW, CC	WW, CC
<b>Weights &amp; Dimensions</b>				
Approx. shipping weight—elec. (lbs.)	155	122	125	125
Approx. shipping weight—gas (lbs.)	156	127	129	129

\*PL = Dark Platinum, WW = White on white, CC = Bisque on bisque.

## Dryer Specifications

### Exhaust Options:

**Electric:** 4-way via rear, right, left and bottom.

**Gas:** For 7.0 and 7.3 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

### Circuit Requirements:

**Electric:** An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

### Electric Dryer Rating:

240V, 6000W, 28.5A, 60Hz—7.3 cu. ft. dryer

240V, 5600W, 24A, 60Hz—7.0 cu. ft. dryers

208V, 4400W, 22A, 60Hz—7.0 cu. ft. dryers

**Gas:** An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.

### NEMA Receptacle Codes:

3 prong dryer cord/30A/4' long (cat #WX9X2) is for NEMA10-30R receptacle.

4 prong dryer cord/30A/4' long (cat #WX9X18) is for NEMA14-30R receptacle.

### Gas Dryer Electric Rating:

120V, 60Hz, 6A


**Gas (BTU/HR):** 22,000 for 6.0 cu. ft. and 7.0 cu. ft. dryers and 25,000 for 7.3 cu. ft. dryers. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 7.0 cu. ft. model kit is WE25X0217 and 7.3 cu. ft. model kit is WE25X10014. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

**Note:** Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

**Note:** GE Profile Harmony™ 7.3 cu. ft. dryer elbow kit, Pub. No. 14-A003, is available at additional cost.

**Note:** An extra length (10-ft.) communication cable, Pub. No. 14-A013, is available at additional cost.

## Dryer Dimensions (in inches)

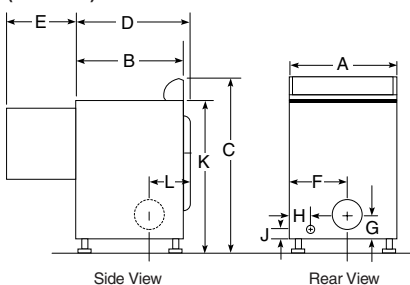


	7.0 cu. ft. Capacity	7.3 cu. ft. Capacity
A	27	27
B	25-1/2*	26-1/2
C	42	43-1/4
D	28-1/4	29
E	23-1/2	22-1/2
F	11-1/2	13
G	3-1/2	3-1/2
H	2	3
J	2-1/2	2-1/2
K	36	37-1/4
L	8-1/2	3-1/2

\*24-1/2" from the edge of the side panel to the front. 25-1/2" from front to edge of end caps.

## Power Cord Locations

### 7.0 cu. ft. Dryers




## GE® Dryers

Electric Gas	GE									
	DWSR405EB	DWXR485EB	DRSR483ED	DWSR483EB	DLSR483EE	DWXR483EB	DBSR453EB	DBXR463ED	DBLR333EE	DVLR223EE
	DWSR405GB	DWXR485GB	DRSR483GD	DWSR483GB	DLSR483GE	DWXR483GB	DBSR453GB	DBXR463GD	DBLR333GE	DVLR223GE
Capacity										
Capacity cu. ft.	7.0 Super	6.0 Extra-large	7.0 Super	7.0 Super	7.0 Super	6.0 Extra-large	7.0 Super	6.0 Extra-large	5.8 Extra-large	5.8 Extra-large
Controls										
Rotary	●	●	●	●	●	●	●	●	●	●
Heat selections	4	4	4	4	4	4	4	4	3	2
Long vent capability					up to 150 ft					
Dry System										
Clothing moisture sensor	Sensor Dry Plus	Sensor Dry Plus								
Temperature sensor	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Dryer drum	DuraDrum™	DuraDrum	Stainless Steel	DuraDrum	DuraDrum	DuraDrum	DuraDrum	DuraDrum	DuraDrum	DuraDrum
Drum baffles	White	White	White	White	White	White	White	White	White	White
Signals										
End-of-cycle	Deluxe	Deluxe	Variable	Variable	Variable	Variable	Fixed	Fixed		
Dry Cycles										
Number of cycles	10	8	8	8	8	8	5	6	3	2
Cottons	●	●	●	●	●	●	●	●	●	●
Easy care	●	●	●	●	●	●	●	●	●	
Optional wrinkle care	●	●	●	●	●	●				
Damp dry	●		●	●	●	●	●	●		
Timed Dry										
Time control	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.
Special Cycles										
Dewrinkle	●	●	●	●	●	●	●	●		
Quick Fluff (no heat)	●		●	●	●	●		●		
Additional Features										
Quiet performance	Deluxe	Deluxe	Quiet-by-Design™	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design
Deluxe dryer rack	●									
Dryer interior light	●	●	●	●	●	●	●	●		
Appearance										
Colors available*	WW/CC	WW/CC	WW/CC	WW/CC	WW/CC	WW/CC **	WW/CC	WW/CC	WW/CC	WW
Weights & Dimensions										
Approx. shipping weight—elec. (lbs.)	119	112	119	119	120	112	119	112	112	112
Approx. shipping weight—gas (lbs.)	125	115	125	125	125	115	125	115	115	115

\*WW = White on white, CC = Bisque on bisque.

\*\*DWXR483GB available in White on white only.

## Dryer Dimensions (in inches)

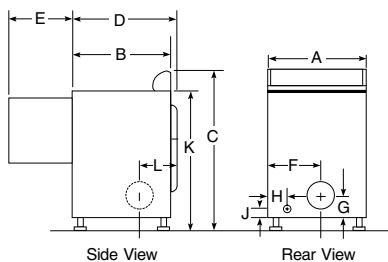


	5.8 & 6.0 cu. ft. Capacity	7.0 cu. ft. Capacity
A	27	27
B	25-1/2*	25-1/2*
C	42	42
D	25-3/4	28-1/4
E	23-1/2	23-1/2
F	11-1/2	11-1/2
G	3-1/2	3-1/2
H	2	2
J	2-1/2	2-1/2
K	36	36
L	5-1/4	8-1/2


\*24-1/2" from the edge of the side panel to the front. 25-1/2" from front to edge of end caps.

## Power Cord Locations

5.7 cu. ft. Dryers



5.8, 6.0 and 7.0 cu. ft. Dryers



## Dryer Specifications

## Exhaust Options:

**Electric:** 4-way via rear, right, left and bottom, **except for DLSR483 which is exhausted 3-way via rear, right and bottom.****Gas:** For 5.8, 6.0 and 7.0 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom, **except for DLSR483 which is exhausted 2-way via rear and bottom.** Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

## Circuit Requirements:

**Electric:** An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

## Electric Dryer Rating:

240V, 5600W, 24A, 60Hz—5.8, 6.0, 7.0 cu. ft. dryers  
208V, 4400W, 22A, 60Hz—5.8, 6.0, 7.0 cu. ft. dryers**Gas:** An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.

## Gas Dryer Electric Rating:

120V, 60Hz, 6A

**Gas (BTU/HR):** 22,000 for 5.8, 6.0 and 7.0 cu. ft. dryers. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 5.8, 6.0 and 7.0 cu. ft. model kit is WE25X0217. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.**Dryer Note:** Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

# Dryer Exhausting Information

For complete information see installation instructions packed with dryer.

**Important Note:** To convert a 5.7 cu. ft. dryer from rear exhaust to bottom or side venting, Pub. No. 14-A018 is required. To convert a 7.3 cu. ft. dryer from rear exhaust to bottom or side venting, Pub. No. 14-A003 is required. 6.0 cu. ft. and 7.0 cu. ft. dryers do not require additional parts to convert to bottom or side venting. **Note:** An extra length (10-ft.) communication cable is available at additional cost, Pub. No. 14-A013.

## Ducting Materials

For best performance, this dryer should be vented with 4" diameter all-rigid metal exhaust duct. If "all-rigid metal" duct cannot be used, then "flexible all-metal" venting can be used, but it will reduce the maximum recommended duct length.

The following kit or parts are available from your local service organization.

Kit WX8X75—7' aluminum duct and 4' hood, short tail.

(OR individual parts):

WX8X65 7' aluminum flex duct only

WX8X58 4' clamps (2)

WX8X67 4' exhaust hood

See installation instructions for complete information.

## Exhaust length calculation:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.  
The maximum lengths for flexible ducts are less than for rigid duct.  
See table in installation instructions. A turn of 45° or less may be ignored.  
Two 45° turns within the duct length should be treated as a 90° elbow.  
A turn over 45° should be treated as a 90° elbow.

**Exhausting the dryer to the outside is strongly recommended** to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

**Caution:** For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down. Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

# Special Installation Requirements

## Alcove or Closet Installation

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer **MUST** be exhausted to the outdoors. See installation instructions.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:  
0" either side  
3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc., is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

## Bathroom or Bedroom Installation

- The dryer **MUST** be exhausted to the outdoors. See installation instructions.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

## Minimum Clearances other than Alcove or Closet Installations

- Minimum clearances to combustible surfaces:  
0" both sides  
3" rear

## Side or Bottom Exhaust

- For 7.3 cu. ft. models, order kit Pub. No. 14-A003
- For 7.0 or 6.0 cu. ft. models, see installation instructions
- For 5.7 cu. ft. models, order kit Pub. No. 14-A018

For more information on venting kits and accessories, please call 1-800-GE-CARES.

## Dryer Exhausting Information—Use Metal Duct Only

### Vertical and Horizontal Ducting

	Number of 90° Turns	Best Performance			
		Maximum Length of 4" Dia. <b>Rigid Metal Duct</b>		Maximum Length of 4" Dia. <b>Flexible Metal Duct</b>	
		Exhaust Hood Type		Exhaust Hood Type	
		A	B	A	B
Domestic Dryer Models		4" Opening	2-1/2" Opening	4" Opening	2-1/2" Opening
7.3 Capacity Electric and Gas Dryers	0	150 ft.	127 ft.	75 ft.	52 ft.
	1	140 ft.	117 ft.	65 ft.	42 ft.
	2	130 ft.	107 ft.	55 ft.	32 ft.
	3	120 ft.	97 ft.	45 ft.	22 ft.
7.0 and 6.0 Capacity Models all Electric Dryers	4	110 ft.	87 ft.	35 ft.	12 ft.
	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
7.0 and 6.0 Capacity Models all Gas Dryers	3	35 ft.	25 ft.	20 ft.	15 ft.
	4	25 ft.	15 ft.	15 ft.	10 ft.
DLSR483E/G	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
	3	35 ft.	25 ft.	20 ft.	15 ft.
	4	25 ft.	15 ft.	15 ft.	10 ft.
5.7 Capacity Electric and Gas Dryers	0	150 ft.	125 ft.	75 ft.	52 ft.
	1	135 ft.	115 ft.	65 ft.	42 ft.
	2	125 ft.	105 ft.	55 ft.	32 ft.
	3	115 ft.	95 ft.	45 ft.	22 ft.
Spacemaker® Models	4	105 ft.	85 ft.	35 ft.	12 ft.
	5	95 ft.	75 ft.	25 ft.	10 ft.
DSKS433EB DSKS333EC DSKP333EC WSM2780D	0	60 ft.	48 ft.	30 ft.	18 ft.
	1	52 ft.	40 ft.	22 ft.	14 ft.
	2	44 ft.	32 ft.	14 ft.	10 ft.
	3	32 ft.	24 ft.	—	—
Spacemaker Model WSM2700D	4	28 ft.	16 ft.	—	—
	0	56 ft.	42 ft.	30 ft.	22 ft.
	1	46 ft.	36 ft.	22 ft.	14 ft.
Spacemaker Models WSM2420D WSM2480D	2	34 ft.	28 ft.	16 ft.	10 ft.
	3	32 ft.	18 ft.	10 ft.	5 ft.
	0	43 ft.	36 ft.	30 ft.	24 ft.
	1	33 ft.	26 ft.	24 ft.	18 ft.
	2	23 ft.	16 ft.	16 ft.	10 ft.



Listed by  
Underwriters  
Laboratories




## Front-Loading Washer

	GE Profile™	GE®
	WPXH214A	WSXH208A
<b>Capacity</b>		
Capacity	Extra-large	Extra-large
Cubic feet	3.1 IEC	3.1 IEC
<b>Features</b>		
ENERGY STAR®	●	●
Total water usage	Approx. 25 gallons maximum	
Wash/rinse temperatures	7	4
Water levels	Auto. adjustment	Auto. adjustment
Standard rinse cycles	4	3
Motor speeds	Variable	Variable
ColorLogic™	●	●
Combinations*	HC, WW, WC, CC	HC, WW, WC, CC
Detergent dispenser (liquid/powder)	●	●
Bleach dispenser	●	●
Fabric softener dispenser	●	●
End-of-cycle signal	Fixed	Adjustable
Final spin/speed selections	4	Automatic
Number of wash cycles	14	8
Cotton		
Heavy Soil	●	●
Medium Soil	●	●
Light Soil	●	●
Easy Care		
Medium Soil/Perm. Press	●	●
Light Soil/Wrinkle Free	●	●
Delicates/Ultra Care	●	●
Pre-Wash		●
Quick Wash	●	●
Extra-Rinse Cycle/Auto Option	3	2
Max. spin speed	950	850
AutoTemp	●	●
Noise package	Deluxe	Standard
Leveling legs	●	●
Stainless steel wash basket	●	●
<b>Appearance</b>		
Colors available	White on white, Bisque on bisque	White on white
<b>Weights &amp; Dimensions</b>		
Approx. shipping weight (lbs.)	217	217
Flexible installation	Undercounter, stacked, side-by-side	

\*HC = Hot-Cold, WW = Warm-Warm, WC = Warm-Cold, CC = Cold-Cold.

### Washer Dimensions (in inches)

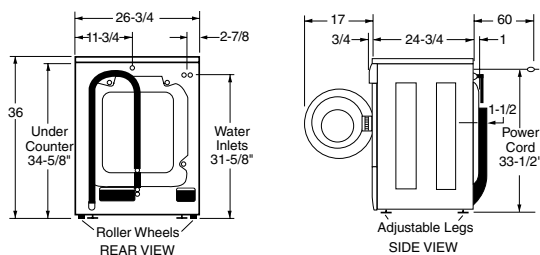

### Washer Specifications

**Circuit Requirements:** An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.


**Electrical Requirements:** 120V, 60 Hertz, 12.0 Amps

See Pub. No. 31-2819 for installation information.



## Front-Loading Matching Dryer

	GE Profile	GE
	DPXH46EA/GA	DSXH43EA/GA
<b>Capacity</b>		
Capacity	Extra-large	Extra-large
Cubic feet	5.7	5.7
<b>Features</b>		
Tumble drying	●	●
Time dry cycles	1	1
Auto dry cycles	5	2
Sensor Dry	●	●
ColorLogic	●	●
Temperature options	4	4
Regular/Cottons	●	●
Medium/Perm. Press	●	●
Low/Delicates	●	●
Air Fluff/No Heat (Cool Down)	●	●
Wrinkle Care cycle	2	●
Moisture sensor	●	●
Drying rack	●	●
Auto Dry Cycles		
Cottons	●	●
Easy Care	●	●
Knits/Delicate	●	●
Cool Down	●	●
Quick clean lint screen	●	●
End-of-cycle signal	Fixed	Adjustable
Dryer interior light	●	●
Reverse-A-Door	●	●
Dura finish top and drum	●	●
Spill-Saver top	●	●
Poly tumbling vanes	●	●
Leveling legs	●	●
100% front serviceable	●	●
Exhaust options (Electric/Gas)	4/3	4/3
Heavy-duty suspension system	●	●
<b>Appearance</b>		
Colors available	White on white, Bisque on bisque	White on white
<b>Weights &amp; Dimensions</b>		
Approx. shipping wt. (Elec/Gas) (lbs.)	116	116
Flexible installation	Undercounter, stacked, side-by-side	
LP conversion kit	WE25X10016	WE25X10016

### Dryer Dimensions (in inches)

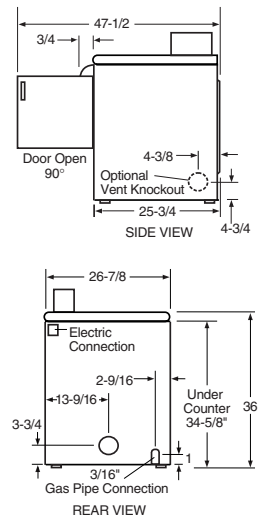

### Dryer Exhausting Information— Use Metal Duct Only

Use Metal Duct Only		Best Performance	
		Maximum Length of 4" Dia. <b>Rigid Metal Duct</b>	
		Number of 90° Turns	Exhaust Hood Type
<b>A</b> 4" Opening			<b>B</b> 2-1/2" Opening
Front Loading Dryers	0	60 ft.	48 ft.
	1	52 ft.	40 ft.
	2	44 ft.	32 ft.
	3	32 ft.	24 ft.
	4	28 ft.	16 ft.
		Maximum Length of 4" Dia. <b>Flexible Metal Duct</b>	
	Number of 90° Turns	Exhaust Hood Type	
		<b>A</b> 4" Opening	<b>B</b> 2-1/2" Opening
Front Loading Dryers	0	30 ft.	18 ft.
	1	22 ft.	14 ft.
	2	14 ft.	10 ft.

### Dryer Specifications

#### Exhaust Options:

**Electric:** 4-way via rear, right, left and bottom.  
**Gas:** For 5.7 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, right and bottom.  
 Dryer is shipped exhausted to the rear.  
 Exhaust Elbow Kit:  
 Order Pub. No. 14-A018.

#### Electrical Requirements:

240V, 3 Wire, 5600W, 24A, 60 Hz  
 208V, 3 Wire, 4400W, 22A, 60 Hz

#### Gas Requirements: 120V, 60 Hz, 6A

See Pub. No. 49-9963-2 for installation information.

## Special Installation Requirements

### Undercounter Installation

- Accessory mounting kits are required for undercounter installation. To order, call 1-800-848-7722.  
 Washer—Order Pub. No. 14-A037  
 Dryer—Order Pub. No. 14-A008

### Stacked Installation

- Brackets for stacking dryer are included as part of the dryer. See dryer Use & Care for details.

### Alcove or Closet Installation

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outdoors.  
 See EXHAUST INFORMATION on previous page.

- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:  
 0" either side  
 3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc., is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

### Bathroom or Bedroom Installation

- The dryer MUST be exhausted to the outdoors.  
 See EXHAUST INFORMATION on previous page.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

### Minimum Clearances other than Alcove or Closet Installations

- Minimum clearances to combustible surfaces:  
 0" both sides  
 3" rear

For more information on venting kits and accessories, please call 1-800-GE-CARES.

## Spacemaker® Portable/Stationary Models


Individual Spacemaker Washers	GE*		
	Stationary WLS1100D	Portable WSLP1100D	Stationary WSKS2060W
<b>Capacity</b>			
Capacity	2.5 Extra-large	2.5 Extra-large	2.0 Large
<b>Features</b>			
Wash/spin speed combinations	1	1	2
Wash/rinse temperatures	3	3	3
Water levels	4	4	4
Number of cycles	10	10	6
Cycle countdown	Digital	Digital	
Regular			
Heavy Soil	●	●	●
Medium Soil	●	●	●
Perm. Press			
Medium Soil	●	●	●
Light Soil	●	●	●
Delicates	●	●	●
Spin only	●	●	●
One-touch load sensing	●	●	
Automatic cool down	●	●	
Bleach dispenser	●	●	●
Fabric softener dispenser	●	●	
Automatic detergent dispenser	●	●	
Lint filter	2 Removable	2 Removable	●
Washer lid type	Bifold	Bifold	Solid
Quiet pump	●	●	●
Easy-roll rollers		●	
Unicouple connector		●	
Basket material	Stainless steel	Stainless steel	Porcelain-on-steel
<b>Appearance</b>			
Colors available*	WW	WW	White w/granite-look top
<b>Weights &amp; Dimensions</b>			
Circuit requirements	120V, 60 Hertz, 15 or 20 Amps		
Dimensions (HxWxD in inches)**	37-1/2" x 23-5/8" x 26"	38" x 23-5/8" x 26"	34-1/4" x 22-1/4" x 24"
Approx. shipping wt. (lbs.)	114	116	109

\*Colors available: WW = White on white.  
 \*\*Depth measured from front of control knob.  
 †With leveling legs extended.


Individual Spacemaker Dryers	GE	
	DSKS433EB	DSKP333EC* DSKS333EC
<b>Capacity</b>		
Capacity (cu. ft.)	3.6	3.6
<b>Features</b>		
Dry control	Automatic	Automatic
Heat selections	4	3 (timer)
Number of dry cycles	3	3
Auto. Perm. Press & Delicate	●	
Auto. Reg.	●	●
Timed Regular (min.)	140	150
Air Fluff (min.)	(Heat selection)	30
Separate start switch	●	●
Control location	Mid-band	Top
Lint filter	Upfront	Mid-band
<b>Appearance</b>		
Colors available**	WW, WH	WW
<b>Weight &amp; Dimensions</b>		
Exhaust options***	4-Way	4 way – Rear, Bottom, Left, Right 4 way – Rear, Top, Left, Right
Circuit requirements	240/208V†, 60 Hertz, 30 Amp	120V, 60 Hertz, 15 Amp
Power cord	No Cord	6 feet
Dimensions (HxWxD in inches)	33-1/4" x 23-7/8" x 24-1/2"	33-1/4" x 23-7/8" x 24-1/2"
Wall-mount kit (available at additional cost)	WMK-35	WMK-35
Approx. shipping wt. (lbs.)	108	108

\*DSKP333EC dryer comes equipped with casters and stationary leveling legs.  
 \*\*Colors available: WW = White on white, WH = White with black controls.  
 \*\*\*DSKS433EB and DSKS333EC are shipped exhausted through the top.  
 †Rear-mounted outlet on DSKS433EB (120V, 60 Hertz, 10 Amp) DSKS433EB and DSKS333EC approved for use with washer/dryer stack rack DSDR24D.  
 Circuit Requirements: An individual, properly grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

### Top Vent Installation Dimensions (in inches)

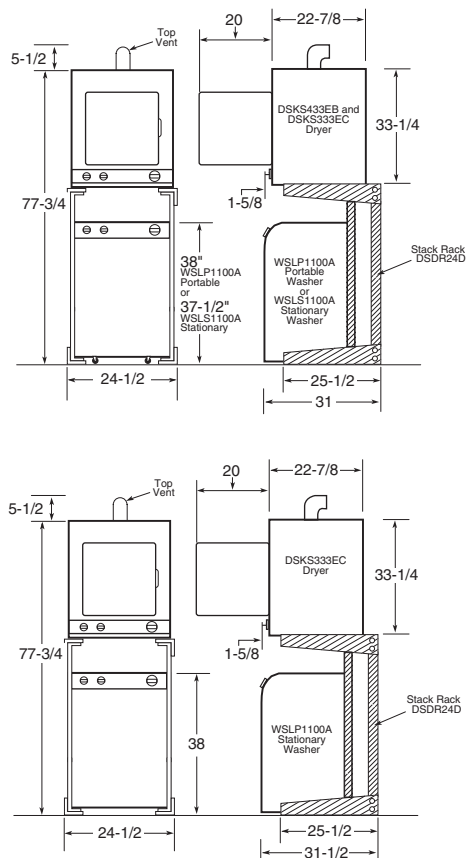

### Wall-Mount Installation Dimensions (in inches)

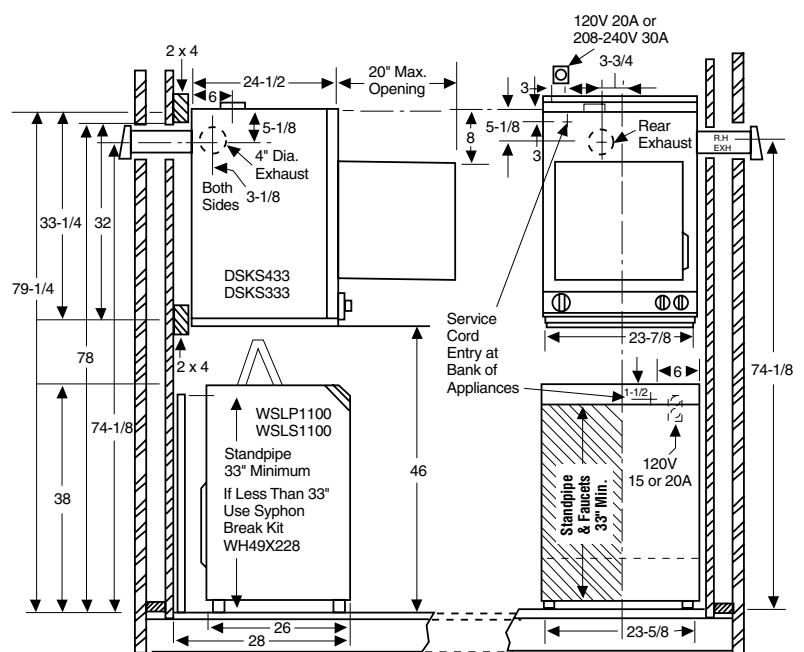

# Unitized GE Spacemaker Washers and Dryers

	GE™			
	Washer		Dryer	
Electric	WSM2700D		WSM2420D	
Gas	WSM2780D		WSM2480D	
Capacity	Extra-large	Extra-large	Compact	Compact
Features				
Wash/spin speed combinations	1		2	
Wash/rinse temperatures	3		3	
Water levels	3		3	
Number of wash cycles	3		3	
Regular	●		●	
Perm. Press	●		●	
Delicates	●		●	
Unbalanced load control	●		●	
Lint filter	●		●	

## Dryer

Features				
Automatic dry control		●		●
Number of dry cycles		4		4
Auto Regular		●		●
Auto Perm. Press		●		●
Delicates		●		●
Timed		●		●
Air Fluff		●		●
Control location		Mid-band		Mid-band
Exhaust options		Rear		Rear/Sides

## Appearance

Colors available*	WW, CC WW	WW, CC WW
Weight & Dimensions		
Dimensions (HxWxD in inches)	75-1/2 x 27 x 30-13/16**	71-3/4 x 23-7/8 x 27-1/4**
Approx. shipping wt. (lbs.)	300	238

\*WW = White on white, CC = Bisque on bisque

\*\*Depth dimension assumes water hook-up is recessed in the wall.

**Note:** The third prong on the WSM2780D plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.

## Electrical Requirements for Unitized Spacemaker Dryers

**WSM2700D: Electric Dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

**WSM2420D: Electric Dryer**—This appliance should be connected to an individual, properly grounded branch circuit with 120/240V single-phase 60Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.

**NOTE:** THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.

**WSM2480D: Gas Dryer**—This appliance should be connected to an individual, properly grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60 Hz electrical service and should be protected by 15- or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot long flexible U.L. listed 20-amp power cord to match a 15-amp receptacle.

**Gas Rated** input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.

**WSM2780D: Gas Dryer**—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60 Hz electrical service and should be protected by 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot long flexible U.L. listed 20-amp power cord to match a 20-amp receptacle.

**Gas Rated** input 20,000 BTU/HR. Factory equipped for natural gas.

**LP gas supply requires a conversion kit.**

Kits: WSM2780D—WE25X206

WSM2480D—WE25X0219



Have a qualified gas technician install a conversion kit before use.

## Exhaust Information

See "Dryer Exhausting Information" on page 20.


For complete information see installation instructions packed with the product.

## Models WSM2700D and WSM2780D Dimensions (in inches)

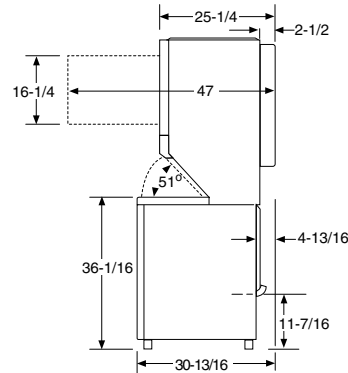
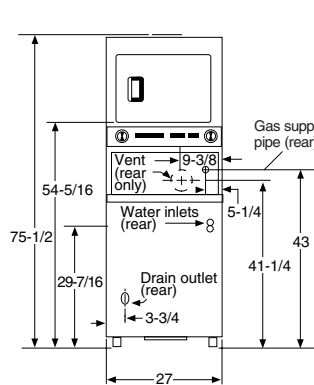


## Power Cord Location

### Model WSM2700




## Models WSM2420D and WSM2480D Dimensions (in inches)

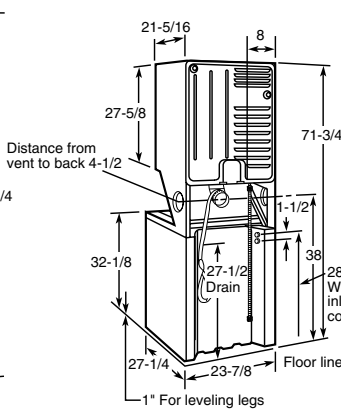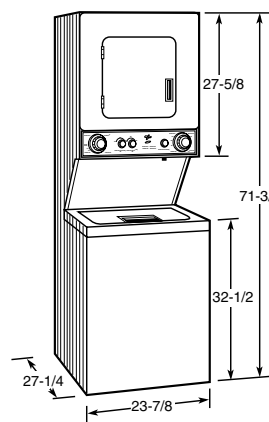

## Power Cord Location

### Model WSM2420



# Non-Coin-Op Commercial Washers and Dryers

	GE Washer
	WNRD2050D
Capacity	
Capacity (cu. ft.)	3.5 Stainless steel
Features	
Motor	2-speed
Wash/spin speed combinations	3
Wash/rinse temperatures	3
Water levels	4
Digital cycle countdown	●
Number of wash cycles	5
White cottons	●
Colored cottons	●
Bright colors	●
Permanent Press	●
Delicate	●
Spin only	●
Bleach dispenser	●
Fabric softener dispenser	●
Quiet performance	Deluxe quiet
Lid instructions	●
LED indicators	●
Appearance	
Colors available	White
Weights & Dimensions	
Approx. shipping weight (lbs.)	160

	GE Dryer
	DNCD450EA/GA
Capacity	
Capacity (cu. ft.)	Super (7.0)
Features	
Dry cycles	5
Cottons/high heat	●
Mixed loads/ high heat	●
Perm press/ medium heat	●
Knits/low heat	●
Delicates/extra low heat	●
Temperatures	4
Air dry	●
Digital cycle countdown	●
Quiet performance	Hush quiet
Lockable lint filter	●
LED indicators	●
Door swing	Reversible
Drum material	White DuraDrum
Appearance	
Colors available	White
Weights & Dimensions	
Approx. shipping weight (lbs.)	125

## Answers that click!

GE puts everything you need at your fingertips.



**GE Appliances web site — 16 million visitors a year!**  
Visit us at [GEAppliances.com](http://GEAppliances.com)

Everything you need to know about GE products is here. Access up-to-date information, find out “what’s new,” obtain dimensions, get installation tips and more. Extremely user-friendly, this one-stop site lets you research by brand, category or model number and even buy online through a local GE dealer.

**GE Answer Center® saves you time. 800.626.2000**

This 24-hour-a-day, 7-day-a-week service provides answers on product features, installation, service and more.



### A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.



### GE Appliances

GE Consumer Products  
GE Company  
Louisville, Kentucky 40225  
[GEAppliances.com](http://GEAppliances.com)

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or [GEAppliances.com](http://GEAppliances.com)

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2003 GE Company  
Pub. No. 14-S234

PC36862