## PHP9036SJ/BM

### GE Profile™ 36" Built-In Touch-Control Induction Cooktop


#### **DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)**

**IMPORTANT:** Requires a 3" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

**NOTE:** 36" induction cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered.

Before installing, consult installation instructions packed with product for current dimensional data.


#### APPROXIMATE COOKING DIMENSIONS



To insure accuracy, it is best to make a template when cutting the opening in the counter

### 13" MAX, depth of unprotected overhead cabinets (when no hood or microwave is installed) 30" MIN. from countertop to 15" MIN. height from countertop unprotected cabinet (when to nearest cabinet (including no hood or microwave is light rails) on both sides of installed) cooktop See label next to nameplate for MIN. clearance to wall Electrical junction box 16" MIN. below countertop 2" MIN. clearance to side wall from cut-out on both sides of cooktop

#### **INSTALLATION ABOVE A WALL OVEN**



| KW RATING |                      |
|-----------|----------------------|
| 240V      | 11.1                 |
| 208V      | 9.6                  |
| AMPERAGE  |                      |
| 240V      | 50 Amps <sup>†</sup> |
| 208V      | 50 Amps <sup>†</sup> |

\*NOTE: Check local codes for required breaker size.



For answers to your Monogram, GE Café<sup>™</sup> Series, GE Profile<sup>™</sup> Series or GE Appliances product questions, visit our website at geappliances. com or call GE Answer Center\* Service, 800.626.2000.







# PHP9036SJ/BM

## GE Profile™ 36" Built-In Touch-Control Induction Cooktop

#### **FEATURES AND BENEFITS**

Five induction elements

Digital touch controls

Power Boil (11" 3,700-watt induction element)

SyncBurners

Auto-pan size detection

Worry-free pan detection

Kitchen timer


Control lock capability

Red LED with black glass surface and stainless trim

Fit Guarantee

Model PHP9036SJSS - Stainless steel

Model PHP9036BMTS - Black stainless

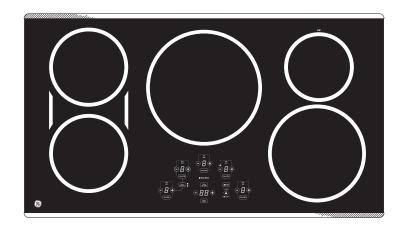

#### **GUARANTEED FIT**

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications

Visit geappliances.com for more info

