




Profile™

ASM16DB—GE Profile™ 230 Volt Window Room Air Conditioner with Electronic Remote Control

Wall Case Dimensions (in inches)

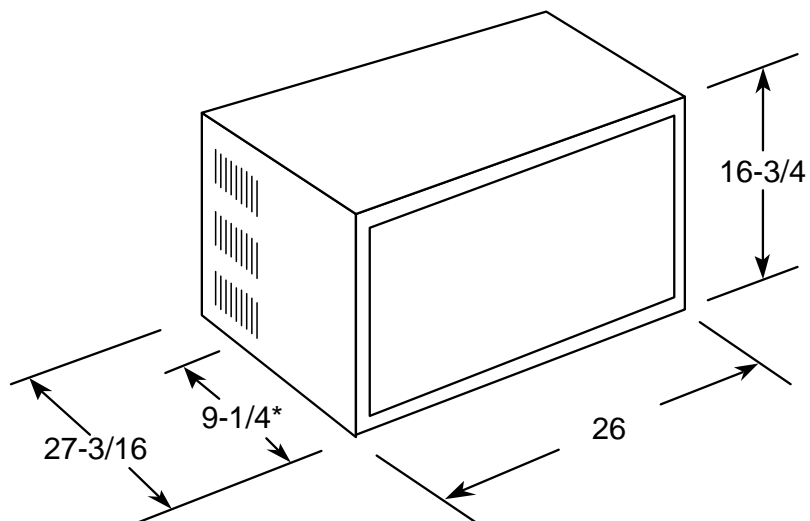

*Distance from front of case to side louvers (excluding grille).

Note: When installing Slide-Out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

Tandem



230/208V
15 Amp

Wall Outlets: All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum building wiring may pose special problems—consult a qualified electrician.

Specification Created 5/01

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.




Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.



Listed by
Underwriters
Laboratories



ASM16DB—GE Profile™ 230 Volt Window Room Air Conditioner with Electronic Remote Control

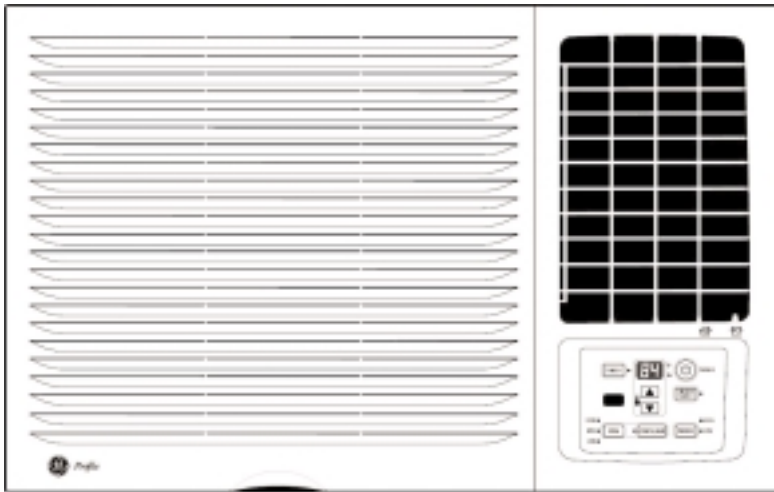

Features and Benefits

- 15,600 / 15,200 BTUH, 230 / 208 Volts
- 9.7 / 9.7 EER
- Electronic Control with Electronic Thermostat
- 3 Cooling / 3 Fan Speeds
- Energy Saver Switch for Reduced Energy Consumption
- 24-Hour Timer with Sleep Mode
- Circulaire-Oscillating Louvers for Enhanced Air Circulation
- 1,610 / 1,570 Watts / 7.4 / 7.9 Amps
- 3.6 Dehumidification (pints / hr)
- 490 CFM (High)
- Slide-Out Chassis
- One Touch Lift-Out Filter for Easy Cleaning
- Plug Type—Tandem
- EZ Mount Window Installation
- Model ASM16DB