

Installation Instructions

Range Hood Power Cord Kit

JXHC1

Questions? Call 800.GE.CARES (800.432.2737) or Visit our Website at: www.GEAppliances.com

BEFORE YOU BEGIN

Read these instructions completely and carefully.

- **IMPORTANT** — Save these instructions for local inspector's use.
- **IMPORTANT** — Observe all governing codes and ordinances.
- **Note to Installer** — Be sure to leave these instructions with the Consumer.
- **Note to Consumer** — Keep these instructions for future reference.
- To reduce the risk of fire and electric shock, this range hood cord connection kit should be used only with GE range hood models JN327, JV327, JV337 and JV347.
- **Skill level** — Installation of this power cord kit requires basic mechanical skills.
- Completion time — 1-3 hours
- Proper installation is the responsibility of the installer.
- Product failure due to improper installation is not covered under the GE Appliance Warranty.

FOR YOUR SAFETY:

WARNING — Before beginning the installation, switch power off at service panel and lock the service disconnecting means to prevent power from being switched on accidentally. When the service disconnecting means cannot be locked, securely fasten a prominent warning device, such as a tag, to the service panel.




GROUNDING INSTRUCTIONS

This appliance must be grounded. In the event of an electrical short circuit, grounding reduces the risk of electric shock by providing an escape wire for the electric current. This appliance is equipped with a cord having a grounding wire with a grounding plug. The plug must be plugged into an outlet that is properly installed and grounded.

WARNING — Improper grounding can result in a risk of electric shock.


Consult a qualified electrician if the grounding instructions are not completely understood, or if doubt exists as to whether the appliance is properly grounded. Do not use an extension cord. If the power supply cord is too short, have a qualified electrician install an outlet near the appliance.

PARTS INCLUDED


PART		QUANTITY
	Power Cord with Molded Strain Relief	1
	Wire Nuts	2
	Installation Instructions	1

1 REMOVE CONNECTION BOX COVER

Using a 1/4" nutdriver, remove the screw that holds the connection box cover and remove the cover.

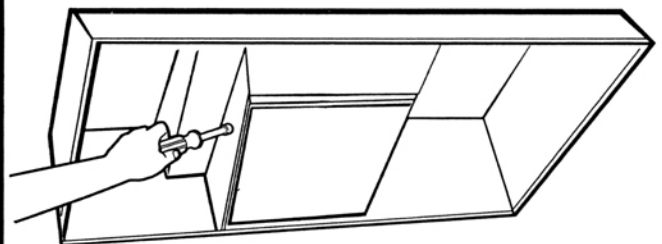

TOOLS YOU WILL NEED



Flat blade screwdrivers




1/4" Nutdriver

Installation Instructions


2 REMOVE KNOCKOUT

Insert the blade of a flat blade screwdriver into the knockout slot and bend until the knockout is removed.

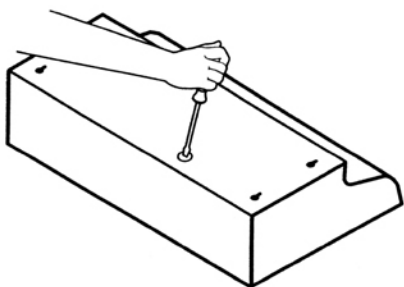


3 THREAD WIRES THROUGH THE KNOCKOUT

Thread the cord wires through the knockout hole.

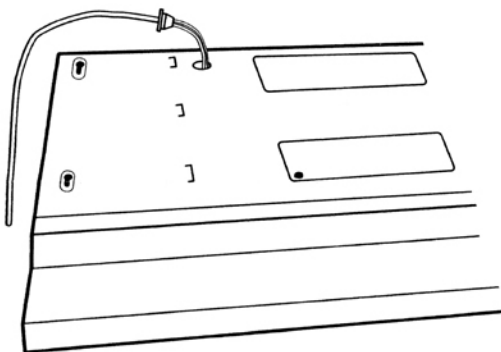


4 PULL CORD THROUGH THE KNOCKOUT

Pull the cord at various angles until the strain relief lip is firmly seated in the knockout. The strain relief is designed to fit tightly into the knockout, so a firm pull will be necessary.

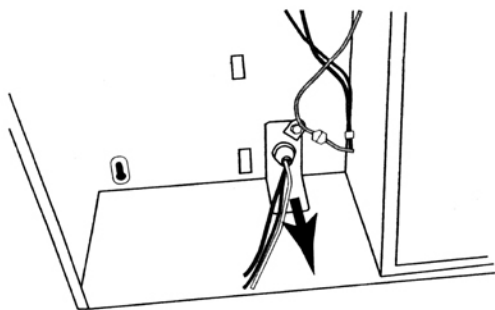


5 CONNECT THE CORD WIRES

- A Connect the green ground wire to the green ground screw.
- B Using the wire nuts provided, connect the black power cord lead to the stripped black lead and the white power cord lead to the stripped white lead in the connection box.
- C All electrical connections should be inspected carefully before replacing the connection box cover.

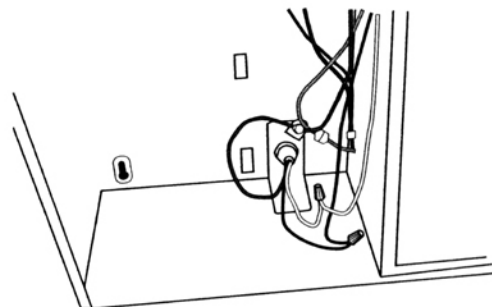

6 REPLACE CONNECTION BOX COVER

Replace the connection box cover using the screw removed in Step 1.

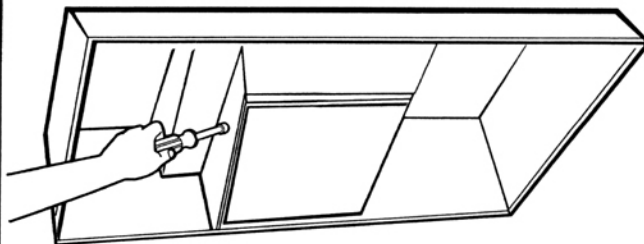

7 INSTALL HOOD

Return to and proceed with the Installation Instructions to install the range hood.

Part No. 164D4290P045

Pub. No. 49-80087-1

945-0681-000

05-01 JR

Printed in the United States