

Major appliances

HOTPOINT



Value and Dependability

1999

\$10



Hotpoint appliances are a good choice when value and affordability are important. Hotpoint offers a wide choice of products combining flexibility, convenience and strong value with a recognized brand name. From more traditional styling to dependable features, Hotpoint brings a practical approach to the kitchen.

HOTPOINT

For the long run.

| | |
|---|------------|
| Refrigeration..... | 4-5 |
| Side-by-sides | 6-7 |
| Top-mounts | 8-13 |
| GE Bottom-mount | 11 |
| GE Cycle defrost..... | 14 |
| GE Manual defrost | 14 |
| GE Spacemaker™ models..... | 15 |
| GE Upright freezers..... | 16 |
| GE Chest freezers..... | 17 |
| Specifications..... | 18-21 |
| GE SmartWater™ whole home water improvement systems | |
| GE SmartWater™ filtration systems | 22-25 |
| GE SmartWater™ softening systems..... | 25-26 |
| Specifications..... | 27-29 |
| Washers and dryers | |
| Super and Extra-large capacity washers | 30 |
| Extra-large and Large capacity dryers..... | 31 |
| GE Spacemaker® washers and dryers | 32 |
| Specifications..... | 33-36 |
| Free-standing ranges | |
| Electric..... | 37 |
| 30" ranges | 38-41 |
| Specialty application ranges | 42 |
| Specifications..... | 43-44 |
| Gas | 45 |
| 30" ranges | 46-51 |
| Compact ranges..... | 52 |
| Specifications..... | 53-55 |
| GE Hoods | 56 |
| Specifications | 57 |
| Microwave ovens | |
| Counter Saver Plus™ | 58-59 |
| GE Spacemaker over-the-range | 60-61 |
| GE Countertop | 62-63 |
| Specifications..... | 64-67 |
| Dishwashers..... | 68-69 |
| GE Spacemaker® undersink | 70 |
| GE Built-in 18" | 70 |
| GE Convertible | 70 |
| Specifications..... | 72-74 |
| GE Disposers and GE Compactors | 71 |
| Specifications..... | 75 |
| GE Room air conditioners | |
| GE Built-in "J" Series | 76 |
| GE Deluxe, Value and Heat/Cool Series | 77-78 |
| GE Quiet-Aire™ split system | 79 |
| GE Slide-Aire..... | 79 |
| GE Profile™ and GE Dehumidifiers..... | 79 |
| Specifications | 80-82 |
| Warranties..... | 83 |
| Consumer Services..... | Back cover |

Side-by-side refrigerators

Side-by-side refrigerators

Hotpoint Side-by-side refrigerators are available with a variety of convenient extras, including gallon storage on the door, to fit a range of food storage needs.



One Touch! ice dispenser
Exterior ice and water service responds to a mere touch, delivering crushed ice or chilled water to your glass.



Hotpoint water filter
Delivers filtered water through the OneTouch! dispenser.



Adjustable glass shelves
Cabinet shelves in fresh food compartment adjust for storage flexibility.



Slide-out freezer storage bin
Allows for easy loading and unloading of bulk purchases.



Adjustable door bins
Door bins hold gallon containers and six-packs in the fresh food compartment.



Vegetable/fruit crispers
Crispers offer adjustable humidity environments, providing optimum storage conditions to keep food fresher longer.



QuietSound Noise Reduction Package
Significantly reduces noise.



CSX25GPC

Not all features available on all models.

Top-freezer refrigerators

Hotpoint Top-freezer no-frost refrigerators have a wide range of capacities with a variety of new features, including gallon door storage, providing maximum food storage flexibility and convenience.



CTX21DAB



Fixed gallon door storage

Provides storage for gallon containers, six-packs and other large fresh food items; in the freezer, storage for large, bulky items.




Twin crisper system

Controls storage conditions with two different humidity levels to keep foods fresh.



Spill-proof glass shelves

Help contain spills for ease of cleaning.



Snack pan

Excellent for rewrapped meats, cheese, hors d'oeuvres, pudding and other snacks.



Full-width freezer shelf

Provides maximum convenience and flexibility in storing frozen food items.



Dairy compartment

Convenient counter balanced door covers butter and cheese to keep unwanted odors away.



Nice Cubes™ Icemaker

Provides rounded-shape ice, designed for better fit into a glass, reducing ice clogging as you drink a beverage.

All 14 and 16 cu. ft. models have galvanized steel doors.

Not all features available on all models.

Side-by-side refrigerators



CSX25GPC



CSX20BAB

Side-by-side refrigerators



CSX22GAB



CSX19LAB

One Touch! dispenser

Discover the convenience of the One Touch! dispenser delivering crushed ice, cubes or chilled water—directly through the door!



QuietSound Noise Reduction Package

Significantly reduces noise.



CSX25GPC

- 25.2 cubic foot capacity
- 9.32 cubic foot freezer
- Hotpoint water filter
- One Touch! dispenser
- QuietSound Noise Reduction Package
- Adjustable gallon door storage
- Adjustable temperature meat pan
- Adjustable humidity vegetable/fruit crisper

CSX22GRB (not shown)

- 21.7 cubic foot capacity
- 6.79 cubic foot freezer
- One Touch! dispenser
- QuietSound Noise Reduction Package
- Fixed gallon door storage
- Adjustable temperature meat pan
- Adjustable humidity vegetable/fruit crisper

CSX22GAB

- 21.7 cubic foot capacity
- 6.79 cubic foot freezer
- QuietSound Noise Reduction Package
- Adjustable glass cabinet shelves
- Adjustable humidity vegetable/fruit crisper
- Adjustable temperature meat pan
- Fixed gallon door storage

CSX20BAB

- 19.7 cubic foot capacity
- 6.79 cubic foot freezer
- Adjustable wire Everwhite cabinet shelves
- Classic white vegetable/fruit crispers
- Fixed gallon door storage
- Equipped for optional automatic icemaker

CSX22BCB (not shown)

- Similar features and appearance as CSX20BAB except 21.7 cubic foot capacity and includes One Touch! dispenser with cubes only.

CSX19LAB

- 19.4 cubic foot capacity
- 6.70 cubic foot freezer
- Wire Everwhite cabinet shelves
- Classic white vegetable/fruit crisper and wire trivet
- Fixed gallon door storage
- Equipped for optional automatic icemaker

Not all features available on all models.

For additional features, specifications and color availability, refer to page 18. For warranty information, refer to page 83.

Top-freezer refrigerators



CTX21DAB



CTX18GIC



CTX18DAB



CTX18EAC

Gallon door storage

Door shelves hold gallon containers and six-packs in the fresh food compartment; in the freezer, they store larger frozen food containers.



Spill-proof glass shelves help contain spills for ease of cleaning.

CTX18DAB

- 18.2 cubic foot capacity
- 5.13 cubic foot freezer
- Fixed gallon door storage
- Two split, one full-width spill-proof glass shelves
- Two clear tall vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker

CTX18DIB (not shown)

- Similar features and appearance as CTX18DAB except is equipped with factory-installed Nice Cubes™ icemaker.

CTX18GAC (not shown)

- 18.2 cubic foot capacity
- 5.13 cubic foot freezer
- Fixed gallon door storage
- Two full-width glass shelves
- Clear vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker

CTX18GIC

- Similar features and appearance as CTX18GAC except is equipped with factory-installed Nice Cubes™ icemaker.

CTX18EAC

- 17.6 cubic foot capacity
- 4.0 cubic foot freezer
- Fixed gallon door storage
- Two full-width wire Everwhite cabinet shelves
- Equipped for optional automatic icemaker
- Two clear vegetable/fruit crispers

CTX21DAB

- 20.6 cubic foot capacity
- 6.30 cubic foot freezer
- Two split, one full-width spill-proof glass shelves
- Three door shelves, two with gallon storage
- Two clear tall vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker

CTX21DIB (not shown)

- Similar features and appearance as CTX21DAB except is equipped with factory-installed Nice Cubes™ icemaker.

CTX21GAC (not shown)

- 20.6 cubic foot capacity
- 6.30 cubic foot freezer
- Two full-width glass shelves
- Gallon storage
- Clear vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker

CTX21GIC (not shown)

- Similar features and appearance as CTX21GAC, except is equipped with factory-installed Nice Cubes™ icemaker.

CTX16HAB (not shown)

- 15.6 cubic foot capacity
- 3.86 cubic foot freezer
- Two split, one full-width adjustable glass shelves
- Two clear vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker

Not all features available on all models.

For additional features, specifications and color availability, refer to page 19. For warranty information, refer to page 83.

Top-freezer refrigerators



CTX21BAB



CTX18CIB



CTX18LYZ

Top-freezer refrigerators



CTX18BAC

Nice Cubes™ icemaker

Models equipped with Nice Cubes™ icemaker let you provide continuous icemaking.



CTX21BAB

- 20.6 cubic foot capacity
- 6.30 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Three door shelves
- Two classic white tall vegetable/fruit crispers
- White snack pan
- Equipped for optional automatic icemaker

CTX18BAC

- 17.6 cubic foot capacity
- 4.0 cubic foot freezer
- Two classic white vegetable/fruit crispers
- White snack pan
- Two full-width wire Everwhite cabinet shelves
- Tall bottle storage
- Equipped for optional automatic icemaker



Arrange wire Everwhite shelves for day-to-day needs; then adapt as storage needs change.

CTX18CIB

- 18.2 cubic foot capacity
- 5.13 cubic foot freezer
- One full-width classic white vegetable/fruit crisper
- Two full-width wire Everwhite cabinet shelves
- Equipped with factory-installed Nice Cubes™ icemaker

CTX18CAB (not shown)

- Similar features and appearance as CTX18CIB except is equipped for optional automatic icemaker.

CTX18LYZ

- 17.6 cubic foot capacity
- 4.00 cubic foot freezer
- Three full-width wire Everwhite cabinet shelves
- Color-matched, recessed handles

GE Refrigerator with bottom-freezer

A versatile, bottom-freezer refrigerator that puts the fresh food compartment right at eye level.

TCX18IAC

- 17.6 cubic foot capacity
- Two adjustable humidity tall vegetable/fruit crispers
- Snack pan
- Adjustable glass shelves
- Wire Everwhite sliding freezer basket
- Equipped for optional automatic icemaker



TCX18IAC

Not all features available on all models.

For additional features, specifications and color availability, refer to pages 18 and 19. For warranty information, refer to page 83.

Top-freezer refrigerators



CTX16CYB



CTX16CIB



TBX12SAX



CTX16BYB



TBX10SNB

Recessed handles

Color-matched recessed door handles reflect the latest in European design and appearance.



CTX16CYB

- 16.4 cubic foot capacity
- 3.86 cubic foot freezer
- Two adjustable wire Everwhite cabinet shelves
- Tall bottle door storage
- Two white vegetable/fruit crispers
- Recessed door handles
- Equipped for optional automatic icemaker

CTX16CZB (not shown)

- Similar features and appearance as CTX16CYB except 15.6 cubic foot capacity.

CTX14CYB (not shown)

- Similar features and appearance as CTX16CYB except 14.4 cubic foot capacity.

CTX16BYB

- 15.6 cubic foot capacity
- 3.86 cubic foot freezer
- Tall bottle door storage
- White snack pan
- Two white vegetable/fruit crispers
- Recessed door handles
- Equipped for optional automatic icemaker

Top-freezer refrigerators

CTX16CIB

- 16.4 cubic foot capacity
- 3.86 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Tall bottle door storage
- Two white vegetable/fruit crispers
- Equipped with factory installed Nice Cubes™ icemaker

CTX16CAB (not shown)

- Similar features and appearance as CTX16CIB except is equipped for optional automatic icemaker.

CTX14CIB (not shown)

- Similar features and appearance as CTX16CIB except 14.4 cubic foot capacity.

CTX14CAB (not shown)

- Similar features and appearance as CTX16CAB except 14.4 cubic foot capacity.

GE "S" Series Top-freezer refrigerators

When space is limited, these refrigerators solve a host of food storage problems.

TBX12SAX

- 12.1 cubic foot capacity
- 3.00 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Tall bottle storage
- Two Ice 'N Easy trays
- Classic white interior

TBX10SNB

- 9.8 cubic foot capacity
- 2.33 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Tall bottle storage
- Two Ice 'N Easy trays
- Classic white interior
- Rounded doors

Not all features available on all models.
For additional features, specifications and color availability, refer to page 19.
For warranty information, refer to page 83.

Cycle defrost refrigerators



TDX11SNY

GE Cycle defrost refrigerators

Provide manual defrosting in the zero-degree freezer.

TDX11SNY

- 11.0 cubic foot capacity
- 2.4 cubic foot freezer
- Two modular door bins, two stationary shelves
- Three adjustable wire Everwhite cabinet shelves
- Full-width vegetable/fruit pan
- Two mini Ice 'N Easy trays
- Full-width freezer shelf

TDX9SNY (not shown)

- 9.0 cubic foot capacity
- 2.4 cubic foot freezer
- Four modular door bins, one stationary shelf
- Two adjustable wire Everwhite cabinet shelves
- Full-width vegetable/fruit pan
- Two mini Ice 'N Easy trays
- Full-width freezer shelf

Manual defrost refrigerator



TAX10SNX

GE Manual defrost refrigerator

Single-door model with short-term frozen food compartment.

TAX10SNX

- 9.6 cubic foot capacity
- .94 cubic foot compartment for short-term frozen food storage (not a zero-degree freezer)
- Two adjustable wire Everwhite cabinet shelves
- Full-width vegetable/fruit pan
- Tall bottle storage

GE Spacemaker™ refrigerators

Sizes and capacities for every need—the family room, den, office, dorm or cabin; space-efficient models that bring surprising convenience to small places.

TAX6SNXWN/WH

- 6.0 cubic foot capacity
- Two adjustable cabinet shelves
- Reversible door
- Available in white or woodgrain
- Optional black panel or custom wood panel available with TK6 trim kit

TAX4SNYWH

- 3.7 cubic foot capacity
- Two cabinet shelves
- Two door shelves
- Rounded door
- Reversible door
- Available in white only

TAX4ANXWN

- 3.7 cubic foot capacity
- Three cabinet shelves
- Two door shelves
- Available in woodgrain only

TAX2SNBWH

- 1.7 cubic foot capacity
- One cabinet shelf
- 1-1/2 door shelves with retaining rod
- Available in white only

TAX2SNYWN (not shown)

- Available in woodgrain only



TAX6SNXWN/WH



TAX4SNYWH



TAX4ANXWN



TAX2SNBWH



FUM17DA



FUM9SA

Spacious GE Upright freezers from no-frost to compacts

Select from these quality uprights for ease in viewing frozen foods! A range of capacities handles your exact requirements.

FUM17DA

- 17.1 cubic foot capacity
- Manual defrost
- Four cabinet shelves (1 adj.)
- Five door shelves

FUM21DA (not shown)

- 20.6 cubic foot capacity
- Manual defrost
- Four cabinet shelves (1 adj.)
- Six door shelves

FUM14DA (not shown)

- 14.1 cubic foot capacity
- Manual defrost
- Three cabinet shelves (1 adj.)

FUM12SA (not shown)

- 11.6 cubic foot capacity
- Manual defrost
- Three cabinet shelves
- Four door shelves

FUM14SA (not shown)

- 14.1 cubic foot capacity
- Manual defrost
- Three cabinet shelves
- Five door shelves

FUM17SA (not shown)

- 17.1 cubic foot capacity
- Manual defrost
- Three cabinet shelves
- Five door shelves

FUM21SA (not shown)

- 20.6 cubic foot capacity
- Manual defrost
- Four cabinet shelves
- Six door shelves

FUM9SA

- 8.7 cubic foot capacity
- Manual defrost
- Four cabinet shelves
- Five door shelves

FUM5SA (not shown)

- 5.0 cubic foot capacity
- Manual defrost
- Rounded doors
- Two cabinet shelves
- Three door shelves

FUF20DA Frost-Free (not shown)

- 20.3 cubic foot capacity
- Five cabinet shelves (3 adj.)
- Six door shelves

FUF17DA Frost-Free (not shown)

- 16.7 cubic foot capacity
- Four cabinet shelves (3 adj.)
- Five door shelves

FUF14DA Frost-Free (not shown)

- 13.7 cubic foot capacity
- Three cabinet shelves (2 adj.)



Safety lock provides security.

GE Chest freezers from compact to large-capacity models

For routine family needs, unexpected guests or changing schedules, there's a chest freezer to keep you prepared. Cook meals ahead and freeze; or take advantage of supermarket specials.

FCM20DA

- 19.7 cubic foot capacity
- Two lift-out and sliding bulk storage baskets
- Temperature monitor with audible alarm
- Interior light
- Built-in lock
- Power "ON" light

FCM25DA (not shown)

- 24.9 cubic foot capacity
- Three lift-out and sliding bulk storage baskets

FCM15DA (not shown)

- 14.8 cubic foot capacity
- Two lift-out and sliding bulk storage baskets

FCM15SA (not shown)

- 14.8 cubic foot capacity
- One lift-out and sliding bulk storage basket

FCM9SA

- 8.8 cubic foot capacity
- Adjustable temperature control

FCM9DA (not shown)

- 8.8 cubic foot capacity
- One lift-out and sliding bulk storage basket
- Temperature monitor with audible alarm
- Interior light
- Built-in lock

FCM7DA (not shown)

- 7.2 cubic foot capacity

FCM5SA (not shown)

- 5.0 cubic foot capacity
- Adjustable temperature control



FCM20DA



FCM9SA



Lift-out and sliding wire baskets for easy loading and unloading.

For additional features, specifications and color availability, refer to page 21. For warranty information, refer to page 83.

Refrigeration specifications

Side-by-side no-frost refrigerators

Side-by-sides provide storage flexibility combined with high performance and style. A wide variety of convenience features include full-length freezer and separate storage compartments. The Automatic Energy Saver System and efficient foam insulation on no-frost models help cut operating costs.


Side-by-side no-frost refrigerators

| | CSX25GPC | CSX22GRB | CSX22GAB | CSX22BCB | CSX20BAB | CSX19LAB |
|---|---------------------------|-----------------------|-----------------------|------------------------|------------------------|-----------------------|
| Capacity | | | | | | |
| Total (cu. ft.) | 25.2 | 21.7 | 21.7 | 21.7 | 19.7 | 19.4 |
| Fresh food (cu. ft.) | 15.92 | 14.96 | 14.96 | 14.96 | 12.90 | 12.71 |
| Freezer (cu. ft.) | 9.32 | 6.79 | 6.79 | 6.75 | 6.79 | 6.70 |
| Shelf area (sq. ft.) | 24.2 | 22.8 | 22.8 | 22.4 | 20.6 | 16.7 |
| Features | | | | | | |
| Hotpoint water filter | ■ | ■ | ■ | ■ | ■ | ■ |
| Automatic icemaker | ■ | ■ | Opt. (IM3) | ■ | Opt. (IM3) | Opt. (IM3) |
| Exterior crushed ice, cubes and chilled water service | One Touch! Dispenser | One Touch! Dispenser | | (Cubes only) | | |
| Dispenser light | ■ | ■ | ■ | ■ | ■ | ■ |
| Ice 'N Easy trays | | | 2 | | 2 | |
| Ice storage bin | ■ | ■ | ■ | ■ | ■ | ■ |
| Cabinet shelves (total) (adjustable) | 3 Glass | 3 Glass | 3 Glass | 3 Wire Everwhite | 3 Wire Everwhite | 2 Wire Everwhite |
| Vegetable/fruit crisper(s) (upper) | Adj. Humid (clear) | Adj. Humid (clear) | Adj. Humid (clear) | Sealed (classic white) | Sealed (classic white) | 1 Pan (classic white) |
| Meat pan (lower) | Adj. Temp. (clear) | Adj. Temp. (clear) | Adj. Temp. (clear) | Sealed (classic white) | Sealed (classic white) | Wire trivet |
| Door shelves (total) | 4 (2 Adj. w/gal. storage) | 4 (2 w/ gal. storage) | 4 (2 w/ gal. storage) | 4 (2 w/ gal. storage) | 4 (2 w/ gal. storage) | 4 (2 w/ gal. storage) |
| Dairy compartment | (w/door) | (w/door) | (w/door) | (w/door) | (w/door) | ■ |
| Utility bin | ■ | ■ | ■ | ■ | ■ | ■ |
| Freezer compartment shelf(s) (Wire Everwhite) | 3 Adj. | 3 Adj. | 4 Adj. | 3 Adj. | 4 (3 Adj.) | 3 Adj. |
| Freezer sliding storage bin | 1 | 1 | 1 | 1 | 1 | 1 |
| Freezer door shelves (total) | 5 | 5 | 6 | 5 | 6 | 6 |
| Economical/Quiet | | | | | | |
| QuietSound Noise Reduction System | ■ | ■ | ■ | ■ | ■ | ■ |
| Energy Saver (condenser loop) | ■ | ■ | ■ | ■ | ■ | ■ |
| Insulation (cabinet and doors) | Foam | Foam | Foam | Foam | Foam | Foam |
| Cabinet liner | Baked-Enamel-on-Steel | Baked-Enamel-on-Steel | Baked-Enamel-on-Steel | Baked-Enamel-on-Steel | Baked-Enamel-on-Steel | Baked-Enamel-on-Steel |
| Door liner | ABS | ABS | ABS | ABS | ABS | ABS |
| Appearance | | | | | | |
| Color(s) available* | WW, AA | WW, AA | WW, AA | WH | WH, AD | WH |
| Door handle(s) | CM | CM | CM | Black | Black | Black |
| Textured steel case & doors | ■ | ■ | ■ | ■ | ■ | ■ |
| Adjustable rollers | ■ | ■ | ■ | ■ | ■ | ■ |
| Door stops | ■ | ■ | ■ | ■ | ■ | ■ |
| Coil-free back | ■ | ■ | ■ | ■ | ■ | ■ |
| Weights & Dimensions | | | | | | |
| Height to top of hinge (in.) A | 69-3/4 | 67-5/8 | 67-5/8 | 67-5/8 | 67-5/8 | 67-5/8 |
| Height to top of case (in.) B | 68-3/4 | 66-5/8 | 66-5/8 | 66-5/8 | 66-5/8 | 66-5/8 |
| Case depth without door (in.) C | 28 | 28 | 28 | 28 | 28 | 28 |
| Case depth (less handle) with door (in.) D | 30-1/2 | 30-1/2 | 30-1/2 | 30-1/2 | 30-1/2 | 30-1/2 |
| Case depth with door handle (in.) E | 32-1/2 | 32-1/2 | 32-1/2 | 32-1/2 | 32-1/2 | 32-1/2 |
| Depth with door open 90° (in.) F | 49-3/8 | 49-3/8 | 49-3/8 | 49-3/8 | 47-3/8 | 47-3/8 |
| Width (in.) G | 35-3/4 | 33-1/2 | 33-1/2 | 33-1/2 | 31-1/2 | 31-1/2 |
| Width with door open 90° less door handle (in.) H | 36-1/8 | 34-3/8 | 34-3/8 | 34-3/8 | 32-1/4 | 32-1/4 |
| Air clearances | | | | | | |
| Each side (in.) | 3/41 | 3/41 | 3/41 | 3/41 | 3/41 | 3/41 |
| Top (in.) | 1 | 1 | 1 | 1 | 1 | 1 |
| Back (in.) | 1 | 1 | 1 | 1 | 1 | 1 |
| Approx. shipping weight (lbs.) | 335 | 317 | 317 | 327 | 296 | 283 |

CM = Color Matched

*Color(s) available: WW = White on white, AA = Almond on almond, WH = White/Black handles, AD = Almond/Black handles.

†If installed against a wall, allow clearance of 11-1/4" on freezer side to remove ice bin.



Note: Before installing, consult installation instructions packed with product for current dimensional data.

Note: Before purchasing any appliance on which the Federal Trade Commission requires an energy label, read important energy cost and efficiency information available from your retailer.

GE Refrigerator with bottom-freezer


A versatile, bottom-freezer refrigerator that puts the fresh food compartment right at eye level.

Bottom-freezer refrigerator

| | TCX181AC |
|--|---------------------------|
| Capacity | |
| Total (cu. ft.) | 17.6 |
| Fresh food (cu. ft.) | 12.90 |
| Freezer (cu. ft.) | 4.7 |
| Shelf area (sq. ft.) | 23.0 |
| Features | |
| Automatic icemaker | Opt. (IM3) |
| Ice 'N Easy trays | 2 |
| Ice tray shelf | ■ |
| Ice storage bin | ■ |
| Cabinet shelves (spill-proof) (adjustable) | 4 Glass |
| Snack pan | ■ |
| Vegetable/fruit crisper(s) | 2 Adj. Humid. |
| Modular door bins | 4 Adj. |
| Door shelf (full-width) | 1 Fixed w/ Gallon Storage |
| Dairy compartments | 1 Clear |
| Interior light | ■ |
| Wire Everwhite freezer storage basket | 1 Full-Width |
| Freezer compartment shelf | 1 Full-Width |
| Freezer door shelves | 2 Full-Width |
| Freezer interior light | ■ |
| Economical/Quiet | |
| Cabinet/door insulation | Foam |
| Appearance | |
| Color(s) available* | WW |
| Full-length door handle(s) | Color Matched |
| Textured steel doors and case | ■ |
| Door stops | ■ |
| Reversible doors | ■ |
| Adjustable front rollers | ■ |
| Adjustable rollers | ■ |
| Coil-free back | ■ |
| Weights & Dimensions | |
| Height to top of hinge (in.) A | 66-1/4 |
| Height to top of case (in.) B | 65-3/4 |
| Case depth without door (in.) C | 26 |
| Case depth less door handle (in.) D | 28 |
| Case depth with door handle (in.) E | 29-1/8 |
| Depth with door open 90° (in.) F | 56-1/4 |
| Width (in.) G | 30-1/2 |
| Side clearance for 90° door open | 1-3/4 |
| Air clearances | |
| Each side (in.) | 1/2 |
| Top (in.) | 1 |
| Back (in.) | 0** |
| Approx. shipping wt. (lbs.) | 247 |

*Color(s) available: WW = White on white

**Metal cover on back when touching wall, gives 1-1/4" clearance.




Top-freezer no-frost refrigerators

Enjoy the convenience of a large capacity freezer at eye level. The refrigerator compartment features distinctive storage bins and, on most models, adjustable shelves that adapt quickly to changing storage needs. Energy Saver Switch and efficient foam insulation help cut operating costs.


Top-freezer no-frost refrigerators

| | CTX21GAC CTX21GIC | CTX21DAB CTX21DIB | CTX21BAB | CTX18GAC CTX18GIC | CTX18DAB CTX18DIB | CTX16HAB | CTX18EAC CTX18BAC | CTX18CAB CTX18CIB | CTX18LYZ | CTX16CAB CTX16CIB | CTX16CZB CTX16CYB | CTX16BYB | CTX14CAB CTX14CIB | CTX14CYB | TBX12SAX | TBX10SNB |
|---|----------------------|----------------------|------------------------|----------------------|----------------------|----------------------|---|-----------------------|------------|------------------------|-------------------------|------------------------|------------------------|------------------------|------------------------|-----------------------------|
| Capacity | | | | | | | | | | | | | | | | |
| Total (cu. ft.) | 20.6 | 20.6 | 20.6 | 18.2 | 18.2 | 15.6 | 17.6 | 18.2 | 17.6 | 16.4 | $\frac{15.6}{16.4}$ | 15.6 | 14.4 | 14.4 | 12.1 | 9.8 |
| Fresh food (cu. ft.) | 14.25 | 14.25 | 14.25 | 13.04 | 13.04 | 11.69 | 13.60 | 13.04 | 13.60 | 12.58 | $\frac{11.69}{12.58}$ | 11.69 | 10.58 | 10.58 | 9.10 | 7.50 |
| Freezer (cu. ft.) | 6.30 | 6.30 | 6.30 | 5.13 | 5.13 | 3.86 | 4.00 | 5.13 | 4.00 | 3.86 | 3.86 | 3.86 | 3.86 | 3.86 | 3.00 | 2.33 |
| Shelf area (sq. ft.) | 24.9 | 24.9 | 24.2 | 23.2 | 23.2 | 17.5 | 13.7 | 20.1 | 13.7 | $\frac{17.5}{16.7}$ | $\frac{17.2}{17.5}$ | 18.1 | $\frac{17.4}{16.4}$ | 17.2 | 13.6 | 12.1 |
| Features | | | | | | | | | | | | | | | | |
| Automatic icemaker | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | Opt. (IM3) | | |
| Ice 'N Easy trays | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Ice storage bin | Utility White | Utility White | | Utility White | Utility White | | | | | | | | | | | |
| Ice tray shelf | | | | | | | | | | | | | | | | |
| Cabinet shelves (total) | 2 F/W Glass | 2 Split, 1 F/W | 2 F/W Wire | 2 F/W Glass | 2 Split, 1 F/W | 2 Split, 1 F/W Glass | 2 F/W Wire | 2 F/W Wire | 3 F/W Wire | 2 F/W Wire | 2 F/W Wire | 2 F/W Wire | 2 F/W Wire | 2 F/W Wire | 2 F/W Wire | 2 F/W Wire |
| (adjustable) | 2 | 3 | 2 | 2 | 3 | 3 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | | 2 |
| (spill-proof) | 2 | 3 | | 2 | 3 | | | | | | | | | | | |
| Door shelves w/tall bottle storage | 3 (2 w/gal. storage) | 3 (2 w/gal. storage) | 3 | 2 w/gal. storage | 2 w/gal. storage | 2 w/gal. storage | $\frac{2}{2 \text{ w/gal. storage}}$ | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Vegetable/fruit crisper(s) | 2 (clear) | 2 (tall clear) | (2 tall classic white) | 2 (clear) | 2 (tall clear) | 2 (clear) | $\frac{2 \text{ (clear)}}{2 \text{ (classic white)}}$ | 1 F/W (classic white) | | 2 (classic white) | 2 (classic white) | 2 (classic white) | 2 (classic white) | 2 (classic white) | 2 (classic white) | 1 F/W (classic wh.) Divided |
| Snack pan | | | | | | | | | | | | | | | | |
| Dairy compartment(s) | (w/door) | (w/door) | (w/door) | (w/door) | (w/door) | | (w/door) | (w/door) | | | | | | | | |
| Utility bin | | | | | | | | | | | | | | | | |
| Freezer compartment shelf(s) (Wire Everwhite) | 1 Adj. F/W (2 Pos.) | 1 Adj. F/W (2 Pos.) | 1 Adj. F/W (2 Pos.) | 1 Adj. F/W (2 Pos.) | 1 Adj. F/W (2 Pos.) | 1 F/W | 1 Adj. F/W (2 Pos.) | Trivet | | | | 1 F/W | | | | 1 F/W |
| Freezer door shelves | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 4 |
| Quiet/Economical | | | | | | | | | | | | | | | | |
| Cabinet/door insulation | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam | Foam |
| Cabinet/door liner | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | ABS | Plastic |
| Energy Saver Switch | | | | | | | | | | | | | | | | |
| Appearance | | | | | | | | | | | | | | | | |
| Color(s) available* | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WW, AA | WH, AD |
| Door handle(s) | CM | CM | CM | CM | CM | CM | CM | CM | CM | CM Recessed | CM | CM Recessed | CM Recessed | CM | CM Recessed | Black |
| Customer installed handles | | | | | | | | | | | | | | | | |
| Textured steel case & doors | | | | | | | | | | | | | | | | |
| Reversible doors | | | | | | | | | | | | | | | | |
| Right or left door opening | | | | | | | | | | | | | | | | |
| Coil-free back | | | | | | | | | | | | | | | | |
| Adjustable rollers | | | | | | | | | | 4 Fixed (2 Level Legs) | 4 Fixed (2 Level Legs) | 4 Fixed (2 Level Legs) | 4 Fixed (2 Level Legs) | 4 Fixed (2 Level Legs) | 4 Fixed (2 Level Legs) | Level Legs |
| Door stops | | | | | | | | | | | | | | | | |
| Weights & Dimensions | | | | | | | | | | | | | | | | |
| Height to top of hinge (in.) A | 67 | 67 | 67 | 64-3/4 | 64-3/4 | 64-1/2 | 67-1/4 | 64-3/4 | 67-1/4 | 67-1/4 | $\frac{64-1/2}{66-3/4}$ | 64-1/2 | 61-1/2 | 61-1/2 | 60-5/8 | 59-1/8 |
| Height to top of case (in.) B | 66-1/4 | 66-1/4 | 66-1/4 | 64 | 64 | 64 | 63-3/4 | 64 | 66-3/4 | 66-3/4 | $\frac{64}{66-3/4}$ | 64 | 61 | 61 | 60-1/4 | 58-5/8 |
| Case depth without door (in.) C | 27-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 27-1/2 | 26 | 26-1/2 | 27-1/2 | 26-1/2 | 26-1/2 | $\frac{26}{26-1/2}$ | 26 | 26 | 26 | 27-7/16 | 25 |
| Case depth with door less handle (in.) D | 29-13/16 | 29-13/16 | 29-13/16 | 29-13/16 | 29-13/16 | 28 | 30 | 29-13/16 | 30 | 29-1/8 | $\frac{28}{29-1/8}$ | 28 | 28 | 28 | 29-11/16 | 26-3/8 |
| Case depth with door handle (in.) E | 31-1/2 | 31-1/2 | 31-1/2 | 31-1/2 | 31-1/2 | 28 | 31-1/4 | 31-1/2 | 31-1/4 | 30-7/8 | $\frac{28}{29-1/8}$ | 28 | 29-9/16 | 28 | 31-7/16 | 28 |
| Depth with door open 90° (in.) F | 59-7/8 | 59-7/8 | 59-7/8 | 58 | 58 | 54-1/2 | 55-7/8 | 58 | 55-7/8 | 54-3/4 | $\frac{54-1/2}{54-3/4}$ | 54-1/2 | 54-1/2 | 54-1/2 | 51-9/16 | 48-3/4 |
| Width (in.) G | 31-1/4 | 31-1/4 | 31-1/4 | 29-3/8 | 29-3/8 | 28 | 28 | 29-3/8 | 28 | 28 | 28 | 28 | 28 | 28 | 23-3/8 | 23-5/8 |
| Width with door open 90° less handle (in.) H | 31-1/4 | 31-1/4 | 31-1/4 | 29-3/8 | 29-3/8 | 28-1/2 | 30-1/2 | 29-3/8 | 30-1/2 | 30-1/8 | 28-1/2 | 28-1/2 | 29-3/4 | 28-1/2 | 23-9/16 | 24-1/8 |
| Air clearances | | | | | | | | | | | | | | | | |
| Each side (in.) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| Top (in.) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 1 |
| Back (in.) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 3/4 | 1 |
| Approx. shipping weight (lbs.) | 240 | 240 | 240 | 230 | 230 | 170 | 230 | 230 | 230 | $\frac{190}{195}$ | $\frac{170}{188}$ | 170 | $\frac{170}{174}$ | 168 | 152 | 157 |

CM = Color Matched
 *Color(s) available: WW = White on white, AA = Almond on almond, WH = White/Black handles, AD = Almond/Black handles.
 †If installed against a wall, allow clearance of 11-1/4" on freezer side to remove ice bin.



Front View



Top View

See page 83 for warranty information.

Refrigeration specifications

GE Cycle and manual defrost refrigerators


Cycle defrost:

Two-door refrigerators combine dependability in food storage with economical operation. Freezer requires manual defrost.


Manual defrost:

Single-door refrigerators feature a compartment for short-term frozen food storage and a fresh food compartment with an adjustable shelf.

Cycle defrost



Front View




Top View

Manual defrost



Front View



Top View

| | GE Cycle defrost two door | | GE Manual defrost single door |
|-------------------------------------|---------------------------|-------------------------|-------------------------------|
| | TDX11SNY | TDX9SNY | TAX10SNX |
| Capacity | | | |
| Total (cu. ft.) | 11.0 | 9.0 | 9.6 |
| Fresh food (cu. ft.) | 8.60 | 6.60 | 8.64 |
| Freezer (cu. ft.) | 2.40 | 2.40 | .94* |
| Shelf area (sq. ft.) | 15.5 | 15.2 | 9.88 |
| Features | | | |
| Ice 'N Easy trays | 2 Mini | 2 Mini | 2 |
| Freezer chiller tray with baffle | | | ■ |
| Cabinet shelves wire Everwhite | 3 Adj. | 2 Adj. | 2 Adj. |
| Vegetable/fruit crisper | 1 F/W | 1 F/W | 1 F/W |
| Door shelves | 2 Modules, 2 Stationary | 4 Modules, 1 Stationary | 3 F/W |
| Tall bottle storage on door | ■ | ■ | ■ |
| Dairy compartment(s) | 2 | 2 | 1 |
| Egg storage bin | | | Pockets |
| Freezer compartment shelf(s) | 1 F/W | 1 F/W | |
| Economical/Quiet | | | |
| Cabinet/door insulation | Foam | Foam | Foam |
| Cabinet/door liner | Plastic | Plastic | Plastic |
| Appearance | | | |
| Color(s) available | White | White | White/Almond |
| Door handle(s) | White | White | Black |
| Reversible doors | ■ | ■ | ■ |
| Right or left door opening | | | ■ |
| Weights & Dimensions | | | |
| Height to top of hinge (in.) A | 63-1/2 | 55 | 58 |
| Height to top of case (in.) B | 63 | 54-1/2 | 57-9/16 |
| Case depth without door (in.) C | 20-1/2 | 20-1/2 | 21-3/8 |
| Case depth less door handle (in.) D | 23-1/4 | 23-1/4 | 23-1/2 |
| Case depth with door handle (in.) E | 24-1/2 | 24-3/4 | 24-13/16 |
| Depth with door open 90° (in.) F | 46 | 46 | 44-13/16 |
| Width (in.) G | 23-1/4 | 23-1/2 | 23 |
| Width with door open 90° (in.) H | 23-3/4 | 23-3/4 | 23-1/2 |
| Air clearances | | | |
| Each side (in.) | 1/2 | 1/2 | 5/8 |
| Top (in.) | 2 | 2 | 2 |
| Back (in.) | 2 | 2 | 1 |
| Approx. shipping weight (lbs.) | 139 | 126 | 135 |

*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about **two weeks**. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.

GE Spacemaker™ compact refrigerators


| | TAX6SNXWH TAX6SNXWN | TAX4SNYWH | TAX4ANXWN | TAX2SNYWN TAX2SNBWH |
|----------------------------------|----------------------------|---------------------------|-----------------------------------|---------------------------|
| Capacity | | | | |
| Total (cu. ft.) | 6.0 | 3.7 | 3.7 | 1.7 |
| Fresh food (cu. ft.) | 5.51 | 3.26 | 3.42 | 1.51 |
| Freezer (cu. ft.) | .49* | .42* | .34* | .21* |
| Shelf area (sq. ft.) | 8.8 | 6.0 | 6.5 | 2.9 |
| Features | | | | |
| Ice 'N Easy trays | 2 Mini | 1 Mini | 1 Mini | 2 Mini |
| Manual defrost | ■ | ■ | ■ | ■ |
| Cabinet shelves | 2 (Adj.) | 2 Full-width wire | 3 F/W wire (1 wire/retaining rod) | 1 |
| Vegetable/fruit pan | | 1 F/W White | | |
| Door shelves | 3 F/W | 2 F/W | 2 F/W | 1-1/2 |
| Utility bin | | | | Tray |
| Economical/Quiet | | | | |
| Cabinet/door insulation | Foam | Foam | Foam | Foam |
| Cabinet/door liner | Polystyrene | Polystyrene | Polystyrene | Polystyrene |
| Appearance | | | | |
| Color(s) available | White Woodgrain | White | Woodgrain | Color-Matched Recessed |
| Door handles | White Visor Black Visor | Color-Matched Recessed | Color-Matched Recessed | Woodgrain White |
| Rounded doors | | ■ | | |
| Reversible door(s) | ■ | ■ | | |
| Right or left door opening | | | Right Hand | Right Hand |
| Weights & Dimensions | | | | |
| Height (in.) A | 34-1/4 | 34-1/2 | 34-1/2 | 18-7/8** |
| Width (in.) B | 23-5/8 | 18-7/8 | 18-7/8 | 18-5/8 |
| Depth with handle (in.) C | 25-7/8 | 20-3/4 | 20-3/4 | 19-1/2 |
| Depth with door open 90° (in.) D | 47-1/2 | 39-1/4 | 39-1/4 | 37 |
| Air clearances | | | | |
| Each side (in.) | 0 1/4 | 1/2 | 1/2 | 1/2 |
| Top (in.) | 1-1/2 | 12 | 12 | 12 |
| Back (in.) | 3/4 | 5 | 5 | 5 |
| Approx. shipping weight (lbs.) | 88 | 68 | 71 | 40 |
| Accessories | | | | |
| Custom trim kit | TK6 Optional† | | | |

*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about **two weeks**. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.


**Height does not include hinge.

†TK6 trim kit comes with black panel.

††If installed against a wall, allow 1-1/4" on hinge side to allow for proper door opening.



Front View




Top View

Note: Right-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.
Left-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.

GE Upright freezers

Quality, convenient freezers equipped with door shelves and spacious interiors for ease in viewing frozen foods.




| GE Upright frost-free | | | | GE Upright manual defrost | | | | | | | | |
|----------------------------------|-----------------------|-----------------------|-----------------------|---------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-------------|-------------|
| | FUF20DA | FUF17DA | FUF14DA | FUM21DA | FUM21SA | FUM17DA | FUM17SA | FUM14DA | FUM14SA | FUM12SA | FUM9SA | FUM5SA |
| Capacity | | | | | | | | | | | | |
| Total volume (cu. ft.) | 20.3 | 16.7 | 13.7 | 20.6 | 20.6 | 17.1 | 17.1 | 14.1 | 14.1 | 11.6 | 8.7 | 5.0 |
| Shelf area (sq. ft.) | 23.9 | 18.4 | 14.3 | 25.3 | 21.9 | 19.1 | 16.2 | 17.9 | 15.0 | 13.0 | 10.1 | 6.0 |
| Features | | | | | | | | | | | | |
| Audible temperature alarm | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Temperature control | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable |
| Limited food loss warranty | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Door shelves (total) | 6 | 5 | 5 | 6 | 6 | 5 | 5 | 5 | 5 | 4 | 5 | 3 |
| Defrost water drain | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Power "ON" light | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Interior light | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Lock | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Cabinet shelves (total) | 5 (3 Adj.) | 4 (3 Adj.) | 3 (2 Adj.) | 4 (1 Adj.) | 4 | 4 (1 Adj.) | 3 | 3 (1 Adj.) | 3 | 3 | 4 | 2 |
| Refrigerated shelves | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Bulk storage basket | Slide-Out | Slide-Out | Slide-Out | Slide-Out | ■ | Slide-Out | ■ | Slide-Out | ■ | ■ | ■ | ■ |
| Drop-front storage | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Economical/Quiet | | | | | | | | | | | | |
| Defrost | Frost-Free | Frost-Free | Frost-Free | Manual | Manual | Manual | Manual | Manual | Manual | Manual | Manual | Manual |
| Magnetic door gasket | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Cabinet liner | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Baked enamel-on-steel | Polystyrene | Polystyrene |
| Wrap-around condenser | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Appearance | | | | | | | | | | | | |
| Color available | White | White | White | White | White | White | White | White | White | White | White | White |
| Door handle | ■ | ■ | ■ | ■ | Recessed | ■ | Recessed | ■ | Recessed | Recessed | ■ | Recessed |
| Textured steel case and door | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Rounded door | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Weights & Dimensions | | | | | | | | | | | | |
| Height (in.) A | 70 | 64-1/2 | 59 | 70 | 70 | 64-1/2 | 64-1/2 | 59 | 59 | 54-1/2 | 53-3/8 | 33-1/2 |
| Width (in.) B | 32 | 32 | 28 | 32 | 32 | 32 | 32 | 28 | 28 | 28 | 24 | 21-3/8 |
| Depth (in.) C | 28-1/2 | 26-1/2 | 28-1/2 | 28-1/2 | 28-1/2 | 26-1/2 | 26-1/2 | 28-1/2 | 28-1/2 | 26-1/2 | 26-3/8 | 26-1/8 |
| Depth with door open 90° (in.) D | 59-1/8 | 57-1/8 | 55-1/8 | 59-1/8 | 59-1/8 | 57-1/8 | 57-1/8 | 55-1/8 | 55-1/8 | 53-1/8 | 49-1/8 | 45-3/4 |
| Air clearances | | | | | | | | | | | | |
| Each side (in.) | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 1 | 1 |
| Top (in.) | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 4 | 4 |
| Back (in.) | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 4 | 4 |
| Approx. shipping weight (lbs.) | 231 | 213 | 173 | 231 | 231 | 211 | 211 | 173 | 173 | 168 | 120 | 80 |

NOTE: For proper installation of Upright Freezers (except FUM9SA and FUM5SA), allow clearance of 3" on each side; 3" or 4" on top; and 3" on back.

GE Chest freezers

Large-capacity or smaller chest models save money and deliver big performance features.



| GE Chest freezers | | | | | | | | |
|--|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | FCM25DA | FCM20DA | FCM15DA | FCM15SA | FCM9DA | FCM9SA | FCM7DA | FCM5SA |
| Capacity | | | | | | | | |
| Total volume (cu. ft.) | 24.9 | 19.7 | 14.8 | 14.8 | 8.8 | 8.8 | 7.2 | 5.0 |
| Features | | | | | | | | |
| Manual defrost | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Audible temperature alarm | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Temperature control | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable |
| Wrap-around condenser | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Wrap-around evaporator | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Limited food loss warranty | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Defrost water drain | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Power "ON" light | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Interior light | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Lock | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Removable sliding bulk storage basket(s) | 3 | 2 | 2 | 1 | 1 | ■ | 1 | ■ |
| Economical/Quiet | | | | | | | | |
| Cabinet/lid insulation—Foam | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Cabinet liner | Steel Epoxy-Coated | Steel Epoxy-Coated | Steel Epoxy-Coated | Steel Epoxy-Coated | Steel Epoxy-Coated | Steel Epoxy-Coated | Steel Epoxy-Coated | Steel Epoxy-Coated |
| Appearance | | | | | | | | |
| Color available | White | White | White | White | White | White | White | White |
| Handle | ■ | ■ | ■ | Recessed | ■ | Recessed | ■ | Recessed |
| Textured steel case and lid | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Weights & Dimensions | | | | | | | | |
| Height (in.) A | 35 | 35 | 35 | 35 | 34-1/4 | 34-1/4 | 34-1/4 | 34-1/4 |
| Width (in.) B | 73-1/4 | 61-1/4 | 48 | 48 | 41 | 41 | 35 | 27 |
| Depth (in.) C | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 23-1/4 | 23-1/4 | 23-1/4 | 23-1/2 |
| Height with lid open (in.) D | 60-3/4 | 59-1/2 | 60-3/4 | 60-3/4 | 55-1/4 | 55-1/4 | 55-1/4 | 55-1/4 |
| Air clearances | | | | | | | | |
| Each side (in.) | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Back (in.) | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Approx. shipping weight (lbs.) | 229 | 201 | 160 | 160 | 137 | 137 | 120 | 105 |

NOTE: For proper installation of Chest Freezers, allow clearance of 3" on each side and 3" on back.



Total volume and shelf area ratings are calculated by the Association of Home Appliance Manufacturers' standards.



Listed by Underwriters Laboratories, Inc.

See page 83 for warranty information.

Dual Carbon Filtration Systems: GE Systems

Introducing the new CarbonBlock System. Engineered to provide superior technology and cleaner performance.

These models include

SmartWater™ faucet with electronic monitor
Indicator light on the faucet base shows when filters need replacement.



Amber "Filter" Light:
Indicates when to replace filters for the highest quality water.

Note: Batteries are included. Filter Cartridges should be changed every six months, when monitor indicates replacement, or if faucet water pressure drops.

Filter options

Model specific filters are included with filtration system selected (see options shown); or model is available without filters (Model GXEM01B).

NSF approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects, tests and certifies our product performance. See page 28 for details.



CarbonBlock System

Superior Carbon Block Technology—Cleaner Performance

Comparison of dual carbon systems

| GE | | | |
|-------------------|--|--------------------------------------|--------------------------------------|
| | GNUT03B GXUT03B (Non monitored faucet) | GNUT05B (Monitored faucet) | GNUL30B (Monitored faucet) |
| Elements reduced: | | | |
| Drinking Water | ■ | ■ | ■ |
| Sediment | ■ | ■ | ■ |
| Rust | ■ | ■ | ■ |
| Taste and Odor | | | ■ |
| Sodium | | | ■ |



Simple Installation Can be easily installed undercounter, in basement or another convenient location.



SmartWater™ faucet Separate faucet is used only when filtered water is needed, extending filter life.



GNUL30B (filters included)

Lead/cysts reduction model

- System rated for 1250 gallons of water
- Long-reach faucet with electronic monitor

CarbonBlock System

Filter I

- Reduces unpleasant dirt, rust and sediments

Filter II

■ Absolute 1 micron

- Reduces unpleasant tastes and odors
- Removes 95.7% lead
- Removes 99.98% filterable cysts (such as cryptosporidium and giardia)
- Removes 99.5% chlorine

For detailed specifications, installation information and color availability, refer to page 28. For warranty information, refer to page 83.



GNUT05B (filters included)

Taste and odor reduction model

- System rated for 6000 gallons of water
- Long-reach faucet with electronic monitor

CarbonBlock System

Filter I

- Reduces dirt, rust and sediments

Filter II

- Reduces unpleasant tastes and odors
- Removes 99.5% chlorine



GNUT03B/GXUT03B (filters included)

Taste and odor reduction model

- System rated for 6000 gallons of water
- Short-reach faucet without electronic monitor

CarbonBlock System

Filter I

- Reduces dirt, rust and sediments

Filter II

- Reduces unpleasant tastes and odors
- Removes 99.5% chlorine



GXEM01B (filters sold separately)

- Model is customized based on water quality needs
- Filters must be purchased separately
- Long-reach faucet with electronic monitor

Refrigeration/icemaker water filter

Provides healthy great tasting water and ice through your refrigerator dispenser.



GXITQ

Taste and odor reduction model

- System rated for 2000 gallons of water
- Quick connect fittings allow for easy installation
- Filter reduces dirt, rust, sediments and chlorine
- Auto shut-off valve

GXITQR (not shown)
Replacement filter for model GXITQ

GXIT (not shown)
Taste and odor reduction model

- System rated for 750 gallons of water
- Filter reduces dirt, rust, sediments and chlorine

GXILQ (not shown)

Lead/cysts reduction model

- System rated for 1000 gallons of water
- CarbonBlock Filter for cleaner performance
- Quick connect fittings allow for easy installation
- Filter reduces dirt, rust, sediments, chlorine, lead and cysts
- Auto shut-off valve
- Available 11/99

CarbonBlock System


For detailed specifications, installation information and color availability, refer to page 28. For warranty information, refer to page 83.

GE SmartWater™ filtration system

GE Reverse osmosis filtration system:

Reverse osmosis (RO) process

GE's best filtration process, combines dual carbon filtration with reverse osmosis technology, reducing up to 99%* of the following undesirable elements: Taste and odor, sediment, lead, inorganic chemical contaminants, nitrates/nitrites, sodium and cysts (such as cryptosporidium/giardia). See below for a complete list of undesirable elements reduced.



Refrigerator connection kit

RVKIT (For use with reverse osmosis models.)

Optional hook-up kit is available to provide the added convenience of filtered water through your refrigerator dispenser. Provides for great tasting water and ice. Kit includes all necessary items for hook-up, including supplemental tank (RVTNK1).



Simple installation

Can be installed easily undersink, in basement connected to kitchen sink or other convenient location.




NSF Approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects, tests and certifies our product performance (see page 29 for details).

Dual Carbon Filtration*

Reduces unpleasant tastes and odors, such as chlorine from your drinking water.


Reduces:



Reverse Osmosis Process

This is GE's best filtration process. It combines dual carbon filtration with reverse osmosis technology.

Reduces:

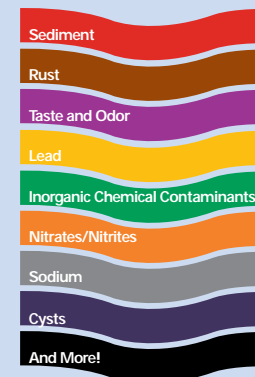

Plus, Reverse Osmosis Technology Reduces:

| | | |
|---------------------|-----------|----------|
| Ammonia | Fluoride | Sulfate |
| Barium | Magnesium | Tannin |
| Bicarbonate | Mercury | Zinc |
| Bromide | Nickel | Chloride |
| Cadmium | Nitrate | TDS |
| Chlorine (residual) | Sediment | Nitrite |
| Chromium | Selenium | |
| Copper | Sodium | |

*Dual Carbon Filtration will reduce lead and cysts on certain models.



GXR10ABL Reverse osmosis filtration system with faucet (includes tank)

- Reverse osmosis process
- Chrome with black SmartWater™ faucet is used only when filtered water is needed, extending filter life
- Large capacity—provides up to 10 gallons** of high-quality filtered water per day
- Simple installation

* Elements removed are not necessarily present in your water. See product specification sheet, packed with product, for specific elements reduced by model, or call the GE Answer Center™ toll-free, 800.626.2000.

** As tested and validated by the Water Quality Association using Standard S-300.
Note: Depends on water pressure, temperature and total dissolved solids.

For detailed specifications, installation information and color availability, refer to page 29. For warranty information, refer to page 83.

GE SmartWater™ filtration benefits—healthy water

75% of all Americans are concerned about the quality of their water.[†] Homeowners are looking for water solutions from a name they can trust—GE.



Healthy water—
Provides added assurance of healthy drinking water.



Better tasting water—
Healthy water for drinking and making beverages such as coffee, tea and juice.



Great for cooking—
Cooking with filtered water provides great tasting foods.



NSF certified—
GE is certified by NSF the most highly recognized independent testing institution for water treatment products.

GE SmartWater™ softening benefits

85% of the U.S. has hard water.[†] A GE SmartWater™ softening system provides quality water throughout your home.




Easier to clean—
Reduces hard water build-up (less soap residue) in tub, shower and sink.



Whiter towels—
Clothes are softer, cleaner, brighter and last longer. Towels are 45% whiter while using 1/3 less detergent. Eliminates hard water-related washer service issues.



Reduces spotting—
Provides cleaner dishes, glassware and china by reduced spotting. Reduces detergent use and eliminates hard water-related dishwasher service issues.

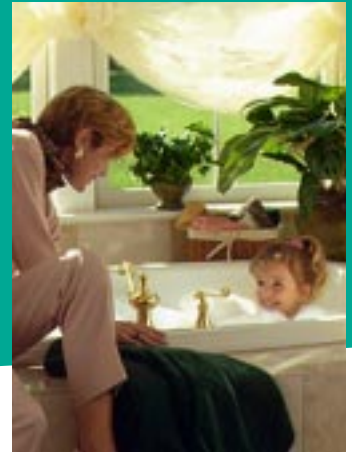

Soft water—
Will feel noticeably smoother to your skin.

[†]Source: Water Quality Association

Water softening systems: GE systems

This model includes

- **Large capacity means less maintenance**
A 23,100 grain capacity helps assure an ample supply of soft water and provides for lifestyle changes.
- **200 lb. salt storage**
Reduces the need for frequent salt replacement.
- **High-efficiency**
Large capacity combined with the salt-efficiency of the unit provides cost savings and convenience. Reduces the need for frequent salt replacement.
- **Demand-initiated regeneration**
Softening system monitors water usage to determine proper amount of salt needed using demand-initiated regeneration (system will use only as much salt as needed).
- **Program and time memory**
Permanent memory maintains hardness and regeneration time settings even if power is off or unit is unplugged for extended periods. Maintains time for up to 6 hours in case of power failure. No batteries needed, unit recharges itself when power is restored.
- **24-Volt electronic system**
Simplifies installation and maintenance.



- **Installation kit included**
For installing convenience, a complete installation kit with bypass valve, drain tubing and use & care video is included with product.
- **Easy-to-set electronic controls**
No calculations or complicated programming. Simply turn it on, set time of day and set the hardness level of your water supply.
- **Regenerates only when needed**
Memory maintains water usage pattern reducing salt usage and assuring an ample supply of soft water.



GE
GNSF23Z

This model includes

- **18,000 grain capacity**
Assures an ample supply of soft water.
- **140 lb. salt storage**
Combined with the compact size means easier salt loading.
- **High efficiency**
The salt-efficiency of the unit provides cost savings and convenience. Reduces the need for frequent salt replacement.
- **Compact size means installation flexibility**
The compact housing provides installation flexibility; installs in many areas other softeners may not. Perfect for condos and small spaces.
- **Demand-initiated regeneration**
Softening system monitors water usage to determine proper amount of salt needed using demand-initiated regeneration (system will use only as much salt as needed).
- **Program and time memory**
Permanent memory maintains hardness and regeneration time settings even if power is off or unit is unplugged for extended periods. Maintains time for up to 6 hours in case of power failure. No batteries needed, unit recharges itself when power is restored.
- **24-Volt electronic system**
Simplifies installation and maintenance.
- **Installation kit included**
For installing convenience, a complete installation kit with bypass valve, drain tubing and use & care video is included with product.
- **Easy-to-set electronic controls**
No calculations or complicated programming. Simply turn it on, set time of day and set the hardness level of your water supply.
- **Regenerates only when needed**
Memory maintains water usage pattern reducing salt usage and assuring an ample supply of soft water.



GE
GNSF18Z

For detailed specifications, installation information and color availability, refer to page 27. For warranty information, refer to page 83.

GE SmartWater™ softening systems specifications

GE SmartWater™ softening systems

| | GNSF23Z | GNSF18Z |
|---------------------------------------|--------------------------|--------------------------|
| Capacity | | |
| Capacity (grains) | Large-23,100* | Compact-18,000* |
| Features | | |
| Efficiency (grains per lb.-salt) | 5200** | 5000** |
| Max. hardness removal (gpg) | 50 | 25 |
| Max. clear water iron reduction (ppm) | 3 | 3 |
| Resin filter type | Std. mesh | Std. mesh |
| Resin weight (lbs.) | 31.20 | 38 |
| Resin quantity (cu. ft.) | .60 | .73 |
| Resin tank size (in inches) | 8 x 40 | 10 x 21 |
| Salt capacity (lbs.) | 200 | 140 |
| Water used for regeneration (gals.) | 23-30 | 25-30 |
| Regeneration time (min.) | Approx. 118 | Approx. 120 |
| Service flow rate (at 15 psi drop) | 8 | 7 |
| Electronic controls | ■ | ■ |
| Permanent settings memory | ■ | ■ |
| Plumbing connection | 1"-NPT | 1"-NPT |
| Appearance | | |
| Spacesaver design | | ■ |
| Style | Round | Round |
| Unit color | Grey | Grey |
| Electronic-demand driven | ■ | ■ |
| Weights & Dimensions | | |
| Approximate shipping wt. (lbs.) | 88 | 66 |
| Overall W x H x D (in.) | 18-1/4 x 48-3/4 x 18-1/4 | 18-5/8 x 29-1/2 x 18-5/8 |
| Power/Ratings | | |
| Electronic rating | 24V, 60Hz | 24V, 60Hz |

*GNSF23-Test protocol @ 9.6 lbs. of salt.
 GNSF18Z-Test protocol @ 6.3 lbs. of salt.
 **GNSF23-Test protocol @ 1.8 lbs. of salt.
 GNSF18Z-Test protocol @ 1.6 lbs. of salt.



Installation kit included


For installing convenience, a complete installation kit with bypass valve, drain tubing and use & care video is included with product.

Water test kit

To order a water test kit, call 800.626.2000.

Model GNSF23Z

Installation information (in inches)

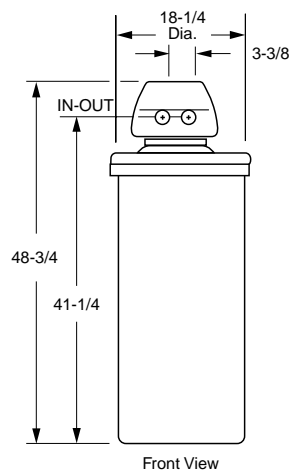


Note: Before installing, see installation instructions packed with product for complete details, or call GE QuickSpecs 800-432-3729.

Salt capacity – 200 lbs.

Important: All units must be installed according to local codes.

Model GNSF18Z

Installation information (in inches)

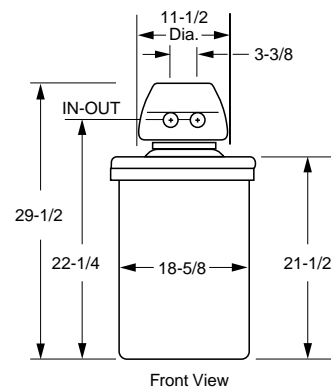

Note: Before installing, see installation instructions packed with product for complete details, or call GE QuickSpecs 800-432-3729.

Salt capacity – 140 lbs.

Important: All units must be installed according to local codes.

GE SmartWater™ filtration systems specifications

GE SmartWater™ dual carbon filtration systems


| Filtration systems | | | | | Refrigerator/Icemaker Water Filters | | | |
|---|------------------------------|------------------------------|-----------------------|------------------------------|-------------------------------------|------------------|--------------------|--------------------|
| GNUL30B | GNUT05B | GNUT03B GXUT03B* | GXEM01B* | GXIT** | GXITQ** | GXILQ** | GXITQR | GXILQ** |
| Features | | | | | | | | |
| SmartWater™ Faucet | Electronic Monitor | Electronic Monitor | Short-Reach | Electronic Monitor | N/A | N/A | N/A | N/A |
| Faucet Color | Chrome w/black | Chrome w/black | Chrome w/black | Chrome w/black | N/A | N/A | N/A | N/A |
| Feed Water Pressure (psi) | 40 min.-125 max. | 40 min.-125 max. | 40 min.-125 max. | 40 min.-125 max. | 20 min.-125 max. | 20 min.-125 max. | 20 min.-125 max. | 20 min.-125 max. |
| Feed Water Temperature | 40-100°F | 40-100°F | 40-100°F | 40-100°F | 40-100°F | 40-100°F | 40-100°F | 40-100°F |
| Filtered Water Flow (gpm) | 0.6 | 0.6 | 0.6 | 0.6 | | | | |
| Filter I (Sediment) | FXUSB | FXUSB | FXUSB | | | | | |
| Filter Cartridge | Polyspun Depth Filter | Polyspun Depth Filter | Polyspun Depth Filter | | | | | |
| | FXULB (Lead,Cysts) | FXUTB (Taste/Odor) | FXUTB (Taste/Odor) | | | | | |
| Filter II (Carbon block) | | | | | | | | |
| Filter Cartridge | Block Act. Carbon | Block Act. Carbon | Block Act. Carbon | | Act. Carbon | Act. Carbon | Act. Carbon | Block Act. Carbon |
| Particulate Removal | Absolute 1 micron | Nominal 1 micron | Nominal 1 micron | | 5 micron nominal | 5 micron nominal | 5 micron nominal | Absolute 1 micron |
| Chlorine Reduction (percent / gals.) | 99.5/1250 | 99.5/6000 | 99.5/6000 | | 750 gallons | 2000 gallons | 2000 gallons | 1000 gallons |
| Lead Reduction (percent / gals.) | 95.7/1250 | | | | | | | >90/1000 |
| Cysts Reduction (percent / gals.) | 99.98/1250 | | | | | | | >99.98/1000 |
| Turbidity Reduction (percent / gals.) | 99.7/1250 | | | | | | | |
| Filter Change Indicator | Electronic | Electronic | | Electronic | Sticker | Sticker | Sticker | Sticker |
| Undercounter Installation (kit included) | ■ | ■ | ■ | ■ | N/A | N/A | N/A | N/A |
| Installation Kit | | | | | ■ | ■ | Replacement Filter | ■ |
| Fittings | | | | | Brass | Quick Connect | Replacement Filter | Quick Connect |
| Auto-Shut Off Valve | | | | | | ■ | ■ | ■ |
| Optional Basement Installation (hardware not included) | ■ | ■ | ■ | ■ | | | | |
| Appearance | | | | | | | | |
| Style | Bracket | Bracket | Bracket | Bracket | | | | |
| Unit Color | White | White | White | White | White | White | White | White |
| Filter Housing | White | White | White | White | | | | |
| Weights & Dimensions | | | | | | | | |
| Approximate Shipping Weight (lbs.) | 7 | 7 | 7 | 6 | 2 | 2 | 2 | 2 |
| Overall W x H x D (in.) | 12 x 13 x 4-5/8 | 12 x 13 x 4-5/8 | 12 x 13 x 4-5/8 | 12 x 13 x 4-5/8 | 14 x 2 x 2 | 14 x 2 x 2 | 14 x 2 x 2 | 15 x 2-1/2 x 2-1/2 |
| Power/Ratings | | | | | | | | |
| Faucet Monitor | 2 AA batteries (included) | 2 AA batteries (included) | | 2 AA batteries (included) | N/A | N/A | N/A | N/A |
| Power Requirement | | | | | | | | |
| Accessories (available at additional cost) | | | | | | | | |
| Icemaker Connection Kit | UCKIT | UCKIT | UCKIT | UCKIT | N/A | N/A | N/A | N/A |

Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cysts reduction may be used on disinfected water that may contain filterable cysts.


*Models GXUT03B and GXEM01B have retail packaging.

**All in line filters subject to change.

Models GNUL30B/GNUT05B/GXEM01B Installation information (in inches)

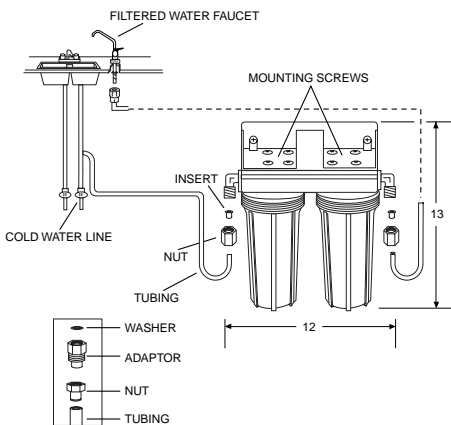

Models GNUT03B/GXUT03B Installation information (in inches)

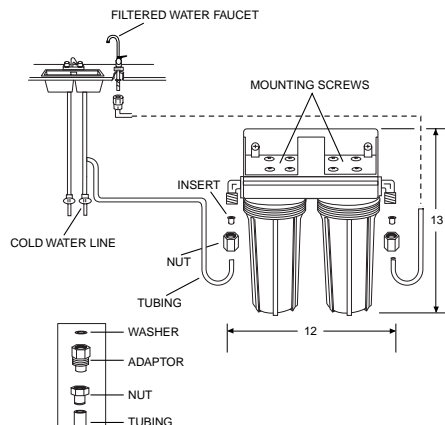

GXUT03B, GNUT03B, GNUT05B and GNUL30B are Tested and Certified by NSF International against ANSI/NSF Standard 42 for Particulate Reduction Class I, Chlorine Reduction Class I and Taste and Odor Reduction.

GNUL30B is Tested and Certified by NSF International against ANSI/NSF Standard 53 for Cyst, Turbidity and Lead Reduction.

GXEM01B is Tested and Certified by NSF International against ANSI/NSF Standard 42 for Material and Structural Integrity only.

NSF approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects our manufacturing facilities, structurally tests our product, tests our product to make sure nothing harmful is added to the water and certifies our product performance as specified on the performance data sheet (inside the product box).

SPECTRUM LABS INC.

The GE SmartWater™ filtration system (GNUL30B) have been quality tested by an independent laboratory, Spectrum Labs, Inc.

Installation, parts and warranty information

Note: Can be installed undercounter (as shown), in basement, or other convenient location. Before installing, see installation instructions packed with product for complete details.

Replacement filters

Call GE SmartWater Services toll-free 800.952.5039 to order replacement filters.

Water test kit

To order a water test kit, call 800.626.2000.

GE SmartWater™ filtration systems specifications

GE SmartWater™ reverse osmosis filtration system

| GXR10ABL | |
|--|---|
| Capacity | |
| Storage tank capacity (gals.) | 1.3 |
| Features | |
| SmartWater™ faucet (short-reach) | Chrome with black |
| Output per day (gals.) – Production Rate (gpd) as tested by WQA Standard S-300 | 10 |
| Process water used (per gal.) | 4 |
| Working pressure (psi) | 40 min. - 125 max. |
| Max. TDS removal (ppm) | 2000 |
| Percent TDS removal * (ppm) | 75-92 |
| Percent cysts reduction | 99.95 effective |
| Max. hardness | 10 grains |
| Feed water pH limits | 4-10 |
| Operation and storage water temperature | 40-100° F |
| Auto shut-off | ■ |
| Filters & Membrane | |
| RO membrane | FX12M-Thin film polyamid (TFP) |
| Pre-filter (sediment) | FX12PA-Carbon block |
| Post-filter (taste/odor) | FX12PA-Carbon block |
| Undercounter installation (kit included) | ■ |
| Optional basement installation (hardware not included) | ■ |
| Appearance | |
| Style | Bracket |
| Unit color | Grey |
| Filter housing | Opaque |
| Weights & Dimensions | |
| Approximate shipping weight (lbs.) | 23 |
| Overall W x H x D (in.) | 17 x 16 x 5-3/4 (unit) 9 x 15 x 9 (tank) |
| Accessories (available at additional cost) | |
| Supplemental tank | RVTNK1 |
| Icemaker connection kit | RVKIT |

*Feed water = 50 psig, 77°F, pH = 7.5 ± 5 and 750 ppm TDS as sodium chloride. Product water produced, amount of waste and percent rejection will vary with changes in pressure, temperature and total dissolved solids. Feed water over 10 grains of hardness may affect performance of the filtration system.

GE SmartWater™ reverse osmosis filtration systems reduce the following undesirable elements*:

| | |
|---------------------|----------|
| Ammonia | Mercury |
| Barium | Nickel |
| Bicarbonate | Nitrate |
| Bromide | Sediment |
| Cadmium | Selenium |
| Chlorine (residual) | Sodium |
| Chromium | Sulfate |
| Copper | Tannin |
| Cysts | Zinc |
| Fluoride | Chloride |
| Lead | TDS |
| Magnesium | Nitrite |

*Product water produced and percent rejection will vary with changes in pressure, temperature and TDS. Feed water over 10 grains of hardness may effect performance of RO membrane.



GE reverse osmosis model GXR10ABL is tested and certified to ANSI/NSF Standard 58 for TDS and cysts reduction.

NSF approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects our manufacturing facilities, structurally tests our product, tests our product to make sure nothing harmful is added to the water and certifies our product performance as specified on the performance data sheet (inside the product box).


SPECTRUM LABS INC.

The GE reverse osmosis model GXR10ABL has been quality tested by an independent laboratory, Spectrum Labs, Inc.

Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cysts reduction may be used on disinfected water that may contain filterable cysts. This reverse osmosis unit contains a replaceable membrane cartridge treatment component critical for effective removal of Total Dissolved Solids. The water should be tested periodically to verify that the system is performing satisfactorily.

Model GXR10ABL

Installation information (in inches)

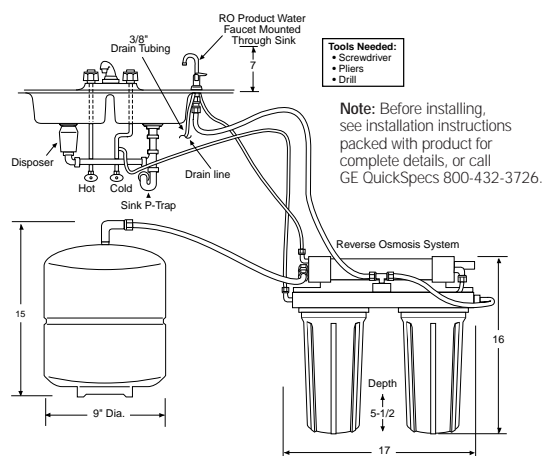

Installation and parts information

Note: R.O. system can be installed up to 30 feet from point-of-use/faucet.

Note: Can be installed undercounter (as shown), in basement, or other convenient location. Before installing, see installation instructions packed with product for complete details.

Replacement membranes, pre- and post-filters

Call GE SmartWater™ Services toll-free 800-952-5039 for convenient ordering.

Water test kit

To order a water test kit, call 800.626.2000.

See page 83 for warranty information.

Super and Extra-large capacity washers

VBSR2080W

- Super capacity washer
- 3 water levels
- 8 cycles
- 2 wash/spin speed combinations
- Bleach dispenser
- Self-cleaning filter
- Fabric softener dispenser
- Front lid opening

VBXR1070W

- Extra-large capacity washer
- 3 water levels
- 6 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- Self-cleaning filter
- Front lid opening

VVSR1040V

- Super capacity washer
- 2 water levels
- 4 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- Front lid opening



Super capacity

The 3.2 cu. ft. super capacity washer provides added space for extra-large loads.



FlexCare™ agitator

Delivers excellent wash performance, and the innovative "Flexible Fins," care for delicate wash loads.




Balance Pro™ suspension system

An innovative rod and spring floating suspension system designed to handle off-balanced loads on any type of floor.



Tuf Tub™ basket

The basket resists peeling, chipping, rusting or flaking for long term durability.

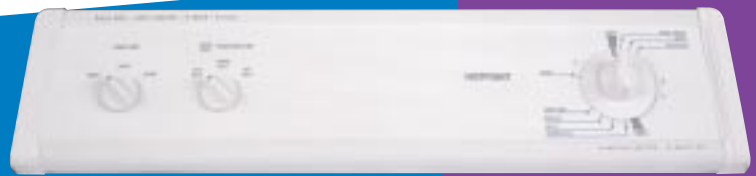

VBSR2080W



VBXR1070W



VVSR1040V



VBSR2080W

All features may not be available on all models.

For detailed specifications, installation information and color availability, refer to page 33. For warranty information, refer to page 83.



NBXR453EV (Electric), NBXR453GV (Gas)



NVLR333EV (Electric), NVLR333GV (Gas)



NBXR453E/GV

Extra-large and large capacity dryers

NBXR453EV (Electric)

NBXR453GV (Gas)

- Extra-large capacity dryer
- Automatic dry control
- 5 cycles
- 4 heat selections
- Up-front lint filter
- Reversible door

NVLR333EV (Electric)

NVLR333GV (Gas)

- Large capacity
- Automatic dry control
- 3 cycles
- 3 heat selections
- Up-front lint filter



Automatic dry control

Monitors moisture level with an automatic thermostat and ends the cycle when clothes are properly dried. **Optional press guard** provides extra care to help prevent wrinkles.




Up-front lint filter

Convenient, up-front removable lint filter is easy to reach, easy to clean.



Double-coated drum interior

Provides long-lasting dependability and durability.



Off-set appearance

A contemporary design that makes cleaning easy.

All features may not be available on all models.

For detailed specifications, installation information and color availability, refer to pages 33 and 36. For warranty information, refer to page 83.

GE Spacemaker® washers and dryers



GE Portable/stationary models

WSKP2060T 120V Washer

- Portable model
- 2 wash/spin speeds
- 6 cycles: Regular (Heavy Soil, Medium Soil), Permanent Press (Medium Soil, Light Soil) Delicates and Spin Only
- 3 wash/rinse temperatures
- 4 water levels
- Automatic cool down
- Lint filter
- Easy-roll rollers
- Unicouple connector quickly attaches to a faucet adaptor
- Available in White and Almond with black control panel

WSKS2060T

- 120V Washer (not shown)
- Stationary model


DSKP233ET 120V Dryer

- Portable/Stationary model
- 3 drying cycles: Automatic Regular-Permanent Press, Timed Dry up to 105 minutes and Air Fluff
- 2 Heat selections: Normal and No-Heat Air Fluff (in timer)
- 15-amp dryer cord attached
- Available in White and Almond with black control panel

DSKS433ET

240V Dryer (not shown)

- Stationary model
- 3 drying cycles: Auto Regular-Permanent Press, Auto Delicates and Timed Dry up to 140 minutes
- 4 Heat selections: Regular (High Heat), Permanent Press (Medium Heat), Delicates (Low Heat) and Air Fluff (No-Heat)
- Available in White and Almond with black control panel



DSR24RT Stack Rack

(Available at additional Cost)

- For use with portable or stationary washers and stationary dryer
- DSR24RT shown with WSKS2060T washer and DSKS433ET dryer



GE Unitized washer/dryer models

WSM2700T Electric

WSM2780T Gas

- Full size 27" wide
- Extra-Large Capacity Washer features 3 cycles (Regular, Permanent Press and Delicate), 3 wash temperature options, 3 water level selections
- Dryer features Automatic Dry Control, 4 cycles: Automatic Dry (Medium Heat), Timed Dry (High Heat), Delicate (Low Heat), Air Fluff (No-Heat)
- Available in White and Almond with black control panel

WSM2420T Electric

WSM2480T Gas

- 24" wide
- Washer features 3 cycles: Regular, Permanent Press and Delicates, 3 wash/rinse temperatures, 3 water levels
- Dryer features Automatic Dry Control, 4 cycles: Automatic Regular, Automatic Permanent Press, Timed Dry, and Air Fluff
- Available in White on white
- Electric model also available in Almond on almond


For detailed specifications, installation information and color availability, refer to pages 34 -36. For warranty information, refer to page 83.

Washers

| Models | VBSR2080W | VVSR1040V | VBXR1070W |
|--------------------------------|-----------|-----------------|-----------------|
| Features | | | |
| Capacity/Cubic feet | Super/3.2 | Super/3.2 | Extra-Large/2.7 |
| Wash/spin speed combination(s) | 2 (timer) | 1 | 1 |
| Wash/rinse temperatures | 3 | 3 (timer) | 3 |
| Water levels | 3 | 2 | 3 |
| Fabric softener dispenser | ■ | | |
| Bleach dispenser | ■ | | |
| FlexCare™ agitator | ■ | ■ | ■ |
| Front lid opening | ■ | ■ | ■ |
| New lid instructions | ■ | ■ | ■ |
| Tuf Tub™ basket | ■ | ■ | ■ |
| Self-cleaning filter | ■ | ■ | ■ |
| Number of wash cycles | 8 | 4 | 7 |
| Perm press | ■ | Warm cycle only | ■ |
| Knits | ■ | | ■ |
| Delicates | ■ | | ■ |
| Heavy soil | ■ | Hot cycle only | ■ |
| Normal soil | ■ | Warm cycle only | ■ |
| Light soil | ■ | Cold cycle only | ■ |
| Auto soak (15 min.) | ■ | | ■ |
| Supercycle™ | ■ | | |
| Front serviceable | ■ | ■ | ■ |
| Colors available* | WW/AA | WW | WW/AA |
| Approx. shipping weight (lbs.) | 160 | 160 | 152 |

*Colors available: White on White or Almond on Almond

Washer Dimensions (in inches)

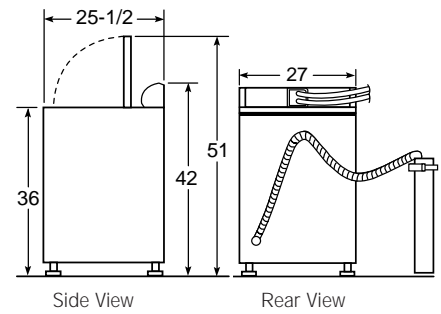

Washer specifications

Electrical rating: 115V, 60 Hz, 10 Amps

Circuit requirements: An individual properly-grounded branch circuit, with a three-prong grounding-type receptacle protected by a 15 or 20 amp circuit breaker or time-delay fuse, is required.

Washer Note: Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Dryers

| Models | Electric Gas | NBXR453EV NBXR453GV | NVLR333EV NVLR333GV |
|--------------------------------|-----------------|------------------------|------------------------|
| Features | | | |
| Capacity/Cubic feet | | Extra-Large/6.0 | Large/5.4 |
| Automatic dry control | | ■ | ■ |
| Double-coated drum | | ■ | |
| Porcelain drum interior | | | ■ |
| Removable upfront lint filter | | ■ | ■ |
| Heat selections | | 4 | 3 (timer) |
| Number of dry cycles | | 5 | 3 |
| Auto cotton | | | |
| Cottons cycle | | ■ | ■ |
| Auto perm press | | | |
| Perm press cycle | | ■ | ■ |
| Timed dry | | | |
| Actual minutes on timer | | 80 | 70 |
| Damp dry | | ■ | |
| De-wrinkle | | ■ | |
| Timed (no-heat) | | | ■ |
| Front serviceable | | ■ | ■ |
| Reversible door | | ■ | |
| Colors available* | | WW/AA | WW/AA |
| Approx. shipping weight (lbs.) | Elec. Gas | 110 115 | 118 136 |


*Colors available: White on white or Almond on almond

Note: Before installing, consult installation instructions packed with product for current dimensional data. Hotpoint electric dryers are available with long ducting capability.



Listed by
Underwriters
Laboratories

Dryer dimensions (in inches)

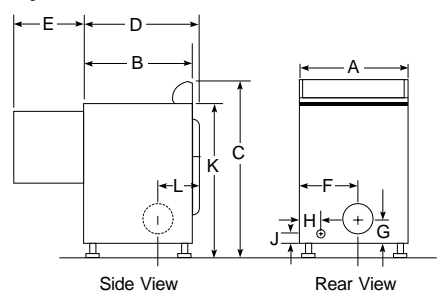

Dryer specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom.
Gas: 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

See installation instructions for venting specifications.

Dryer dimensions (in inches)

| | Large capacity | Extra-Large capacity | Super capacity |
|---|----------------|----------------------|----------------|
| A | 27 | 27 | 27 |
| B | 25-1/2 | 25-1/2 | 25-1/2 |
| C | 42 | 42 | 42 |
| D | 25-3/4 | 25-3/4 | 28-1/4 |
| E | 23-1/2 | 23-1/2 | 23-1/2 |
| F | 11-3/4 | 11-1/2 | 11-1/2 |
| G | 5-1/2 | 3-1/2 | 3-1/2 |
| H | 2 | 2 | 2 |
| J | 2-1/2 | 2-1/2 | 2-1/2 |
| K | 36 | 36 | 36 |
| L | 4-3/4 | 5-1/4 | 8-1/2 |

Circuit requirements:

Electric: An individual properly-grounded branch circuit protected by a 30 amp circuit breaker or time-delay fuse, is required.

Gas: An individual, properly-grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or time-delay fuse, is required.
(BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional WE25M35 conversion kit. Check installation instructions for correct kit and have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Electric dryer rating: 208/240V, 5600W, 60 Hz, 30 Amp
Gas dryer electric rating: 120V, 60 Hz, 15 Amp

GE Washer and dryer specifications

GE Spacemaker® washers and dryers

| Individual Spacemaker® Washers | Stationary WSKS2060T | Portable WSKP2060T |
|--------------------------------|--|--|
| Capacity | | |
| Capacity | Compact | Compact |
| Features | | |
| Wash/spin speed combinations | 2 | 2 |
| Wash/rinse temperatures | 3 | 3 |
| Water levels | 4 | 4 |
| Number of cycles | 6 | 6 |
| Regular | | |
| Heavy Soil | ■ | ■ |
| Medium Soil | ■ | ■ |
| Perm. Press | | |
| Medium Soil | ■ | ■ |
| Light Soil | ■ | ■ |
| Delicates | | |
| Spin Only | ■ | ■ |
| Automatic cool down | ■ | ■ |
| Bleach dispenser | ■ | ■ |
| Fabric softener dispenser | ■ | ■ |
| Lint filter | ■ | ■ |
| Easy-roll rollers | ■ | ■ |
| Appearance | | |
| Colors available | White and Almond with black backsplash | White and Almond with black backsplash |
| Weight and Dimensions | | |
| Circuit requirements | 120V, 60 Hertz, 15 or 20 Amps | |
| Dimensions (HxWxD in inches)* | 34-1/4 x 22-1/4 x 24 | 34 x 22-1/4 x 24 |
| Approx. shipping wt. (lbs.) | 109 | 109 |

*Depth measured from front of control knob.

To install these washers with matching dryers, use accessory kit:

DSR24RT—Metal rack for stationary dryer with portable washer rolled beneath.

Note: To obtain matching appearance between the washers and dryers, the dryers must be *T* model year. For example, DSKS433ET.

Accessories

Stack Rack DSR24RT

For use with stationary dryers and storage of washer WSKP2060T/WSKS2060T underneath.

| Individual Spacemaker® Dryers | Stationary DSKS433ET | Portable/Stationary* DSKP233ET |
|---------------------------------|--|--|
| Capacity | | |
| Capacity | Compact | Compact |
| Features | | |
| Dry control | Automatic | Automatic |
| Heat selections | 4 | 2 (timer) |
| Number of dry cycles | 3 | 3 |
| Auto. Reg. — Perm. Press | | |
| Auto. Perm. Press & Delicate | ■ | |
| Auto. Reg. (min) | ■ | |
| Timed Regular (min.) | 140 | 105 |
| Air Fluff (min.) | (Heat selection) | 10 |
| Separate start switch | ■ | ■ |
| Control location | Mid-Band | Top |
| End-of-cycle signal | | ■ |
| Lint filter | Up-Front | Back of Drum |
| Appearance | | |
| Colors available | White and Almond with black backsplash | White and Almond with black backsplash |
| Weight and Dimensions | | |
| Exhaust options** | 4-Way | Rear |
| Circuit requirements | 240/208Vt, 60 Hertz, 30 Amp | 120V, 60 Hertz, 15 Amp |
| Power cord | | 6 feet |
| Dimensions (HxWxD in inches) | 33-1/4 x 23-7/8 x 24-1/2 | 32 x 23-7/8 x 23-5/8 |
| Approx. shipping wt. (lbs.) | 108 | 100 |


*Dryer comes equipped with casters and stationary leveling legs.

**DSKS433ET shipped exhausted through the top. DSKP233ET exhausted to rear only.


†120 volt outlet: Rear-mounted outlet on DSKS433ET approved for use only with Washer/Dryer Stack Rack DSR24RT.

Circuit requirements: An individual, properly-grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

Stack Rack DSR24RT with DSKP233ET and Portable Washer WSKP2060T or Stationary Washer WSKS2060T
Dimensions (in inches)

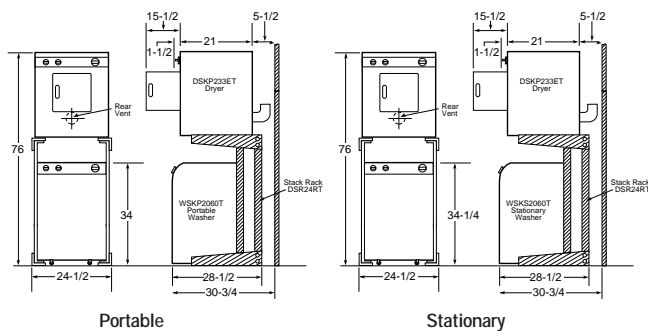

Stack Rack DSR24RT with DSKS433ET and Portable Washer WSKP2060T or Stationary Washer WSKS2060T
Dimensions (in inches)

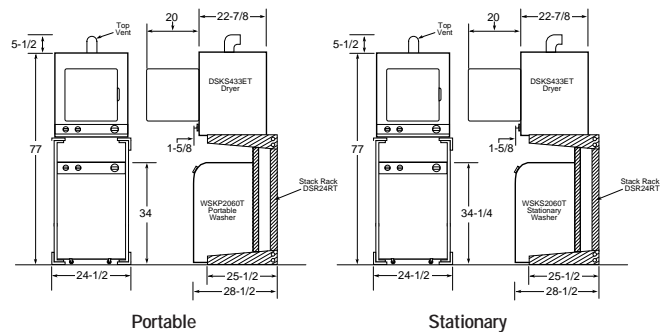

GE Unitized Spacemaker® washers and dryers

| Electric | WSM2700T | WSM2420T |
|------------------------------|-------------------------|---------------------------|
| Gas | WSM2780T | WSM2480T |
| Washer Features | Washer | Dryer |
| Capacity | Washer | Dryer |
| Capacity | X-Large | X-Large |
| Wash/spin speed combinations | 1 | 2 |
| Wash/rinse temperatures | 3 | 3 |
| Water levels | 3 | 3 |
| Number of wash cycles | 3 | 3 |
| Regular | ■ | ■ |
| Perm. Press | ■ | ■ |
| Delicates | ■ | ■ |
| Unbalanced load control | ■ | ■ |
| Lint filter | ■ | ■ |
| Dryer Features | Washer | Dryer |
| Features | Washer | Dryer |
| Automatic dry control | ■ | ■ |
| Number of dry cycles | 4 | 4 |
| Auto Regular | ■ | ■ |
| Auto Perm Press | ■ | ■ |
| Delicates | ■ | ■ |
| Timed | ■ | ■ |
| Air Fluff | ■ | ■ |
| Control location | Mid-Band | Mid-Band |
| Exhaust options | Rear | Rear/Sides |
| Appearance | Washer | Dryer |
| Colors available | White/Almond | White on white** |
| Weights and Dimensions | Washer | Dryer |
| Dimensions (HxWxD in inches) | 75-1/2 x 27 x 30-13/16* | 71-3/4 x 23-7/8 x 27-1/4* |
| Approx. shipping wt. (lbs.) | 300 | 238 |

*Depth dimension assumes water hook-up is recessed in the wall.

**Electrical model is also available in Almond on almond.

Note: The third prong on the WSM2780T plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.

Electrical requirements

WSM2700T: Electric dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

WSM2420T: Electric dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

NOTE: THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.

WSM2480T: Gas dryer—This appliance should be connected to an individual, properly-grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60 Hz electrical service and should be protected by 15 or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot long flexible U.L. listed 20-amp power cord to match a 15-amp receptacle.

Gas rated input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.

WSM2780T: Gas dryer—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60 Hz electrical service and should be protected by 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot long flexible U.L. listed 20-amp power cord to match a 20-amp receptacle.

WSM2780T Gas Rated input 20,000 BTU/HR. Factory equipped for natural gas.

LP gas supply requires a conversion kit.


Have a qualified gas technician install a conversion kit before use.

Exhaust information


See "Dryer Exhausting Information" on page 36.

For complete information see installation instructions packed with the product.

Models WSM2700T and WSM2780T
Dimensions (in inches)

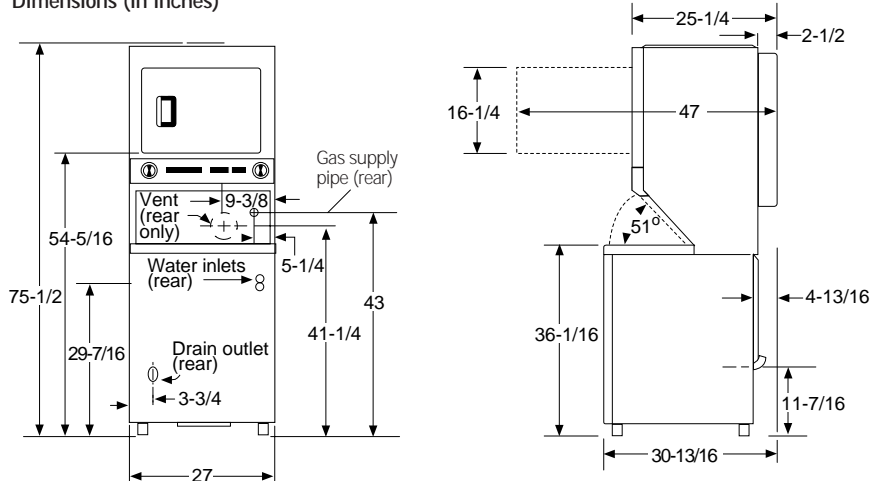

Models WSM2420T and WSM2480T
Dimensions (in inches)

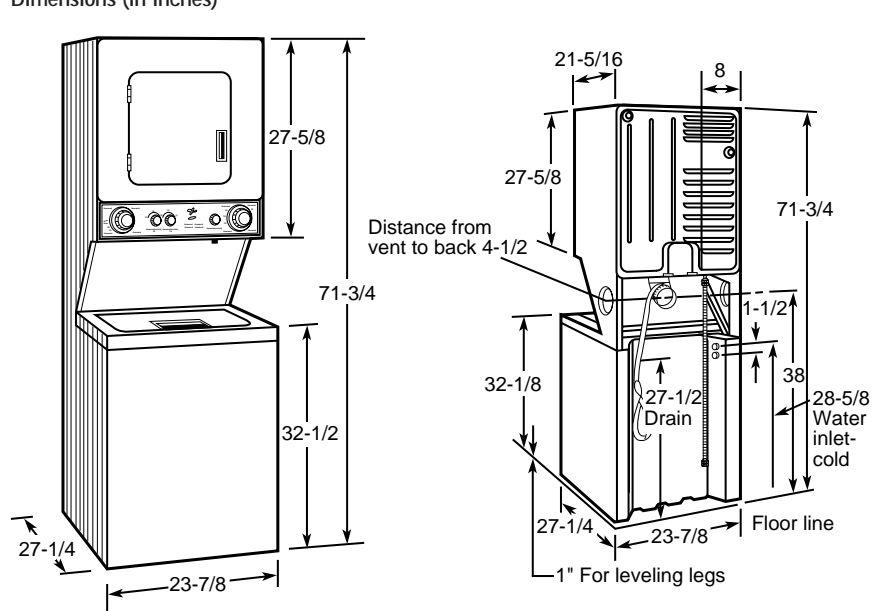

Dryer specifications

Dryer exhausting information

For complete information see installation instructions packed with dryer.

Important note:

GE Kit Number WE14X70 needed when converting rear exhaust to bottom or side. (On large capacity models.)

Ducting materials

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If "all rigid metal" duct cannot be used, then "flexible all metal" venting can be used, but it will reduce the maximum recommended duct length. The following kit or parts are available from your local service organization.

Kit WX8X75—7' aluminum duct and 4" hood, short tail.

(OR individual parts):

WX8X65 7' aluminum flex duct only

WX8X58 4" clamps (2)

WX8X67 4" exhaust hood

See installation instructions for complete information.

Exhaust length calculation:

1. Determine the number of 90° turns needed for your installation.

If you exhaust to the side or bottom of dryer, add one turn.

2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. The

maximum lengths for flexible ducts are less than for rigid duct.

See table in installation instructions.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly

recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down. Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

Dryer exhausting information use metal duct only

| | | Best Performance | | | |
|---------------------------------------|---------------------|--|------------------|---|------------------|
| | | Maximum Length of 4" Dia. Rigid Metal Duct | | Maximum Length of 4" Dia. Flexible Metal Duct | |
| | | Exhaust Hood Type | | Exhaust Hood Type | |
| | | Cat. No. WX8X59 (Preferred) | B 2-1/2" Opening | Cat. No. WX8X59 (Preferred) | B 2-1/2" Opening |
| | | A 4" Opening | | A 4" Opening | |
| Domestic Dryer Models | Number of 90° Turns | | | | |
| | 0 | 90 ft. | 60 ft. | 55 ft. | 45 ft. |
| | 1 | 60 ft. | 45 ft. | 40 ft. | 30 ft. |
| | 2 | 45 ft. | 35 ft. | 30 ft. | 20 ft. |
| Full Size All Electric Dryers | 3 | 35 ft. | 25 ft. | 20 ft. | 15 ft. |
| | 4 | 25 ft. | 15 ft. | 15 ft. | 10 ft. |
| Full Size All Gas Dryers | 0 | 45 ft. | 30 ft. | 30 ft. | 15 ft. |
| | 1 | 35 ft. | 20 ft. | 20 ft. | 10 ft. |
| | 2 | 25 ft. | 10 ft. | 10 ft. | — |
| | 3 | 15 ft. | — | — | — |
| Spacemaker® Models DSKS433ET WSM2780T | 0 | 46 ft. | 37 ft. | 30 ft. | 24 ft. |
| | 1 | 38 ft. | 30 ft. | 25 ft. | 20 ft. |
| | 2 | 31 ft. | 22 ft. | 20 ft. | 14 ft. |
| Spacemaker® Model DSKP233ET | 3 | 24 ft. | 15 ft. | 16 ft. | 10 ft. |
| Spacemaker® Model DSKP233ET | 0 | 43 ft. | 36 ft. | 30 ft. | 24 ft. |
| | 1 | 33 ft. | 26 ft. | 24 ft. | 18 ft. |
| | 2 | 23 ft. | 16 ft. | 16 ft. | 10 ft. |
| | 3 | — | — | — | — |
| Spacemaker® Model WSM2700T | 0 | 56 ft. | 42 ft. | 30 ft. | 22 ft. |
| | 1 | 46 ft. | 36 ft. | 22 ft. | 14 ft. |
| | 2 | 34 ft. | 28 ft. | 16 ft. | 10 ft. |
| | 3 | 32 ft. | 18 ft. | 10 ft. | 5 ft. |
| Spacemaker® Models WSM2420T WSM2480T | 0 | 43 ft. | 36 ft. | 30 ft. | 24 ft. |
| | 1 | 33 ft. | 26 ft. | 24 ft. | 18 ft. |
| | 2 | 23 ft. | 16 ft. | 16 ft. | 10 ft. |

Special installation requirements

Alcove or closet Installation:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer **MUST** be exhausted to the outdoors. See EXHAUST INFORMATION above.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
0" either side
3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- The closet should be vented to the outdoors to prevent gas pocketing in case of a gas leak in the supply line.
- No other fuel-burning appliance shall be installed in the same closet with the dryer.

Bathroom or bedroom installation:

- The dryer **MUST** be exhausted to the outdoors. See EXHAUST INFORMATION above.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum clearances other than alcove or closet installations

- Minimum clearances to combustible surfaces:
0" both sides
3" rear

For more information on venting kits and accessories, please call 1-800-GE-CARES.



Listed by Underwriters Laboratories



RB757BB

Electric ranges

Quality Hotpoint free-standing electric ranges are perfect solutions for today's busy schedules! Self-cleaning ovens save you time and effort. On ranges with one-piece, upswept cooktops, a simple wipe-up does the job.

The Hotpoint free-standing smooth top ranges provide quick cooking response. The fast, ribbon heating elements are positioned beneath the smooth cooktop and direct heat straight up to the pan.




Lift-up cooktop

Cooktop lifts up to allow easy clean-up of hard-to-reach spots underneath.



One-piece upswept cooktop

No cracks or crevices to trap dirt! The porcelain enamel-on-steel surface wipes clean easily.



Ribbon heating elements

Unlike conventional elements, the heat comes from brightly glowing ribbon elements positioned beneath the smooth fingerprint and scratch resistant patterned glass surface.



Plug-in surface elements

Unplug to permit clean-up or removal of drip bowls for easy cleaning in dishwasher. Plus easy access for cleaning of recessed areas designed to catch spillovers.



Electronic oven controls

Easy-to-use electronic oven controls provide:

- Simple touchpad oven operation
- Auto Self-Clean
- Self-clean cycling light
- Preheated oven light with audible preheat signal
- Auto oven shut-off
- Electronic clock and timer
- Automatic oven timer
- Oven "ON" light
- Delay Bake option.



Two-step self-clean

Simply latch the oven door and turn to "Auto Self-Clean" – the oven does the rest.

Calrod® surface elements

The design of the removable Calrod® surface elements assures fast, clean cooking and better heat distribution.



Frameless glass oven door

The full-width frameless door offers easy-clean, contemporary styling.

Removable full-width storage drawer

Conveniently stores cooking utensils close at hand. Drawer removes easily for cleaning underneath.

All features may not be available on all models.

30" electric ranges



RB787WB
Ribbon Range



RB787BB
Ribbon Range



RB757WB
Self-Cleaning Oven



RB757BB
Self-Cleaning Oven

30" electric ranges with self-cleaning ovens

Put an end to messy oven cleaning! Choose from these quality ranges, all with the convenience of self-cleaning ovens. Simply set the controls and the oven cleans itself. All models feature two oven shelves; broiler pan with grid; lift-off oven door; interior oven light; infinite heat controls; removable, full-width storage drawer; and porcelain-enameled, upswept cooktop, except Model RB787BB/WB has a ribbon cooktop.



Electronic oven controls

Easy-to-use electronic oven controls provide:

- Simple touchpad oven operation
- Auto Self-Clean
- Self-clean cycling light
- Preheated oven light with audible preheat signal
- Auto oven shut-off
- Electronic clock and timer
- Automatic oven timer
- Oven "ON" light
- Delay Bake option.

RB787BB

- Black on black model
- Smooth, easy-to-clean fingerprint and scratch resistant patterned black glass cooktop
- Two 8" and two 6" ribbon heating elements
- 2 hot surface indicator lights
- Electronic clock and minute timer
- Automatic oven timer
- Auto oven shut-off
- Two-step self-clean
- Frameless black glass oven door with window
- Black visor door handle

RB787WB

- Same features and appearance as RB787BB, except White on white.

RB757WB

- White on white model
- Electronic clock and minute timer
- Automatic oven timer
- Auto oven shut-off
- Two-step self-clean
- Two 8" and two 6" plug-in Calrod® heating elements with one-piece chrome drip bowls
- Lift-up cooktop
- Frameless white glass oven door with window
- White visor door handle

RB757BB

- Same features and appearance as RB757WB, except available in White or Almond with black glass oven door.

RB753BB

- White or almond model
- Electronic clock and minute timer
- One 8" and three 6" plug-in Calrod® heating elements with one-piece chrome drip bowls
- Frameless black glass oven door
- Full-width storage drawer
- Black visor door handle



RB753BB
Self-Cleaning Oven

For detailed specifications, installation information and color availability, refer to page 43. For warranty information, refer to page 83.

30" electric ranges



RB536GW



RB533GW

30" electric ranges with standard cleaning ovens

Choose from these quality Hotpoint ranges featuring standard clean ovens. Calrod® models feature easy-to-clean, upswept, porcelain-enameled cooktop; two oven shelves; plug-in Calrod® heating elements; one-piece removable chrome drip bowls; full-width removable storage drawer and broiler pan with grid.



RB526WW



RB525GV

RB536GW

- White or almond model
- Electronic clock and minute timer
- Lift-up cooktop
- Two 8" and two 6" heating elements
- Frameless black glass oven door with window
- Chrome visor door handle

RB533GW

- White or almond model
- Electronic clock and minute timer
- Lift-up cooktop
- Two 8" and two 6" heating elements
- Frameless solid black glass oven door
- Chrome visor door handle

RB526WW

- White on white model
- One 8" and three 6" plug-in heating elements
- Frameless solid white glass oven door
- Chrome visor door handle

RB525GV

- White or almond model
- One 8" and three 6" heating elements
- Frameless solid black glass oven door
- Chrome visor door handle

RB525V (not shown)

- Same features and appearance as RB525GV, except has color-matched painted oven door.

For detailed specifications, installation information and color availability, refer to page 43. For warranty information, refer to page 83.

Specialty application ranges



RA524W

Hotpoint 24" electric range

RA524W

- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights



RA520W

Hotpoint 20" electric range

RA520W


- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights

For detailed specifications, installation information and color availability, refer to page 44. For warranty information, refer to page 83.

30" electric ranges

| Models | RB787WB | RB787BB | RB757WB RB757BB | RB753BB | RB536GW | RB533GW | RB526WW | RB525GV | RB525V |
|---|------------------|-------------|----------------------------|-------------|------------------|-------------|-------------|-------------|--------|
| Features | | | | | | | | | |
| Self-cleaning oven | ■ | ■ | ■ | ■ | | | | | |
| Cleaning time | Variable | Variable | Variable | Variable | | | | | |
| Standard cleaning oven | | | | | ■ | ■ | ■ | ■ | ■ |
| Oven shelves | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Patterned cooktop | Ribbon | Ribbon | | | | | | | |
| Porcelain-enameled upswept cooktop | | | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Lift-up cooktop | | | ■ | | ■ | ■ | | | |
| 8-inch heating elements | 2 | 2 | 2 | 1 | 2 | 2 | 1 | 1 | 1 |
| 6-inch heating elements | 2 | 2 | 2 | 3 | 2 | 2 | 3 | 3 | 3 |
| Plug-in Calrod® heating elements | | | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Removable one-piece drip bowls | | | Porcelain Chrome | Chrome | Chrome | Chrome | Chrome | Chrome | Chrome |
| Electronic oven control | ■ | ■ | ■ | ■ | | | | | |
| Clock and minute timer | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | | | |
| Automatic oven timer | Electronic | Electronic | Electronic | | | | | | |
| Hot surface indicator lights | ■ | ■ | | | | | | | |
| Heating element "ON" indicator lights | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Oven cycling light | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Interior oven light | ■ | ■ | ■ | ■ | ■ | ■ | | | |
| Broiler pan with grid | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Appearance | | | | | | | | | |
| Color appearance* | WW | BB | WW WH/AD | WH/AD | WH/AD | WH/AD | WW | WH/AD | WH/AD |
| Oven window door | ■ | ■ | ■ | | ■ | | | | |
| Visor door handle | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Lift-off oven door | White Glass | Black Glass | White Glass Black Glass | Black Glass | Black Glass | Black Glass | White Glass | Black Glass | CM* |
| Full-width storage drawer | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Weights and Dimensions | | | | | | | | | |
| Overall oven | 23 x 16 x 17-3/4 | | | | 23 x 16 x 17-3/4 | | | | |
| Interior dimensions (W x H x D in inches) | | | | | | | | | |
| KW rating @ 240V | 10.5 | 10.5 | 11.7 | 10.6 | 11.7 | 9.8 | 9.8 | 9.8 | 9.8 |
| @ 208V | 7.9 | 7.9 | 8.8 | 8 | 8.5 | 7.4 | 7.4 | 7.4 | 7.4 |
| Approx. shipping weight (lbs.) | 166 | 166 | 155 | 149 | 144 | 142 | 141 | 141 | 139 |

*BB=Black on black, WW=White on white, WH=White, AD=Almond, CM=Oven door is color-matched to cooktop and drawer front (either White or Almond).

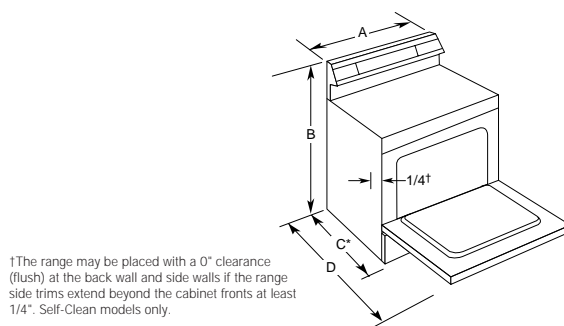

30" electric range dimensions (in inches)

| Models | A Width | B Height | C* Depth | D |
|---------|------------|-------------|-------------|---------|
| RB787WB | 29 -7/8 | 45 -1/8 | 25 -7/16 | 46 -1/8 |
| RB787BB | 29 -7/8 | 45 -1/8 | 25 -7/16 | 46 -1/8 |
| RB757WB | 29 -7/8 | 45 -1/8 | 25 -7/16 | 46 -1/8 |
| RB757BB | 29 -7/8 | 45 -1/8 | 25 -7/16 | 46 -1/8 |
| RB753BB | 29 -7/8 | 45 -1/8 | 25 -7/16 | 46 -1/8 |
| RB536GW | 29 -7/8 | 44 -5/8 | 25 -3/8 | 45 -3/4 |
| RB533GW | 29 -7/8 | 44 -5/8 | 25 -3/8 | 45 -3/4 |
| RB526WW | 29 -7/8 | 44 -5/8 | 25 -3/8 | 45 -3/4 |
| RB525GV | 29 -7/8 | 44 -5/8 | 25 -3/8 | 45 -3/4 |
| RB525V | 29 -7/8 | 44 -5/8 | 25 -1/8 | 45 -3/4 |

*Dimensions from wall to front of closed oven door.

FULL ONE-YEAR WARRANTY One year from date of original purchase, we will provide free of charge, parts and service labor in your home to repair or replace any part of the appliance that fails because of a manufacturing defect. Complete details from your dealer.




Listed by
Underwriters
Laboratories



All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

30" free-standing range installation information (in inches)

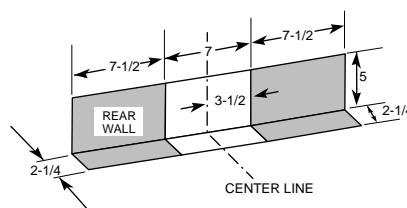

Note: 30" Electric Ranges conform to U.L. requirements for 0" spacing from walls below countertops. However some kitchen cabinet finishes can be damaged by heat from the range heating elements. It is recommended that a clearance of at least 1-1/2 inches be maintained to walls. Where varnished wood or plastic film finishes are used, a minimum clearance of 6 inches should be maintained.

Receptacle locations

Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.


Installation information: Before installing, consult installation instructions packed with product for current dimensional data.
See page 83 for warranty information.

Electric range specifications

| Hotpoint 24" and 20" electric ranges | 24" range | 20" range |
|---|--------------|--------------|
| Models | RA524W | RA520W |
| Features | | |
| Oven cleaning | Standard | Standard |
| Oven shelves | 2 | 2 |
| Recessed lift-up cooktop | ■ | ■ |
| Porcelain-enameled subtop | ■ | ■ |
| 8-inch heating elements | 1 Plug-in | 1 Plug-in |
| 6-inch heating elements | 3 Plug-in | 3 Plug-in |
| Removable drip bowls | Chrome | Chrome |
| Push-to-turn controls | ■ | ■ |
| Heating element "ON" indicator lights | 2 | 2 |
| Oven cycling light | ■ | ■ |
| Broiler pan with grid | ■ | ■ |
| Appearance | | |
| Color appearance | WH/AD* | WH/AD* |
| Porcelain-enameled oven door | Solid CM* | Solid CM* |
| Four leveling legs | ■ | ■ |
| Weights and Dimensions | | |
| Overall oven interior dimensions (W x H x D in inches) | 19 x 14 x 19 | 16 x 15 x 19 |
| KW rating @ 240V | 8.2 | 8.2 |
| @ 208V | 6.2 | 6.2 |
| Approx. ship. wt. (lbs.) | 145 | 120 |

*WH=White, AD=Almond, CM=Color-Matched.


24" free-standing range dimensions and installation information (in inches)

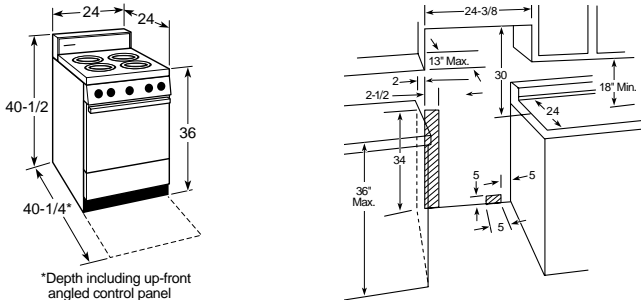

*Depth including up-front angled control panel

Note: 24" Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching of the side wall adjacent to the heating elements, it is recommended a 2" spacing from adjacent side walls be allowed for possible extended high-heat, no-load heating element operation.

20" free-standing range dimensions and installation information (in inches)

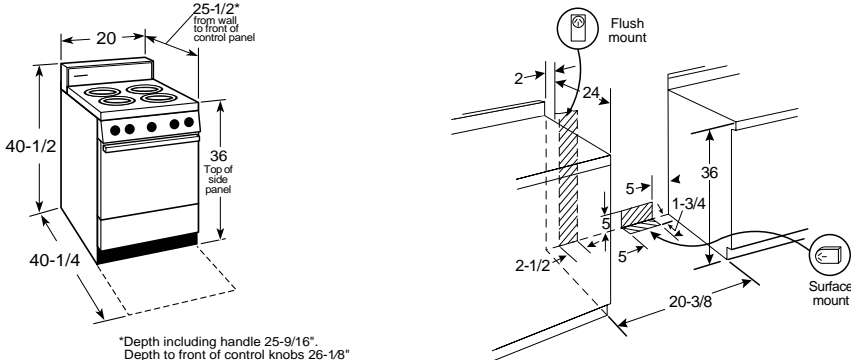

*Depth including handle 25-9/16".
Depth to front of control knobs 26-1/8"

Note: Compact 20" Electric Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching of side walls adjacent to heating elements, it is recommended a minimum of 2-1/2" spacing from adjacent side walls be allowed for possible extended, high-heat, no-load operation of heating elements.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Receptacle locations

Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawings for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.



All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by
Underwriters
Laboratories

Gas ranges

Hotpoint Capacity Plus™ gas ranges feature:

- More usable oven capacity than any other leading manufacturer
- Available with self-cleaning, continuous cleaning or standard clean oven
- Select models feature sealed burners that provide simmer capability and maximum output
- Extra-large broiler pan and grid
- Six embossed rack positions
- Upswept porcelain-enameled cooktop



Sealed gas burners

Special burner design helps contain spills and boilover liquids from dripping beneath cooktop for easy clean-up.



Simmer 600 burner

Offers true simmer capability with a low (600 BTU) setting. Provides low, even heat distribution for delicate foods and sauces.



Performance Plus burner

Provides maximum output (12,000 BTU) for fast heat-up and boiling.



EasySet clock and oven timer

Easy-to-use electronic touchpad controls and delayed baking function with the convenience of knobs for controlling the oven, make cooking simple.



Capacity Plus™ gas ranges

Extra-large oven has more usable capacity than any other leading brand. Sixth embossed rack position increases cooking flexibility.



One-piece upswept cooktop

Has no cracks or crevices to trap dirt. The porcelain enamel-on-steel surface wipes clean easily.



Extra-large broiler pan/grid

Porcelain-enameled broiler pan and grid are extra large. Allows for extra broiling space.



Lift-up cooktop with easy-clean subtop

Standard burner models have a cooktop that lifts up for easy access to porcelain-enameled subtop. Twin rod supports allow cooktop to lift and lock into place. No pipes or wires to interfere with clean-up.

All features may not be available on all models.

30" gas ranges



RGB745WEA
CAPACITY PLUS™



RGB744WEA
CAPACITY PLUS™

CAPACITY PLUS™ 30" free-standing gas ranges

Features more usable oven capacity than any other leading brand, a sixth embossed rack position, extra-large broiler pan, porcelain-enameled upswept cooktop, interior oven light and electronic pilotless ignition.



RGB745BEA
CAPACITY PLUS™



RGB744BEA
CAPACITY PLUS™

RGB745WEA

- White on white model
- Extra-large, self-cleaning oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy-steel grates
- In-oven broiling
- Frameless white glass oven door with window
- EasySet III clock and oven timer
- Removable chrome drip pans
- Storage drawer

RGB745BEA

- White or almond model
- Extra-large, self-cleaning oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy-steel grates
- In-oven broiling
- Frameless black glass oven door with window
- EasySet III clock and oven timer
- Removable black porcelain-enameled drip pans
- Storage drawer

RGB744WEA

- White on white model
- Extra-large self-cleaning oven
- In-oven broiling
- Frameless solid white glass oven door
- EasySet II clock and oven timer
- Twin cooktop burners
- Lift-up cooktop
- Removable chrome drip pans
- Storage drawer

RGB744BEA

- White or almond model
- Extra-large, self-cleaning oven
- In-oven broiling
- Frameless solid black glass oven door
- EasySet II clock and oven timer
- Automatic oven timer
- Twin cooktop burners
- Lift-up cooktop
- Removable black porcelain-enameled drip pans
- Storage drawer

For detailed specifications, installation information and color availability, refer to page 54. For warranty information refer to page 83.

30" gas ranges



RGB628BEA
CAPACITY PLUS™



RGB535BEA
CAPACITY PLUS™



RGB532BEA
CAPACITY PLUS™



RGB530BEA
CAPACITY PLUS™



RGB533WEA
CAPACITY PLUS™

CAPACITY PLUS™ 30" free-standing gas ranges



Features more usable oven capacity than any other leading manufacturer, a sixth embossed rack position, extra-large broiler pan, porcelain-enameled, upswept cooktop, interior oven light, slide-out broiler drawer and electronic pilotless ignition.

RGB628BEA

- White or almond model
- Extra-large continuous cleaning oven
- Frameless black glass oven door with window
- Electronic clock and timer
- Twin cooktop burners
- Lift-up cooktop

RGB535BEA

- White or almond model
- Extra-large standard oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy-steel grates
- Frameless black glass oven door with window
- Electronic clock and timer
- Removable black porcelain-enameled drip pans

RGB533WEA

- White on white model
- Extra-large standard oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Frameless white glass oven door with window
- Electronic clock and timer

RGB532BEA

- White or almond model
- Extra-large standard oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Frameless black glass oven door with window
- Electronic clock and timer

RGB530BEA

- White or almond model
- Extra-large standard oven
- Sealed cooktop burners
- Frameless black glass oven door with window

RGB528BEA

- White or almond model
- Extra-large standard oven
- Frameless black glass oven door with window
- Electronic clock and timer
- Twin cooktop burners
- Lift-up cooktop

RGB528PEA

- White on white model
- Extra-large standard oven
- White porcelain-enameled oven door with window
- Electronic clock and timer
- Twin cooktop burners
- Lift-up cooktop



RGB528BEA
CAPACITY PLUS™



RGB528PEA
CAPACITY PLUS™

For detailed specifications, installation information and color availability, refer to pages 54 and 55. For warranty information refer to page 83.

30" gas ranges



RGB526PEA
CAPACITY PLUS™



RGB525PEA/PPA
CAPACITY PLUS™



RGB508PEA/PPA
CAPACITY PLUS™



RGB524PEA/PPA
CAPACITY PLUS™



RGB501PPA

CAPACITY PLUS™ 30" free-standing gas ranges

Models feature an extra-large standard oven, six embossed rack positions, twin cooktop burners and lift-up cooktop.

RGB526PEA

- White or almond model
- Extra-large standard oven
- Color-matched porcelain-enameled oven door with window
- Electronic clock and timer
- Slide-out broiler drawer
- Electronic pilotless ignition

RGB525PEA

- White on white model
- Extra-large standard oven
- Solid white porcelain-enameled oven door
- Slide-out broiler drawer
- Electronic pilotless ignition

RGB525PPA

- Same features as RGB525PEA, except with standing pilot ignition system.

RGB524PEA

- White or almond model
- Extra-large standard oven
- Solid color-matched porcelain-enameled oven door
- Slide-out broiler drawer
- Electronic pilotless ignition

RGB524PPA

- Same features as RGB524PEA, except with standing pilot ignition system.

RGB508PEA

- White or almond model
- Extra-large standard oven
- Solid color-matched porcelain-enameled oven door
- Drop-down broiler door
- Electronic pilotless ignition

RGB508PPA

- Same features as RGB508PEA, except with standing pilot ignition system.

RGB501PPA

- Extra-large standard oven
- Solid white porcelain-enameled oven door
- Removable square one-piece wire grates
- Drop-down door broiler
- Standing pilot ignition system
- One oven shelf

Available in White only with pilot ignition.

For detailed specifications, installation information and color availability, refer to page 55. For warranty information, refer to page 83.



RGA524EW/PW

24" compact gas ranges with standard oven

RGA524EW

- Standard oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls

RGA524PW

- Same features as RGA524EW, except with standing-pilot ignition system.



RGA520EW/PW

20" compact gas ranges with standard oven

RGA520EW

- Standard oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls

RGA520PW

- Same features as RGA520EW, except with standing-pilot ignition system.

For detailed specifications, installation information and color availability, refer to page 53. For warranty information refer to page 83.

24" and 20" gas ranges


| | 24" range | 20" range |
|--|---------------------|----------------------|
| Models | RGA524EW/PW | RGA520EW/PW |
| Features | | |
| Oven cleaning | Standard | Standard |
| Oven shelves | 2 | 2 |
| Recessed lift-up cooktop | ■ | ■ |
| Porcelain-enameled subtop | ■ | ■ |
| Round grates | ■ | ■ |
| Ignition system | Electronic/Pilot | Electronic/Pilot |
| Push-to-turn controls | ■ | ■ |
| Broiler pan with grid | ■ | ■ |
| Separate broiler drawer (with tip down door) | ■ | ■ |
| Appearance | | |
| Color appearance* | WH/AD | WH/AD |
| Porcelain-enameled oven door | Solid color-matched | Solid color-matched |
| Removable oven door | ■ | ■ |
| Four leveling legs | ■ | ■ |
| Weights and Dimensions | | |
| Overall oven interior dimensions (WxHxD in inches) | 19 x 14 x 19 | 14-7/8 x 16 x 19-1/2 |
| Burner BTU's: | | |
| Top (Nat/LP) | 10,000/9,000 | 10,000/9,000 |
| Oven (Nat/LP) | 18,500/18,500 | 18,500/18,500 |
| Gas range electrical rating** | 120V, 60 Hz, 5A | 120V, 60 Hz, 5A |
| Approx. ship. wt. (lbs.) | 140 | 124 |

*WH=White, AD=Almond


Factory set for natural gas. Can be converted to LP by a qualified technician.

**Electrical rating not applicable to standing pilot model RGA524PW and RGA520PW.

24" gas range dimensions and installation information (in inches)

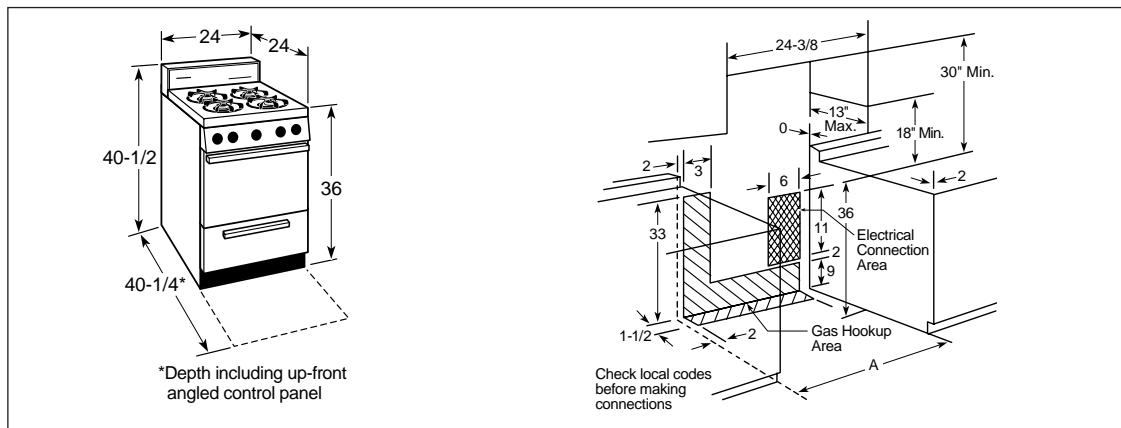

20" gas range dimensions and installation information (in inches)

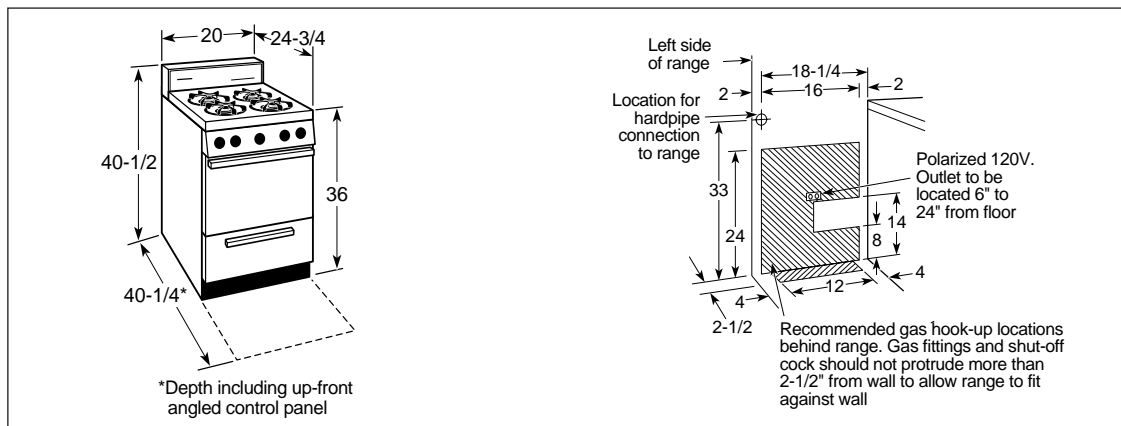

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Gas range specifications

30" CAPACITY PLUS™ gas ranges


| Models | RGB745WEA | RGB745BEA | RGB744WEA | RGB744BEA | RGB628BEA | RGB535BEA | RGB533WEA | RGB532BEA | |
|--|--|--|-------------------|-------------------|---------------------|--|----------------------|----------------------|--|
| Features | | | | | | | | | |
| Extra-large oven | Self-cleaning | Self-cleaning | Self-cleaning | Self-cleaning | Continuous Cleaning | Standard Clean | Standard Clean | Standard Clean | |
| Cooktop burners | Sealed | Sealed | Twin | Twin | Twin | Sealed | Sealed | Sealed | |
| Performance Plus burner (Nat.) | (1) 12,000/2,200 BTU | (1) 12,000/2,200 BTU | | | | (1) 12,000/1,000 BTU | (1) 12,000/1,000 BTU | (1) 12,000/1,000 BTU | |
| Simmer 600 burner (Nat.) | (1) 5,000/600 BTU | (1) 5,000/600 BTU | | | | (1) 5,000/600 BTU | (1) 5,000/600 BTU | (1) 5,000/600 BTU | |
| All purpose sealed burners (Nat.) | (2) 9,500/850 BTU | (2) 9,500/850 BTU | | | | (2) 9,500/850 BTU | (2) 9,500/850 BTU | (2) 9,500/850 BTU | |
| Clock and minute timer | EasySet III | EasySet III | EasySet II | EasySet II | Electronic | Electronic | Electronic | Electronic | |
| Automatic oven timer | Electronic | Electronic | ■ | ■ | | | | | |
| Porcelain-enameled cooktop | Upswept | Upswept | Upswept | Upswept | Upswept | Upswept | Upswept | Upswept | |
| Lift-up cooktop | | | ■ | ■ | ■ | | | | |
| Easy clean subtop | | | ■ | ■ | ■ | | | | |
| Valves (degree of turn) | 270° | 270° | 270° | 270° | 140° | 270° | 270° | 270° | |
| Removable drip pans | Chrome | Black Porc.-Enam. | Chrome | Black Porc.-Enam. | Opt. Access. | Black Porc.-Enam. | Opt. Access. | Opt. Access. | |
| Removable square grates | Grey Heavy-steel | Black Heavy-steel | Grey | Black | Black | Black Heavy-steel | Grey | Black | |
| Ignition system | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | |
| Oven shelves | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | |
| Six embossed rack positions | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | |
| Interior oven light | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | |
| In-oven broiling | ■ | ■ | ■ | ■ | | | | | |
| Slide-out broiler drawer | | | | | ■ | ■ | ■ | ■ | |
| Removable storage drawer | ■ | ■ | ■ | ■ | | | | | |
| Appearance | | | | | | | | | |
| Color appearance* | WW | WH/AD | WW | WH/AD | WH/AD | WH/AD | WW | WH/AD | |
| Frameless oven door | White Glass | Black Glass | Solid White Glass | Solid Black Glass | Black Glass | Black Glass | White Glass | Black Glass | |
| Oven door with window | ■ | ■ | | | ■ | ■ | ■ | ■ | |
| Handle style | Designer-style | Designer-style | Designer-style | Designer-style | Designer-style | Designer-style | Designer-style | Designer-style | |
| Removable oven door | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | |
| Weights and Dimensions | | | | | | | | | |
| Overall oven interior dimensions (WxHxD in inches) | ← 24x17x19 → | | | | | | | | |
| Approx. shipping weight (lbs.) | 185 | 185 | 185 | 185 | 165 | 185 | 185 | 185 | |
| Power/Ratings | | | | | | | | | |
| Gas range electrical rating** | ← 120V, 60 Hz, 5A → | | | | | | | | |
| Top burners† (000's BTU's) | (1)-12.0/9.5 (1)-5.0/3.5 (2)-9.5/7.0 | (1)-12.0/9.5 (1)-5.0/3.5 (2)-9.5/7.0 | ← 9.0/8.0 → | | | ← (1)-12.0/9.5 (1)-5.0/3.5 (2)-9.5/7.0 → | | | |
| Oven/broiler burners† (000's BTU's) | ← 16.0/16.0 - Oven 13.5/12.0 - Broil → | | | | ← 18.0/16.5 → | | | | |
| NAT/LP | | | | | | | | | |
| Accessories | | | | | | | | | |
| LP conversion kit†† | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | |

*WW=White on white WH/AD=White or Almond CM=Indicates color of oven door matches range cooktop (either White or Almond)

**Electrical rating not applicable to standing pilot models RGB525PPA/RGB524PPA/RGB508PPA/RGB501PPA

†Factory set for natural gas.

††LP conversion kit can be ordered (part# WB28K0085) for models RGB508PEA/PPA and RGB501PPA.

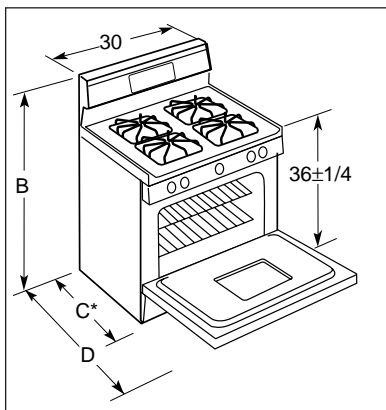

30" gas range dimensions (in inches)

| Models | B Height | C* Depth | D Depth with door open |
|---------------|----------|----------|------------------------|
| RGB745WEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB745BEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB744WEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB744BEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB628BEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB535BEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB533WEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB532BEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB530BEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB528BEA | 46-1/2 | 26-1/4 | 46-3/8 |
| RGB528PEA | 46-1/2 | 26-1/2 | 46-3/8 |
| RGB526PEA | 46-1/2 | 26-1/2 | 46-3/8 |
| RGB525PEA/PPA | 44 | 26-1/2 | 46-3/8 |
| RGB524PEA/PPA | 44 | 26-1/2 | 46-3/8 |
| RGB508PEA/PPA | 39-7/8 | 26-1/2 | 46-3/8 |
| RGB501PPA | 36 | 26-1/2 | 45-1/4 |


*Depth from wall to front of closed oven door.

Optional gas range accessory drip pans (Available at additional cost)

To order these accessory drip pans, call toll-free 800-626-2002.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

| | RGB530BEA | RGB528BEA | RGB528PEA | RGB526PEA | RGB525PEA RGB525PPA | RGB524PEA RGB524PPA | RGB508PEA RGB508PPA | RGB501PPA |
|--|-----------------------|-------------------|----------------------------|----------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| | Standard Clean | Standard Clean | Standard Clean | Standard Clean | Standard Clean | Standard Clean | Standard Clean | Standard Clean |
| | Sealed | Twin | Twin | Twin | Twin | Twin | Twin | Twin |
| | | | | | | | | |
| | (4) 9,500/ 850 BTU | | | | | | | |
| | | Electronic | Electronic | Electronic | | | | |
| | Upswept | Upswept | Upswept | Upswept | ■ | ■ | ■ | ■ |
| | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| | 140° | 140° | 140° | 140° | 140° | 140° | 140° | 140° |
| | Opt. Access. | Opt. Access. | Opt. Access. | Opt. Access. | Opt. Access. | Opt. Access. | Opt. Access. | |
| | Black | Black | Grey | Black | Grey | Black | Black | Black Wire |
| | Electronic | Electronic | Electronic | Electronic | Elec./Pilot | Elec./Pilot | Elec./Pilot | Pilot |
| | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 1 |
| | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| | ■ | ■ | ■ | ■ | | | | |
| | ■ | ■ | ■ | ■ | ■ | ■ | Drop down door | Drop down door |
| | | | | | | | | |
| | WH/AD | WH/AD | WW White Porc.-Enam. | WH/AD CM Porc.-Enam. | WW Solid White Porc.-Enam. | WH/AD Solid CM Porc.-Enam. | WH/AD Solid CM Porc.-Enam. | WH Solid White Porc.-Enam. |
| | Black Glass | Black Glass | | | | | | |
| | ■ | ■ | ■ | ■ | | | | |
| | Designer-style | Designer-style | Visor | Visor | Visor | Visor | Visor | Visor |
| | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| | 24x17x19 | | | | | | | |
| | 185 | 165 | 165 | 165 | 165 | 147 | 165 | 156 |
| | 120V, 60 Hz, 5A | | | | | | | |
| | 9.5/7.0 | 9.0/8.0 | | | | | | |
| | 18.0/16.5 | | | | | | | |
| | ■ | ■ | ■ | ■ | ■ | ■ | | |

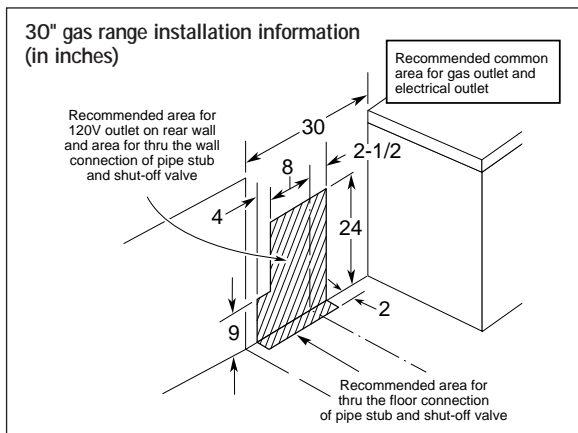

All ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.




Listed by Underwriters Laboratories



GE High Performance and Performance Hoods are designed with an easy-to-clean continuous surface and two large filters that can be cleaned at the sink or dishwasher.

The High Performance hoods are recommended for use with grill/griddle cooktops. Powerful CFM performance draws smoke and odors up and out of the kitchen.

High performance

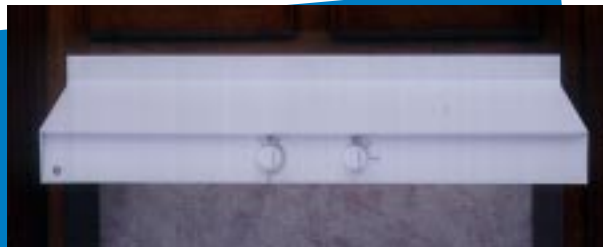

JV376V

- 30" vented hood
- Available in White on white or Black on black
- Rotary controls
- 2 cooktop lights
- Night Light setting
- Variable speed fan control
- Vertical or rear exhaust (410/380 CFM)
- 3-1/4" x 10" rectangular duct

Performance



JV356V

- 30" width
- Available in White on white, Black on black or Almond on almond
- Rotary controls
- Variable speed fan control
- 250 CFM (max.)
- 2 cooktop lights
- Night Light setting
- Convertible exhaust options (rectangular or non-vented)
- Rectangular damper included

JV656V (not shown)

- 36" width

Deluxe



JV347X

- 30" width
- Available in White on white, Black on black or Almond on almond
- Rotary control
- Three-speed fan
- Cooktop light with Night Light setting
- Light cover
- Convertible exhaust (Shipped in non-vented configuration, convertible to round or rectangular exhaust.)
- Rectangular damper included

JXDA22 round damper accessory, available at additional cost.

Standard



JV327X

- 30" width
- 7" round duct
- Easy-to-use rocker switches
- Two-speed fan
- Cooktop light
- Available in White or Almond

JXDA22 round damper accessory, available at additional cost.

JV337X (not shown)

- 3-1/4" x 10" rectangular duct
- Rectangular damper included

JN327X (not shown)

- Non-vented

For detailed specifications, installation information and color availability, refer to page 57. For warranty information, refer to page 83.

| | Width | High Performance | Performance | Deluxe | Standard | |
|--------------------------------------|-------|------------------|-------------|-------------------------|-----------------|-----------------|
| Hoods | 30" | JV376V | JV356V | JV347X | JV327X | JN327X |
| | 36" | | JV656V | | | |
| Features | | | | | | |
| Variable speed fan control | | ■ | ■ | | | |
| Two-speed fan control | | | | ■ | ■ | ■ |
| Three-speed fan control | | | | ■ | | |
| Vertical exhaust (CFM) | | 410 | 250 | 180 | 160 | 160 |
| Rear exhaust (CFM) | | 380 | 230 | 160 | | 150 |
| Damper included (rectangular) | | ■ | ■ | ■ | ■ | |
| Optional damper accessory (round) | | | | JXDA22 | JXDA22 | |
| Sones rating: | | | | | | |
| Top exhaust | | 5.5 | 5.5 | 8.0 | 8.0 | 8.0 |
| Rear exhaust | | 5.5 | 5.5 | 8.0 | 8.0 | |
| Removable grease filters | | 2 | 2* | Disposable 1-Pc. Filter | 1 | 1 |
| Filter size (sq. in.) | | 162 | 162/256 | 90 | 90 | 90 |
| Cooktop light(s)** | | 2 | 2 | 1 | 1 | 1 |
| Night light position on light switch | | ■ | ■ | ■ | | |
| 3-1/4" x 10" rectangular duct | | ■ | Option | Option | ■ | |
| 7" round duct | | | | Option | ■ | |
| Non-vented | | | Option | Option | | ■ |
| Appearance | | | | | | |
| Color appearance† | | WW/BB | WW/BB/AA | WW/BB/AA | Almond or White | Almond or White |
| Weights & Dimensions | | | | | | |
| Approximate shipping weight (lbs.) | | 43 | 35 | 20 | 14 | 17 |
| Power/Ratings | | | | | | |
| Current rating amps @ 120V | | 2.5 | 1.4 | 2.5 | 2.5 | 2.5 |


*WB13X5008 removable charcoal filter (for non-vented use) is available at additional cost. Call toll-free 800-626-2002.

**Light bulbs not furnished.

†WW = White on white, BB = Black on black, AA = Almond on almond

Dimensions (in inches)


| Model | A | B | C | D |
|--------|-------|--------|--------|----|
| JV376V | 7 | 29-7/8 | 19-3/4 | 12 |
| JV356V | 7 | 29-7/8 | 19-3/4 | 12 |
| JV656V | 7 | 35-7/8 | 19-3/4 | 12 |
| JV347X | 5-1/2 | 29-7/8 | 17-1/2 | 12 |
| JV337X | 5-1/2 | 29-7/8 | 17-1/2 | 12 |
| JV327X | 5-1/2 | 29-7/8 | 17-1/2 | 12 |
| JN327X | 5-1/2 | 29-7/8 | 17-1/2 | 12 |

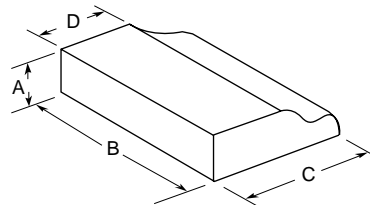

Hood dimensions (in inches)


1 Models: JV656V, JV376V and JV356V

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.

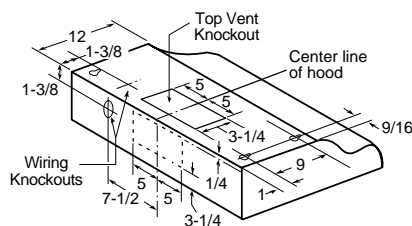

2 Models: JV347X* and JV337X


*JV347X—Refer to this drawing for rectangular exhaust option. Refer to drawing 3 for round exhaust option. Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.

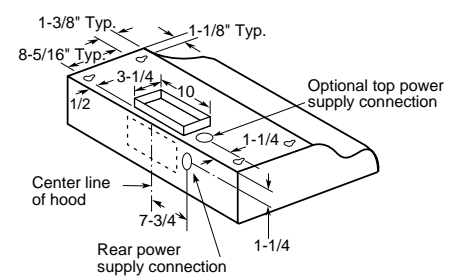


3 Models: JV347X* and JV327X

*JV347X—Refer to this drawing for round exhaust option. Refer to drawing 2 for rectangular exhaust option.

Exhaust outlet connects to 7" diameter duct. Vent top only. Round damper accessory, JXDA22, available at additional cost.

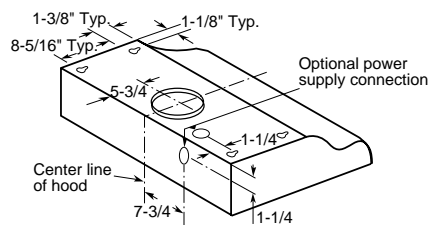

4 Model: JN327X

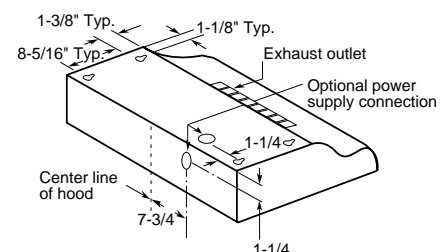

Note: Before installing, consult installation instructions [Pub. No. 49-8646 (JV376); Pub. No. 49-8809 (JV337/327/347/JN327); Pub. No. 49-8645 (JV356/656)] packed with product for current dimensional data.

Counter Saver Plus™ microwave ovens

Microwave convenience with no loss of usable space


Installs in the same space as a range hood. Counter Saver Plus™ microwave ovens are equipped with a built-in venting system, an enhanced two-speed, high-capacity exhaust fan, turntable plus Full-View cooktop lighting which illuminates the entire range cooking surface. The addition of a Counter Saver Plus™ microwave oven over your range creates a complete cooking center!



RVM1425BA



RVM1425WA

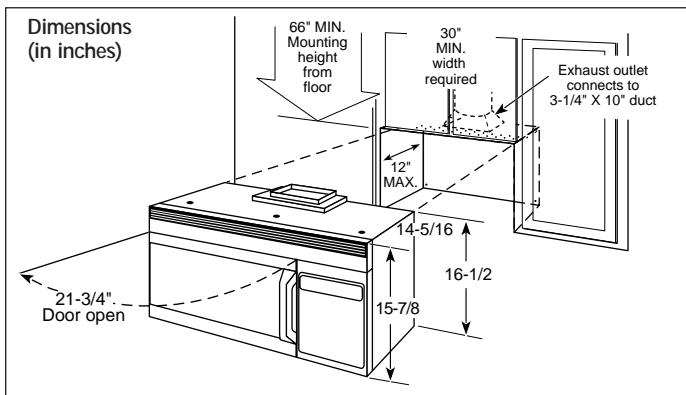


Important: When installing the Counter Saver Plus™ microwave oven over a range, allow minimum of 2" from bottom of Counter Saver Plus™ microwave oven to top of range backguard to allow for removal of light covers.

Optional accessories (Available at additional cost)

For 12" height filler panel kits
JX41-Black filler panel kit
JX40WH-White filler panel kit

For 15" height filler panel kits
JX46BL-Black filler panel kit
JX46WH-White filler panel kit



JX81A-Recirculating charcoal filter kit
To be used when the Counter Saver Plus™ microwave oven cannot be vented to the outside.

When replacing a 36" or 42" range hood, these kits fill in the additional width to provide a custom, built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two, 3" wide filler panels. Two kits are needed for a 42" opening.

Ventilation options

The Counter Saver Plus™ microwave oven is designed for adaptation to the following three types of ventilation:

Outside exhaust (Vertical—as shown above)

Outside exhaust (Horizontal)

Recirculating (Non-vented ductless—see Filter Kit Drawing)

Note: Before installing, consult installation instructions for current dimensional data on these three types of ventilation.

Important: When installing the Counter Saver Plus™ microwave oven over a range, allow minimum of 2" from bottom of the Counter Saver Plus™ microwave oven to top of range backguard to allow for removal of light covers.


Counter Saver Plus™ microwave ovens

The design of the Counter Saver Plus™ microwave ovens complements any kitchen. Available in black or white on white styling. Enjoy the convenience of microwave cooking with eye-level controls, directly above your range or cooktop in the space of a range hood.



1.4 cu. ft. oven cavity

The 1.4 cu. ft. oven cavity is Hotpoint's largest over-the-range microwave oven ever.

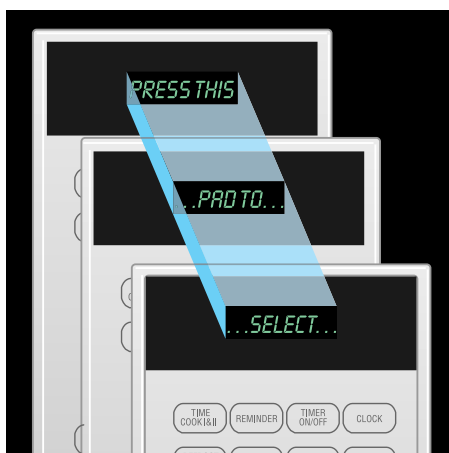

Interactive Display System

Easy-to-read horizontal scrolling display is designed to make cooking easier, and give you the flexibility of programming several functions at once.

900 watts

Powerful 900 watts¹ of microwave output for fast cooking and reheating.

Auto/Time Defrost

Permits defrosting a variety of foods in minutes instead of hours. Automatically sets defrosting time and power level. Enter food weight and the oven does the rest.

Time Cook I & II

Allows you to set two time controlled cooking functions within one program.

Minute Cook Pads

A shortcut to set cook times from 1 to 6 minutes. Automatically cooks at full power with the touch of one pad.

10 power levels

A choice of 10 power levels for maximum cooking flexibility, from warming and reheating, to the full speed of microwave cooking at high power.

Reheat

Offers the flexibility of automatically reheating a variety of popular foods from a cup of coffee to a plate of leftovers.

Popcorn

This feature maximizes popping without scorching. For use with three popcorn bag sizes, 3.5, 3.0 and 1.75 oz.

Instant On controls

Easy, one-step features. Simply press the desired function and the oven automatically begins to cook. No need to press START.

Full-View cooktop lighting

Provides better distribution of light over the entire cooking surface.

¹IEC-705 Test Procedure

Counter Saver Plus™ microwave ovens

| Models | RVM1425BA | RVM1425WA |
|--|------------------------------------|------------------------------------|
| Features | | |
| Watts (IEC-705 Test Procedure) | 900 | 900 |
| Oven cavity (cu. ft.) | 1.4 | 1.4 |
| Door color | Black | White |
| Case color | Black | White |
| Power levels | 10 | 10 |
| Electronic touch controls | ■ | ■ |
| Interactive display system | ■ | ■ |
| Electronic scrolling digital display w/Clock and AM/PM | ■ | ■ |
| Variable scroll speed | ■ | ■ |
| Concurrent programming | ■ | ■ |
| Display on/off | ■ | ■ |
| Turntable | ■ | ■ |
| Time Cook | I & II | I & II |
| Auto Defrost/Time Defrost pad | ■ | ■ |
| Popcorn pad | ■ | ■ |
| Reheat pad | ■ | ■ |
| Minute Cook pads (1-6 minutes) | ■ | ■ |
| Instant on controls | ■ | ■ |
| Cooking complete reminder | ■ | ■ |
| Delay Start pad | ■ | ■ |
| Timer On/Off | ■ | ■ |
| Reminder | ■ | ■ |
| Child lock-out | ■ | ■ |
| Full-View cooktop lighting | ■ | ■ |
| High-capacity exhaust fan | 300 CFM | 300 CFM |
| Easy mount installation | ■ | ■ |
| Frequency (MHz) | 2450 | 2450 |
| Electrical input @ 120V | Watts 1480 Amps 15 | Watts 1480 Amps 15 |
| Warranty* | 1-Yr. In-Home | 1-Yr. In-Home |
| Limited four-year magnetron warranty* (5 years total) | ■ | ■ |
| Dimensions | Cavity 19-5/16 x 9-5/16 x 13-3/16 | Cavity 19-5/16 x 9-5/16 x 13-3/16 |
| WxHxD (in inches) | Exterior 29-7/8 x 16-1/2 x 14-5/16 | Exterior 29-7/8 x 16-1/2 x 14-5/16 |
| Approx. shipping weight (lbs.) | 70 | 70 |

*Full One-Year Warranty
In-home parts and labor included. Plus additional four-year limited warranty on magnetron tube (parts only). See written warranty for details.



Listed by
Underwriters
Laboratories

GE Spacemaker over-the-range microwave ovens

GE — The original Spacemaker™

In 1979, GE invented the Spacemaker™ over-the-range microwave. With so many features and the 20 years that go behind the GE Spacemaker™ it is easy to see why many people are making this their microwave of choice. When combined with a GE range, you now have a cooking center that gives even more flexibility. The GE Spacemaker™ 1600 still reigns as the largest over-the-range microwave ever! A powerful, two-speed exhaust fan, with 300 CFM, and cooktop light are integrated into the base of the microwave oven eliminating the need for a range hood. The Easy Mount system makes GE over-the-range microwave ovens simple to install. When installed above a GE range, you've increased valuable counter-top space in the kitchen. Experience combined with space-saving design, exactly what you've come to expect from GE.



Auto Defrost/Time Defrost Automatically sets defrosting time and power level.



Sensor Controls
Take the guesswork out of cooking.



Convenience Cooking Controls Allow you to defrost, cook or reheat at the touch of a pad.



The Scrolling Display
Easy to read and a helpful cooking guide.



Add 30 Seconds
Extends cooking time without the hassle of reprogramming.



300 CFM venting system
This powerful 300 CFM venting system quickly removes smoke and steam from your cooktop.

GE Spacemaker over-the-range microwave ovens

GE Spacemaker™ microwave ovens with Sensor Cooking Controls provide

1.6 cu. ft. Oven Cavity, 1000 Watts*, Turntable On/Off, Help Pad, Time Cook I & II, Express Cook, Add 30 Seconds, Instant On Controls, Child Lock-Out, Night Light, Two-Speed, High-Capacity Exhaust Fan



JVM1650BB

- Sensor cooking controls for Beverage, Potatoes, Vegetables, Popcorn and Reheat
- Convenience Cooking Controls for Cook and Snack Pads
- CircuWave™ 1000 Cooking System
- Delay Start
- Reminder
- Auto/Time Defrost
- 10 power levels
- Beeper volume control
- Cooking Complete Reminder
- Removable Dual Rack
- Programmable night light
- Time On/Off

JVM1651BB

(not shown)
■ Non-vented model



JVM1650AB

- Almond on almond

JVM1651AB (not shown)

- Non-vented model

JVM1650WB (not shown)

- White on white

JVM1651WB (not shown)

- Non-vented model

GE Spacemaker™ microwave ovens with Convenience Cooking Controls provide

1.6 cu. ft. Oven Cavity, 1000 Watts*, SmartControl System with Interactive Display, Convenience Cooking Controls for Beverage, Time Cook I & II, Auto Defrost/Time Defrost, Express Cook, Timer On/Off, Child Lock-Out, Full-View Cooktop Lighting, Easy Mount Installation, Two-Speed, High-Capacity Exhaust Fan



JVM1640WB

- CircuWave™ 1000 Cooking System
- Help Pad
- Convenience Cooking controls for Popcorn, Reheat and Cook Pads
- Removable Dual Rack
- Beeper volume control
- Turntable On/Off



JVM1640BB (not shown)

- Black on black

JVM1640AB (not shown)

- Almond on almond



JVM1630BB

- Convenience Cooking Controls for Popcorn, Beverage and Reheat
- CircuWave™ 1000 Cooking System
- Turntable

JVM1631BB

(not shown)
■ Non-vented model



JVM1630WB (not shown)

- White on white

JVM1631WB (not shown)

- Non-vented model

*IEC-705 Test Procedure

For detailed specifications, installation information and color availability, refer to page 64. For warranty information, refer to page 83.

GE Countertop microwave ovens

GE Countertop microwave ovens with Convenience Cooking Controls provide

Convenience Cooking Controls for Beverage, Popcorn, Cook, Reheat and Snacks Pads, Time Cook I & II, Delay Start/Reminder, Time Defrost, Auto Defrost, Express Cook, Add 30 Seconds, 10 Power Levels, Instant On Controls, Kitchen Timer, Child Lock-Out, Cooking Complete Reminder, Sound On/Off



JE1840WB

- Extra-Large 1.8 cu. ft. oven cavity ■ 1100 Watts*
- Turntable ■ Built-In kit (available at additional cost)

JE1840GB (not shown)

- Black with Greystone case



JE1640GB

- Full-size 1.6 cu. ft. oven cavity ■ 1100 Watts*
- Built-in kit (available at additional cost)

JE1640WB (not shown)

- White on white

JE1640AB (not shown)

- Almond on almond



JE1340GB

- Family-size 1.3 cu. ft. oven cavity ■ 1100 Watts*

JE1340WB (not shown)

- White on white



JE1040WB

- Mid-size 1.0 cu. ft. oven cavity ■ 1100 Watts*

JE1040GB (not shown)

- Black with Greystone case



JE740GY

- Compact .7 cu. ft. oven cavity ■ 700 Watts*
- Undercabinet hanging kit (available at additional cost)

JE740WY (not shown)

- White on white

*IEC-705 Test Procedure

For detailed specifications, installation information and color availability, refer to page 65. For warranty information, refer to page 83.

GE Countertop microwave ovens

GE Spacemaker II™ microwave ovens provide

.9 cu. ft. Oven Cavity, 800 Watts*, Delay Start/Reminder, Time Defrost, Auto Defrost, Time Cook I & II, Express Cook, Instant On Controls, Sound On/Off, Built-in or undercabinet hanging kit (available at additional cost)



JEM25WY

■ Convenience Cooking Controls for Popcorn, Beverage, Reheat, Snacks and Cook Pads



JEM25GY (not shown)

■ Black with Greystone case

GE Countertop mid-size, compact and subcompact



JE835WW

■ Mid-size .8 cu. ft. oven cavity ■ 800 watts*
■ Convenience Controls for Beverage, Popcorn, Frozen Pizza, Dinner Plate, Baked Potato, Vegetables and Soup Pads
■ Electronic Digital Display with Clock ■ Time Preference
■ Turntable ■ Instant On Controls ■ Auto Start ■ Auto Defrost



JE710BA

■ Compact .7 cu. ft. oven cavity ■ 600 watts* ■ Turntable
■ Mechanical Dial ■ Undercabinet hanging kit (available at additional cost)



JE510BW (not shown)

■ Black with Greystone case ■ Subcompact .5 cu. ft. oven cavity
■ 600 watts* ■ Turntable ■ 15-minute timer ■ Undercabinet hanging kit (available at additional cost)




JE635WW

■ Compact .6 cu. ft. oven cavity ■ 600 watts*
■ Convenience Cooking Controls for Beverage, Popcorn, Frozen Pizza, Dinner Plate, Baked Potato and Vegetables Pads
■ Turntable ■ Electronic Digital Display with Clock
■ Instant On Controls ■ Auto Start ■ Auto Defrost



JE520BW

■ Subcompact .5 cu. ft. oven cavity ■ 600 watts* ■ Turntable
■ Electronic touch controls with electronic digital display and clock
■ Time Cook ■ Time Defrost ■ 10 power levels ■ Undercabinet hanging kit (available at additional cost)



*IEC-705 Test Procedure

For detailed specifications, installation information and color availability, refer to pages 66- 67. For warranty information, refer to page 83.

GE Microwave oven specifications

GE Spacemaker over-the-range microwave ovens

| | | JVM1651AB* JVM1650AB | JVM1651BB* JVM1650BB | JVM1651WB* JVM1650WB | JVM1640BB JVM1640WB/AB | JVM1631BB* JVM1630BB | JVM1631WB* JVM1630WB |
|--|-----------------|------------------------------------|-------------------------|-------------------------|---------------------------|-------------------------|-------------------------|
| Capacity | | | | | | | |
| Oven cavity (cu. ft.) 1.6 | | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 |
| Features | | | | | | | |
| Watts (IEC-705 Test Procedure) | | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| Electronic touch controls | | ■ | ■ | ■ | ■ | ■ | ■ |
| SmartControl System w/Interactive Display | | ■ | ■ | ■ | ■ | ■ | ■ |
| Electronic scrolling digital display | | ■ | ■ | ■ | ■ | ■ | ■ |
| Demo Mode | | ■ | ■ | ■ | ■ | | |
| Clock and AM/PM Pad | | ■ | | ■ | ■ | ■ | ■ |
| Variable Scroll Speed | | ■ | ■ | ■ | ■ | ■ | ■ |
| Help Pad | | ■ | ■ | ■ | ■ | | |
| Concurrent programming | | | | | ■ | ■ | ■ |
| Display On/Off | | ■ | ■ | ■ | ■ | | ■ |
| Sensor Controls | Beverage | ■ | ■ | | | | |
| | Popcorn | ■ | ■ | ■ | | | |
| | Potatoes | ■ | ■ | ■ | | | |
| | Reheat | ■ | ■ | ■ | | | |
| | Vegetables | ■ | ■ | ■ | | | |
| Convenience Controls | Beverage Pad | | | | ■ | ■ | ■ |
| | Cook Pad | ■ | ■ | ■ | ■ | | |
| | Popcorn Pad | | | | ■ | ■ | ■ |
| | Reheat Pad | | | | ■ | ■ | ■ |
| Snacks Pad | | ■ | ■ | ■ | | | |
| Express Cook (1-6 min.) | | ■ | ■ | ■ | ■ | ■ | ■ |
| Instant On Controls | | | | | | ■ | ■ |
| Time Cook | | I & II | I & II | I & II | I & II | I & II | I & II |
| Add 30 Seconds | | ■ | ■ | ■ | ■ | ■ | ■ |
| Auto Defrost/Time Defrost | | ■ | | ■ | ■ | ■ | ■ |
| Power levels | | 10 | 10 | 10 | 10 | 10 | 10 |
| Delay Start | | ■ | ■ | ■ | ■ | ■ | ■ |
| Reminder | | ■ | ■ | ■ | ■ | ■ | ■ |
| CircuWave™ 1000 Cooking System | | ■ | ■ | ■ | ■ | ■ | ■ |
| Dual Rack | | ■ | ■ | ■ | ■ | | |
| Turntable On/Off | | ■ | ■ | ■ | ■ | | |
| Turntable On only | | | | | | ■ | ■ |
| Full-View cooktop lighting | | ■ | ■ | ■ | ■ | ■ | ■ |
| Night light | | ■ | | ■ | ■ | | |
| Programmable nite light | | ■ | ■ | ■ | | | |
| Timer On/Off | | ■ | ■ | ■ | | ■ | ■ |
| Beeper sound level control | | ■ | ■ | ■ | ■ | | |
| Cooking Complete Reminder | | ■ | ■ | ■ | ■ | ■ | ■ |
| Child lock out | | ■ | ■ | ■ | ■ | ■ | ■ |
| Two-speed high-capacity exhaust fan | | 300 CFM | 300 CFM | 300 CFM | 300 CFM | 300 CFM | 300 CFM |
| Easy Mount Installation | | ■ | ■ | ■ | ■ | ■ | ■ |
| Appearance | | | | | | | |
| Color appearance** | | AA | BB | WW | BB/WW/AA | BB | WW |
| Case color | | Almond | Black | White | Black/White/Almond | Black | White |
| Designer-style handle | | ■ | ■ | ■ | ■ | ■ | ■ |
| Big View window | | ■ | ■ | ■ | ■ | ■ | ■ |
| Weights & Dimensions | | | | | | | |
| Approx. shipping weight (lbs.) | | 67 | 67 | 67 | 67 | 67 | 67 |
| WxHxD | | 20-1/4 x 9-9/32 x 14-13/32 | | | | | |
| (in inches) | | 29-7/8 x 16-15/32 (rear) x 15-1/16 | | | | | |
| Power/Ratings | | | | | | | |
| 2450 Frequency (MHz) | | ■ | ■ | ■ | ■ | ■ | ■ |
| Electrical input | Watts | 1480 | 1480 | 1480 | 1480 | 1480 | 1480 |
| | @ 120V Amperage | 15 | 15 | 15 | 15 | 15 | 15 |
| Warranty | | | | | | | |
| Full One-Year In-Home Warranty†† | | ■ | ■ | ■ | ■ | ■ | ■ |
| Limited Nine-Year Magnetron Warranty† (10 years total) | | ■ | ■ | ■ | ■ | ■ | ■ |

*Non-vented model.

**SS = Stainless steel, AA = Almond on almond, BB = Black on black, WW = White on white.


†Exterior dimensions: depth excludes handle.

††See warranty for details.

NOTE: Popcorn Pad designed for use with 3 packages sizes—3.5, 3.0 and 1.75 oz.

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

Dimensions (in inches)

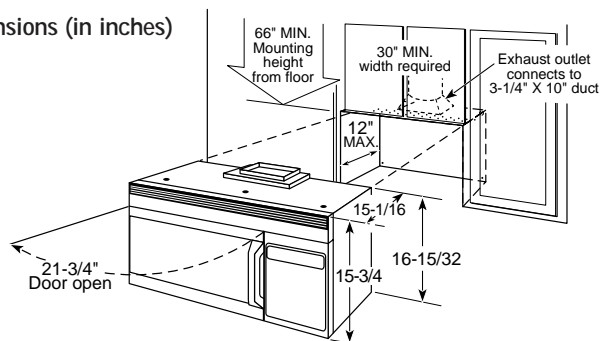

See page 83 for warranty information.

GE Microwave oven specifications

GE Countertop microwave ovens

| | Extra-large | Full-size | Family-size | Mid-size | Compact |
|---|--|---|------------------------------------|------------------------------------|----------------------------------|
| | <u>JE1840WB</u> <u>JE1840GB</u> | <u>JE1640AB</u> <u>JE1640WB</u> <u>JE1640GB</u> | <u>JE1340WB</u> <u>JE1340GB</u> | <u>JE1040WB</u> <u>JE1040GB</u> | <u>JE740WY</u> <u>JE740GY</u> |
| Capacity | | | | | |
| Oven cavity (cu. ft.) | 1.8 | 1.6 | 1.3 | 1.0 | .7 |
| Features | | | | | |
| Watts (IEC-705 Test Procedure) | 1100 | 1100 | 1100 | 1100 | 700 |
| Electronic Touch Controls | ■ | ■ | ■ | ■ | ■ |
| Electronic digital display w/clock | ■ | ■ | ■ | ■ | ■ |
| Beverage Pad | ■ | ■ | ■ | ■ | ■ |
| Cook Pad | ■ | ■ | ■ | ■ | ■ |
| Popcorn Pad | ■ | ■ | ■ | ■ | ■ |
| Reheat Pad | ■ | ■ | ■ | ■ | ■ |
| Snacks Pad | ■ | ■ | ■ | ■ | ■ |
| Express Cook | ■ | ■ | ■ | ■ | ■ |
| Instant On Controls | ■ | ■ | ■ | ■ | ■ |
| Time Cook | I & II | I & II | I & II | I & II | I & II |
| Add 30 Seconds | ■ | ■ | ■ | ■ | ■ |
| Auto Defrost | ■ | ■ | ■ | ■ | ■ |
| Time Defrost | ■ | ■ | ■ | ■ | ■ |
| Power levels | 10 | 10 | 10 | 10 | 10 |
| Turntable | ■ | ■ | ■ | ■ | ■ |
| Kitchen timer | 99-M./99-S. | 99-M./99-S. | 99-M./99-S. | 99-M./99-S. | 99-M./99-S. |
| Delay Start/Reminder | ■ | ■ | ■ | ■ | ■ |
| Sound On/Off | ■ | ■ | ■ | ■ | ■ |
| Cooking Complete Reminder | ■ | ■ | ■ | ■ | ■ |
| Child lock out | ■ | ■ | ■ | ■ | ■ |
| Appearance | | | | | |
| Color appearance* | WW BB | AA WW BB | WW BB | WW BB | WW BB |
| Case color | White Greystone | Almond White Greystone | White Greystone | White Greystone | White Greystone |
| Door color | White Black | Almond White Black | White Black | White Black | White Black |
| Weights & Dimensions | | | | | |
| Approx. shipping wt. (lbs.) | 48 | 50 | 42 | 39 | 33 |
| Cavity | 16-3/4 x 10-3/4 x 17-5/8 | 16-1/2 x 9-23/32 x 16-27/32 | 14-3/4 x 9-1/4 x 16 | 13-11/16 x 8-1/2 x 14-15/16 | 12-1/16 x 7-11/16 x 12-1/16 |
| WxHxD (in inches) | Exterior† 23-7/8 x 13-1/2 x 19-1/4 | 23-21/32 x 13-5/16 x 18-5/16 | 21-7/8 x 12-5/8 x 17-1/4 | 20-1/2 x 11-7/8 x 15-7/8 | 19-1/4 x 10-13/16 x 13-9/16 |
| Power/Ratings | | | | | |
| 2450 Frequency (MHz) | ■ | ■ | ■ | ■ | ■ |
| Electric input | Watts 1550 | 1500 | 1530 | 1500 | 1150 |
| @ 120V | Amperage 13.6 | 13.0 | 13.3 | 13.0 | 10.5 |
| Accessories | | | | | |
| Optional built-in kit | JX1830WB/ JX1827WB JX1830BB/ JX1827BB | JX1530MAW/ JX1527MAW/ JX1530MWW/ JX1527MWW/ JX1530MBW/ JX1527MBW | | | |
| Optional hanging kit | | | | | Pub. No. 4-A019 |
| Warranty | | | | | |
| Full One-Year Warranty** | In-Home | In-Home | Carry-In | Carry-In | Carry-In |
| Limited Nine-Year Magnetron Warranty** (10 years total) | ■ | ■ | ■ | ■ | ■ |

*BB = Black on black, WW = White on white, AA = Almond on almond.

**See written warranty for details.

†Exterior dimensions: height includes feet.

GE Microwave oven specifications


| GE Spacemaker II™ microwave ovens | | JEM25WY | JEM25GY |
|--|-----------|------------------------------|---------------------|
| Capacity | | | |
| Oven cavity (cu. ft.) | | .9 | .9 |
| Features | | | |
| Watts (IEC-705 Test Procedure) | | 800 | 800 |
| Electronic Touch Controls | | ■ | ■ |
| Electronic digital display w/clock | | ■ | ■ |
| Beverage | | ■ | ■ |
| Cook | | ■ | ■ |
| Popcorn | | ■ | ■ |
| Reheat | | ■ | ■ |
| Snacks | | ■ | ■ |
| Express Cook | | ■ | ■ |
| Instant On Controls | | ■ | ■ |
| Time Cook I & II | | ■ | ■ |
| Add 30 Seconds | | ■ | ■ |
| Auto Defrost/Time Defrost | | ■ | ■ |
| Power levels | | 10 | 10 |
| Kitchen timer | | 99-M./99-S. | 99-M./99-S. |
| Sound On/Off | | ■ | ■ |
| Cooking Complete Reminder | | ■ | ■ |
| Delay Start/Reminder | | ■ | ■ |
| Child Lock Out | | ■ | ■ |
| Appearance | | | |
| Door color | | White | Black |
| Case color | | White | Greystone |
| Weights & Dimensions | | | |
| Approx. shipping wt. (lbs.) | | 41 | 41 |
| WxHxD | Cavity | 16-1/2 x 7-7/16 x 11-1/4 | |
| (in inches) | Exterior† | 23-25/32 x 11-3/16 x 12-9/32 | |
| Power/Ratings | | | |
| Frequency (MHz) | | 2450 | 2450 |
| Electrical Input | Watts | 1300 | 1300 |
| @ 120V | Amperage | 11.5 | 11.5 |
| Accessories | | | |
| Hanging kit (Pub. No. 4-A019)* | | Optional | Optional |
| Optional built-in kit | | JX827WN | JX827BN/ JX827SS |
| Warranty | | | |
| Full One-Year Warranty** | | Carry-In | Carry-In |
| Nine-Year Magnetron Warranty** (10 years total) | | Limited | Limited |

*Pub. No. 4-A019 is available at additional cost.

**See written warranty for details.

†Exterior dimensions: height includes feet.

Cut-Out Dimensions (in inches)

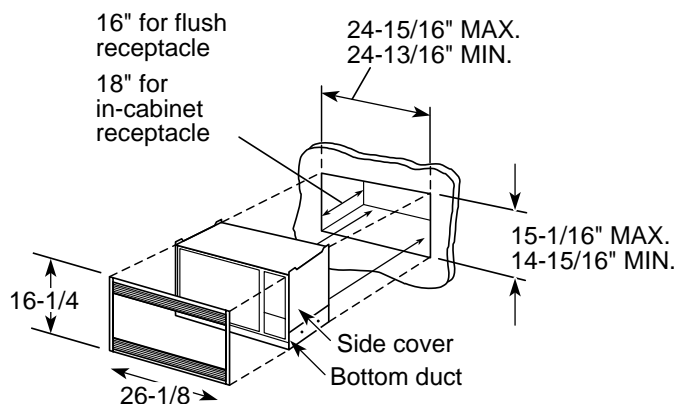

Accessory Trim Kits for .9 Microwave Ovens (Available at additional cost)

For a custom built-in appearance, this kit allows built-in installation of the Spacemaker II™ microwave oven into a wall or cabinet alone, and is U.L.-approved for installation over a GE single electric wall oven. This kit should not be installed over a gas wall oven.

JX827BN—JEM25GY, JX827WN—JEM25WY

JX827SS—JEM25GY

GE Microwave oven specifications

GE Countertop: compact/subcompact microwave ovens

| compact/subcompact microwave ovens | | JE710BA | JE835WW JE635WW | JE520BW | JE510BW |
|--|------------|----------------------------|--|----------------------------------|----------|
| Capacity | | | | | |
| Oven cavity (cu. ft.) | | .7 | $\frac{.8}{.6}$ | .5 | .5 |
| Features | | | | | |
| Watts (IEC-705 Test Procedure) | | 600 | $\frac{800}{600}$ | 600 | 600 |
| Electronic Touch Controls | | | ■ | | |
| Electronic digital display w/clock (LED) | | | ■ | ■ | |
| Mechanical Dial | | ■ | | | ■ |
| Beverage Pad | | | ■ | | |
| Popcorn Pad | | | ■ | | |
| Frozen Pizza Pad | | | ■ | | |
| Dinner Plate Pad | | | ■ | | |
| Baked Potato Pad | | | ■ | | |
| Vegetables Pad | | | ■ | | |
| Soup Pad | | | $\frac{■}{-}$ | | |
| Instant On Controls | | | ■ | | |
| Time Cook | | 15 Min. | | ■ | 15 Min. |
| Auto Defrost | | | ■ | | |
| Time Defrost | | | | ■ | |
| Power levels | | 1 | 10 | 10 | 1 |
| Turntable | | ■ | ■ | ■ | ■ |
| Quick Set | | | ■ | | |
| Auto Start | | | ■ | | |
| Child Lock Out | | | ■ | | |
| Appearance | | | | | |
| Door color | | Black | White | Black | Black |
| Case color | | Black | White | Black | Black |
| Weights & Dimensions | | | | | |
| Approx. shipping wt. (lbs.) | | 28 | 33 | 29 | 29 |
| Cavity | | 11-7/8 x 7-5/8 x 12-1/2 | $\frac{12-5/8 \times 8-1/2 \times 13-3/16}{11-3/8 \times 7-7/8 \times 11-5/8}$ | ← 11-3/32 x 6-11/16 x 11-7/32 → | |
| WxHxD (in inches) | Exterior † | 19 x 11 x 12-7/8 | $\frac{19-1/2 \times 11-3/8 \times 15-1/8}{18-5/16 \times 10-13/16 \times 13-7/8}$ | ← 18-5/32 x 9-19/32 x 12-11/16 → | |
| Power/Ratings | | | | | |
| Frequency (MHz) | | 2450 | 2450 | 2450 | 2450 |
| Electrical input | Watts | 910 | 1200/920 | 950 | 950 |
| @ 120V | Amperage | 8.5 | 10.5/8.0 | 8.5 | 8.5 |
| Accessory | | | | | |
| Hanging kit (Pub. No. 4-A019)* | | Optional | | Optional | Optional |
| Warranty | | | | | |
| Full One-Year warranty** | | Carry-In | Carry-In | Carry-In | Carry-In |
| Four-year Magnetron warranty** (Five years total) | | ■ | ■ | ■ | ■ |


*Pub. No. 4-A019 is available at additional cost.

**See written warranty for details.

†Exterior dimensions: height includes feet.

Undercabinet Mounting Kit Pub. No. 4-A019 For Spacemaker II,[™] Compact and Subcompact Microwave Oven Models (Available at additional cost)

Not to be used over a thermal oven.



Undercabinet Installation

Install Spacemaker II[™], Compact and Subcompact microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements.* These microwave ovens can be installed on practically any wood or metal cabinets.

*Installation may vary depending on cabinets.

Note: 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

Hotpoint dishwashers offer new features for today's customers



New Power Wash II System

Three-level wash action with powerful jet action for effective food soil removal and great wash performance.

Self-cleaning filter

Water recirculates through filtering system, food particles are washed away as water drains and filter cleans itself.



Pots & Pans cycle

Removes dried-on and baked-on (but not burned-on) food from pots, pans and dishes.



Delay Start

Sets the dishwasher to start as much as six hours later.



Crystal Clear™ rinse aid dispenser

Container automatically releases a small amount of rinse agent, which speeds drying and lessens water spotting and streaking.



3-Level "Wall of Water"

Completely covers any item in dishwasher, providing excellent wash performance.



Toe kick & access panel insulation

Fiberglass insulation in toe kick and access panel minimizes operating noise.



Super upper rack

Extra-deep racks include an upper rack that accommodates tall glasses. Extra fold-up cup shelves allow for double-stacking of dishes.



Deluxe flat lower rack

The rack has curved tines to accommodate stoneware and large plates or broiler pans.



Super silverware basket


A heavy-duty lift-out silverware basket is included in the lower rack. A special added feature is the hinged cover on the basket which holds lightweight items in place during washing.



Durable tub and door liner

Guaranteed against leakage from cracking, peeling, chipping or rusting for ten years.

High quality features for performance and convenience

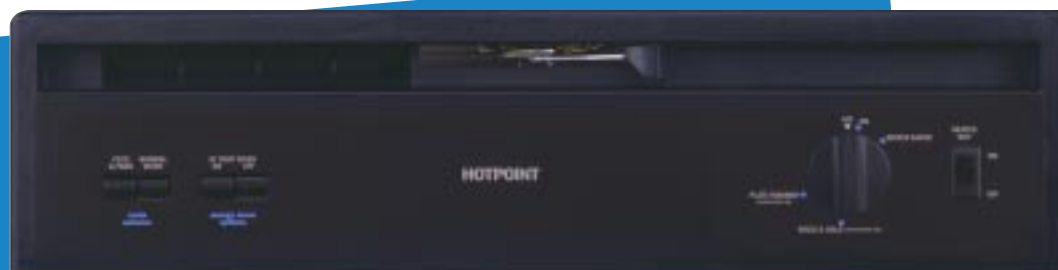


HDA3220ZBB

HDA3220ZBB

- 5 cycles/14 options
- Pots and Pans cycle
- Water Saver cycle (on dial)
- Plate Warmer cycle (on dial)
- Hi-Temp Wash On/Off
- Deluxe upper rack
- Deluxe silverware basket

Also available in White on white as Model HDA3230ZWW.

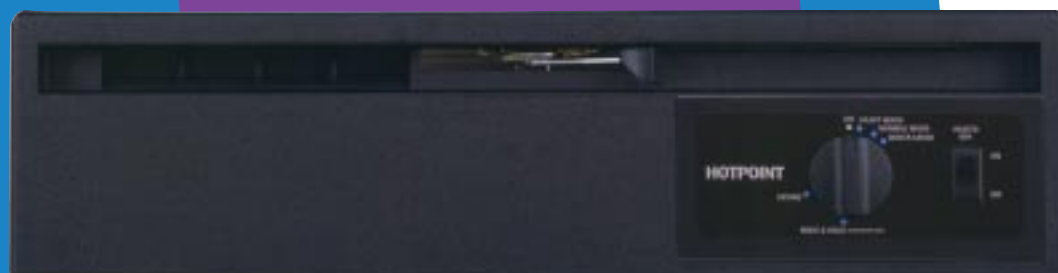


HDA2020ZBB/HDA2000ZWH/AD
(Available for contract sales only.)

HDA2020ZBB/ HDA2000ZWH/AD

- 4 cycles/7 options
- Water Saver cycle (on dial)
- Rinse and Hold cycle (on dial)
- Heavy Wash cycle (on dial)
- Heated Dry On/Off (on rocker)
- Standard upper rack
- Deluxe silverware basket

Available for contract sales only.

Also available in White on white as Model HDA2030ZWW.

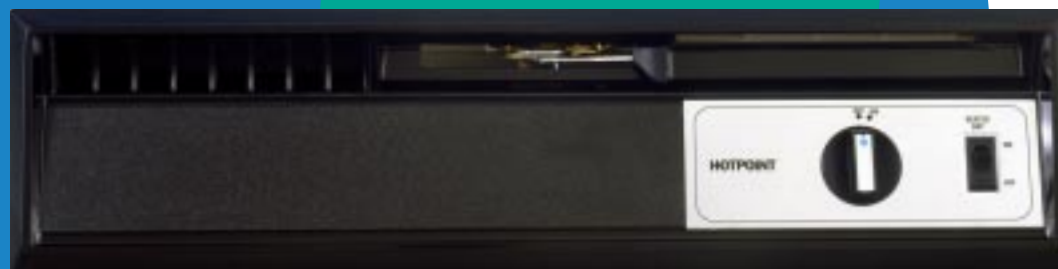

HDA1000ZWH

HDA1000ZWH

- 1 cycle/2 options
- Normal Wash cycle (on dial)
- Heated Dry On/Off (on rocker)
- Standard upper rack
- Standard silverware basket

For detailed specifications, installation information and color availability, refer to page 72. For warranty information, refer to page 83.

GE Spacemaker® undersink dishwashers


Works built-in or under the sink



Single sink bowl



Offset installation for use with disposer

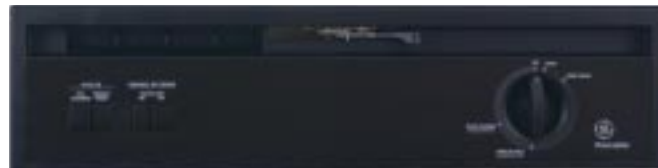



GSM2100ZWH/AD

- 5 cycles/8 options ■ POTSCRUBBER Cycle ■ Normal Wash cycle
- Short Wash cycle (on dial) ■ Rinse Only/Hold cycle (on dial) ■ Plate Warmer cycle (on dial) ■ PermaTuf® interior ■ Spacemaker® upper rack ■ Deluxe lower rack ■ Deluxe silverware basket ■ 2 wash levels

Note: Undersink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

GE Built-in 18" dishwasher

New 18" space-saving model

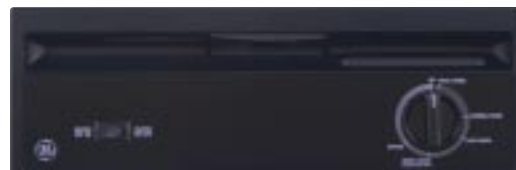

GSS1800Z

- 4 cycles/6 options ■ Pots and Pans cycle (on dial)
- Light Wash cycle (on dial) ■ Rinse Only/Hold cycle (on dial)
- Heated Dry On/Off option (rockers) ■ 3-color panel pack
- Available with black control panel only

GE Convertible dishwashers

All models feature:

- New GE SureClean™ Wash System ■ POTSCRUBBER Cycle ■ Normal Wash cycle ■ Short Wash cycle (on dial) ■ Plate Warmer cycle (on dial) ■ Rinse Only/Hold cycle (on dial) ■ Heated Dry On/Off option ■ Hi-Temp Wash option
- 3 wash levels ■ Rinse Aid dispenser ■ Standard insulation package



Portable now



Built-in later



GSC3430ZWW

- 6 cycles/19 options ■ New GE SureClean™ Wash System ■ Self-cleaning filter ■ Light Wash cycle ■ 6-hour delay start option ■ Deluxe upper rack
- Deluxe lower rack ■ Super silverware basket ■ Rinse Aid dispenser w/indicator ■ White on white with white cabinet

Also available in Black on black with almond cabinet as Model GSC3400ZBL.



GSC3200ZBL

- 5 cycles/14 options ■ New GE SureClean™ Wash System ■ Deluxe upper rack ■ Deluxe lower rack ■ Deluxe silverware basket ■ Black on black with almond cabinet

Also available in White on white with white cabinet as Model GSC3230ZWW.

For detailed specifications, installation information and color availability, refer to pages 72-73. For warranty information, refer to page 83.

All models feature:

- Stainless steel flange ■ Manual reset protector
- Polyester drain housing ■ Dishwasher drain connector
- Dual swivel stainless impellers ■ Precutter ■ Sink stopper



GFC1000Y



GFC800Y



GFC700Y/GFC705Y



GFC300Y/GFC305Y



GFC290Y/GFC295Y



GFB1050V

Continuous feed models

GFC1000Y

- Rugged 3/4-horsepower motor ■ 8000 RPM grinding action ■ Super Deluxe sound insulation ■ Power Boost feature for heavy loads ■ Fast Mount installation
- Removable splash guard

GFC800Y

- 1/2-horsepower motor ■ 8000 RPM grinding action
- Deluxe sound insulation ■ Fast Mount installation
- Removable splash guard

GFC700Y

- 1/2-horsepower motor ■ 8000 RPM grinding action
- Standard sound insulation ■ Fast Mount installation
- Removable splash guard

GFC705Y

- Similar to GFC700Y but has attached line cord.

GFC300Y

- 1/2-horsepower motor ■ 8000 RPM grinding action
- Fast Mount installation ■ Removable splash guard

GFC305Y

- Similar to GFC300Y but has attached line cord.

GFC290Y

- 1/3-horsepower motor ■ 8000 RPM grinding action
- Fast Mount installation ■ Removable splash guard

GFC295Y

- Similar to GFC290Y but has attached line cord.

Batch feed model

GFB1050V

- Rugged 3/4-horsepower motor ■ 2700 RPM grinding action
- Super Deluxe sound insulation ■ Twist Mount installation

Where local codes permit, any GE Dishwasher and any GE Disposer may be connected to a single 20-amp circuit.

White and Almond flanges are available: GPF71 (White) and GPF72 (Almond).

GE Compactors

All models feature:

- 1/3 horsepower ■ Removable key lock



GCG1530ZWW

White on white convertible 15" compactor can be used as a free-standing unit now, built-in later.

- Optional toe pedal opener kit
- Rear wheels allow easy movement and installation ■ Heavy gauge steel construction

For detailed specifications, installation information and color availability, refer to page 75. For warranty information, refer to page 83.



GCG1520ZBB

- Black on black



GCG950T

- Lock/start control with removable key
- Bag storage compartment above compactor drawer ■ Replaces standard 12-inch base cabinet

Convertible 12" compactor can be used as a free-standing unit now, built-in later.

Dishwasher specifications

| Built-in dishwashers | Contract Only | | |
|---|-----------------------|--------------------------|----------------------|
| | HDA3230ZWW/HDA3220ZBB | HDA2020ZBB/HDA2000ZWH/AD | HDA1000ZWH |
| Features | | | |
| New Power Wash II System | ■ | | |
| Wash levels | 3 | 2 | 2 |
| Cycles/Options | 5/14 | 4/7 | 1/2 |
| Pots & Pans cycle | ■ | | |
| Normal Wash cycle | ■ | Dial | Dial |
| Water Saver cycle | Dial | Dial | |
| Heavy Wash cycle | | Dial | |
| Plate Warmer cycle | Dial | | |
| Rinse Only/Hold cycle | Dial | Dial | |
| Heated Dry On/Off option | Rocker | Rocker | Rocker |
| Hi-Temp Wash On/Off option | ■ | | |
| Pushbuttons | 4 | | |
| Rinse Aid dispenser | ■ | ■ | ■ |
| Rack System | Upper Lower | Standard Deluxe | Standard Deluxe |
| Silverware Basket | Deluxe | Deluxe | Standard |
| Economical/Quiet | | | |
| Sound insulation package | Standard | Standard | |
| Appearance | | | |
| Colors available* | WW, BB | WW, BB, WH, AD | WH |
| Color panels | Door Access | Trimless Trimless | Trimless Textured |
| Weights & Dimensions | | | |
| Approx. shipping wt. (lbs.) | 81 | 81 | 81 |
| Height w/legs Retracted (in.) | 34 | 34 | 34 |
| Overall width (in.) | 24 | 24 | 24 |
| Overall depth (in.) | 25-1/8 | 25-1/8 | 25-1/8 |
| Accessories | | | |
| Requires kit for 1/4" panel capability (w/trim) | GPF325W/B | GPF325W/B/A | GPF325W |
| Requires kit for 3/4" panel capability (trimless) | GPF375 | GPF375 | GPF375 |

*WW = White on white, BB = Black on black, WH = White/Black, AD = Almond/Black

**Certificate enclosed in Use and Care Book for ordering information.

***See written warranty for details.

†For the 1/4" panel capability with trim order GPF325A/W/B. For the 3/4" trimless panel capability order GPF375.

Dishwasher accessories

Side panel for all models:

Contains one panel and adjustable toe-kick for end cabinet installation of built-in model.

Does not attach to dishwasher.

Specify color: GPS5AD—Almond GPS5WH—White

Optional dishwasher accessories:

GPF53—Brackets for under non-wood countertop installation

GPF95—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on right; elbow and strainer included

GPF96—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on left; elbow and strainer included

GPF97—Stainless sink for Spacemaker® dishwasher—double bowl 21-1/4" x 33" Elbow and strainer included

GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs.


GPF200—Almond/Black/White side tub flange gasket kit

Wood panel capability:


GPF325A/B/W—GE 1/4" panel trim kit (door and access)

GPF375—GE 3/4" trimless panel trim kit (door and access)


Dishwasher rough-in information (in inches)

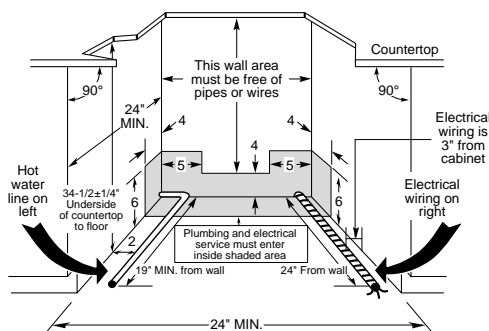

Dishwasher dimensions (in inches)

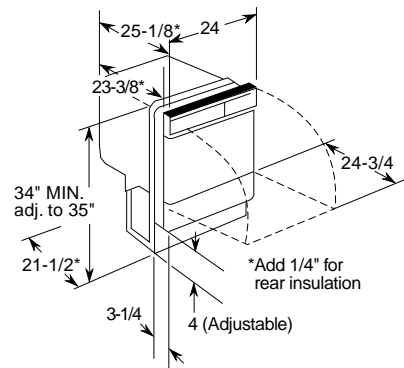

Wood insert cut-out dimensions

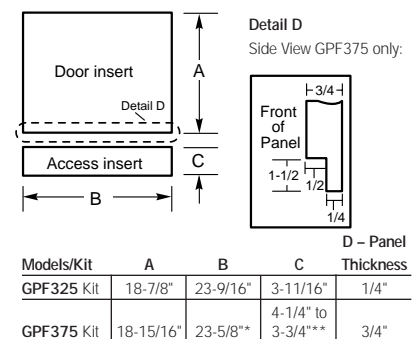

Specifications and electrical rating

120 Volts AC, 60 Hertz, 8.6 Amps total connected load 500 Watt Calrod® heater. For use on adequately wired 120 volt, 15 amp circuit having two-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes. Dishwasher includes drain hose and leveling legs.

Note: Before installing, consult installation instructions packed with product for current dimensional data.



See page 83 for warranty information.

GE Spacemaker® undersink dishwasher

GSM2100ZWH/AD

Features

| | |
|--------------------------|-------------------|
| SureClean™ Wash System | ■ |
| Wash levels | 2 |
| Cycles/Options | 5/8 |
| POTSCRUBBER cycle | ■ |
| Normal Wash cycle | ■ |
| Short Wash cycle | Dial |
| Plate Warmer cycle | Dial |
| Rinse Only/Hold cycle | Dial |
| Heated Dry On/Off option | ■ |
| Rack system | Upper Spacemaker® |
| Lower | Deluxe |
| Silverware basket | Deluxe |
| Control type | Turn-To-Start |
| Indicator lights | Dial |
| Pushbuttons | 4 |
| Rinse aid dispenser | ■ |

Economical/Quiet

| | |
|------------------------------|---|
| PermaTuf™ tub and door liner | ■ |
| GE Motor | ■ |

Appearance

| | |
|--------------------|-----------------|
| Colors Available** | AD, WH |
| Door | Trimless |
| Color Panels | Access Trimless |

Miscellaneous

| | |
|--------------------------------|----|
| Approx. shipping weight (lbs.) | 72 |
| 1, 2, 10-yr. warranty* | ■ |


*See written warranty for details.

**AD = Almond panels with black control panel.


WH = White panels with black control panel

Note: Undersink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Cabinet cutout for sink

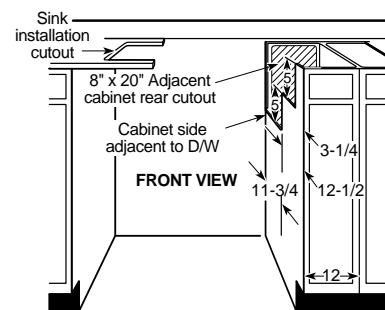

Cabinet cutouts for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.



Undersink dishwasher wood insert dimensions (in inches)

Inserts must not exceed 1/4" thickness within 5/16" of edge around full circumference.

Order GPF325 Kit.

Stainless steel sinks single and double compartment models (dimensions in inches)

| Model Number | Overall Size | | Inside Each Compartment | | |
|-------------------------|--------------|--------|-------------------------|--------|-------|
| | L | W | L | W | D |
| GPF95 (Single Bowl, R)* | 25 | 21-1/4 | 21 | 15-3/4 | 5-3/8 |
| GPF96 (Single Bowl, L)* | 25 | 21-1/4 | 21 | 15-3/4 | 5-3/8 |
| GPF97 (Double Bowl) | 33 | 21-1/4 | 14 | 15-3/4 | 5-3/8 |

| Model Number | Cutout In Countertop 1-1/2" Radius Corners | | No. Of 1-1/2" Dia. Faucet Holes | Ship. Wt. Lbs. |
|-------------------------|--|--------|---------------------------------|----------------|
| | L | W | | |
| GPF95 (Single Bowl, R)* | 24-3/8 | 20-5/8 | 3 or 4** | 10 |
| GPF96 (Single Bowl, L)* | 24-3/8 | 20-5/8 | 3 or 4** | 10 |
| GPF97 (Double Bowl) | 32-3/8 | 20-5/8 | 3 or 4** | 12-1/2 |


Note: Drain opening size is 3-1/2".

Above models are fully sound deadened.

*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.

Plumbing/electrical rough-in




Plumbing: Hot Water Only. Use 3/8" O.D. copper tubing or 1/2" O.D. plastic tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 8.6. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.


Specifications: Inlet Water Temperature Recommended: Minimum 120°F. at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

Cabinet rough-in

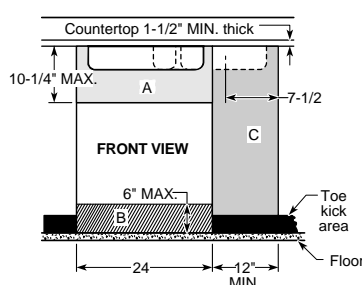


Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Rough-in for installation with disposer



A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher is furnished with a 1/2" I.D. drain hose, 78" long. If using copper tubing, a 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

Rear view plumbing arrangement



See page 83 for warranty information.

GE Convertible/portable specifications

Convertible/portable dishwashers

| | GSC3430ZWW/ GSC3400ZBL | GSC3230ZWW/ GSC3200ZBL |
|--------------------------------|---------------------------|---------------------------|
| Features | | |
| New GE SureClean™ Wash System | ■ | ■ |
| Filtration System | Dual | |
| Piranha™ hard food disposer | ■ | |
| Cycles/Options | 6/19 | 5/14 |
| POTSCRUBBER cycle | ■ | ■ |
| Normal Wash cycle | ■ | ■ |
| Short Wash cycle | Dial | Dial |
| Light Wash cycle | ■ | |
| Rinse Only/Hold cycle | Dial | Dial |
| Plate Warmer cycle | Dial | Dial |
| Hi-Temp Wash option | ■ | ■ |
| 6-Hour Delay Start option | Dial | |
| Heated Dry On/Off option | ■ | ■ |
| Wash levels | 3 | 3 |
| Cycle progress indicators | Dial | Dial |
| Rack system | Upper | Deluxe |
| | Lower | Deluxe |
| Silverware Basket | Super | Deluxe |
| Pushbuttons | 7 | 6 |
| Rinse Aid dispenser | with Indicator | ■ |
| Economical/Quiet | | |
| Sound insulation package | QuietPower™ I | Standard |
| PermaTuf™ Tub and door liner | ■ | ■ |
| GE QuietMotor | ■ | |
| GE Motor | | ■ |
| Sealed toekick | ■ | |
| Appearance | | |
| Colors available* | WW, BL | WW, BL |
| Color panels—Door & Access | Trimless | Trimless |
| Miscellaneous | | |
| Approx. shipping weight (lbs.) | 147 | 147 |
| 1, 2, 10 Warranty* | ■ | ■ |

*See written warranty for details.

† WW=White on white, BL=Black control panels and front panels with almond side panels

18" Compact dishwasher

| | GSS1800Z |
|----------------------------------|-----------------------------|
| Features | |
| Cycles/Options | 4/6 |
| Pots & Pans cycle | Dial |
| Normal Wash cycle | Dial |
| Light Wash cycle | Dial |
| Rinse Only/Hold cycle | Dial |
| Heated Dry On/Off option | Rocker |
| Rack system | Upper |
| | Lower |
| Silverware Basket | Standard |
| Control type | Turn-To-Start |
| Wash levels | 2 |
| Cycle progress indicators | Dial |
| 120° F. @ inlet water capability | ■ |
| Rinse Aid dispenser | ■ |
| Economical/Quiet | |
| Sound insulation package | Standard |
| Appearance | |
| Colors available | Black, Almond, White |
| Color panels | 2 Reversible: |
| Door & Access | Black/Harvest; Almond/White |
| Miscellaneous | |
| Approx. shipping weight (lbs.) | 77 |
| 1, 10 Yr. Warranty* | ■ |


*See written warranty for details.

Note: Does not accept GPF kits. For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order pub. no. 5-A007.

Dimensions (in inches)


GSC3430ZWW, GSC3400ZBL, GSC3230ZWW and GSC3200ZBL

Portable

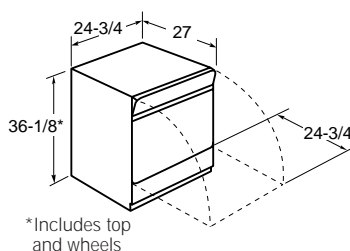


*Includes top and wheels

Built-In

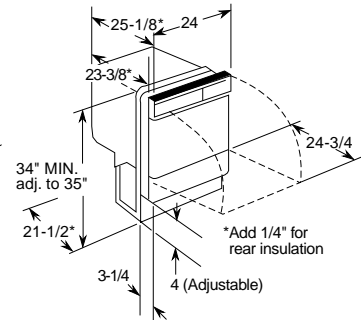

Important Note: GE Kit number WD35M34 needed when adapting GE Convertible Dishwasher to a built-in installation. Contains built-in dishwasher water valve, hardware and complete instructions for changing a GE Convertible Dishwasher to an under-the-counter installation.

Dimensions (in inches)

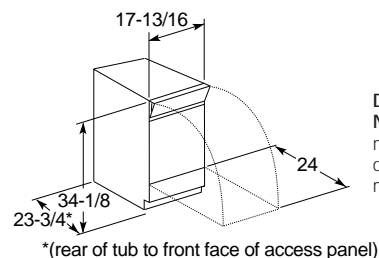

*(rear of tub to front face of access panel)

Dishwasher Rough-in information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Figure 1


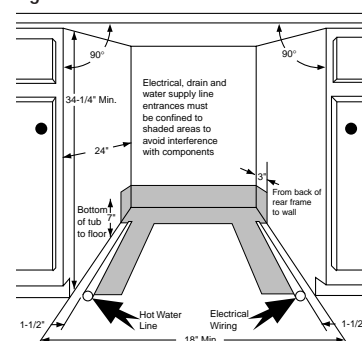


Figure 2

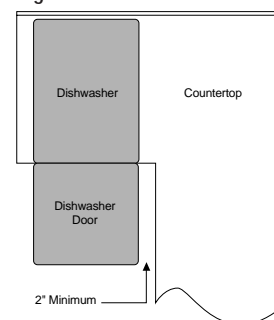

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A *minimum* clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with the installation. The lines should run straight to their connections on the dishwasher.


Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

GE Disposer and compactor specifications

GE Disposall® food waste disposers

| GE Disposal® food waste disposers | Continuous Feed Models | | | | | | | | Batch Feed Model |
|------------------------------------|------------------------|-----------------|-----------------|-----------------|---------------|---------------|---------------|---------------|------------------|
| | GFC1000Y | GFC800Y | GFC705Y | GFC700Y | GFC305Y | GFC300Y | GFC295Y | GFC290Y | GFB1050V |
| Features | | | | | | | | | |
| Motor horsepower | 3/4 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 1/3 | 1/3 | 3/4 |
| Control method | Wall Switch | Wall Switch | Wall Switch | Wall Switch | Wall Switch | Wall Switch | Wall Switch | Wall Switch | Stopper |
| Feed type | Continuous | Continuous | Continuous | Continuous | Continuous | Continuous | Continuous | Continuous | Batch |
| Power connection | Direct Wire | Direct Wire | Line Cord | Direct Wire | Line Cord | Direct Wire | Line Cord | Direct Wire | Direct Wire |
| Power Boost | ■ | | | | | | | | |
| Dual swivel impellers | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Jam resistant | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Stainless steel | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Stainless steel sink flange | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Mounting type | Fast Mount | Fast Mount | Fast Mount | Fast Mount | Fast Mount | Fast Mount | Fast Mount | Fast Mount | Twist Top |
| Precut | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Splash guard | Removable | Removable | Removable | Removable | Removable | Removable | Removable | Removable | Non-Removable |
| Sink stopper | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ |
| Dishwasher drain connector | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Manual reset overload protector | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Permanently lubricated bearing | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Plastic drain elbow | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Turntable | Stainless Steel | Galvanized | Galvanized | Galvanized | Galvanized | Galvanized | Galvanized | Galvanized | Stainless Steel |
| Polyester drain housing | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Grinding speed (RPM's) | 8000 | 8000 | 8000 | 8000 | 8000 | 8000 | 8000 | 8000 | 2700 |
| Hopper liner/grinding ring | Stainless Steel | Stainless Steel | Stainless Steel | Stainless Steel | Galvanized | Galvanized | Galvanized | Galvanized | Stainless Steel |
| Hopper | Polypropylene | Polypropylene | Polypropylene | Polypropylene | Polypropylene | Polypropylene | Polypropylene | Polypropylene | Nylon |
| Economical/Quiet | | | | | | | | | |
| Sound insulation wrapper | Super Deluxe | Deluxe | Standard | Standard | — | — | — | — | Super Deluxe |
| Weights & Dimensions | | | | | | | | | |
| Approx. shipping weight (lbs.) | 12.5 | 10.0 | 9.8 | 9.8 | 8.4 | 8.4 | 8.4 | 8.4 | 14.0 |
| Net weight (lbs.) | 11 | 8.8 | 8.6 | 8.6 | 7.6 | 7.6 | 7.6 | 7.6 | 12.5 |
| (A) | 14-5/8 | | | | | | | | 16-9/16 |
| (B) | 6-1/4 | | | | | | | | 5-1/2 |
| (C) | 3-1/4 | | | | | | | | 6-1/2 |
| (D) | 8-1/4 | | | | | | | | 9-5/16 |
| (E) | 8-1/8 | | | | | | | | 8-5/8 |
| Dishwasher inlet diameter (in.) | 7/8 | | | | | | | | 1 |
| Drain outlet diameter (in.) | 1-1/2 | | | | | | | | |
| Accessories | | | | | | | | | |
| GPF71 White sink flange & stopper | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| GPF72 Almond sink flange & stopper | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

Disposers




Disposer Accessories:
GPF75 Clamp nut kit

GE Compactors

| | GCG1530ZWW/GCG1520ZBB | GCG950T |
|-------------------------------------|--|--|
| Features | | |
| Cycle time | 27 seconds max., 14 seconds min. | 70 seconds max., 12 seconds min. |
| Motor horsepower | 1/3 | 1/3 |
| Compression ratio (average) | 75% reduction of volume | 75% reduction of volume |
| Ram force (lb.) (max.) | 2,300 | 5,000 |
| Lock/start control w/removable key | ■ | ■ |
| Bag storage | — | ■ |
| Appearance | | |
| Color | WW,BB | BB |
| Door panels included | White/Black; Black/White | Black/Almond |
| Heavy gauge steel construction | ■ | ■ |
| 1/4" panel capability | ■ | ■ |
| Weights & Dimensions | | |
| Custom panel size | 14-5/8" wide, 22-15/16" high, 1/4" thick | 11-11/16" wide, 20-7/8" high, 1/4" thick |
| Clearance for drop down drawer side | 6" or more on right side | 6" or more on right side |
| Drawer extension for removal | 23" or more in front of appliance | 22" or more |
| Container volume (cu. ft.) | 1.41 | 1.4 |
| Total appliance weight (lbs.) | 146 | 134 |
| Accessories | | |
| Compactor bags | WC60X5017 | WC60X5015 |
| Optional toe pedal opener kit | — | GSA85 |

GCG1530ZWW GCG1520ZBB GCG950T Convertible compactors



Compactor Accessories:

GPF80 White/Black panel
for **GCG1530**
GPF81 Black/Almond panel
for **GCG1520**

Compactor dimensions (in inches)


| Model | A | B | C |
|------------|--------|----|--------|
| GCG1530ZWW | 34-1/4 | 15 | 24-1/4 |
| GCG1520ZBB | 34-1/4 | 15 | 24-1/4 |
| GCG950T | 34-1/2 | 12 | 20-1/4 |

GE Built-In "J" series

GE Window/Wall mount models

For convenience and efficiency, GE offers a unique line of units that provide cooling only, cooling with electric heat, and cooling with heat pumps, for use in window or through-the-wall application.

All models include, variable setting thermostat, fan cycle switch, four-way air direction, up-front washable air filter, "fan only" setting for air circulation.



E.E.R. (Energy Efficiency Ratio)

Shown on the tag of each new unit, compares the air conditioner's cooling output with the electricity it requires for power. The higher the E.E.R. number, the more efficient the unit, and the less costly to operate.

Fan Cycle Switch

Helps reduce power consumption and operating costs.



GE Cool only units



Includes sleeve and flexible EZ Mount kit.

| Models | BTUH Cooling | Volts | EER | BTUH Electric Resistance Heating | Wall Case |
|----------|---------------|---------|---------|----------------------------------|-------------|
| AJCS06LC | 6000 | 115 | 9.5 | — | RAB46/47/48 |
| AJCS08AC | 8000 | 115 | 9.2 | — | RAB46/47/48 |
| AJCS10AC | 9900 | 115 | 9.2 | — | RAB46/47/48 |
| AJCS09DC | 8900/8700 | 230/208 | 9.5/9.5 | — | RAB46/47/48 |
| AJCS10DC | 9900/9700 | 230/208 | 9.2/9.2 | — | RAB46/47/48 |
| AJCS12DC | 11,600/11,400 | 230/208 | 9.0/9.0 | — | RAB46/47/48 |

GE Heat/cool units



Includes sleeve and hard board window mounting kit.

| Models | BTUH Cooling | Volts | EER | BTUH Electric Resistance Heating | Wall Case |
|----------|---------------|---------|---------|----------------------------------|-------------|
| AJES09DC | 8900/8700 | 230/208 | 9.5 | 11,600/9,480 | RAB46/47/48 |
| AJES10DC | 9900/9700 | 230/208 | 9.2/9.2 | 11,600/9,480 | RAB46/47/48 |
| AJES12DC | 11,600/11,400 | 230/208 | 9.0/9.0 | 11,600/9,480 | RAB46/47/48 |

GE Heat pump units



Includes sleeve and hard board window mounting kit.

| Models | BTUH Cooling | Volts | EER | BTUH Electric Resistance Heating | BTUH Reverse Cycle Heating† | Wall Case |
|-----------|--------------|---------|---------|----------------------------------|-----------------------------|-------------|
| AJHS08DC* | 8000/7800 | 230/208 | 9.2/9.2 | 11,600/9480 | 7700/7500 | RAB46/47/48 |
| AJHS10DC* | 9800/9600 | 230/208 | 9.2/9.2 | 11,600/9480 | 9700/9500 | RAB46/47/48 |

*Model includes two-stage heating thermostat.

†At 47°F.

Note: If any "J" Series unit is a replacement unit the existing rear grille should be replaced for better performance with either stamped aluminum (RAG13) grille or architectural louvered extruded aluminum (RAG14).

For additional features, specifications, and color availability, refer to page 81. For warranty information, refer to page 83.

GE Deluxe series

Offering stylish appearance and convenience features, the Deluxe line of GE Room Air Conditioners are powerful and efficient units.



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|---------------|---------|---------|-----------------|
| AVM24DD | 23,500/23,000 | 8.7/8.7 | 230/208 | 1480-1620 |
| AVM22DB | 22,000/21,300 | 8.2/8.2 | 230/208 | 1330-1450 |
| AVM18DC | 18,000/17,500 | 9.5/9.5 | 230/208 | 1050-1150 |
| AVM15DC | 15,000/14,500 | 9.0/9.0 | 230/208 | 850-950 |
| AVM14AB | 14,000 | 10.0 | 115 | 750-850 |

■ Concealed controls

| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|---------------|---------|---------|-----------------|
| AMD12DB | 12,000/11,800 | 9.1/9.1 | 230/208 | 575-650 |

- Electronic controls
- 12 hour timer
- Circulaire oscillating air flow
- Concealed controls



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|-------|------|-------|-----------------|
| AGH08FA | 7,800 | 10.0 | 115 | 250-350 |

Energy Star compliant



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|--------|------|-------|-----------------|
| AMH12AC | 11,500 | 10.0 | 115 | 550-625 |
| AMH10AA | 10,000 | 10.0 | 115 | 425-525 |



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|-------|------|-------|-----------------|
| AMH06LA | 5,800 | 10.0 | 115 | 170-210 |

Energy Star compliant

For additional features, specifications, and color availability, refer to page 80. For warranty information, refer to page 83.

GE Room air conditioners

GE Value series

The Value line of GE Room Air Conditioners is the answer to your need for a value-priced, quality air conditioner.



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|---------------|---------|---------|-----------------|
| AGV18DB | 17,800/17,400 | 8.8/8.8 | 230/208 | 1,000-1,100 |
| AGV12DA | 12,000 | 9.0/9.0 | 230/208 | 575-650 |

■ Circulaire oscillating air flow



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|--------|-----|-------|-----------------|
| AGV12AA | 12,000 | 9.0 | 115 | 575-650 |
| AGV10AA | 10,000 | 9.2 | 115 | 425-525 |



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|-------|-----|-------|-----------------|
| ASV08AC | 8,000 | 9.0 | 115 | 250-350 |



| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|-------|-----|-------|-----------------|
| AQV06LA | 6,000 | 9.0 | 115 | 170-210 |
| AQV05LA | 5,000 | 9.0 | 115 | 100-150 |

Heat/cool series

- Multiple cooling/heating speeds
- Vent/Exhaust
- 10-Position thermostat
- Four-way adjustable air discharge
- Easy access filter
- Slide-out chassis
- Rigid panel window kit



| Model | BTU | EER | Volts | Cools (sq. ft.) | Heater Wattage |
|---------|---------------|---------|---------|-----------------|----------------|
| AVE22DA | 22,000/21,300 | 8.2/8.2 | 230/208 | 1,330-1,450 | 4.7/3.9 (kw) |
| AVE18DA | 18,000/17,500 | 9.5/9.5 | 230/208 | 1,050-1,150 | 3.0/2.6 (kw) |
| AVE15DA | 15,000/14,500 | 9.0/9.0 | 230/208 | 850-950 | 3.0/2.6 (kw) |


For additional features, specifications, and color availability, refer to pages 80 and 82. For warranty information, refer to page 83.

GE Quiet-Aire™ – Split System

The GE Quiet-Aire™ – Split System Air Conditioner provides virtually silent cooling comfort. With a design that includes outside compressor placement, disturbing sounds are kept out of doors and out of earshot. This design also eliminates annoyances like rattling windows. So rest easily and peacefully. Available in heat pump and cooling only models in 9,000, 12,000 and 18,000 BTU sizes.



Indoor unit

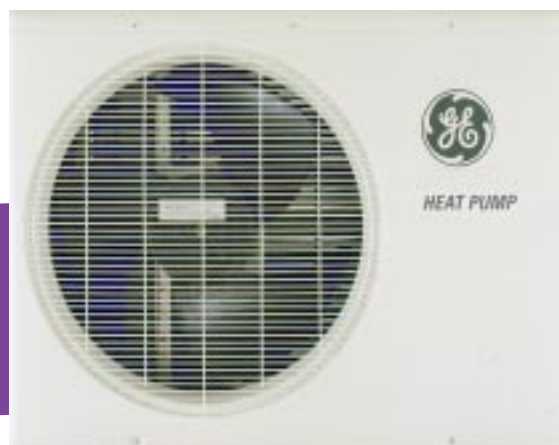

Outdoor unit

For more information, see Pub. No. 20-S008, or call the GE Answer Center® at 800.626.2000.



GE Slide-Aire


Only 14-1/2" wide, GE Slide-Aire units are specially designed for use in casement or sliding windows and narrow double-hung windows. Features a 10-position thermostat, Vertical Slider Kit Panel, 2-way adjustable air direction, three fan speeds for "Cooling" and two "Fan Only" settings.

| Model | BTU | EER | Volts | Cools (sq. ft.) |
|---------|--------|-----|-------|-----------------|
| AVX10AC | 10,000 | 9.0 | 115 | 425-525 |
| AVX07FB | 7,000 | 8.5 | 115 | 210-280 |

GE Profile™ and GE dehumidifiers

Dehumidifies your air

A GE Profile™ or GE dehumidifier can provide added comfort and help protect your home from the damage excess moisture can cause. Use anywhere moisture can be a problem—living areas, damp basements, humid laundry rooms and storage areas. GE Profile™ and GE dehumidifiers help prevent rust, mildew, mold, odors and wood damage.

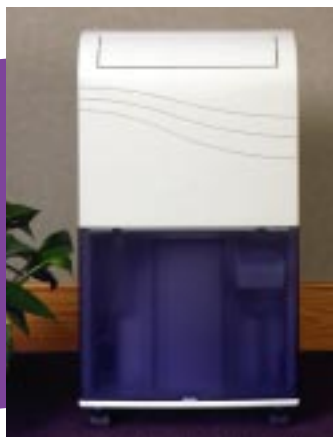

| Model | Pints Per Day |
|---------|---------------|
| AHG20LA | 19 |

- Electronic Micro Computer Control
- Overflow protection
- Water Full indicator
- Automatic defrost
- 6-Pint bucket capacity
- External drain connector



| Model | Pints Per Day |
|---------|---------------|
| AHG50LA | 50 |
| AHG40LA | 40 |
| AHG25LA | 25 |

- Compact and contemporary design
- Automatic Humidistat control
- Automatic Shut-Off system with Bucket Full indicator
- Easy roll casters
- External drain connector
- Automatic defrost control
- Removable condensate container
- Washable air filter

For additional features, specifications, and color availability, refer to pages 80 and 82. For warranty information, refer to page 83.

GE Room air conditioner specifications

| Models | Deluxe 230 Volt | | | | | Deluxe 115 Volt | | | | |
|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| | AVM24DD | AVM22DB | AVM18DC | AVM15DC | AMD12DB | AVM14AB | AMH12AC | AMH10AA | AGH08FA | AMH06LA |
| Features | | | | | | | | | | |
| BTUH | 23,500/23,000 | 22,000/21,300 | 18,000/17,500 | 15,000/14,500 | 12,000/11,800 | 14,000 | 11,500 | 10,000 | 7,800 | 5,800 |
| Voltage | 230/208 | 230/208 | 230/208 | 230/208 | 230/208 | 115 | 115 | 115 | 115 | 115 |
| E.E.R. (BTUH/Watt) | 8.7/8.7 | 8.2/8.2 | 9.5/9.5 | 9.0/9.0 | 9.1/9.1 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 |
| Amps | 13.5/14.4 | 12.5/13.5 | 7.9/8.5 | 7.5/8.1 | 5.9/6.4 | 12.0 | 10.1 | 8.9 | 7.0 | 5.2 |
| Watts | 2,700/2,640 | 2,680/2,600 | 1,890/1,840 | 1,670/1,610 | 1,315/1,295 | 1,400 | 1,150 | 1,000 | 780 | 580 |
| Plug type | Perpendicular | Perpendicular | Tandem | Tandem | Tandem | Parallel | Parallel | Parallel | Parallel | Parallel |
| Energy Saver Feature (speeds) | 2 | 2 | 2 | 2 | 3 | 2 | 3 | 3 | 2 | 2 |
| Electronic Control | | | | | ■ | | | | | |
| 12-hour timer | | | | | ■ | | | | | |
| Dehumidification (pints/hr.) | 8.2 | 8.5 | 5.5 | 4.3 | 3.6 | 4.0 | 3.2 | 3.0 | 2.5 | 0.9 |
| Circulaire | | | | | ■ | | | | | |
| Fan Speeds (Cool/Fan Only) | 2/2 | 2/2 | 2/2 | 2/2 | 3/1 | 2/2 | 3/2 | 3/2 | 2/2 | 2/2 |
| CFM (High Shown) | 500 | 450 | 450 | 420 | 330 | 400 | 340 | 325 | 205 | 220 |
| Vent/exhaust | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Control door | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Thermostat | 10-Position | 10-Position | 10-Position | 10-Position | Electronic | 10-Position | 10-Position | 10-Position | 10-Position | 10-Position |
| Filter type | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out |
| Chassis | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out |
| Window mounting | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount/V Kit |
| Window opening height (min. in inches) | 18-5/8 | 18-5/8 | 18-5/8 | 18-5/8 | 15-3/4 | 18-5/8 | 15-3/4 | 15-3/4 | 14 | 14-17/32 |
| Window opening width (min. in inches) | 30-3/4 | 30-3/4 | 30-3/4 | 30-3/4 | 26-1/2 | 30-3/4 | 25-13/16 | 25-13/16 | 25 | 21-5/8 |
| Window opening width (max. in inches) | 46-1/2 | 46-1/2 | 46-1/2 | 46-1/2 | 41 | 46-1/2 | 42 | 42 | 36 | 35 |
| | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. |
| Warranty* | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. |
| Case Dimensions | | | | | | | | | | |
| Height (in inches) A | 17-1/4 | 17-1/4 | 17-1/4 | 17-1/4 | 14-3/4 | 17-1/4 | 14-3/4 | 14-3/4 | 13-15/16 | 13-5/8 |
| Width (in inches) B | 26-1/2 | 26-1/2 | 26-1/2 | 26-1/2 | 22-1/16 | 26-1/2 | 22 | 22 | 20-1/16 | 17-23/32 |
| Depth (in inches) C | 27-5/8 | 27-5/8 | 23-5/8 | 23-5/8 | 23-5/8 | 23-5/8 | 24 | 24 | 17-9/16 | 20-7/8 |
| Depth to louvers (in inches) D | 10-3/4 | 10-3/4 | 9-1/8 | 9-1/8 | 9-7/16 | 9-1/8 | 9-7/16 | 9-7/16 | 8-5/8 | 8-17/32 |
| Net weight (lbs.) | 174 | 170 | 121 | 118 | 93 | 118 | 77 | 77 | 71 | 64 |
| Approx. shipping weight (lbs.) | 187 | 183 | 128 | 125 | 100 | 125 | 88 | 88 | 77 | 73 |


*See written warranty for details.

| Models | Value 230 Volt | | Value 115 Volt | | | | | Slide-Aire | |
|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|--------------|--------------|
| | AGV18DB | AGV12DA | AGV12AA | AGV10AA | ASV08AC | AQV06LA | AQV05LA | AVX10AC | AVX07FB |
| Features | | | | | | | | | |
| BTUH | 17,800/17,400 | 12,000/11,500 | 12,000 | 10,000 | 8,000 | 6,000 | 5,000 | 10,000 | 7,000 |
| Voltage | 230/208 | 230/208 | 115 | 115 | 115 | 115 | 115 | 115 | 115 |
| E.E.R. (BTUH/Watt) | 8.8/8.8 | 9.0/9.0 | 9.0 | 9.2 | 9.0 | 9.0 | 9.0 | 9.0 | 8.5 |
| Amps | 9.0/9.8 | 5.8/6.2 | 12.0 | 10.0 | 7.9 | 6.1 | 5.1 | 11.0 | 7.5 |
| Watts | 2,020/1,975 | 1,300/1,250 | 1,330 | 1,085 | 890 | 665 | 555 | 1,110 | 820 |
| Plug type | Tandem | Tandem | Parallel | Parallel | Parallel | Parallel | Parallel | Parallel | Parallel |
| Dehumidification (pints/hr.) | 5.1 | 3.5 | 3.3 | 3.0 | 2.5 | 1.5 | 1.3 | 3.1 | 2.5 |
| Circulaire | ■ | ■ | | | | | | | |
| Fan speeds (Cool/Fan Only) | 3/2 | 3/2 | 3/2 | 3/2 | 3/1 | 3/1 | 3/1 | 3/2 | 3/2 |
| CFM (High Shown) | 425 | 285 | 285 | 265 | 220 | 190 | 190 | 260 | 210 |
| Vent/exhaust | Exhaust | Exhaust | Exhaust | Exhaust | Exhaust | No | No | Exhaust | Exhaust |
| Thermostat | 8-Position | 8-Position | 8-Position | 8-Position | 8-Position | 8-Position | 8-Position | 10-Position | 10-Position |
| Filter type | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Rigid Frame/Slide-Out | Foam | Foam |
| Chassis | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Fixed | Fixed | Fixed | Fixed |
| Window mounting | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | EZ Mount | V-Std. Mount | V-Std. Mount |
| Window opening height (min. in inches) | 18 | 16 | 16 | 16 | 14-3/4 | 14-27/32 | 14-27/32 | 21 - 40-1/2 | 21 - 40-1/2 |
| Window opening width (min. in inches) | 29 | 27 | 27 | 27 | 25-1/2 | 23-5/8 | 23-5/8 | 15-1/2 | 15-1/2 |
| Window opening width (max. in inches) | 41 | 39 | 39 | 39 | 37 | 35-7/16 | 35-7/16 | — | — |
| | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. |
| Warranty* | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. |
| Case Dimensions | | | | | | | | | |
| Height (in inches) A | 16-7/8 | 15 | 15 | 15 | 13-3/8 | 14-9/16 | 14-9/16 | 20-1/2 | 20-1/2 |
| Width (in inches) B | 26 | 23-5/8 | 23-5/8 | 23-5/8 | 20-1/2 | 19-11/16 | 19-11/16 | 14-1/2 | 14-1/2 |
| Depth (in inches) C | 24-7/8 | 20-9/32 | 20-9/32 | 20-9/32 | 18-7/8 | 16-17/32 | 16-17/32 | 22-9/16 | 22-9/16 |
| Depth to louvers (in inches) D | 10-5/16 | 8-5/8 | 8-5/8 | 8-5/8 | 8-1/4 | 2-3/4 | 2-3/4 | 6 | 6 |
| Net weight (lbs.) | 121 | 95 | 95 | 90 | 73 | 44 | 44 | 102 | 84 |
| Approx. shipping weight (lbs.) | 134 | 101 | 101 | 96 | 79 | 52 | 52 | 106 | 88 |

*See written warranty for details.

Deluxe and Value Model Wall Case Dimensions

*Distance from front of case to side louvers (excluding grille).

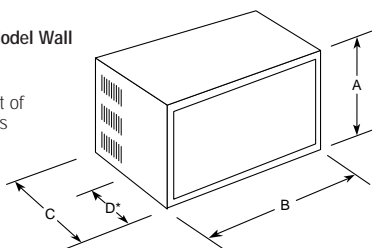

Parallel
115V.
15 Amp.



Perpendicular
230/208V.
20 Amp.



Tandem
230/208V.
15 Amp.



Large Tandem
230/208V.
30 Amp.

Wall Outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems—consult a qualified electrician.

Note: When installing units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Carry-Cool units are not designed for through-the-wall applications.

Note: Some models may not be available in your area due to local legislation. Contact your local dealer.

See page 83 for warranty information.

GE Window/Built-In "J" series units and heat pumps




| Models | Chassis/Cool | | | | | | Chassis/Heat/Cool | | | Chassis/Heat Pumps | |
|---|--------------|-------------|-------------|-------------|-------------|---------------|-------------------|---------------|---------------|--------------------|---------------|
| | AJCS06LC | AJCS08AC | AJCS10AC | AJCS09DC | AJCS10DC | AJCS12DC | AJES09DC | AJES10DC | AJES12DC | AJHS08DC | AJHS10DC |
| Capacity | | | | | | | | | | | |
| BTUH-AHAM | 6000 | 8000 | 9900 | 8900/8700 | 9900/9700 | 11,600/11,400 | 8900/8700 | 9900/9700 | 11,600/11,400 | 8000/7800 | 9800/9600 |
| E.E.R. (BTUH/Watt) | 9.5 | 9.2 | 9.2 | 9.5/9.5 | 9.2/9.2 | 9.0/9.0 | 9.5/9.5 | 9.2/9.2 | 9.0/9.0 | 9.2/9.2 | 9.2/9.2 |
| Dehumidification (pints/hr.) | 1.4 | 2.0 | 2.7 | 2.5 | 2.6 | 3.2 | 2.5 | 2.6 | 3.2 | 2.0 | 2.6 |
| Features | | | | | | | | | | | |
| Cooling | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Fan speed selections: Heating | | | | | | | 2 | 2 | 2 | 2 | 2 |
| Fan Only speeds | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Airflow (cfm) roomside hi/low | 210/180 | 250/210 | 250/210 | 250/210 | 250/210 | 265/230 | 250/210 | 250/210 | 265/230 | 230/190 | 250/210 |
| Air exchange exhaust | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Variable setting thermostat | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Filter type | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out | Slide-Out |
| Rotary compressor | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Economical/Quiet | | | | | | | | | | | |
| Fan cycle switch | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Appearance | | | | | | | | | | | |
| Slide-out chassis | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Installation | Wall | Wall | Wall | Wall | Wall | Wall | Wall | Wall | Wall | Wall | Wall |
| Wall case required | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 | RAB46/47/48 |
| Window installation kit | | | | | | | Optional | Optional | Optional | Optional | Optional |
| Case Dimensions | | | | | | | | | | | |
| Height (in inches) A | 15-5/8 | | | | | | | | | | |
| Width (in inches) B | 26 | | | | | | | | | | |
| Depth (in inches) C | 16-7/8 | | | | | | | | | | |
| Net weight (lbs.) | 66 | 73 | 82 | 75 | 82 | 84 | 77 | 84 | 84 | 75 | 84 |
| Approx. shipping weight (lbs.) | 75 | 82 | 90 | 84 | 90 | 93 | 86 | 93 | 93 | 84 | 93 |
| Power/Ratings | | | | | | | | | | | |
| Voltage | 115 | 115 | 115 | 230/208 | 230/208 | 230/208 | 230/208 | 230/208 | 230/208 | 230/208 | 230/208 |
| Amps-AHAM | 5.7 | 7.9 | 9.7 | 4.2/4.6 | 4.9/5.3 | 5.8/6.3 | 4.2/4.6 | 4.9/5.3 | 5.8/6.3 | 4.0/4.3 | 4.9/5.3 |
| Watts input | 630 | 870 | 1075 | 935/915 | 1075/1055 | 1290/1265 | 935/915 | 1075/1055 | 1290/1265 | 870/850 | 1065/1045 |
| Line cord plug | Parallel | Parallel | Parallel | Tandem | Tandem | Tandem | Perpendicular | Perpendicular | Perpendicular | Perpendicular | Perpendicular |
| Recommended circuit protection (time delay) | 15 Amps | 15 Amps | 15 Amps | 15 Amps | 15 Amps | 15 Amps | 20 Amps | 20 Amps | 20 Amps | 20 Amps | 20 Amps |
| Reverse Cycle Heating | | | | | | | | | | | |
| BTUH-AHAM—H.P. | | | | | | | | | | 7700/7500 | 9700/9500 |
| C.O.P. @ 47°F. | | | | | | | | | | 3.0 | 3.0 |
| Amps AHAM | | | | | | | | | | 3.4/3.7 | 4.3/4.7 |
| Watts input | | | | | | | | | | 750/730 | 950/930 |
| Electric Resistance Heating | | | | | | | | | | | |
| BTUH-AHAM | | | | | | | 11,600/9480 | 11,600/9480 | 11,600/9480 | 11,600/9480 | 11,600/9480 |
| Amps (Max. connected load) | | | | | | | 15.5/14.0 | 15.5/14.0 | 15.7/14.2 | 15.5/14.0 | 15.5/14.0 |
| Watts output | | | | | | | 3400/2780 | 3400/2780 | 3400/2780 | 3400/2780 | 3400/2780 |

All cooling with electric heat models are corrosion treated.
Specifications and design subject to change without notice

Built-in room air conditioners wall opening for RAB46/47/48 cases

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.


Note: Units should be caulked on all four sides of case to the building exterior to assure building integrity.



Two Wall Cases for Tenant Option Installation
When the air conditioner is offered as a tenant option, these wall cases provide protection against outside elements.


RAB47—includes wall case, exterior grille, weather panel and steel closure panels.

RAB48—includes wall case, exterior grille, steel closure panel and two layers of insulation.



Standard Wall Case RAB46

Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis.



Wall Outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems—consult a qualified electrician.

Note: Some models may not be available in your area due to local legislation. Contact your local dealer.

Note: When installing slide out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.



Listed by
Underwriters
Laboratories



Total capacity and
E.E.R. ratings are
calculated based on
the Association of
Home Appliance
Manufacturers'
standards.

See page 83 for warranty information.

GE Heat/cool series

| Models | Heat/Cool Units | | |
|--|-----------------|-----------------|-----------------|
| | AVE22DA** | AVE18DA** | AVE15DA** |
| Features | | | |
| Cooling BTUH-AHAM | 22,000/21,300 | 18,000/17,500 | 15,000/14,500 |
| Heating BTUH-AHAM | 16,000/13,400 | 10,200/8,700 | 10,200/8,700 |
| Voltage | 230/208 | 230/208 | 230/208 |
| E.E.R. (BTUH/Watt) | 8.2/8.2 | 9.5/9.5 | 9.0/9.0 |
| Rated cooling amps - AHAM | 13.0/14.2 | 7.9/8.5 | 7.5/8.1 |
| Cooling watts | 2,680/2,600 | 1,890/1,840 | 1,670/1,610 |
| Rated heating amps - AHAM | 22.8/20.9 | 15.0/13.5 | 15.0/13.5 |
| Circuit size, amps | 30 | 20 | 20 |
| Plug type (see page 81) | Tandem | Perpendicular | Perpendicular |
| Line cord plug recommended circuit protection (time delay) | 30 amps | 20 amps | 20 amps |
| Line cord length | 55" left | 55" left | 55" left |
| Dehumidification (pints/hr.) | 8.2 | 5.5 | 4.3 |
| CFM (high shown) | 500 | 450 | 420 |
| Air exchange exhaust | ■ | ■ | ■ |
| Variable air discharge | 4-Way | 4-Way | 4-Way |
| Control Door | ■ | ■ | ■ |
| Fan speeds: Cooling/Heating | 2/2 | 2/2 | 2/2 |
| Fan Only position | 1 | 1 | 1 |
| Thermostat | 10-Position | 10-Position | 10-Position |
| Filter type | Rigid/Slide-Out | Rigid/Slide-Out | Rigid/Slide-Out |
| Chassis | Slide-Out | Slide-Out | Slide-Out |
| Compressor type | Recip. | Rotary | Rotary |
| Window mounting | Rigid Panel | Rigid Panel | Rigid Panel |
| Window opening height (min. in inches) | 18-5/8 | 18-5/8 | 18-5/8 |
| Window opening width (min. in inches) | 26-3/4 | 26-3/4 | 26-3/4 |
| Window opening width (max. in inches) | 40 | 40 | 40 |
| Case Dimensions | | | |
| Height (in inches) A | 17-1/4 | 17-1/4 | 17-1/4 |
| Width (in inches) B | 26-1/2 | 26-1/2 | 26-1/2 |
| Depth (in inches) C | 27-5/8 | 23-5/8 | 23-5/8 |
| Depth to louvers (in inches) D | 10-3/4 | 9-1/8 | 9-1/8 |
| Net weight (lbs.) | 172 | 123 | 120 |
| Approx. shipping weight (lbs.) | 185 | 130 | 127 |
| Warranty* | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. |
| | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. |
| Heating Capacity - Electric | | | |
| BTUH - AHAM - I ² R | 16,000/13,400 | 10,200/8,700 | 10,200/8,700 |
| Rating Heating Amps - AHAM | 22.8/20.9 | 15.0/13.5 | 15.0/13.5 |
| Heating Watts | 5,200/4,280 | 3,320/2,690 | 3,320/2,690 |

*See written warranty for details.

**These units are not intended to be the primary source of heat.

GE Dehumidifiers

| Models | GE Profile™ | GE | | |
|------------------------------|-------------|------------|-------------|-------------|
| | AHG20LA | AHG50LA | AHG40LA | AHG25LA |
| Features | | | | |
| Dehumidification (pints/day) | 19 | 50 | 40 | 25 |
| Dry Airflow (CFM) | 63 | 113 | 131 | 134 |
| Color | Gray | Grey | Cameo White | Cameo White |
| Electronic Control | ■ | | | |
| Auto Shut Off | ■ | ■ | ■ | ■ |
| Automatic Defrost | ■ | ■ | ■ | ■ |
| Water Full Indicator | ■ | ■ | ■ | ■ |
| Fan speeds | 1 | 2 | 2 | 2 |
| Removable bucket with handle | ■ | ■ | ■ | ■ |
| Bucket capacity (pints) | 6 | 21 | 21 | 21 |
| External drain connector | ■ | ■ | ■ | ■ |
| Casters - 4 movable | ■ | ■ | ■ | ■ |
| Voltage | 115 | 115 | 115 | 115 |
| Watts | 450 | 580 | 550 | 450 |
| Amps | 5.3 | 5.3 | 5.1 | 5.3 |
| Circuit size (Amps) | 15 | 15 | 15 | 15 |
| Plug type | Parallel | Parallel | Parallel | Parallel |
| Case Dimensions | | | | |
| Height (in inches) | 22-5/8 | 20-7/8 | 20-7/8 | 20-7/8 |
| Width (in inches) | 12-1/4 | 12-5/8 | 12-5/8 | 12-5/8 |
| Depth (in inches) | 10-5/8 | 17-1/8 | 17-1/8 | 17-1/8 |
| Shipping weight (lbs.) | 42 | 48 | 48 | 54 |
| Net weight (lbs.) | 38 | 43 | 43 | 50 |
| Warranty* | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. | Full 1-Yr. |
| | Full 1-Yr. | Full 5-Yr. | Full 5-Yr. | Full 5-Yr. |

*See written warranty for details.

GE Split system room air conditioners/heat pumps

| | Cooling Only | | | Heat Pumps | | |
|-----------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | AS1CD09AAO | AS1CD12AAO | AS1CD18DAO | AS1RD09AAO | AS1RD12AAO | AS1RD18DAO |
| Indoor | ASOCD09AAO | ASOCD12AAO | ASOCD18DAO | ASORD09AAO | ASORD12AAO | ASORD18DAO |
| Outdoor | | | | | | |
| Cooling capacity (BTU/hr) | 9,000 | 12,000 | 18,000/17,800 | 9,000 | 12,000 | 18,000/17,800 |
| Heating capacity (BTU/hr) | N/A | N/A | N/A | 9,000 | 12,000 | 19,000/18,700 |
| Auto operation | ■ | ■ | ■ | ■ | ■ | ■ |
| Cooling fan speeds/fan only | 3/3 | 3/3 | 3/3 | 3/3/3 | 3/3/3 | 3/3/3 |
| LCD wireless remote | ■ | ■ | ■ | ■ | ■ | ■ |
| "Sleep Mode" | ■ | ■ | ■ | ■ | ■ | ■ |
| (Delay Start/Pre-Set Stop) | ■ | ■ | ■ | ■ | ■ | ■ |
| Air flow, up & down-auto | ■ | ■ | ■ | ■ | ■ | ■ |
| Air flow, left/right-manual | ■ | ■ | ■ | ■ | ■ | ■ |
| EER, cooling | 9.6 | 9.3 | 9.5/9.5 | 10.0 | 9.3 | 9.5/9.5 |
| SEER, cooling | 10.0 | 10.0 | 10.0/10.0 | 10.0 | 10.0 | 10.0/10.0 |
| COP, heating | N/A | N/A | N/A | 3.1 | 2.75 | 2.9/2.9 |
| Watts, cooling | 940 | 1290 | 1900/1870 | 900 | 1290 | 1900/1870 |
| Watts, heating | N/A | N/A | N/A | 860 | 1290 | 1900/1870 |
| Voltage/Phase/Hz | 115/60/1 | 115/60/1 | 230-208/60/1 | 115/60/1 | 115/60/1 | 230-208/60/1 |
| Amperes, cooling | 8.5 | 11.7 | 8.5/9.0 | 8.0 | 11.7 | 8.5/9.0 |
| Amperes, heating | N/A | N/A | N/A | 7.7 | 11.7 | 8.5/9.0 |
| Temperature range-cool (°F) | 64-86 | 64-86 | 64-86 | 64-86 | 64-86 | 64-86 |
| Temperature range-heat (°F) | N/A | N/A | N/A | 60-86 | 60-86 | 60-86 |
| Temperature increments (°F) | 2 | 2 | 2 | 2 | 2 | 2 |
| Dehumidification (pints/hr.) | 2.6 | 3.5 | 5.3 | 2.6 | 3.5 | 5.3 |
| Washable air filter | ■ | ■ | ■ | ■ | ■ | ■ |
| Tube kit | Optional | Optional | Optional | Optional | Optional | Optional |
| Weights & Dimensions | | | | | | |
| Indoor (H x W x D inches) | 11.4 x 35.4 x 7.2 | 11.4 x 35.4 x 7.2 | 11.4 x 42.6 x 7.2 | 11.4 x 35.4 x 7.2 | 11.4 x 35.4 x 7.2 | 11.4 x 42.6 x 7.2 |
| Weight (lbs.) shipping/net | 28.7/19.8 | 28.7/19.8 | 33.0/24.2 | 28.7/19.8 | 28.7/19.8 | 33.0/24.2 |
| Color | Dove White | Dove White | Dove White | Dove White | Dove White | Dove White |
| Carton (H x W x D inches) | 14.6 x 38.2 x 9.9 | 14.6 x 38.2 x 9.9 | 14.6 x 45.6 x 9.9 | 14.6 x 38.2 x 9.9 | 14.6 x 38.2 x 9.9 | 14.6 x 45.6 x 9.9 |
| Outdoor (H x W x D inches) | 21.9 x 31.6 x 10.3 | 21.9 x 31.6 x 10.3 | 25.8 x 34.3 x 12.6 | 21.9 x 31.6 x 10.3 | 21.9 x 31.6 x 10.3 | 25.8 x 34.3 x 12.6 |
| Weight (lbs.) shipping/net | 83.8/77.2 | 83.8/77.2 | 130/121 | 83.8/77.2 | 83.8/77.2 | 130/121 |
| Color | Pigeon Grey | Pigeon Grey | Pigeon Grey | Pigeon Grey | Pigeon Grey | Pigeon Grey |
| Carton (H x W x D inches) | 23.9 x 37.8 x 15.1 | 23.9 x 37.8 x 15.1 | 28.1 x 40.3 x 17.4 | 23.9 x 37.8 x 15.1 | 23.9 x 37.8 x 15.1 | 28.1 x 40.3 x 17.4 |

Optional Tube Kits

| | 9,000 BTU/Hr. Models | |
|------------------|----------------------|----------|
| | TUS1542 | TUS2542 |
| Insulated Tubing | 15' | 25' |
| Wiring | 30' | 30' |
| Wall Hole Sleeve | Standard | Standard |
| Suction Line | 0.5" | 0.5" |
| Liquid Line | 0.25" | 0.25" |

| | 12,000 BTU/Hr. Models | |
|------------------|-----------------------|----------|
| | TUS1542 | TUS2542 |
| Insulated Tubing | 15' | 25' |
| Wiring | 30' | 30' |
| Wall Hole Sleeve | Standard | Standard |
| Suction Line | 0.5" | 0.5" |
| Liquid Line | 0.25" | 0.25" |

| | 18,000 BTU/Hr. Models | |
|------------------|-----------------------|----------|
| | TUS1553 | TUS2553 |
| Insulated Tubing | 15' | 25' |
| Wiring | 30' | 30' |
| Wall Hole Sleeve | Standard | Standard |
| Suction Line | 0.625" | 0.625" |
| Liquid Line | 0.375" | 0.375" |

The condensed list below is a convenient overview of the written warranties offered on various Hotpoint and GE appliances described in this catalog. For complete warranty details on a specific appliance model, contact your nearest Hotpoint/GE appliance dealer, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

| Appliance | Length | Type | Warranty Covers | Parts Or Labor | Where Serviced* |
|---|-------------------------------------|---------|--|----------------|-----------------|
| Refrigerators (All models except TAX2SNYWN, TAX2SNBWH, TAX4ANXWN, TAX4SNYWH) | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Full | Sealed Refrigeration System, Compressor | Both | In-Home |
| | Lifetime | Limited | See-thru Vegetable/fruit crispers | Parts | Carry-In** |
| Refrigerators (Models TAX2SNXWN, TAX2SNBWH, TAX4ANXWV, TAX4SNYWH) | 1-Year | Limited | Entire Appliance | Both | Carry-In** |
| | Additional 4-Year (5 years total) | Limited | Compressor | Part | Carry-In** |
| Freezers (Upright and Chest) | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Full | Sealed Refrig. Sys. | Both | In-Home |
| | 1-Year/5-Year†† | Full | Food Spoilage† | N/A | N/A |
| GE SmartWater™ Filtration Systems (Models GNUL30Z, GNUV10Z, GNUM05B) | 1-Year | Full | Entire Appliance (excludes filters) | Both | In-Home |
| GE SmartWater™ Filtration Systems (Models GNUM03B, GXUT03B, GXEM01B, GXRV10ABL) | 1-Year | Limited | Entire Appliance (excludes filters or membranes) | Both | Carry-In** |
| GE SmartWater™ Softening Systems (Models GNSF23Z, GNSF18Z) | 1-Year | Full | Entire Appliance | Both | In-Home |
| | 3-Year | Limited | Electronic Monitor | Parts | In-Home |
| | 10-Year | Limited | Replacement Cabinet (brine tank) and resin tank | Parts | In-Home |
| Washers | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Limited | Transmission | Parts | In-Home*** |
| | Additional 19-Year (20 years total) | Limited | Tuf Tub™ basket | Parts | In-Home*** |
| GE Spacemaker® Washers | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Limited | Transmission | Parts | In-Home*** |
| Dryers (Extra-Large Capacity) | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Limited | Extra-Large Capacity Drum | Parts | In-Home*** |
| Dryers (Large Capacity) and GE Spacemaker® Dryers | 1-Year | Full | Entire Appliance | Both | In-Home |
| Ranges | 1-Year | Full | Entire Appliance | Both | In-Home |
| Hoods | 1-Year | Full | Entire Appliance | Both | In-Home |
| Over-The-Range Microwave Oven Models RVM1425BAWA, RVM1325BW/WW | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Limited | Magnetron Tube | Part | In-Home*** |
| Microwave Oven Models JE1840WB/GB, JE1640AB/WB/GB | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 9-Year (10 years total) | Limited | Magnetron Tube | Part | In-Home*** |
| Microwave Oven Models JE1340WB/GB, JE1040WB/GB, JE740WY/GY, JEM25WY/GY | 1-Year | Limited | Entire Appliance | Both | Carry-In** |
| | Additional 9-Year (10 years total) | Limited | Magnetron Tube | Part | Carry-In** |
| Microwave Oven Models JE510BW, JE520BW, JE835WW, JE635WW, JE710BA | 1-Year | Limited | Entire Appliance | Both | Carry-In** |
| | Additional 4-Year (5 years total) | Limited | Magnetron Tube | Part | Carry-In** |
| Dishwashers (Models HDA2000Z, HDA2020Z, HDA2030Z, HDA3220Z, HDA3230Z) | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 9-Year (10 years total) | Full | Polypropylene Tub and Door Liner | Both | In-Home |
| Dishwasher Model HDA1000ZWH | 1-Year | Full | Entire Appliance | Both | In-Home |
| Dishwasher (Models GSC3400Z, GSC3430Z, GSC3200Z, GSC3230Z, GSM2100Z, GSS1800Z) | 1 Year | Full | Entire Appliance | Both | In-Home |
| | Additional 1-Year (2 years total) | Limited | Water Distrib. Sys. | Parts | In-Home*** |
| | Additional 9-Year (10 years total) | Full | PermaTuf® Tub and Door Liner | Both | In-Home |
| Disposer Models GFC1050V, GFC1000Y | 5-Years | Full | Entire Appliance | Both | In-Home |
| Disposer Model GFC800Y | 4-Years | Full | Entire Appliance | Both | In-Home |
| Disposer Models GFC705Y, GFC700Y | 2-Year | Full | Entire Appliance | Both | In-Home |
| Disposer Models GFC305Y, GFC300Y, GFC295Y, GFC290Y | 1-Year | Full | Entire Appliance | Both | In-Home |
| Compactors | 1-Year | Full | Entire Appliance | Both | In-Home |
| Room Air Conditioners (Window, Window Built-In) | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Full | Sealed Refrig. Sys. | Both | In-Home |
| Dehumidifiers | 1-Year | Full | Entire Appliance | Both | In-Home |
| | Additional 4-Year (5 years total) | Full | Sealed Refrigeration System | Both | In-Home |

*See warranty for details.

**In-Home service available at additional cost.

***Does not include service trip and labor charges.

†Cumulative limits: \$100—14.9 cu. ft. and smaller; \$150—15.0 cu. ft. and larger.

††One year on spoilage from any part failure. Five years on spoilage from sealed refrigerant system failure.

GE Consumer Service, We'll Be There!

Here are four reasons to choose Monogram®, GE Profile Performance Series™, GE Profile™, GE and Hotpoint Appliances:



GE Appliance Service

800-GE-CARES (800-432-2737)

Expert service when you need it!

- Easy to reach; prompt handling of calls.
- Same day/Next day service.
- Among the best one-call repair completion rate in the industry!
- Excellent parts availability; full five-year warranty on parts when installed by GE.

GE Answer Center®

800.626.2000

We never close!

- Any hour of the day or night—even on weekends and holidays—the GE Answer Center® service is available to answer questions about Monogram®, GE Profile Performance Series™, GE Profile™, GE and Hotpoint features and installations.
- You and your customers can call toll-free before, during and after the sale.



GE Genuine Parts

800-626-2002

When you want parts to fix it yourself!

- We offer a complete line of parts, accessories and appliance care products for GE appliances and most other major brands too!
- Fast, convenient delivery direct to you.

GE Warranty Management, Inc.

800-626-2224

Service Protection Plus™

- Backed By GE
- Covers all brands!

Assure the performance you paid for—year after year.

- All parts and labor costs included.
- No hidden costs/no deductibles.

Before purchasing any appliance on which the Federal Trade Commission requires an energy label, read important energy cost and efficiency information available from your retailer.

GE has a policy of continuous improvement on its products and reserves the right to change materials and specifications without notice.

HOTPOINT
For the long run.