




**GE Appliances**

## AVE15DB - GE 230 Volt Heat/Cool Series Room Air Conditioner with Mechanical Controls


### Wall Case Dimensions (in inches)

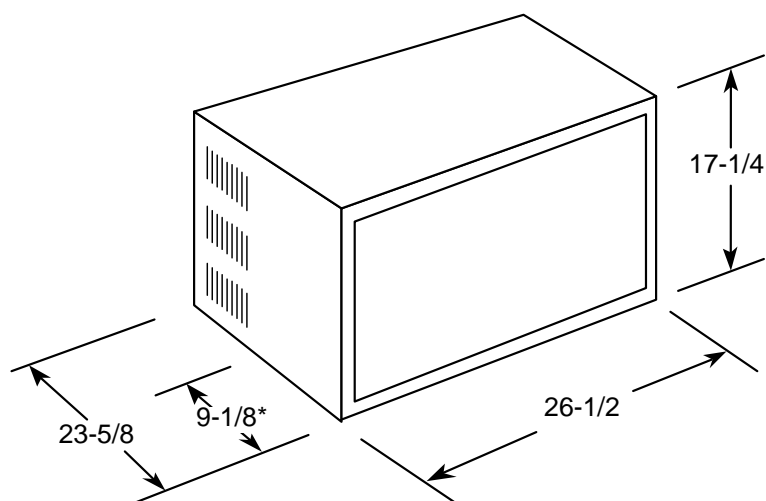

\* Distance from front of case to side louvers (excluding grille).

**Note:** When installing Slide-Out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

Perpendicular



230/208V  
20 Amp

**Wall Outlets:** All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

**Note:** Aluminum building wiring may pose special problems—consult a qualified electrician.

Specification Created 5/01

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at [GEAppliances.com](http://GEAppliances.com) or call GE Answer Center® service, 800.626.2000.



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.




Listed by  
Underwriters  
Laboratories



**GE Appliances**

## **AVE15DB - GE 230 Volt Heat/Cool Series Room Air Conditioner with Mechanical Controls**

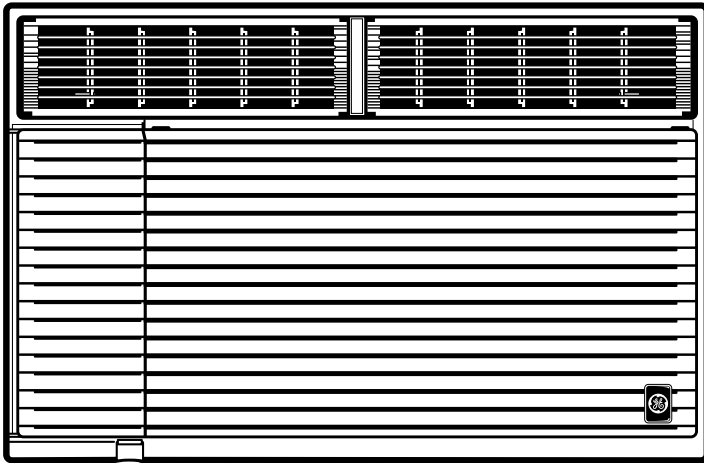

### **Features and Benefits**

- 15,000/14,500 BTUH (Cooling), 10,200/8,700 BTUH (Electric Heat)
- 9.0/9.0 E.E.R.
- Mechanical Controls with 10-Position Thermostat
- 2 Cooling / 2 Heating Fan Speeds (1 Fan Position)
- 4-Way Variable Air Discharge
- Slide-Out Chassis
- 1,545/1,495 Cooling Watts / 13.0/14.2 Cooling Amps / 15.0/13.5 Heating Watts
- 4.3 Dehumidification (pints/hr)
- 420 CFM
- Hidden Controls Provide Clean, Contemporary Appearance
- Easy Cleaning Rigid, Slide-Out Filter
- Exhaust for Air Exchange
- Plug Type - Perpendicular
- Rigid Panel Window Mounting
- Rotary Compressor
- Model AVE15DB