




C O N T R A C T

GE DISHWASHERS

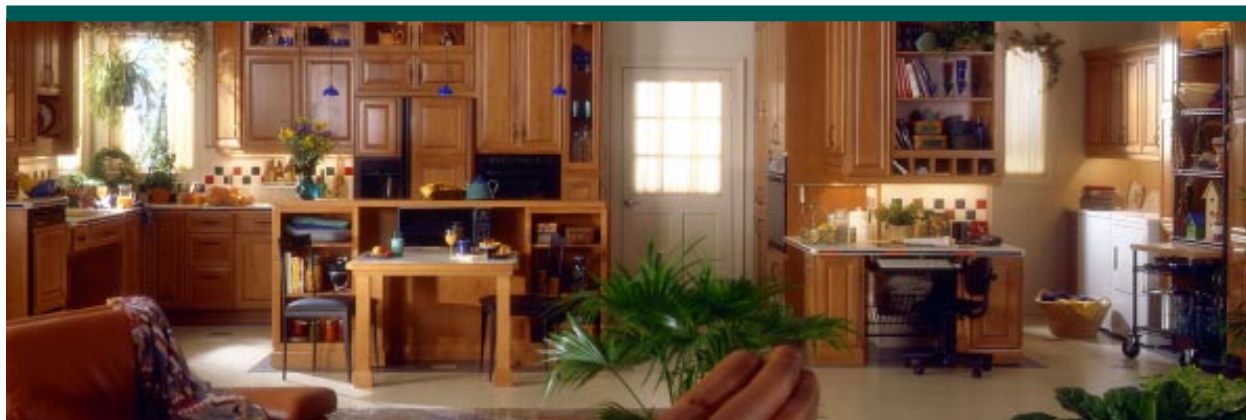

GE Appliances

Introducing the
GE Profile Performance Series™

GE Profile™

GE




Table of Contents

GE Profile Performance Series™ Dishwashers	6
GE Profile™ QuietPower Series	7
GE Built-In Dishwashers	8
GE Convertible Dishwashers	10
GE Spacemaker® Undersink Dishwashers	11
GE Spacemaker® Built-In 18" Dishwasher	11
Disposers	12
Compactors	13
Specifications and Installation Information	14 - 20

The GE Appliance Lines

Individuality is the combination of qualities that distinguish one person from all others, making each of us unique. GE Appliances honors this individuality by offering three distinctive lines: the GE Profile Performance Series™, GE Profile™, and GE. So everyone can choose the line that's right for them, from a company they've known and trusted for years.

GE Profile Performance Series™



GE Profile Performance Series™

GE Profile™



GE Profile™

GE Appliances



GE

Look for this color-coding system throughout this brochure to easily identify brand, product and features.

What smart

A GE dishwasher has the ability to blend with its surroundings—and that's a plus for builders and homeowners alike. It means you can choose the look you want: a dishwasher that's sleek and alluring in black; dazzling in white; professionally attired in stainless steel; or impeccably outfitted in custom panels to match the kitchen cabinets.

Choose the look that coordinates with the decorative theme of your kitchen, and see what a difference it makes! The design options offered by a GE dishwasher provide you with yet another way to enhance the appearance of the kitchen and make your home more distinctive.



**GSD4320ZBB shown with custom wood panels
and 1/4" wood panel trim kit GPF425B**

dishwashers are wearing



GSD4940ZSS

GE Profile Performance Series™

BOTH MODELS FEATURE:


- CleanSensor II • Electronic Controls • SureClean™ Wash System • Piranha™ Anti-Jamming Hard Food Disposer • Glasses Cycle
- China/Crystal Cycle* • 8-Hour Delay Start • Triple Filtration • SmartBasket • SmartBasket Plus • GE Profile Performance™ Quiet Package
- GE Profile™ QuietMotor • ActiveVent • Quiet Water Valve • Trimless appearance • Child lock



SureClean™ Wash System
cleans dishes completely.



Triple filtration eliminates the need to pre-rinse dishloads.



CleanSensor II adjusts water usage preventing under washing or over washing of dishes.



Glasses Cycle saves time, energy and money.

Not all features available on all models.



GE Profile Performance Series™

GSD4940ZSS

- Variable cycles/options
- Power Pre-Soak option
- Super (nylon) upper rack
- SmartShelf with StemSafe
- Super12 (nylon) lower rack with 4 rows of fold-down tines

GSD4930ZWW (not shown)

- White on white

GSD4920ZBB (not shown)

- Black on black

GSD4910ZAA (not shown)

- Almond on almond



GE Profile Performance Series™

GSD4620ZBB

- Variable cycles/options
- Super upper rack
- SmartShelf
- Super12 lower rack with 2 rows of fold-down tines

GSD4630ZWW (not shown)

- White on white

GSD4610ZAA (not shown)

- Almond on almond

*Developed in consultation with Lenox,
the leading manufacturer of fine china.



Built-In GE Profile™ QuietPower™ Series

BOTH MODELS FEATURE:

- SureClean™ Wash System • Electronic Controls • SmartShelf • Piranha™ Anti-Jamming Hard Food Disposer
- POTSCRUBBER Cycle • Hi-Temp Rinse option • Hi-Temp Wash option • Delay Start • SmartShelf
- GE Profile™ QuietMotor • Trimless appearance



SureClean™ Wash System
cleans dishes completely.



Especially for fine china and crystal (GSD4300 series only)*:



GE Profile™ QuietMotor
is quieter and more energy efficient.



Electronic Controls
provide reliability and cleanability.

Not all features available on all models.



GE Profile™

GSD4330ZWW

- 5 cycles/30 options
- China/Crystal cycle*
- Triple filtration
- Super12 racks
- SmartBasket
- SmartBasket Plus
- 8-hour Delay Start option
- QuietPower™ III package
- ActiveVent

GSD4320ZBB (not shown)

- Black on black

GSD4310ZAA (not shown)

- Almond on almond

*Developed in consultation with Lenox,
the leading manufacturer of fine china.



GE Profile™

GSD4010ZAA

- 4 cycles/26 options
- Dual filtration
- Super upper rack
- Deluxe flat lower rack
- Super silverware basket
- QuietPower™ II package
- 6-hour Delay Start option

GSD4030ZWW (not shown)

- White on white

GSD4020ZBB (not shown)

- Black on black



ALL MODELS FEATURE:

- SureClean™ Wash System • Normal Wash cycle • Short Wash cycle (on dial) • Heated Dry On/Off option
- Trimless appearance • Rinse Only/Hold (on dial)




SureClean™ Wash System
cleans dishes completely.



Dual Filtration System
eliminates the need to pre-rinse dishes.



GE Motor is quieter and more energy efficient.

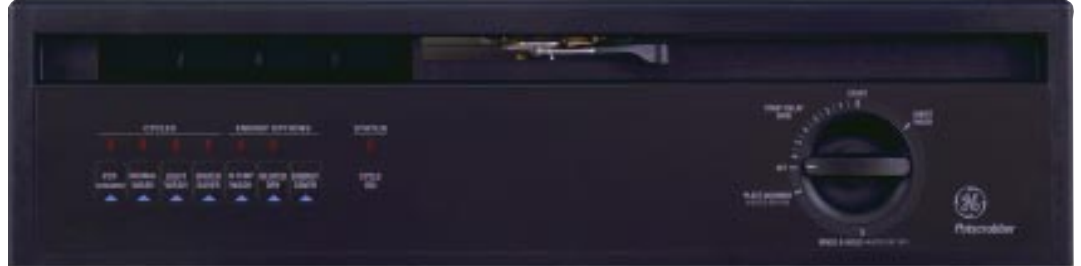

GE

GSD3820ZBB

(contract exclusive model)

- 7 cycles/23 options
- POTSCRUBBER Cycle
- Plate Warmer cycle (on dial)
- Hi-Temp Wash option
- 6-hour Delay Start option (on dial)
- Dual Filtration
- Super upper rack
- GE Motor
- Light Wash cycle
- Energy Saver
- Super silverware basket
- Rinse Aid dispenser with indicator
- QuickClean controls

GSD3830ZWW (not shown)

- White on white

GSD3810ZAA (not shown)

- Almond on almond



GE

GSD3630ZWW

(contract exclusive model)

- 6 cycles/18 options
- POTSCRUBBER Cycle
- Plate Warmer cycle (on dial)
- Hi-Temp Wash option
- Deluxe rack system
- Deluxe silverware basket
- Rinse Aid dispenser with indicator
- QuickClean controls

GSD3620ZBB (not shown)

- Black on black

GSD3610ZAA (not shown)

- Almond on almond



GSD3230ZWW (not shown)

- *White on white*

GSD3220ZBB (not shown)

- *Black on black*

GE

GSD3210ZAA

- 5 cycles/14 options
- POTSCRUBBER Cycle
- Plate Warmer cycle
- Hi-Temp Wash option
- Deluxe rack system
- Deluxe silverware basket
- Rinse Aid dispenser
- PermaTuf® Tub



GSD2220ZBB (not shown)

- *Black on black*

GSD2200ZWH (not shown)

- *White front panels/black control panel*

GSD2200ZAD (not shown)

- *Almond front panels/black control panel*

GE

GSD2230ZWW

(contract exclusive model)

- 5 cycles/8 options
- POTSCRUBBER Cycle
- Plate Warmer cycle (on dial)
- Heated Dry On/Off
- GE Motor
- Deluxe silverware basket
- Deluxe flat lower rack



GSD2020ZBB (not shown)

- *Black on black*

GSD2000ZWH (not shown)

- *White front panels/black control panel*

GSD2000ZAD (not shown)

- *Almond front panels/black control panel*

GE

GSD2030ZWW

- 4 cycles/7 options
- Heavy Wash cycle (on dial)
- Standard upper rack
- Deluxe flat lower rack
- Deluxe silverware basket
- Rinse Aid dispenser
- PermaTuf® Tub

GE Convertible

ALL MODELS FEATURE:


- SureClean™ Wash System • POTSCRUBBER Cycle • Normal Wash cycle • Short Wash cycle (on dial) • Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial) • Heated Dry On/Off option • Hi-Temp Wash option • 3 wash levels • Deluxe rack system • Trimless appearance



SureClean™ Wash System cleans dishes completely.



POTSCRUBBER Cycle



Hi-Temp Wash Option



Portable now



Built-in later



GE

GSC3430ZWW/GSC3400ZBL

- 6 cycles/19 options
- Light Wash cycle
- Dual Filtration
- 6-hour Delay Start Option (on dial)
- Piranha™ Anti-Jamming Hard Food Disposer
- GE QuietMotor
- Super Silverware Basket
- QuietPower™ I Package
- Rinse Aid Dispenser with indicator



GE

GSC3200ZBL/GSC3230ZWW

- 5 cycles/14 options
- Deluxe Silverware Basket
- Standard Quiet Package

Not all features available on all models.


GE Spacemaker® Undersink



Single sink bowl



Offset installation for use with disposer

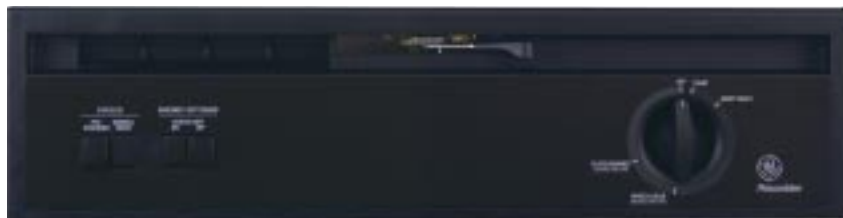


GE

GSM2100ZAD/WH

- 5 cycles/8 options
- POTSCRUBBER Cycle
- Normal Wash cycle
- Short Wash cycle (on dial)
- Plate Warmer cycle (on dial)
- Rinse Only/Hold cycle (on dial)
- 2 wash levels
- Spacemaker® upper rack
- Deluxe flat lower rack
- Deluxe silverware basket
- PermaTuf® interior

GE Spacemaker® Built-In 18" Dishwasher

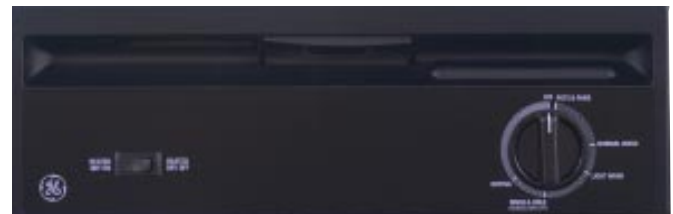

GE

GSS1800Z

- 4 cycles/6 options
- 2 wash levels
- Pots & Pans cycle
- Normal Wash cycle (on dial)
- Light Wash cycle (on dial)
- Standard silverware basket
- Heated Dry On/Off option
- Reversible color panels
Black/White/Almond

Not all features available on all models.

Disposers

ALL MODELS FEATURE:

- Dishwasher drain connector • Polyester drain housing • Stainless steel flange • Sink stopper • Manual reset protector
- Dual swivel impellers • Precutter



GFC1000Y



GFC800Y



GFC700Y/GFC705Y



GFC300Y/GFC305Y



GFC290Y/GFC295Y



GFB1050V

GE Continuous Feed Models

GFC1000Y

- Rugged 3/4-horsepower motor
- 8000 RPM grinding action
- Super Deluxe sound insulation
- Power Boost feature for heavy loads
- Fast Mount installation
- Removable splash guard

GFC800Y

- 1/2-horsepower motor
- 8000 RPM grinding action
- Deluxe sound insulation
- Fast Mount installation
- Removable splash guard

GFC700Y

- 1/2-horsepower motor
- 8000 RPM grinding action
- Sound shield
- Fast Mount installation
- Removable splash guard

GFC705Y

Similar to GFC700Y but has attached line cord.

GFC300Y

- 1/2-horsepower motor
- 8000 RPM grinding action
- Fast Mount installation
- Removable splash guard

GFC305Y

Similar to GFC300Y but has attached line cord.

GFC290Y

- 1/3-horsepower motor
- 8000 RPM grinding action
- Fast Mount installation
- Removable splash guard

GFC295Y

Similar to GFC290Y but has attached line cord.

GE Batch Feed Model

GFB1050V

- Rugged 3/4-horsepower motor
- 2700 RPM grinding action
- Super Deluxe sound insulation
- Twist Mount installation

Where local codes permit, any GE Dishwasher and any GE Disposer may be connected to a single 20-amp circuit.
White and Almond flanges are available: GPF71 (White) and GPF72 (Almond).

Compactors

ALL MODELS FEATURE:

- 1/3 horsepower • Removable key lock



GE

GCG1520ZBB

- Black on black
- Hands-free toe opening drawer
- Automatic anti-jam feature
- Bag caddy
- Rear wheels allow easy movement and installation
- Heavy-gauge steel construction



GCG1530ZWW

- White on white



GE

GCG950T

- Easy-opening drawer
- Bag storage compartment above compactor drawer
- Replaces standard 12-inch base cabinet

Optional Dishwasher Accessories

Door and Access Panels:

GE:	GE Profile Performance™ and GE Profile™:
GPF300A—Almond	GPF400A—Almond
GPF300B—Black	GPF400B—Black
GPF300W—White	GPF400W—White
	GPF400S—Stainless Steel

Side Panel for All GE Models:

Contains one panel and adjustable toe-kick for end cabinet installation of built-in model. Does not attach to dishwasher. Specify color: GPS5AD—Almond GPS5WH—White

Optional Dishwasher Accessories

- GPF47BK—Black 6" access panel kit
- GPF47WH—White 6" access panel kit
- GPF53—Brackets for under non-wood countertop installation
- GPF95—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on right; elbow and strainer included
- GPF96—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on left; elbow and strainer included
- GPF97—Stainless sink for Spacemaker® dishwasher—double bowl 21-1/4" x 33" Elbow and strainer included
- GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs.
- GPF200—Almond/Black/White side tub flange gasket kit

Wood Panel Capability

- GPF325A/B/W—GE 1/4" panel trim kit (door and access)
- GPF375—GE 3/4" trimless panel trim kit (door and access)
- GPF475—GE Profile Performance™ and GE Profile™ 3/4" trimless panel kit (door and access)
- GPF425A/B/W—GE Profile Performance™ and GE Profile™ 1/4" panel trim kit (door and access)

Disposers:

- GPF71 White sink flange and stopper for GFC290/295/300/305/700/705/800/1000Y
- GPF72 Almond sink flange and stopper for GFC290/295/300/305/700/705/800/1000Y
- GPF75 Clamp nut kit

Compactor:

- GSA85 Toe Pedal Opener Kit for GCG950
- GPF80 White/Black Panel for GCG1530
- GPF81 Black/Almond Panel for GCG1520

Built-In Dishwashers


	GE Profile Performance Series™			GE Profile™	
	GSD4940ZSS	GSD4930ZWW GSD4920ZBB GSD4910ZAA	GSD4630ZWW GSD4620ZBB GSD4610ZAA	GSD4330ZWW GSD4320ZBB GSD4310ZAA	GSD4030ZWW GSD4020ZBB GSD4010ZAA
Performance					
SureClean™ Wash System	●	●	●	●	●
Filtration System	Triple	Triple	Triple	Triple	Dual
CircuClean Pump	●	●	●	●	
Piranha™ Hard Food Disposer	●	●	●	●	●
CleanSensor II	●	●	●		
Cycles/Options	Variable	Variable	Variable	5/30	4/26
Normal Wash Cycle	●	●	●	●	●
Pots and Pans Cycle	●	●	●		
POTSCRUBBER Cycle				●	●
Light Wash Cycle				●	●
China/Crystal Cycle	●	●	●	●	
Glasses Cycle	●		●		
Rinse Only/Hold Cycle	●	●	●	●	●
Power Pre-Soak Option	●	●			●
Child Lock Option	●	●	●	●	●
Hi-Temp Rinse Option	●	●	●	●	●
Hi-Temp Wash Option				●	●
Heated Dry On/Off Option	●	●	●	●	●
Delay Start Option	8 Hour	8 Hour	8 Hour	8 Hour	6 Hour
Wash levels	3	3	3	3	3
Cycle progress indicators	LEDs	LEDs	LEDs	1 "Clean"	1 "Clean"
Touchpads	11	11	10	11	10
Rinse-Aid Dispenser	w/indicator	w/indicator	w/indicator	w/indicator	w/indicator
Quiet					
Sound insulation package	Profile Performance™	Profile Performance™	Profile Performance™	QuietPower™ III	QuietPower™ II
GE Profile™ QuietMotor	●	●	●	●	●
ActiveVent	●	●	●	●	
Quiet Water Valve	●	●	●	●	
Tub Collar Trim	●	●	●	●	●
Capacity					
Upper rack	Super (Nylon)	Super (Nylon)	Super	Super	Super
SmartShelf	w/StemSafe	w/StemSafe	●	●	●
Lower rack	Super12 w/4 Rows of Fold-Down Tines	Super12 w/4 Rows of Fold-Down Tines	Super12 w/2 Rows of Fold-Down Tines	Super12	Deluxe
Silverware basket	SmartBasket	SmartBasket	SmartBasket	SmartBasket	Super
SmartBasket Plus	●	●	●	●	
Dependability					
Control type	Electronic	Electronic	Electronic	Electronic	Electronic
1, 2, 5, 20-yr. warranty*	●	●	●	●	●
Lock	●	●	●	●	●
Door	Trimless	Trimless	Trimless	Trimless	Trimless
Color panels Access	Trimless	Trimless	Trimless	Trimless	Trimless
General Features					
Colors available**	Stainless Steel	WW,BB,AA	WW,BB,AA	WW,BB,AA	WW,BB,AA
Requires kit for 1/4" panel capability with trim	N/A	GP425A/B/W	GP425A/B/W	GP425A/B/W	GP425A/B/W
Requires kit for trimless 3/4" panel capability	N/A	GP4475	GP4475	GP4475	GP4475
Approx. shipping weight (lbs.)	81	81	81	81	81

All GE Profile Performance™ and GE Profile™ Dishwashers are equipped with the following: 120°F inlet water capability, PermaTuf® interior, Easy-Glide roller system, convection drying, 120V/60Hz/8.6A, horizontal mechanism, leveling screws.


* See written warranty for details.

** Colors available: WW = White on white, BB = Black on black, AA = Almond on almond.

Built-In Dishwasher Dimensions (in inches)

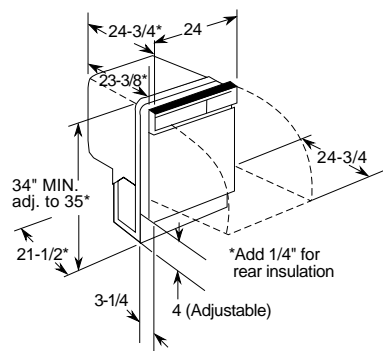


Built-In Dishwasher Installation Information (in inches)



Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Note: If a flush look is needed, a 25" base cabinet needs to be used.

Wood Insert Cut-Out Dimensions



Models/Kit	A	B	C	Panel Thickness
GE Profile Performance [®] and GE Profile [®] models/GPF425	19-3/4"	23-9/16"	3-11/16"	1/4"
GE Profile Performance [®] and GE Profile [®] models/GPF475	19-13/16"	23-5/8**	4-1/4" to 3-11/16***	3/4"

*Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel

**Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

Warranty Information*

1, 2, 5, 20-Year Warranty Package:
Full one-year warranty on entire dishwasher.
Limited second-year parts warranty on
entire dishwasher.
Limited five-year rack/electronic control
board warranty.
Full twenty-year tub/door liner warranty.

*See written warranty for details.

Listed by
Underwriters
Laboratories

Electrical Rating

Voltage AC.....	120
Hertz.....	60
Total connected load amperage.....	8.6
Calrod® heater watts.....	500

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Built-In Dishwashers

	GE				
	GSD3830ZWW GSD3820ZBB GSD3810ZAA	GSD3630ZWW GSD3620ZBB GSD3610ZAA	GSD3230ZWW GSD3220ZBB GSD3210ZAA	GSD2230ZWW GSD2220ZBB GSD2200ZAD/WH	GSD2030ZWW GSD2020ZBB GSD2000ZAD/WH
Performance					
SureClean™ Wash System	●	●	●	●	●
Filtration System	Dual				
Cycles/Options	7/23	6/18	5/14	5/8	4/7
POTSCRUBBER Cycle	●	●	●	●	
Normal Wash Cycle	●	●	●	●	Dial
Heavy Wash Cycle					Dial
Light Wash Cycle	●				
Water Saver Cycle	●	●			
Short Wash Cycle	Dial	Dial	Dial	Dial	Dial
Rinse Only/Hold Cycle	Dial	Dial	Dial	Dial	Dial
Plate Warmer Cycle	Dial	Dial	Dial	Dial	
Hi-Temp Wash Option	●	●	●		
Delay Start Option	6 Hour				
Heated Dry On/Off Option	●	●	●	●	Rocker
Energy Saver Option	●	●			
Wash levels	3	3	3	2	2
Touchpads/Pushbuttons	7 Pushbuttons	6 Touchpads	6 Pushbuttons	4 Pushbuttons	
Indicator lights	7	5			
Rinse-Aid Dispenser	w/Indicator	w/Indicator	●	●	●
Quiet					
Sound Insulation package	Deluxe	Deluxe	Standard	Standard	Standard
GE Motor	●	●	●	●	●
Capacity					
Upper Rack system	Super	Deluxe	Deluxe	Standard	Standard
Lower Rack system	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
Silverware basket	Super	Deluxe	Deluxe	Deluxe	Deluxe
Dependability					
Control type	Turn-to-start	Turn-to-start	Turn-to-start	Turn-to-start	Turn-to-start
1, 2, 10-yr. warranty*	●	●	●	●	
1, 10-yr. warranty*					●
Door	Trimless	Trimless	Trimless	Trimless	Trimless
Color Panels	Trimless	Trimless	Trimless	Trimless	Trimless
General Features					
Colors available**	WW,BB,AA	WW,BB,AA	WW,BB,AA	WW,BB,WH, AD	WW,BB,WH, AD
Requires kit for 1/4" panel capability with trim	GPF325W/B/A	GPF325W/B/A	GPF325W/B/A	GPF325W/B/A	GPF325W/B/A
Requires kit for trimless 3/4" panel capability	GPF375	GPF375	GPF375	GPF375	GPF375
Approx. shipping weight (lbs.)	81	81	81	81	81

All GE Dishwashers are equipped with the following: 120°F inlet water capability, PermaTuf™ interior, Easy-Glide roller system, convection drying, 120V/60Hz/8.6A, horizontal mechanism, leveling screws.

* See written warranty for details.

** Colors available: WW = White on white BB = Back on black AA = Almond on almond
WH = White body w/black control panel AD = Almond body w/black control panel

Warranty Information*

1, 2, 10-Year Warranty Package:
Full one-year warranty on entire dishwasher.
Limited second-year water distribution parts warranty.
Full ten-year tub/door liner warranty.

1-10 Year Warranty Package:
Full one-year warranty on entire dishwasher.
Full ten-year tub/door liner warranty.

*See written warranty for details.




Listed by
Underwriters
Laboratories


Electrical Rating

Voltage AC120
Hertz60
Total connected load amperage8.6
Calrod® heater watts500
For use on adequately wired 120-volt,
15-amp circuit having 2-wire service with a
separate ground wire. This appliance must
be grounded for safe operation.

Built-In Dishwasher Dimensions (in inches)

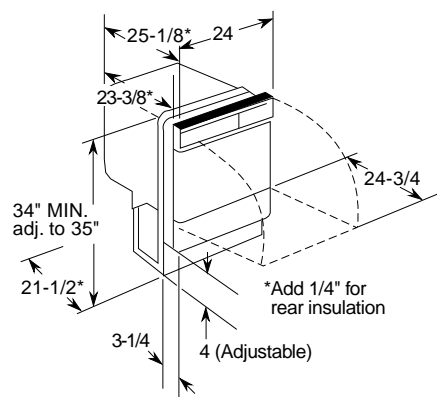


Installation Information (in inches)

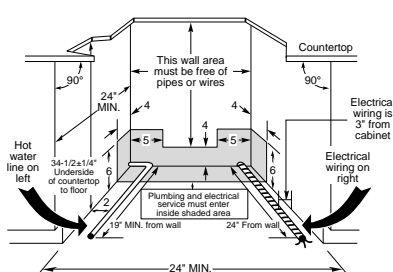

Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage.
All plumbing and electrical work must be in accordance with local codes.

Wood Insert Cut-Out Dimensions



Models/Kit	A	B	C	Panel Thickness
GE Models				
GPF325 Kit	18-7/8"	23-9/16"	3-11/16"	1/4"
GPF375 Kit	18-15/16"	23-5/8"	4-1/4" to 3-3/4"***	3/4"

*Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel.

**Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

GE Convertible/Portable Dishwashers

	GE	
	GSC3430ZWW GSC3400ZBL	GSC3230ZWW GSC3200ZBL
Performance		
SureClean™ Wash System	•	•
Filtration System	Dual	
Piranha™ Hard Food Disposer	•	
Cycles/Options	6/19	5/14
POTSCRUBBER Cycle	•	•
Normal Wash Cycle	•	•
Short Wash Cycle	Dial	Dial
Light Wash Cycle	•	
Rinse Only/Hold Cycle	Dial	Dial
Plate Warmer Cycle	Dial	Dial
Hi-Temp Wash Option	•	•
Delay Start Option	6 Hour	
Heated Dry On/Off Option	•	•
Wash levels	3	3
Cycle Progress Indicators	1 "Cycle On"	
Pushbuttons	7	6
Rinse Aid Dispenser	w/indicator	•
Quiet		
Sound insulation package	QuietPower™ I	Standard
GE QuietMotor	•	
Sealed toe kick	•	
Capacity		
Upper	Deluxe	Deluxe
Rack system Lower	Deluxe	Deluxe
Silverware Basket	Super	Deluxe
Dependability		
Door	Trimless	Trimless
Color panels Access	Trimless	Trimless
1, 2, 10 Warranty†	•	•
General Features		
Colors available*	WW,BL	WW,BL
Approx. shipping wt (lbs.)	147	147


†See written warranty for details.

*Colors available: WW = White on white BL = Black control panel and front panels w/almond side panels.

Dimensions (in inches)


GSC3230ZWW, GSC3200ZBL, GSC3430ZWW and GSC3400ZBL

Portable

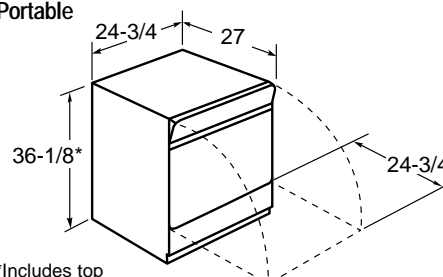

*Includes top and wheels

Built-In

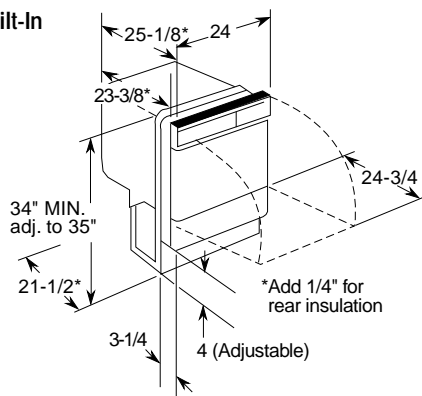

Conversion Kit to Build-In Convertible Dishwashers WD35M34 for Models GSC3430ZWW, GSC3400ZBL, GSC3230ZWW and GSC3200ZBL. Contains built-in dishwasher water valve, hardware and complete instructions for adapting a GE convertible dishwasher for under-the-counter installation.


GE Spacemaker® Built-In 18" Dishwasher

	GE
	GSS1800Z
Performance	
Cycles/Options	4/6
Pots & Pans Cycle	Dial
Normal Wash Cycle	Dial
Light Wash Cycle	Dial
Rinse Only/Hold Cycle	Dial
Heated Dry On/Off Option	Rocker
Wash levels	2
Cycle/Progress Indicators	Dial
120°F. Inlet Water Capability	●
Rinse Aid Dispenser	●
Quiet	
Sound Insulation	Standard
Capacity	
Upper	Standard
Rack system Lower	Standard
Silverware basket	Standard
Dependability	
Control Type	Turn-to-Start
Polypropylene Inner Door	●
1, 10-yr. warranty†	●
General Features	
Colors available*	Black/Almond/White
Amperage Rating (120V/60Hz)	10
Horiz. Mechanism	●
Leveling Screws	●
Approx. shipping weight (lbs.)	77

†See written warranty for details. *All have black control panel

Note: For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order Pub. No. 5-A007.

Dimensions (in inches)

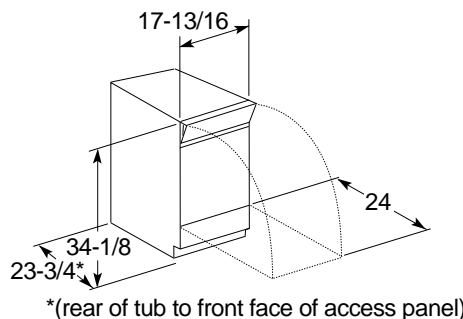

Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with the installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

Figure 1


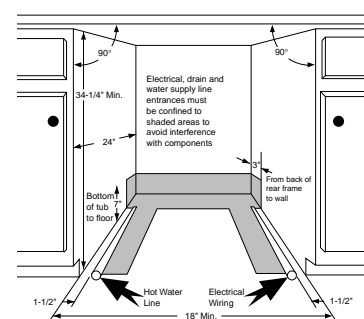


Figure 2




GE Spacemaker® Undersink Dishwasher

GE	
GSM2100ZAD/WH	
Performance	
SureClean™ Wash System	●
Cycles/Options	5/8
POTSCRUBBER Cycle	●
Normal Wash Cycle	●
Short Wash Cycle	Dial
Plate Warmer Cycle	Dial
Rinse Only/Hold Cycle	Dial
Heated Dry On/Off Option	●
Wash levels	2
Pushbuttons	4
Rinse-Aid Dispenser	●
Quiet	
GE Motor	●
Capacity	
Upper	Spacemaker*
Rack system Lower	Deluxe
Silverware basket	Deluxe
Dependability	
Control Type	Turn-to-Start
1, 2, 10-yr. warranty†	●
Door	Trimless
Color Panels Access	Trimless
General Features	
Colors available*	AD, WH
Approx. shipping weight (lbs.)	72

†See written warranty for details.


*Colors available: AD = Black control panel with almond front panels.
WH = Black control panel with white front panels.

Cabinet Cut-Out for Sink



Cabinet cutouts for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom and back must be provided by installer at time of installation.

Cabinet cut-outs for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.



Inserts must not exceed 1/4" thickness within 5/16" of edge around full circumference.

Undersink Dishwasher Wood Insert Dimensions (in inches)

Inserts must not exceed 1/4" thickness within 5/16" of edge around full circumference. Order GPF325 kit.

Stainless Steel Sinks Single and Double Compartment Models (Dimensions in Inches)

Model Number	Overall Size		Inside Each Compartment			
	L	W	L	W	D	
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8	
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8	
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8	

Model Number	Cutout In Countertop 1-1/2" Radius Corners		No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2


Note: Drain opening size is 3-1/2".

Above models are fully sound deadened.

*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.

Plumbing/Electrical Rough-In

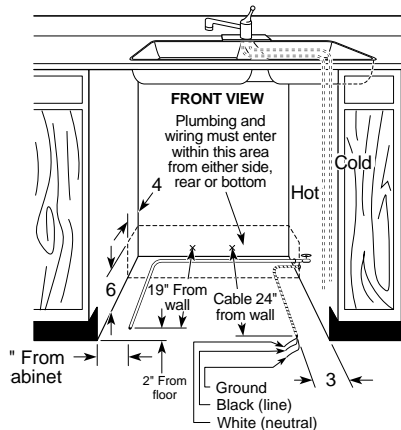


Plumbing: Hot Water Only: Use 3/8" O.D. copper tubing or 1/2" O.D. plastic tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 8.6. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.


Specifications: Inlet Water Temperature Recommended: Minimum 120°F. at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

Cabinet Rough-In

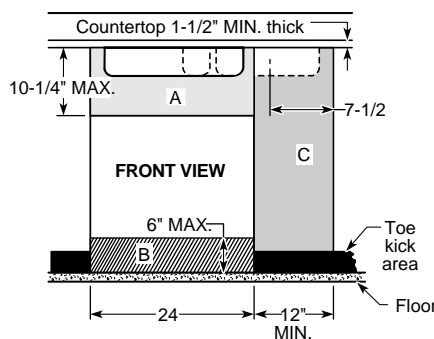


Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Rough-In for Installation with Disposer

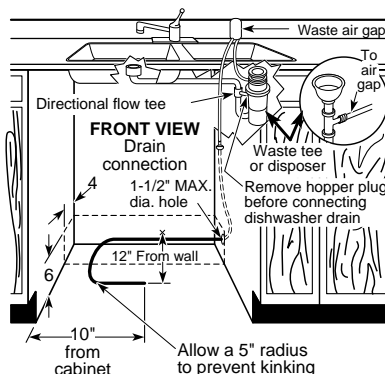

A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. If using copper tubing, 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

Rear View Plumbing Arrangement

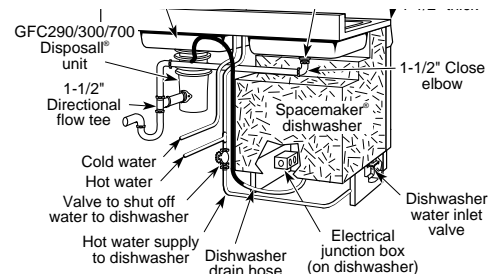


See page 124 for warranty information.

Disposall® Food Waste Disposers

	GE								
	Continuous Feed Models								Batch Feed Model
	GFC1000Y	GFC800Y	GFC705Y	GFC700Y	GFC305Y	GFC300Y	GFC295Y	GFC290Y	GFB1050V
Dependability									
Sound insulation wrapper	Super Deluxe	Deluxe	Standard	Standard	—	—	—	—	Super Deluxe
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Stopper
Power connection	Direct Wire	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Direct Wire
Motor horsepower	3/4	1/2	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Power Boost	●								
Grinding speed (RPM's)	8000	8000	8000	8000	8000	8000	8000	8000	2700
Volts	115	115	115	115	115	115	115	115	115
Hertz	60	60	60	60	60	60	60	60	60
Amperage	6.0	4.5	4.5	4.5	4.2	4.2	4.2	4.2	6.0
Easy Installation									
Mounting type	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Twist Top
Splash guard	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Non-Removable
Dishwasher drain connector	●	●	●	●	●	●	●	●	●
Plastic drain elbow	●	●	●	●	●	●	●	●	●
Polyester drain housing	●	●	●	●	●	●	●	●	●
Stainless steel sink flange	●	●	●	●	●	●	●	●	●
Sink stopper	●	●	●	●	●	●	●	●	●
Manual reset overload protector	●	●	●	●	●	●	●	●	●
Permanently lubricated bearing	●	●	●	●	●	●	●	●	●
Dual swivel impellers	●	●	●	●	●	●	●	●	●
Jam resistant	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●
Hopper	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Nylon
Hopper liner and grinding ring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Turntable	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Precutler	●	●	●	●	●	●	●	●	●
Performance									
Approx. shipping weight (lbs.)	12.5	10.0	9.8	9.8	8.4	8.4	8.4	8.4	14.0
Net weight (lbs.)	11	8.8	8.6	8.6	7.6	7.6	7.6	7.6	12.5
Dimensions									
(A)	14-5/8								16-9/16
(B)	6-1/4								5-1/2
(C)	3-1/4								6-1/2
(D)	8-1/4								9-5/16
(E)	8-1/8								8-5/8
Dishwasher inlet diameter (in.)	7/8								1
Drain outlet diameter (in.)	1-1/2								


Disposers



Compactors

	GE	
	GCG1530ZWW/GCG1520ZBB	GCG950T
Performance		
Cycle time	27 seconds max., 14 seconds min.	70 seconds max., 12 seconds min.
Motor horsepower	1/3	1/3
Compression ratio (average)	75% reduction of volume	75% reduction of volume
Ram force (lb.) (max.)	2,300	5,000
Voltage	120V; 60Hz 6.5A	120V; 60Hz 5.0A
Circuit requirement	120V; 15 Amp Grounded Outlet	120V; 15 Amp Grounded Outlet
General Features		
Bag storage	—	Yes
Custom panel size	14-5/8" wide, 22-15/16" high, 1/4" thick	11-11/16" wide, 20-7/8" high, 1/4" thick
Clearance for drop down drawer side	6" or more on right side	—
Drawer extension for removal	23" or more in front of appliance	22" or more
Container volume	1.41 cu. ft.	1.4 cu. ft.
Total appliance weight	146 Pounds	134 Pounds

GCG1530ZWW,
GCG1520ZBB,GCG950T
Convertible Compactors

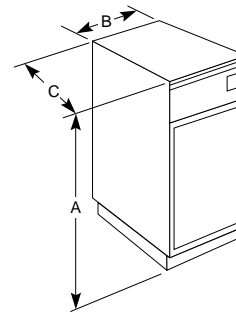

Door Panels Included:

GCG1530Z White/Black
GCG1520Z Black/White
GCG950T Black/Almond

Compactor Dimensions (in inches)

Model	A	B	C
GCG1530ZWW	34-1/4	15	24-1/4
GCG1520ZBB	34-1/4	15	24-1/4
GCG950T	34-1/2	12	20-1/4

#1

and getting better.

Even after 40 years of leadership in supporting our builder and remodeler customers, we've just begun.

A dynamic new GE is emerging:

A company for whom "good enough" is never good enough.

A company constantly renewing itself with fresh ideas.

A company eagerly anticipating the opportunities that lie ahead, as we approach a new millennium.

Join us—and share in the good things yet to come.



For more information on GE appliances, call the
GE Answer Center® 800.626.2000,
toll-free, 24 hours a day, seven days a week.



We bring good things to life.

General Electric Company
Louisville, Kentucky 40225
www.ge.com/appliances

Pub. No. 5-S077
PG7750