



GE Appliances

GSD2000GWW/CC/BB—GE Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)



Rough-In Installation Information (in inches)

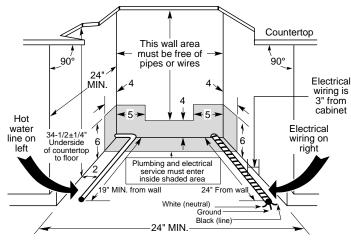


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Electrical Rating

| Voltage AC1 | 20 |
|---|-----|
| Hertz | |
| Total connected load amperage | 3.2 |
| Calrod® heater watts5 | 00 |
| For use on adequately wired 120-volt, 15-amp | ı |
| circuit having 2-wire service with a separate | |
| ground wire. This appliance must be grounded | ł |
| for safe operation. | |

Wood Insert Cut-Out Dimensions (in inches)

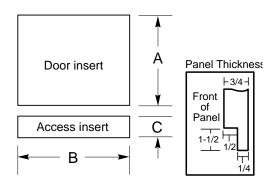

| | | | | Panel | |
|-------------|-----------|----------|-----------|-----------|--|
| Models/Kits | Α | В | С | Thickness | |
| GE Models | | | | | |
| GPF325 Kit | 18-7/8" | 23-9/16" | 3-11/16" | 1/4" | |
| | | | 4-1/4" to | | |
| GPF375 Kit | 18-15/16" | 23-5/8"* | 3-3/4"** | 3/4" | |
| • | | | | | |

^{*}Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel

For answers to your Monogram,® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.




^{**}Adjustment required to match adjcent cabinets fronts due to leveling leg adjustment, 4" nominal.





GSD2000GWW/CC/BB—GE Built-In Dishwasher

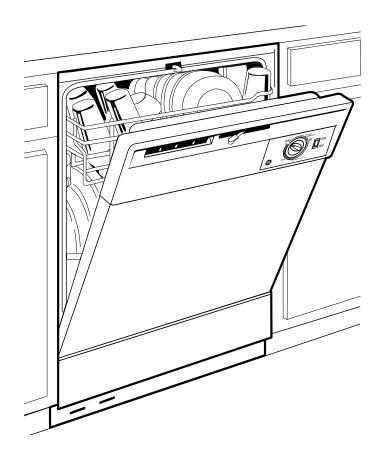

Features and Benefits

- Standard Wash System with Two Wash Levels
- Food Disposer
- Turn-to-Start Controls
- 4 Cycle Selections: Heavy Wash, Normal Wash, Short Wash, and Rinse Only
- 9 Options: Heated Dry and HotStart™
- Standard Upper Rack
- Deluxe Lower Rack
- Deluxe Silverware Basket
- Rinse Aid Dispenser
- QuietPower[™] Motor
- Standard Sound Insulation Package
- Trimless Appearance
- Model GSD2000GWW White on white
- Model GSD2000GCC Bisque on bisque
- Model GSD2000GAA Almond on almond
- Model GSD2000GBB Black on black
- Model GSD2001GWW Has power code attached