

DISHWASHERS

Introducing The GE Triton™ Dishwasher



“The cleanest wash you never heard.”™



We bring good things to life.

ONLY GE HAS 3 WASH ARMS FOR CLEANER DISHES.




NO PRE-RINSING, SOAKING OR SCRUBBING!

Only GE has three wash arms for improved coverage. Every spot on every dish receives a powerful spray. Eliminate recirculating food particles with 100% Triple Water Filtration and Dual Pumps. Food particles are pulverized by the Piranha™ Hard Food Disposer.

“The cleanest wash you

YOU WANT CLEAN AND QUIET?



GE TRITON™ DISHWASHERS DELIVER BOTH!

Now, you don't have to choose between clean and quiet, because the GE Triton™ Dishwasher delivers both! Thanks to GE's advanced technology and TriClean™ design, you get more than clean, you get a quiet kind of clean. By redirecting the spray jets, more water hits the dishes and less hits the tub and door, keeping more of the noise inside the dishwasher. Combined with the ActiveVent™, PermaTuf® Tub and a blanket of insulation, this dishwasher is quieter than ever—so quiet, you will be talking about it, not over it.

ou never heard.”™

SANIWASH. IT MORE THAN CLEANS—IT SANITIZES.



GE Triton™ with SaniWash, an NSF-certified sanitization cycle, reduces 99.999% of the bacteria found on dishes. It's ideal for sanitizing baby bottles and cutting boards, as well as glasses and dishes.

SPEEDWASH™ AND SPEED DRY™. CLEAN DISHES 30 MINUTES FASTER!



When dinner's almost ready and the dishes are still dirty, use GE Triton Speed cycles. SpeedWash™ and Speed Dry™ cycles cut a full half-hour off GE's standard normal cycles. Thirty minutes can make a big difference when everyone's hungry and you're in a hurry.

GE TRITON™ DISHWASHERS

BOTH MODELS INCLUDE • TriClean™ Wash System • 3 Wash Arms • 100% Triple Water Filtration with Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • CleanSensor • Electronic Controls • SaniWash • SpeedWash™ and Speed Dry™ • China/Crystal Cycle* • 8-Hour Delay Start • QuietPower III Package • GE Profile™ QuietMotor • ActiveVent • Quiet Water Valve • Trimless appearance • Child lock • Super Capacity Plus Silverware Basket



ONLY GE HAS IT!

TriClean™ Wash System has 3 Wash Arms that provide complete coverage eliminating pre-rinsing, soaking and scrubbing.




ONLY GE HAS IT!

100% Triple Water Filtration with Dual Pumps eliminates recirculating food particles.



ONLY GE HAS IT!

Piranha™ Anti-Jamming Hard Food Disposer grinds and pulverizes food particles.



SaniWash cycle reduces 99.999% of the bacteria found on dishes.



GE Profile Performance Series™ GSD5940DSS

- TriClean™ Wash System • 100% Triple Water Filtration and Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • Variable cycles/options • Power Pre-Soak option
- SaniWash Cycle • SpeedWash™ and Speed Dry™ • QuietPower™ III • Super upper rack with 2 rows of fold down tines • SmartShelf with StemSafe • Super lower rack with 4 rows of fold-down tines • Stainless steel exterior

GSD5950DCC (not shown)

- Bisque

GSD5930DWW (not shown)

- White on white

GSD5920DBB (not shown)

- Black on black

GSD5910DAA (not shown)

- Almond on almond



GE Profile Performance Series™ GSD5630DWW

- Variable cycles/options • SaniWash cycle
- SpeedWash™ and Speed Dry™
- QuietPower™ III • Super upper rack
- SmartShelf • Super lower rack with 2 rows of fold-down tines • Super Capacity Plus Silverware Basket • White on white

GSD5650DCC (not shown)

- Bisque

GSD5620DBB (not shown)

- Black on black

GSD5610DAA (not shown)

- Almond on almond



*Developed in consultation with Lenox,® the leading manufacturer of fine china.

GE TRITON™ DISHWASHERS

BOTH MODELS INCLUDE • TriClean™ Wash System • 3 Wash Arms • 100% Triple Water Filtration with Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • Electronic Controls • Pots & Pans Cycle • China/Crystal Cycle* • Hi-Temp Rinse option • Hi-Temp Wash option • Delay Start • SmartShelf • Super Capacity Silverware Basket • GE Profile™ QuietMotor • Trimless appearance

ONLY GE HAS IT!



TriClean™ Wash System has 3 Wash Arms that provide complete coverage eliminating pre-rinsing, soaking and scrubbing.

ONLY GE HAS IT!



100% Triple Water Filtration with Dual Pumps eliminates recirculating food particles.

ONLY GE HAS IT!



Piranha™ Anti-Jamming Hard Food Disposer grinds and pulverizes food particles.

ONLY GE HAS IT!



GE Profile™ QuietMotor is quieter and more energy efficient.

*Developed in consultation with Lenox,® the leading manufacturer of fine china.

Not all features available on all models.



GE Profile™

GSD5330DWW

• 5 cycles/34 options • TriClean™ Wash System • 100% Triple Water Filtration and Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • Electronic Controls • Super racks • 8-hour Delay Start option • QuietPower™ III package • ActiveVent • Super Capacity Silverware Basket with 2 cell covers • White on white

GSD5350DCC (not shown)

• Bisque

GSD5320DBB (not shown)

• Black on black

GSD5310DAA (not shown)

• Almond on almond



GE Profile™

GSD5130DWW

• 4 cycles/26 options • TriClean™ Wash System • 100% Triple Water Filtration and Dual Pumps • Piranha™ Anti-Jamming Hard Food Disposer • Electronic Controls • China/Crystal cycle* • Super upper rack • Deluxe lower rack • QuietPower™ II package • 8-hour Delay Start option • Super Capacity Silverware Basket with 1 cell cover • White on white

GSD5120DBB (not shown)

• Black in black

GSD5110DAA (not shown)

• Almond on almond



GE BUILT-IN

ALL MODELS INCLUDE • SureClean™ Wash System • Normal Wash cycle • Short Wash cycle (on dial)
• Heated Dry On/Off option • Trimless appearance • Rinse Only/Hold (on dial)

ONLY GE HAS IT!



SureClean™ Wash System cleans dishes completely.

ONLY GE HAS IT!



Piranha™ Anti-Jamming Hard Food Disposer grinds and pulverizes food particles.



Dual Filtration System eliminates the need to pre-rinse dishes.



PermaTuf® Tub won't chip, peel, crack or rust under normal use and is backed by a full lifetime warranty*.



GSD3430ZWW (not shown)
• White on white

GSD3410ZAA (not shown)
• Almond on almond



GSD33330CWW (not shown)
• White on white

GSD3310CAA (not shown)
• Almond on almond



GSD2130CWW (not shown)
• White on white

GSD2110CAA (not shown)
• Almond on almond



GSD2020ZBB (not shown)
• Black on black

GSD2000ZWH (not shown)
• White front panels/
black control panel

GSD2000ZAD (not shown)
• Almond front panels/
black control panel



GE

GSD3420ZBB

- 6 cycles/19 options
- Piranha™ Anti-Jamming Hard Food Disposer
- POTSCRUBBER Cycle
- QuietPower™ I Package
- Hi-Temp Wash option
- 6-hour Delay Start option (on dial) • Dual Filtration
- Deluxe rack system
- Light Wash cycle • Deluxe silverware basket • Rinse Aid dispenser with indicator

GE

GSD3320CBB

- 5 cycles/15 options
- POTSCRUBBER Cycle
- 3 level wash • Hi-Temp Wash option • Deluxe rack system
- Deluxe silverware basket
- Delay Start

GE

GSD2120CBB

- 5 cycles/14 options
- POTSCRUBBER Cycle
- Plate Warmer cycle (on dial)
- Hi-Temp Wash option
- Deluxe lower rack
- Deluxe silverware basket
- Rinse Aid dispenser
- PermaTuf® Tub

GE

GSD2030ZWW

- 4 cycles/7 options
- Heavy Wash cycle (on dial) • Standard upper rack
- Deluxe lower rack
- Deluxe silverware basket
- Rinse Aid dispenser
- PermaTuf® Tub

GE

GSD1920CBB

- 3 cycles/9 options
- Plate Warmer cycle (on dial) • Hi-Temp Wash Option • Heated Dry On/Off • Deluxe silverware basket • Deluxe lower rack

*See written warranty for details.
Not all features available on all models.

GE CONVERTIBLE

ALL MODELS INCLUDE • SureClean™ Wash System • POTSCRUBBER Cycle • Normal Wash cycle • Short Wash cycle (on dial)
• Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial) • Heated Dry On/Off option • Hi-Temp Wash option
• 3 wash levels • Deluxe rack system • Trimless appearance



ONLY GE HAS IT!

SureClean™ Wash System
cleans dishes completely.



ONLY GE HAS IT!

Piranha™ Anti-Jamming Hard
Food Disposer pulverizes food
particles. (GSC3400 Series only)



PORTABLE NOW



BUILT-IN LATER



POTSCRUBBER Cycle



GE

GSC3430ZWW/GSC3400ZBL

• 6 cycles/19 options • 3 wash levels • Light Wash cycle • Dual Filtration • 6-hour Delay Start Option (on dial) • Piranha™ Anti-Jamming Hard Food Disposer • GE QuietMotor
• Deluxe silverware basket with 1 cell cover • QuietPower™ I Package • Rinse Aid dispenser with indicator



Hi-Temp Wash Option



GE

GSC3200ZBL/GSC3230ZWW

• 5 cycles/14 options • Deluxe silverware basket • Standard Quiet Package
• Rinse Aid dispenser

GE SPACEMAKER®: UNDERSINK



SINGLE SINK BOWL



OFFSET INSTALLATION FOR USE WITH DISPOSER



GE
GSM2100ZAD/WH
• 5 cycles/8 options • POTSCRUBBER Cycle • Normal Wash cycle • Short Wash cycle (on dial) • Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial)
• 2 wash levels • Spacemaker® upper rack • Deluxe lower rack • Deluxe silverware basket • PermaTuf® Tub

Note: Undersink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

GE SPACEMAKER®: 18" BUILT-IN



GE
GSS1800Z
• 4 cycles/6 options • 2 wash levels • Pots & Pans cycle • Normal Wash cycle (on dial) • Light Wash cycle (on dial) • Standard silverware basket • Heated Dry On/Off option • Reversible color panels Black/Harvest, Almond/White

DISPOSERS

ALL MODELS INCLUDE • Dishwasher drain connector • Polyester drain housing • Stainless steel flange • Sink stopper • Manual reset protector • Dual swivel impellers • Precutter



GFC1000Y



GFC800Y



GFC700Y/GFC705Y



GFC300Y/GFC305Y



GFC290Y/GFC295Y



GFB1050V

GE Continuous Feed Models

GFC1000Y

- Rugged 3/4-horsepower motor • 8000 RPM grinding action
- Super Deluxe sound insulation • Power Boost feature for heavy loads • Fast Mount installation • Removable splash guard

GFC800Y

- 1/2-horsepower motor • 8000 RPM grinding action
- Deluxe sound insulation • Fast Mount installation
- Removable splash guard

GFC700Y

- 1/2-horsepower motor • 8000 RPM grinding action • Standard sound insulation • Fast Mount installation • Removable splash guard

GFC705Y

Similar to GFC700Y but has attached line cord.

GFC300Y

- 1/2-horsepower motor • 8000 RPM grinding action
- Fast Mount installation • Removable splash guard

GFC305Y

Similar to GFC300Y but has attached line cord.

GFC290Y

- 1/3-horsepower motor • 8000 RPM grinding action
- Fast Mount installation • Removable splash guard

GFC295Y

Similar to GFC290Y but has attached line cord.

GE Batch Feed Model

GFB1050V

- Rugged 3/4-horsepower motor • 2700 RPM grinding action
- Super Deluxe sound insulation • Twist Mount installation

Where local codes permit, any GE Dishwasher and any GE Disposer may be connected to a single 20-amp circuit.

White and Almond flanges are available: GPF71 (White) and GPF72 (Almond).

COMPACTORS

ALL MODELS INCLUDE • 1/3-horsepower • Removable key lock



GE

GCG1530ZWW

- White on white • Optional toe pedal opener kit • Rear wheels allow easy movement and installation • Heavy-gauge steel construction

GCG1520ZBB

- Black on black

GCG1550DCC (not shown)

- Bisque



GE


GCG950T

- Lock/start control with removable key • Bag storage compartment above compactor drawer
- Replaces standard 12-inch base cabinet

Not all features available on all models

DISHWASHER ACCESSORIES

GPF425C/W/B/A—GE Profile Performance™ and GE Profile™
1/4" panel trim kit (door and access)

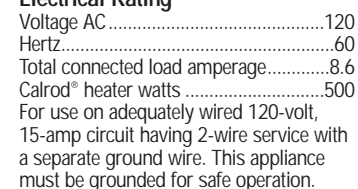

Note: If a flush look is needed, a 25" base cabinet needs to be used.


BUILT-IN DISHWASHERS

	GE				
	GSD3430ZWW GSD3420ZBB GSD3410ZAA	GSD3330CWW GSD3320CBB GSD3310CAA	GSD2130CWW GSD2120CBB GSD2110CAA	GSD2030ZWW GSD2020ZBB GSD2000ZAD/WH	GSD1920CBB
Features					
Wash System					
SureClean™ Wash System	●	●	●	●	●
Wash levels	3	3	2	2	2
Filtration System	Dual	Dual			
Piranha™ Hard Food Disposer	●				
Cycles	6	5	5	4	3
POTSCRUBBER	●	●	●		
Heavy Wash				Dial	Dial
Normal Wash	●	●	●	Dial	Dial
Light Wash	●				
Short Wash	Dial	Dial	Dial	Dial	
Plate Warmer	Dial	Dial	Dial		
Rinse Only/Hold	Dial	Dial	Dial	Dial	Dial
Options	19	15	14	7	9
Delay Start	1-6-Hour	1-6-Hour			
Heated Dry On/Off	●	●	Rocker	Rocker	Rocker
Hi-Temp Wash	●	●	●		●
Racks, shelf & basket					
Upper Rack	Deluxe	Deluxe	Standard	Standard	Standard
Lower Rack	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
Silverware basket	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
Control type	Turn-to-Start	Turn-to-Start	Turn-To-Start	Turn-To-Start	Turn-To-Start
Cycle progress indicator	"Cycle On"	"Cycle On"	Dial	Dial	Dial
Pushbuttons	7	6	4		2
Rinse Aid dispenser	with Indicator	●	●	●	●
1, 2, 10-yr. warranty	●	●	●		
1, 10-yr. warranty				●	●
Economical/Quiet					
Quiet					
Sound Insulation Package	QuietPower™	Standard	Standard	Standard	Standard
PermaTuf™ tub and door liner	●	●	●	●	●
GE Motor	QuietMotor	●	●	●	●
Appearance					
Colors available*	WW, BB, AA	WW, BB, AA	WW, BB, AA	WW, BB, WH, AD	BB
Color Panels—Door & Access	Trimless	Trimless	Trimless	Trimless	Trimless
Weights & Dimensions					
Approx. shipping weight (lbs.)	100	100	100	100	100
Height w/legs retracted (in.)	34	34	34	34	34
Overall width (in.)	24	24	24	24	24
Overall depth (in.)	25-1/8	25-1/8	25-1/8	25-1/8	25-1/8
Accessories					
Requires kit for 1/4" panel capability with trim	GPF325W/B/A	GPF325W/B/A	GPF325W/B/A	GPF325W/B/A	GPF325B
Requires kit for trimless 3/4" panel capability	GPF375	GPF375	GPF375	GPF375	GPF375

All GE Dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

*Colors available: WW = White on white, BB = Back on black, AA = Almond on almond, WH = White body w/black control panel, AD = Almond body w/black control panel


Built-In Dishwasher Dimensions (in inches)

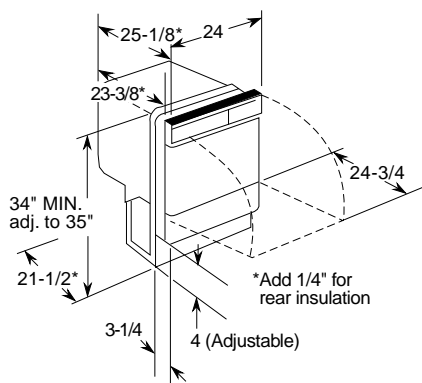

Electrical Rating

Voltage AC120
Hertz60
Total connected load amperage8.6
Calrod® heater watts500
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Installation Information (in inches)

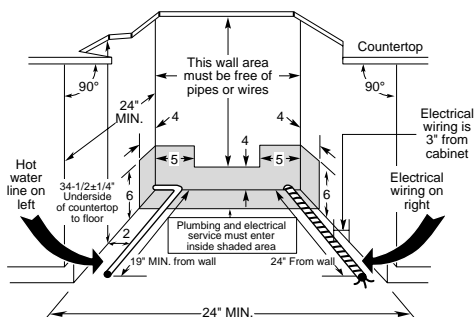

Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Note: If a flush look is needed, a 25" base cabinet needs to be used.



Listed by
Underwriters
Laboratories

DISHWASHER ACCESSORIES

Dishwasher Panel Kits and Accessories:

GE models: GSD3400, 3300, 2100, 2000 and 1920 Series.

GPF300W/B/A—panel kit

GPF500W/B/A—trimless door panel

Note: W = White, B = Black, A = Almond, .

Side Panel for All GE Models:

Contains one panel and adjustable toe-kick for end cabinet installation of built-in model.

Does not attach to dishwasher.

Specify color: GPF5AD—Almond GPF5WH—White

Optional Dishwasher Accessories:

GPF53—Brackets for under non-wood countertop installation

GPF95—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on right; elbow and strainer included

GPF96—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on left; elbow and strainer included

GPF97—Stainless sink for Spacemaker® dishwasher—double bowl 21-1/4" x 33" Elbow and strainer included

GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs.

GPF200—Almond/Black/White side tub flange gasket kit

Wood Panel Capability:

GPF325A/B/W—GE 1/4" panel trim kit (door and access)

GPF375—GE 3/4" trimless panel trim kit (door and access)

Warranty Information*

1, 2, 10-year warranty package: Full one-year warranty on entire dishwasher. Limited second-year water distribution parts warranty. Full ten-year tub/door liner warranty.

1, 10-year warranty package: Full one-year warranty on entire dishwasher. Full ten-year tub/door liner warranty.

*See written warranty for details.

Wood Insert Cut-Out Dimensions

Models/Kit	A B C			D - Panel Thickness
	A	B	C	
GE Models				
GPF325 Kit	18-7/8"	23-9/16"	3-11/16"	1/4"
GPF375 Kit	18-15/16"	23-5/8"	4-1/4" to 3-3/4"***	3/4"

*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)

***Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

GE CONVERTIBLE/PORTABLE DISHWASHERS


	GE	
	GSC3430ZWW GSC3400ZBL	GSC3230ZWW GSC3200ZBL
Features		
Wash System		
SureClean™ Wash System	●	●
Wash levels	3	3
Filtration System	Dual	
Piranha™ Hard Food Disposer	●	
Cycles	6	5
POTSCRUBBER	●	●
Normal Wash	●	●
Light Wash	●	
Short Wash	Dial	Dial
Plate Warmer	Dial	Dial
Rinse Only/Hold	Dial	Dial
Options	19	14
Delay Start	1-6-Hour	
Heated Dry On/Off	●	●
Hi-Temp Wash	●	●
Racks (upper/lower)	Deluxe	Deluxe
Silverware basket	Deluxe w/1 cell cover	Deluxe
Cycle progress indicator	1 "Cycle On"	Dial
Pushbuttons	7	6
Rinse Aid dispenser	with Indicator	●
1, 2, 10-yr. warranty	●	●
Economical/Quiet		
Quiet		
Sound insulation package	QuietPower™ I	Standard
PermaTuf™ Tub and door liner	●	●
GE QuietMotor	●	
GE Motor		●
Sealed toekick	●	
Appearance		
Colors available*	WW, BL	WW, BL
Color panels—Door & Access	Trimless	Trimless
Decorative wood laminate top	Grey/Woodgrain	Grey/Woodgrain
Weights & Dimensions		
Approx. shipping wt (lbs.)	147	147
Overall height w/legs extended (in.)	36-1/8*	36-1/8*
Overall width (in.)	24-3/4	24-3/4
Overall depth (in.)	27	27

*Colors available: WW = White on white BL = Black control panel and front panels w/almond side panels.

Dimensions (in inches)


GSC3230ZWW, GSC3200ZBL, GSC3430ZWW and GSC3400ZBL

Portable

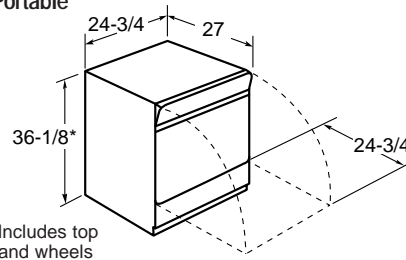

*Includes top and wheels

Built-In

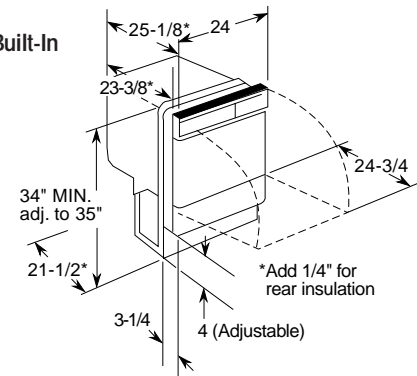

Important Note: GE kit number WD35M34 needed when adapting GE convertible dishwasher to a built-in installation. Contains built-in dishwasher water valve, hardware and complete instructions for converting a GE convertible dishwasher to an under-the-cabinet installation.

Warranty Information*

1, 2, 10-year warranty package: Full one-year warranty on entire dishwasher. Limited second-year water distribution parts warranty. Full ten-year tub/door liner warranty.

*See written warranty for details.

GE SPACEMAKER® BUILT-IN 18" DISHWASHER

	GE
	GSS1800Z
Features	
Wash System	
Wash levels	2
Cycles	4
Pots & Pans	Dial
Normal Wash	Dial
Light Wash	Dial
Rinse Only/Hold	Dial
Options	6
Heated Dry On/Off	Rocker
Racks (upper/lower)	Standard
Silverware basket	Standard
Control type	Turn-To-Start
Cycle progress indicator	Dial
Rinse Aid dispenser	●
120°F @ Inlet water capability	●
Leveling screws	●
1, 10-yr. warranty	●
Economical/Quiet	
Tub Insulation	Standard
Appearance	
Colors available	Black/Almond/White
Color panels	2 Reversible:
Door & Access	Black/Harvest: Almond/White
Weights & Dimensions	
Approx. shipping weight (lbs.)	70
Height w/legs retracted (in.)	34-1/8
Overall width (in.)	17-13/16
Overall depth (in.)	23-3/4

Note: For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order Pub. No. 5-A007.

Dimensions (in inches)


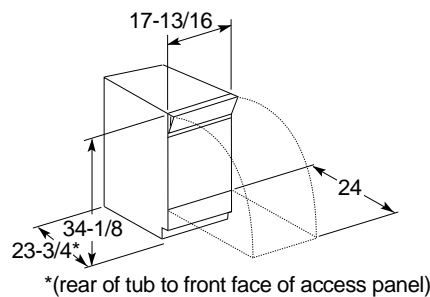


Figure 1

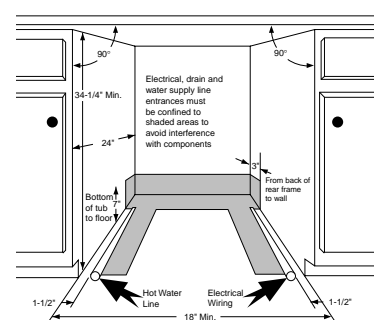

Dishwasher Rough-In Information


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with the installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

Figure 2

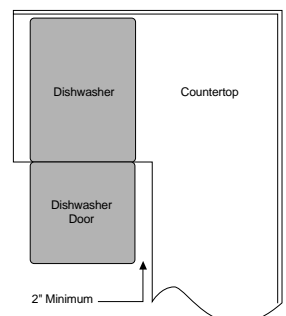

Warranty Information*

1, 10-year warranty package: Full one-year warranty on entire dishwasher. Full ten-year tub/door liner warranty.

*See written warranty for details.

GE SPACEMAKER® UNDERSINK DISHWASHER


GE	
GSM2100ZAD/WH	
Features	
Wash System	
Wash levels	2
Cycles	5
POTSCRUBBER	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only/Hold	Dial
Options	8
Heated Dry On/Off	●
Racks, shelf & basket	
Upper Rack	Spacemaker™
Lower Rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-To-Start
Cycle progress Indicator	Dial
Pushbuttons	4
Rinse Aid dispenser	●
1, 2, 10-yr. warranty*	●
Economical/Quiet	
PermaTuf™ Tub and door liner	●
GE Motor	●
Appearance	
Colors available**	AD, WH
Door	Trimless
Color Panels Access	Trimless
Weights & Dimensions	
Approx. shipping weight (lbs.)	100
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	24

*See written warranty for details.

**Colors available: AD = Black control panel with almond front panels.
WH = Black control panel with white front panels.


Note: Undersink dishwashers can be installed under GE Cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Rough-In for Installation with Disposer

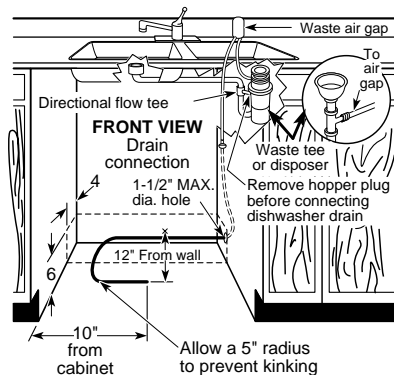


A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. If using copper tubing, 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

Rear View Plumbing Arrangement

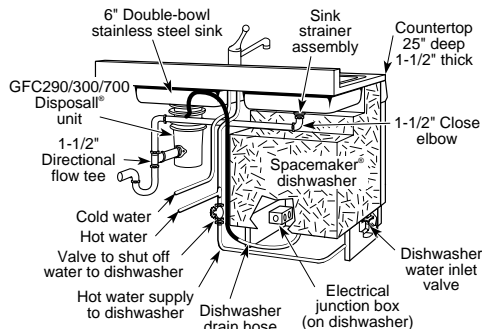

Cabinet Cut-Out for Sink



Cabinet cut-outs for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.

Stainless Steel Sinks Single and Double Compartment Models (Dimensions in Inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2" Radius Corners		No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2

Note: Drain opening size is 3-1/2".


Above models are fully sound deadened.

*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.



Wood Insert

Cut-Out Dimensions (in inches)




Inserts must not exceed 1/4" thickness within 5/16" of edge around full circumference. Order GPF325 kit.

Cabinet Rough-In

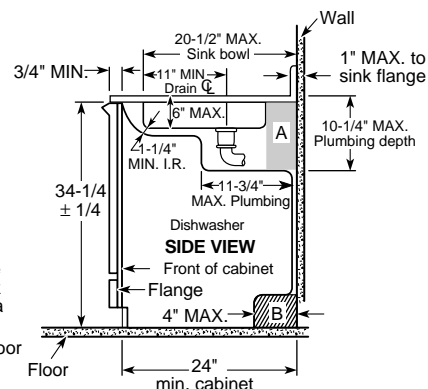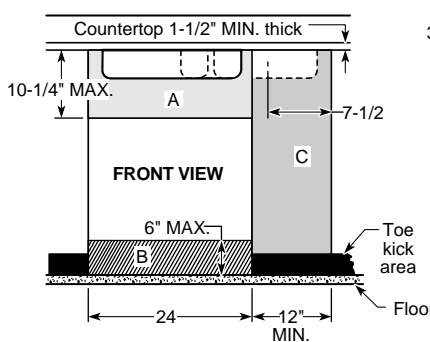

Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Plumbing/Electrical Rough-In

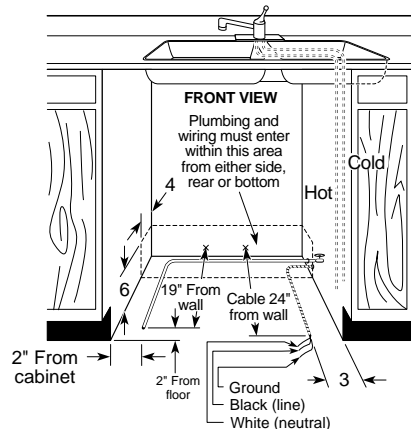

Plumbing: Hot Water Only: Use 3/8" O.D. copper tubing or 1/2" O.D. plastic tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 8.6. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.


Specifications: Inlet Water Temperature Recommended: Minimum 120°F. at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

DISPOSERS

	GE								
	Continuous Feed Models								Batch Feed Model
	GFC1000Y	GFC800Y	GFC705Y	GFC700Y	GFC305Y	GFC300Y	GFC295Y	GFC290Y	GFB1050V
Features									
Motor horsepower	3/4	1/2	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Stopper
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch
Power connection	Direct Wire	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Direct Wire
Power Boost	●								
Impellers									
Dual swivel	●	●	●	●	●	●	●	●	●
Jam resistant	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●
Stainless steel sink flange	●	●	●	●	●	●	●	●	●
Mounting type	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Twist Top
Precuttor	●	●	●	●	●	●	●	●	●
Splash guard	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Non-Removable
Sink stopper	●	●	●	●	●	●	●	●	●
Dishwasher drain connector	●	●	●	●	●	●	●	●	●
Manual reset overload protector	●	●	●	●	●	●	●	●	●
Permanently lubricated bearing	●	●	●	●	●	●	●	●	●
Plastic drain elbow	●	●	●	●	●	●	●	●	●
Turntable	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Polyester drain housing	●	●	●	●	●	●	●	●	●
Grinding speed (RPM's)	8000	8000	8000	8000	8000	8000	8000	8000	2700
Hopper	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Nylon
Hopper liner and grinding ring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Full warranty*	5-Year	4-Year	2-Year	2-Year	1-Year	1-Year	1-Year	1-Year	5-Year
Economical/Quiet									
Sound insulation wrapper	Super Deluxe	Deluxe	Standard	Standard					Super Deluxe
Weights & Dimensions									
Approx. shipping weight (lbs.)	12.5	10.0	9.8	9.8	8.4	8.4	8.4	8.4	14.0
Net weight (lbs.)	11	8.8	8.6	8.6	7.6	7.6	7.6	7.6	12.5
(A)	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	16-9/16
(B)	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	5-1/2
(C)	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	6-1/2
(D)	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	9-5/16
(E)	8-1/8	8-1/8	8-1/8	8-1/8	6-3/8	6-3/8	6-3/8	6-3/8	8-5/8
Dishwasher inlet diameter (in.)	7/8	7/8	7/8	7/8	7/8	7/8	7/8	7/8	1
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
Accessories									
White sink flange & stopper	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71
Almond sink flange & stopper	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72
Bisque sink flange & stopper	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73

*See written warranty for details.

Disposers




Disposer Accessories:
GPF75 Clamp nut kit

COMPACTORS

	GE	
	GCG1550DCC GCG1530ZWW GCG1520ZBB	GCG950T
Features		
Cycle time	27 seconds max., 14 seconds min.	70 seconds max., 12 seconds min.
Motor horsepower	1/3	1/3
Compression ratio (average)	75% reduction of volume	75% reduction of volume
Ram force (lb.) (max.)	2,300	5,000
Lock/start control w/removable key	●	●
Bag storage	●	●
Full 1-yr. warranty*	●	●
Appearance		
Color appearance	CC; WW; BB	BB
Door panels included	Bisque; White/Black; Black/White	Black/Almond
Heavy-gauge steel construction	●	●
1/4" panel capability	●	●
Weights & Dimensions		
Total appliance weight (lbs.)	146	134
Overall height (in.)	34-1/4	34-1/2
Overall width (in.)	15	12
Overall depth (in.)	24-1/4	20-1/4
Clearance for drop-down drawer side	6" or more on right side	
Drawer extension for removal	23" or more in front of appliance	22" or more
Custom panel size H x W (in.)	22-15/16 x 14-5/8	20-7/8 x 11-11/16
Accessories		
Compactor bags	WC60X5017	WC60X5015
Optional toe pedal opener kit		GSA85

*See written warranty for details.

GCG1550DCC, GCG1530ZWW, GCG1520ZBB, GCG950T Convertible Compactors



Compactor Accessories:
GPF80 White/Black Panel
for GCG1530
GPF81 Black/Almond Panel
for GCG1520

GE TRITON™. CLEAN AND QUIET.



TriClean™ Wash System eliminates pre-rinsing, soaking and scrubbing!

Improved wash coverage provided by exclusive 3 wash arm technology. Eliminates recirculating food particles with 100% Triple Water Filtration and Dual Pumps. Pulverizes food particles with Piranha™ Hard Food Disposer.



QuietPower™ III—The quietest dishwasher available in the industry.

Redirected spray jets hit the dishes; not the tub and door. Sound is deadened with insulation blanket, sound cushioning and PermaTuf® Tub. ActiveVent, an intelligent air vent system closes during wash cycle, opens during dry cycle to contain noise.



SaniWash for peace of mind.

With SaniWash cycle, your dishes, cutting boards and baby bottles are beyond clean—they're sanitized—reducing bacteria by 99.999%.



Speed cycles save time.

Forget to run the dishwasher? Speed cycles cut 30 minutes off GE's standard normal cycles.

“The cleanest wash you never heard.”™



GE Appliances

General Electric Company
Louisville, Kentucky 40225
www.geappliances.com

Pub. No. 5-S179
PC20676