





GE Appliances

## GSD2110CAA—GE Built-In Potscrubber® Dishwasher

### Built-In Dishwasher Dimensions (in inches)

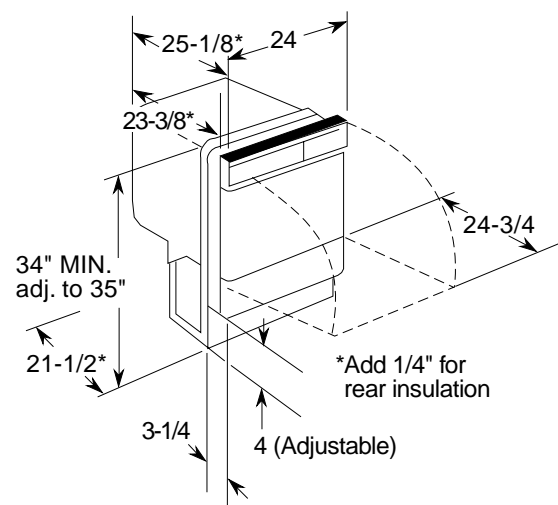

### Rough-In Installation Information (in inches)

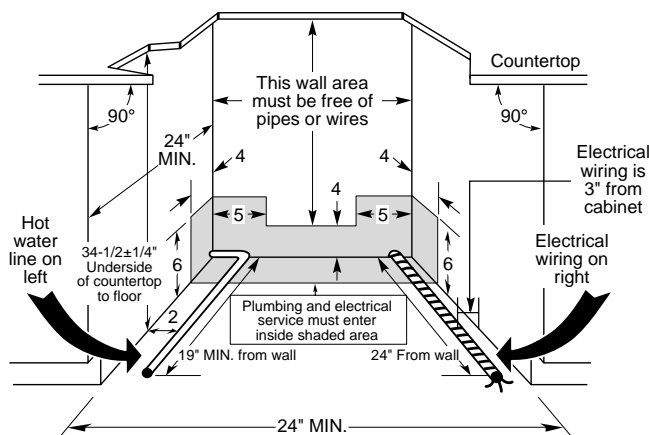


**Note:** Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

### Electrical Rating

Voltage AC.....120  
Hertz .....60  
Total connected load amperage.....8.6  
Calrod® heater watts.....500  
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

### Wood Insert Cut-Out Dimensions (in inches)

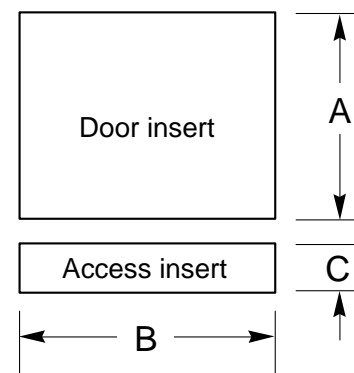

Models/Kits	A	B	C	Panel Thickness
GE Models				
GPF325 Kit	18-7/8"	23-9/16"	3-11/16"	1/4"
GPF375 Kit	18-15/16"	23-5/8"*	4-1/4" to 3-3/4"***	3/4"

\*Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel

\*\*Adjustment required to match adjacent cabinets fronts due to leveling leg adjustment, 4" nominal.

For answers to your Monogram®,  
GE Profile Performance Series™,  
GE Profile™ or GE appliance questions, call  
GE Answer Center® service, 800.626.2000.




Listed by  
Underwriters  
Laboratories



*GE Appliances*

## **GSD2110CAA—GE Built-In Potscrubber® Dishwasher**

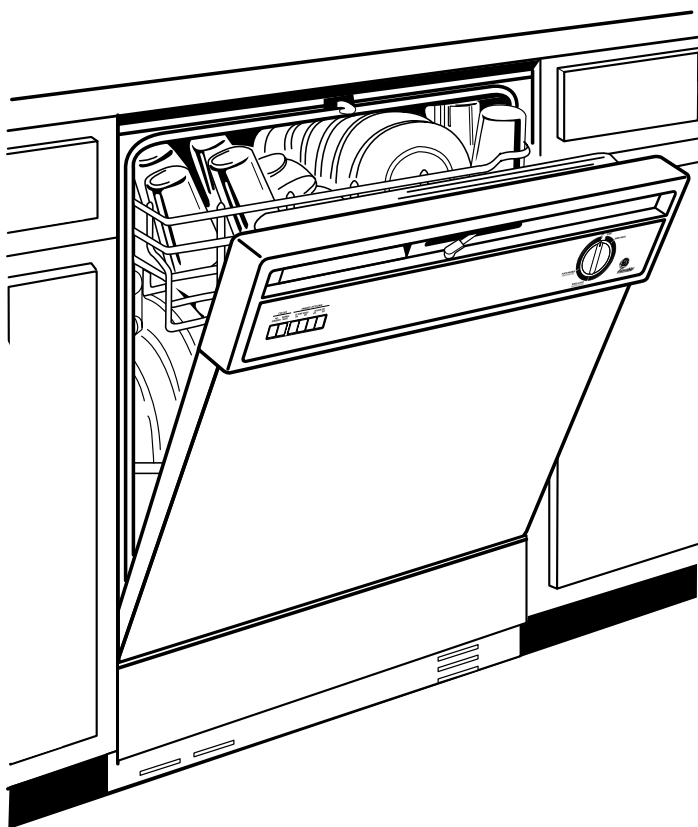

### ***Features and Benefits***

- SureClean™ Wash System with 2 Wash Levels
- 5 Cycles / 14 Options
- 5 Cycle Selections: POTSRUBBER, Normal Wash, Short Wash (Dial), Plate Warmer and Rinse Only/Hold (Dial)
- Heated Dry On/Off Option
- Hi-Temp Wash
- Standard Upper Rack
- Deluxe Lower Rack
- Deluxe Silverware Basket
- Standard Lower Wash Arm
- GE Motor
- Standard Sound Insulation Package
- Trimless Appearance
- 4 Push Buttons
- GSD2130CWW - White on white
- GSD2120CBB - Black on black
- GSD2110CAA - Almond on almond