

Apartment Appliance Guide



Featuring GE® and Hotpoint® appliances

imagination at work



Why is GE the right choice for property managers like you?

Dependable appliances. Exclusive features. Unparalleled sales support.

For everything from products and parts to service and support, property managers across the country have made GE their number one brand choice for appliances. Here's why:



Professional Sales Support

800.942.4223

Only GE offers a knowledgeable and responsive sales team that knows your market, understands your needs and provides the personal attention you deserve.

GE Customer Service **800.523.7277**

Order appliances using this convenient toll-free number. Call 7:30 am to 7:00 pm EST for Eastern and Central time zones and 7:30 am to 8:30 pm EST for Mountain and Pacific time zones.

GE CustomerNet

GECustomerNet.com is efficient and easy to use. An online network gives you fast, reliable access to GE products and services 24/7. You can order parts, schedule service, access invoices and choose from several appliance ordering options.

GE makes servicing appliances our job—not yours. **800.432.2737**

If you need repairs, you'll get a quick response. GE has the largest number of factory-employed service technicians (1300 nationwide) in the country.

GE Genuine Parts **800.851.6200**

Depend on GE for quality parts and accessories. All parts and accessories are backed by a full or limited GE warranty and a 30-day satisfaction guarantee.

GE Answer Center® **800.626.2000**

This service provides answers on product features, installation procedures, and service—24 hours a day, seven days a week.

GE Commercial Property Program **800.626.8690**

When you sign up for this program, GE's expert service is available at your convenience. Call today!

- No "Trip charges"
- Flat-rate labor pricing saves you money and helps you budget. Discounts for multiple repair calls.
- Wholesale parts pricing
- More than 85% of our repair calls are complete in one visit

Rated “the highest quality refrigeration brand” by maintenance managers.

Maintenance managers want appliances that will make their jobs easier. That’s why they rated GE refrigerators best in quality and dependability.



In a 2002 independent national survey of property management firms, maintenance managers were randomly selected and asked to rate 13- to-17-cubic-foot refrigerators. They named GE® and Hotpoint® as the highest in quality and dependability by more than two to one over other brands.



No other brand offers such a complete line.

From maintenance managers to property managers, remodelers to builders, the number one brand choice for appliances is GE. And no wonder! Only GE gives you a full line of dependable appliances with exclusive and apartment-friendly features.



GE refrigerators. **Built to last.**

Features such as fresh food compartment cross-bracing and coil-free backs mean you devote less time and money to maintenance and replacement.



GE Nautilus™ **dishwashers.** **Quiet and powerful.**

With the QuietPower™ motor and the QuietPower I sound package, this GE standout keeps sound at a minimum and tenants happy.



GE ranges. **Large and dependable.**

Not only are these ranges the most dependable you can buy*, they offer a cooking capacity your tenants will appreciate.



GE Spacemaker® **laundry. Compact and convenient.**

This stacked design is ideal for tight spaces and easily stays out of the way or out of sight. And, what it lacks in size, it makes up in performance.



PARTNER OF THE YEAR 2004

GE cuts utility bills down to size.

GE has been named ENERGY STAR® Partner of the Year for accomplishments in energy efficiency and conservation. It's just one more reason property managers count on GE.

And, no other brand offers such versatile design options.



Hotpoint® in silver metallic. Today's alternative to stainless.

Offer a striking contemporary look

- Unique **silver metallic finish** complements any kitchen décor, countertop and cabinetry regardless of their color or finish
- Conveys a **striking, modern** and stylish look
- Full-line of appliances offer a **distinct design advantage**

Take advantage of this durable design option

- Silver metallic finish **resists fingerprints** and is easy to wipe clean
- **Low maintenance costs**
- **Easy to order** entire kitchen package or stand alone models
- Refrigerators **hold magnets** for everyday convenience

Differentiate your properties with a stainless steel appearance

- Stainless steel is a **growing trend** and GE is leading the way
- Increases perceived **value of your property**
- Makes a **positive first impression** with your customer
- Coordinates with other appliance colors
- **Exclusive** color offering

Take advantage of this unique, versatile and attention-getting design option—choose Hotpoint® in silver metallic.



HOTPOINT®
In Silver Metallic



GE® Side-By-Side Refrigerator



GE side-by-side refrigerators offer space advantages that tenants will appreciate. Adjustable bins and compartments optimize space for flexibility and generous food storage.




NeverClean™ condenser coils are rolled up and encased, so they never require cleaning in normal operating environments.



Exclusive removable gasket is quick and easy to replace, with a metal retainer strip that provides door support.




Optional icemaker makes ice automatically, ensuring a ready supply.



Gallon door bins provide maximum storage flexibility.



Simple-to-set temperature controls minimize error and improve temperature stability in the fresh food and freezer compartments.



FrostGuard™ technology defrosts only when needed, reducing freezer burn.



GSS20DBP

- 19.9 cu. ft. capacity • Upfront electronic temperature controls • Sealed vegetable/fruit crisper • Sealed meat drawer • Gallon door storage • FrostGuard™ technology • Deluxe quiet design • NeverClean™ condenser • Equipped for optional icemaker • Available in White on white or Bisque on bisque

GE Top-Freezer Refrigerators

Average annual energy savings* for refrigerators

1972	\$138.77
1989	75.09
1993	56.39
2003**	39.15

**\$36 per year
x 12 years
\$432 total savings**

Based on .084¢ per/KWH
*Source: AHAM
**Based on U.S. Dept. of Energy Guidelines
†Versus a continuously running standard light bulb.

GE 14- to 18-cu. ft. refrigerators use less energy than a 60-watt light bulb.† Today's refrigerators are 48% more efficient than 1989 models, helping tenants or management companies reduce their utility bills.



Fresh-food compartment cross-braces provide extra support to keep the door from sagging, even with heavy loads.



Galvanized-finish door and case provides extra protection against rust and the unique inner door material is less likely to crack over time.



Exclusive removable gasket is quick and easy to replace, with a metal retainer strip that provides door support.



Simple-to-set temperature controls minimize error and improve temperature stability in the fresh food and freezer compartments.



Stronger door alignment supports heavier door loads and was designed with a heavy-duty, factory-set center hinge.



NeverClean condenser coils are rolled up and encased, so they never require cleaning in normal operating environments, thus reducing maintenance time.



Icemaker Models

GTS18DCP

- 17.9 cu. ft. capacity • Factory-installed icemaker • Upfront temperature controls • Vegetable/fruit crispers • Spillproof freezer floor • Gallon door storage • Slide-out, slide-over pan removal system • NeverClean condenser • Deluxe quiet design • Available in White on white, Bisque on bisque or Black on black

GTH18DCR (not shown)

- Similar features and appearance as GTS18DCP, except ENERGY STAR®-qualified

Non-Icemaker Models

GTS18DBP (not shown)

Similar features and appearance as GTS18DCP, but equipped for optional icemaker

GTH18DBR (not shown)

Similar features and appearance as GTS18DCP, except equipped for optional icemaker and ENERGY STAR-qualified



(Models GTH18DCR and GTH18DBR)

GE® Top-Freezer Refrigerators



Non-Icemaker Models

GTR18BBR

- 17.9 cu. ft. capacity • Upfront temperature controls • Recessed handles
- Two vegetable/fruit crispers • Two fixed door shelves with tall bottle storage • Two fixed freezer door shelves • Two adjustable wire full-width shelves • Deluxe quiet design
- Equipped for optional icemaker
- NeverClean condenser • Available in White on white or Bisque on bisque

GTS17BBR (not shown)

- 17.2 cu. ft. capacity • Color-matched handles • Equipped for optional icemaker

GTR17BBR (not shown)

- 17.2 cu. ft. capacity • Recessed handles
- Equipped for optional icemaker

GTS16BBR (not shown)

- 15.8 cu. ft. capacity • Color-matched handles • Equipped for optional icemaker
- Also available in Black on black

GTS15BBR (not shown)

- 14.9 cu. ft. capacity • Color-matched handles • Equipped for optional icemaker
- Also available in Black on black

GTR15BBR (not shown)

- 14.9 cu. ft. capacity • Recessed handles
- Equipped for optional icemaker

GTH15BBR (not shown)

- 14.9 cu. ft. capacity • Color-matched handles • Equipped for optional icemaker
- ENERGY STAR®-qualified



GTS12BBP (not shown)

- 11.9 cu. ft. capacity • One full-width, white divided crisper • Two and one-half fixed door shelves • Equipped for optional icemaker

Icemaker Models

GTS17BCR (not shown)

- 17.2 cu. ft. capacity • Two vegetable/fruit crispers • Two fixed door shelves with tall bottle storage • Two fixed freezer door shelves • Color-matched handles
- Equipped with factory-installed icemaker
- NeverClean condenser

GTS15BCR (not shown)

- 14.9 cu. ft. capacity • Color-matched handles



GTR11AAP

- 11.4 cu. ft. capacity
- Adjustable wire shelves • Recessed handles • Full-width vegetable/fruit crisper
- Tall bottle door storage • Fixed freezer door shelves • Rounded doors • Available in White on white

GE Spacemaker® Compact Refrigerators



GMR06AAP

- 6.0 cu. ft. capacity • Two wire cabinet shelves, one adjustable • One full-width, two half-width door shelves • Can rack • Built-in or free-standing capability • Color-matched visor handle
- Available in white and black

*Optional wood panel trim kit available on black unity only. (Installation option and model number on page 36.)



GMR04AAM

- 4.3 cu. ft. capacity • Two adjustable wire cabinet shelves • Two full-width, one half-width door shelves • Can rack • Available in white and black

GMR02BAN (not shown)

- 1.7 cu. ft. capacity • One fixed wire cabinet shelf • One full-width, one half-width door shelf
- Available in white and black



GE® 30" Free-Standing Electric Ranges



You can be assured that tenants can rely on GE range quality and dependable operation day-after-day. And that means less maintenance and added property value.



Super-large 5.0 cu. ft. oven capacity gives consumers the room they need to cook large meals.



Clean-Well™ cooktop system on most free-standing ranges is designed with a combination of features for total cleaning simplicity.



Lift-up cooktop locks into place for easy cleaning.



JBP26WH

- White on white • Self-clean oven • TrueTemp™ system • Super-large 5.0 cu. ft. capacity oven • SmartLogic™ electronic controls • Six-pass power bake element • ClearView™ window • QuickSet IV controls

JBP26CH (not shown)

Bisque on bisque

JBP26BH (not shown)

Black on black



JBP24BH

- Self-clean oven • Super-large 5.0 cu. ft. capacity oven • Clean-Well cooktop system • Lift-up cooktop • ClearView window • QuickSet III oven controls • Interior oven light • Available in white or bisque

JBP24WH (not shown)

White on white

JBP24EH (not shown)

Black on black



JBP21WH

- Self-clean oven • Clean-Well cooktop system • Lift-up cooktop • QuickSet III oven controls • Frameless solid white glass oven door • Designer-style handle • Available in White on white



JBP21BH

- Self-clean oven • Clean-Well cooktop system • Lift-up cooktop • QuickSet III oven controls • Frameless solid black glass oven door • Designer-style handle • Available in white or bisque

Not all features available on all models.

For additional features, specifications and color availability, refer to page 37.



JBS27BH

- Black on black • Super-large 5.0 cu. ft. capacity oven
- Standard clean oven
- Lift-up cooktop • Plug-in Calrod heating elements, two 8" and two 6" • Electronic clock and minute timer
- Heating element "ON" indicator light • Frameless black glass oven door with window • Designer-style handle • Removable full-width storage drawer

JBS27SH (not shown)
Stainless steel

JBS27WH (not shown)
White on white

JBS27CH (not shown)
Bisque on bisque



JBS07H

- Super-large 5.0 cu. ft. capacity oven • Standard clean oven • Plug-in Calrod heating elements, one 8" and three 6" • Oven door with window • Designer-style handle • Interior oven light switch • Available in White on white, Bisque on bisque or Black on black

30" Front Control Model



JBS03BH

- Super-large 5.0 cu. ft. capacity oven
- Standard clean oven • Plug-in Calrod heating elements, one 8" and three 6" • Frameless solid black glass oven door • Designer-style handle • Removable full-width storage drawer
- Available in white or bisque



JBS03H

- Similar features and appearance as JBS03BH, except has solid color-matched oven door and chrome visor handle.
- Available in white or bisque



JBS15H

- Standard clean oven • Upfront controls
- Plug-in heating elements, one 8" and three 6" • Removable one-piece chrome drip bowls • Two oven shelves
- Color-matched oven door with window
- Chrome visor handle • Storage drawer
- Available in White on white, Bisque on bisque and Black on black

GE® 30" Slide-In Electric Ranges



JSP26BD

- Self-clean oven • Electronic oven controls • Coil heating elements
- ClearView™ window • Frameless glass oven door • Dual oven bake
- Lift-up porcelain cooktop • Available in white or bisque

JSS16PD (not shown)

- Standard clean oven • Electronic clock and timer • Dual element bake
- Coil heating elements • Lift-up porcelain cooktop • ClearView window
- Chrome drip bowls • Available in white or bisque

GE 30" and 27" Drop-In Electric Ranges



JMS08BD

- 27" width • White or bisque cooktop • Standard clean oven
- Coil heating elements • Big ClearView window • Dual element bake
- Lift-up porcelain cooktop • Chrome drip bowls • Available in white or bisque

JDP36 (not shown)

- 30" width • Lift-up overhanging cooktop • Two 8" and two 6" plug-in heating elements
- Removable one-piece drip bowls • Frameless glass oven door with window
- Available in White or Bisque

GE Built-In Electric Cooktops



JP201CB Stainless steel

- 21" cooktop • One 8" and one 6" plug-in Calrod® heating element
- Infinite heat rotary controls • Removable one-piece chrome drip bowls
- Heating element "ON" indicator light

JP202D White on white (not shown)

GE 30" Standard Hoods



JN327H

- Non-vented • 30" width • Variable two-speed fan control
- Cooktop light • Removable grease filter • Available in White on white, Bisque on bisque or Black on black



JV338H

- Vented • 30" width • Variable two-speed fan control • Cooktop light
- Removable grease filter • Round or rectangular ducting
- Available in White on white, Bisque on bisque or Black on black

GE 30" Free-Standing Gas Ranges



Imagine the time and cost savings the most dependable ranges can bring. GE ranges deliver everyday peace-of-mind that lasts year-after-year and tenant-after-tenant.



Extra-large 4.8 cu. ft. oven capacity is large enough to prepare an entire holiday dinner at once.



One-piece upswept cooktop raised edge helps contain spills; has no cracks or crevices to trap dirt or food particles.



Sabbath Mode allows cooked foods to be kept warm on the Jewish Sabbath, in accordance with K kosher law.



JGBP24BEH

- Extra-large 4.8 cu. ft. capacity self-clean oven
- Square, standard porcelain-steel, grates
- Lift-up cooktop
- QuickSet III oven controls
- Frameless black glass oven door with designer-style handle
- Certified Sabbath mode
- Available in white or bisque



JGBS20BEH

- Extra-large 4.8 cu. ft. capacity standard clean oven
- Square, standard porcelain-steel grates
- Lift-up cooktop
- Electronic clock and minute timer
- Frameless black glass oven door with designer-style handle
- Slide-out broiler drawer
- Available in white or bisque

JGBS20WEH (not shown)
White on white

JGBS17PEH (not shown)
• Similar features and appearance as JGBS20BEH, except has color-matched porcelain-enameled oven door with window



JGBS04BEH

- Extra-large standard clean oven
- Frameless solid black glass oven door with designer-style handle
- Electronic pilotless ignition
- Available in white or bisque

JGBS04PPH (not shown)
• Similar features and appearance as JGBS04BEH, except has standing pilot ignition



JGBS07PEH

- Extra-large standard clean oven
- All-purpose burners
- Standard grates
- Porcelain oven door
- ClearView window
- Two oven racks
- Available in White on white, Bisque on bisque or Black on black

GE Spacemaker® Over-the-Range Microwave Ovens



Differentiate your property with an OTR.

The GE Spacemaker provides space-saving convenience that is invaluable—especially in multi-family properties. Offer more usable counter space and enhance the function of your kitchens quickly and easily.



This powerful **300-CFM-rated venting system** removes smoke and steam from the cooktop. **Full-view cooktop lighting** illuminates the cooking surface below.



Easy to remove grease filters



Convenience cooking controls allow you to defrost, cook or reheat at the touch of a pad.



JVM1630WJ

White on white
 • 1.6 cu. ft. oven cavity
 • 1000 watts*
 • CircuWave™ cooking system
 • Convenience cooking controls • Turntable • Auto/Time Defrost • Express Cook
 • Add 30 seconds

JVM1630CJ

Bisque on bisque (not shown)

JVM1630BJ

Black on black (not shown)

JVM1631WJ

White on white (not shown)
 • **Non-vented model**

JVM1631CJ

Bisque on bisque (not shown)

• **Non-vented model**

JVM1631BJ

Black on black (not shown)

• **Non-vented model**



JVM1440SH

Stainless steel
 • 1.4 cu. ft. oven cavity
 • 950 watts* • CircuWave cooking system
 • Turntable On/Off
 • Removable rack

JVM1440WH

White on white (not shown)

JVM1440BH

Black on black (not shown)

JVM1441SH

Stainless steel (not shown)

• **Non-vented model**

JVM1441WH

White on white (not shown)

• **Non-vented model**

JVM1441BH

Black on black (not shown)

• **Non-vented model**



JVM1430WD

White on white
 • 1.4 cu. ft. oven cavity
 • 950 watts* • Convenience cooking controls • Turntable
 • ExpressCook

JVM1430BD

Black on black (not shown)

*IEC-705 Test Procedure

GE Spacemaker II™ Microwave Oven



JEM25WF White on white

- Mid-size 1.0 cu. ft. oven cavity
- 800 watts* • Convenience cooking controls • Auto/Time Defrost • Turntable On/Off
- Optional trim kit available**
- Optional undercabinet mounting kit available†

JEM25BF
Black on black
(not shown)


GE® Microwave Ovens



JE740WH White on white

- Compact .7 cu. ft. oven cavity
- 700 watts* • Electronic digital display with clock • Optional undercabinet mounting kit available†

JE740BH
Black on black
(not shown)



JE620WF White on white

- .6 cu. ft. oven cavity • 650 watts* • Electronic touch controls • Electronic digital display with clock • Turntable On only • Time Defrost
- Optional undercabinet mounting kit available†

JE620BF
Black on black
(not shown)

*IEC-705 Test Procedure

**Optional trim kit—Custom trim kits available in both 27" and 30" configurations at additional cost.

†Undercabinet mounting kit—Noted microwave ovens can easily be mounted below your cabinetry, freeing up valuable counter space. A mounting template provides all the necessary measurements for installation on practically any wood or metal cabinets. Pub. No. 4-A019 is available at an additional cost.

GE® Washers and Dryers



As a unique selling point, GE washers and dryers add instant appeal to your properties. With all the benefits associated with doing laundry at home, tenants will appreciate the extra convenience.

Long vent dryers now available.



100% front serviceable for easy access to operational parts without moving the unit.



Reverse-A-Door is the ultimate in flexibility. Change door swing to accommodate your laundry area.



Upfront lint filter is close at hand for cleaning and optimizing dryer performance.



WCSR4170D Washer

- 3.2 cu. ft. super capacity plus washer • Rotary electromechanical controls • ExtraAction™ basket • 4 wash/spin speed combinations • 17 wash cycles • Bleach and fabric softener dispensers • 4 water levels • GentlePower™ agitator • Spin only option • Rinse and spin • Color lid instructions • Available in White on white or Bisque on bisque

WCSR2090D Washer (not shown)

- 3.2 cu. ft. super capacity washer • Rotary electromechanical controls • PermaTuf® II basket • 2 pulse wash/spin speed combinations • 9 wash cycles • Bleach dispenser • FlexCare™ agitator • 3 water levels • Quiet-By-Design™ • Spin only option • Rinse and spin • Available in White on white or Bisque on bisque



DJXR433EC Electric Dryer

DJXR433GC Gas Dryer

- 6.0 cu. ft. extra-large capacity • Auto Dry • Rotary controls • DuraDrum™ • 3 drying cycles • 4 heat selections • Quiet-By-Design • Reverse-A-Door • Available in White on white or Bisque on bisque

DBXR463ED Electric Dryer (not shown)

DBXR463GD Gas Dryer (not shown)

- 6.0 cu. ft. extra-large capacity • Auto dry • DuraDrum™ • 4 heat selections • Interior dryer light • 6 dry cycles • Quiet-By-Design • Fixed end-of-cycle signal • Reverse-a-door • Upfront lint filter • Available in White on white or Bisque on bisque

DBL333EB Electric Dryer (not shown)

DBL333GB Gas Dryer (not shown)

- 5.7 cu. ft. extra-large capacity • Auto Dry • 3 drying cycles • 3 heat selections • Reverse-A-Door • Upfront lint filter • 100% front serviceable • Available in White on white or Bisque on bisque

DBLR333EE/DBLR333GE Available July 2004

DLSR483EE Electric Dryer (not shown)

DLSR483GE Gas Dryer (not shown)

- **Long vent capability (up to 150 ft. of equivalent ducting)** • 7.0 cu. ft. super capacity • Auto Dry • DuraDrum interior • 4 heat selections • Wrinkle care extended tumble • 8 dry cycles • Available in White on white or Bisque on bisque

GE Front-Loading Washer and Dryer



GE front-loading laundry pairs can be customized to fit any tight space. The units can be stacked or built-in* to give your tenants total laundry accessibility.

*Undercounter kits required for undercounter use.



Automatic water fill eliminates guesswork and water waste. Automatically adjusts to the load type by adding water. Water fill level remains below the door.

Note: Electric dryer cord kit sold separately.



WSXH208A*

- ENERGY STAR®-qualified model • 3.1 cu. ft. extra-large capacity • Timed dispensers • 8 wash cycles • 4 wash/rinse temperatures • Automatic water level adjustment • Auto 2nd rinse • Fabric softener dispenser • Bleach dispenser • Available in White on white



DSXH43EA/GA 240V*

- 5.7 cu. ft. extra-large capacity • Rotary controls • Under-the-counter and stacked installation options • Painted steel drum interior • 3 dry cycles • 4 temperature options • Adjustable end-of-cycle signal • Dryer interior light • Reverse-A-Door • Dryer rack • Available in White on white

GE Spacemaker Unitized Washers and Dryers



WSM2700D Electric

WSM2780D Gas

- Full size 27" wide • 2.7 cu. ft. extra-large capacity washer • 1 wash/spin speed • 3 wash cycles • 3 wash/rinse temperatures • 3 water levels • Electromechanical controls • Auto Dry • 4 dry cycles • Available in White on white (electric model also available in Bisque on bisque)



WSM2420D Electric

WSM2480D Gas

- 24" wide • 1.9 cu. ft. large capacity washer • 2 wash/spin speed combinations • 3 wash cycles • 3 wash/rinse temperatures • 3 water levels • Electromechanical controls • Auto dry • 4 dry cycles • Available in White on white (electric model also available in Bisque on bisque)

GE Spacemaker® Portable/Stationary Washers and Dryers



Give your tenants the convenience of laundry with the freedom of portability. The compact size makes Spacemaker washers and dryers easy to use and quick to store.



Extra-large 2.7 cu. ft. stainless steel tub with lint filter.



Easily accessible detergent/ fabric softener dispenser.



WSLP1100D 120V

Portable/Topload Washer

- 24", 2.5 cu. ft. extra-large capacity
- Stainless steel basket • Electronic one-touch controls with LED read-out
- Load sensing • 10 wash cycles
- 3 wash/rinse temperatures
- 1 wash/spin speed • 4 water levels
- Available in White on white or White with black controls

WSLS1100D 120V

Stationary/Topload Washer (not shown)

- Available in White on white



DSKS433EB 240V

Stationary Dryer

- 3.6 cu. ft. capacity • 3 drying cycles • Auto Dry
- Rotary controls
- 4 heat selections
- Available in White on white or White with black control panel • Dryer cord sold separately



WSKS2060W 120V

Stationary Topload Washer


- 2.0 cu. ft. large capacity
- 2 wash/spin speeds • 6 wash cycles • 3 wash/rinse temperatures
- 4 water levels • Solid lid • Available in White on white or White with black controls



DSKP333EC 120V

Portable Dryer

- 3.6 cu. ft. capacity
- 3 drying cycles
- 3 heat selections
- 15-amp dryer cord attached
- Available in White on white



DSDR24D Stack Rack

White (only) (Available at additional cost)
For use with portable or stationary Spacemaker washers and stationary dryers




DSKS333EC 120V

Stationary Dryer

- Similar to the DSKP333EC, except is a stationary model
- Available in White on white

GE® Commercial Washers and Dryers

Durability and dependable operation are key issues for any property. And GE commercial products are made to withstand the most demanding environments.



Washer is **100% front serviceable** with all operational parts. Dryer is serviceable without moving the unit.



Stainless steel basket is durable, won't chip or peel and resists rust.



Unique upswept design provides a contemporary look and makes cleaning easy.



The GentlePower™ agitator adapts to the clothes load, providing gentle and effective washing action.



WCCD2050D

- Two-Speed Washer • Cycle countdown • 3.2 cu. ft. super capacity • 5 wash cycles • 3 water levels (adjustable) • 24.5 minute wash cycle (excludes fill) • 2 wash/spin speed combinations • 3 wash/rinse temperatures • 100% front serviceable • Available in White with black controls or Bisque with black controls

WCCB1030D Single-Speed Washer (not shown)
 • 3 wash cycles • 1 wash/spin speed combination • Available in White with black controls or Bisque with black controls

Coin box sold separately



DCCD330ED/GD

- 7.0 cu. ft. super capacity • Auto Dry • Pushbutton controls • LED readout • 3 dry cycles • 3 heat selections • Upfront lint filter • 100% front serviceable • Reverse-A-Door • Available in White with black controls or Bisque with black controls

DCCB330ED/GD (not shown)

- Auto Dry • 3 dry cycles • 3 heat selections • Pushbutton controls • Upfront lint filter • 100% front serviceable • Reverse-A-Door • Available in White with black controls or Bisque with black controls

Coin box sold separately



WNRD2050D

- 3.5 cu. ft. super capacity plus • ENERGY STAR®-qualified • Stainless steel basket • Auto Balance Suspension System • 4 water levels • 3 wash/spin speed combinations • 3 wash/rinse temperatures • 5 wash cycles • Spin only • Digital cycle countdown • LED indicators for fill, wash, rinse and final spin • Bleach dispenser • Fabric softener dispenser • Deluxe Quiet • Available in White with black controls



DNCD450EA/GA (not shown)

- 7.0 cu. ft. super capacity • 5 dry cycles • 4 heat selections • Auto dry • Cycle countdown • Hush Quiet package • LED indicators for door open, drying, cool down, clean lint filter • Lockable lint filters • Reverse-A-Door • Available in White with black controls



DDC4400S Electric Dryer

DDC4500S Gas Dryer

- 5.4 cu. ft. extra-large capacity • Stacked pair • 3 cycles • 3 heat selections • "ON" indicator light • 100% front serviceable • Shipped preassembled • Available in white

GE® Commercial Coin Front-Loading Washer and Dryer



Commercial Coin Front-Loading Washer

WCCH404V White

- 2.7 (3.1 per IEC) cu. ft. extra-large capacity • ENERGY STAR®-qualified • 1 wash/spin speed • 3 wash/rinse temperatures
- Variable water levels • 4 wash cycles (Color Cottons, Permanent Press, White Cottons, Delicates) • Stainless steel wash drum
- Detergent dispenser • Fabric softener dispenser • Bleach dispenser

Commercial Coin Front-Loading Matching Dryer

DCCH43EA/GA (not shown)

- 5.7 cu. ft. extra-large capacity • 3 dry cycles • 3 heat selections
- Upfront lint filter • Reverse-A-Door • DuraDrum™ finish



Coin box sold separately

GE Commercial Smart Card Washers and Dryers

Increase income with pricing flexibility, upfront revenues, property image and more usage due to convenient payment. Lower operating costs with reduced collection costs, reduced vandalism and audit ability.



An extra-wide opening provides easy access to our 7.0 cu. ft. of total dryer capacity.



WNCK2050D White

- 2.7 cu. ft. extra-large capacity • 3 wash/spin speed combinations • 3 wash/rinse temperatures • 2-speed motor • 5 wash cycles • 3 water levels (adj.) • LED countdown cycle • Color Cottons • Bright Colors • Permanent Press • White Cottons • Delicates • Super Quiet Performance • Lid instructions • LED indicators • ESD Smart Card reader
- Alphanumeric display • Control card




DNCK440EA/GA White

- 7.0 cu. ft. super capacity • 4 dry cycles • 4 heat selections • Digital cycle countdown • Super quiet performance
- Lockable lint filter • Reverse-A-Door • LED indicators • ESD Smart Card reader
- Alphanumeric display • Control card

GE Nautilus™ Built-In Dishwashers



Featuring the QuietPower™ motor and the QuietPower I sound package, the GE Nautilus keeps sound at a minimum—and tenants happy.



HotStart™ option preheats water and dishes before the main wash cycle for dependable performance every time.



Replacing a 10-year old dishwasher with an ENERGY STAR-qualified model can save you \$25 or more a year in energy costs.*

*US Department of Energy



Heated Dry "ON" provides the option to quickly dry dishes. Heated Dry "OFF" reduces energy costs.



GSD3200JBB Black on black

- ENERGY STAR®-qualified • 5 cycles/22 options • Trimless door design • PowerScrub™ wash system • Piranha™ hard food disposer • Pots & Pans cycle • Plate Warmer cycle • Hi-Temp Wash option • HotStart option • Deluxe upper rack • Deluxe lower rack • Deluxe silverware basket • QuietPower I sound package • Quiet Power motor • Short Wash cycle

GSD3200JWW White on white (not shown)

GSD3200JCC Bisque on bisque (not shown)



GSD2200GWW White on white

- ENERGY STAR-qualified • 5 cycles/12 options • Trimless door design • Pots & Pans cycle • HotStart option • Deluxe lower rack • Deluxe silverware basket • QuietDesign™ sound package • Heated Dry option • Plate Warmer cycle • Short Wash cycle

GSD2200GCC Bisque on bisque (not shown)

GSD2200GBB Black on black (not shown)

GSD2201GWW White on white (not shown)

- Power cord attached



GSD2000JCC Bisque on bisque

- ENERGY STAR-qualified • 4 cycles/9 options • Trimless door design • Quiet Power motor • HotStart option • Deluxe lower rack • Deluxe silverware basket • Standard sound package • Heated Dry option • Short Wash cycle

GSD2000JWW White on white (not shown)

GSD2000JBB Black on black (not shown)

GSD2001JWW White on white (not shown)

- Power cord attached

GSD1900JWH White door with black control panel (not shown)

GE Spacemaker® 18" Built-In Dishwashers



GSM1800JBB Black on black

- ENERGY STAR®-qualified • 7 cycles/12 options
- Bright annealed stainless steel interior • Full-length flat door • Nylon racks • Removable upper rack
- China/Crystal cycle • Pots and Pans cycle • Heated Dry option



GSM1800JWW White on white (not shown)



GE Spacemaker Under-the-Sink Dishwashers



Installed under a single sink



Installed under a cooktop



GSM2100GWW White on white

GSM2100GCC Bisque on bisque

GSM2100GBB Black on black (not shown)

Available June 2004

- ENERGY STAR®-qualified • 5 cycles/12 options • Trimless door design
- Two wash levels • Pots & Pans cycle • Normal Wash cycle • Short Wash cycle (on dial) • Plate Warmer cycle (on dial) • Rinse Only cycle (on dial)
- HotStart™ option • PermaTuf® tub • Spacemaker upper rack • Deluxe lower rack • Deluxe silverware basket • QuietPower™ motor



Note: Under-the-sink dishwashers can be installed under GE cooktop models JP201C and JP202D. Refer to cooktop installation instructions.

GE Disposall® Food Waste Disposers

Food disposers minimize plumbing maintenance.



GFC320F

Continuous feed disposer
 • 1/3 HP motor • 1900-RPM grinding action • Standard sound insulation package
 • Large capacity • EZ-Mount installation • Stainless steel, dual-swivel, anti-jam grinding blades • Removable splash guard • One-year full replacement warranty*

GFC325F

• Similar features and appearance as GFC320F, with attached line cord.



GFC520F

Continuous feed disposer
 • Heavy duty 1/2 HP motor • 2600-RPM grinding action
 • Standard sound insulation package • Large capacity • EZ-Mount installation
 • Stainless steel, dual-swivel, anti-jam grinding blades • Removable splash guard • One-year full replacement plus one-year limited warranty*

GFC525F

• Similar features and appearance as GFC520F, with attached line cord.

*See written warranty for complete details.

GE® Built-In Room Air Conditioners



Electronic models feature a **timer control** so you can program the air conditioner to turn "on" or "off" when you're not around.



Upfront easy to clean **filters** make maintenance a breeze.



Clean lines, smooth curves and **contemporary design** help the air conditioner blend into a room.



Controls located at bottom of unit for easy access when mounted high in the wall, offering installation flexibility.



Cooling comfort is at your fingertips with remote control convenience.



- Standard-mount cool only • ENERGY STAR-qualified
- Mechanical controls • Variable position thermostat
- Four-way air direction • Up-front, washable air filter
- 2 cool/2 fan speeds



AJCS06LCB

• 6,000 BTU, 10.0 EER, 115 Volts

AJCS08ACB

• 8,000 BTU, 9.5 EER, 115 Volts

AJCS10ACB

• 9,900 BTU, 9.5 EER, 115 Volts

AJCS09DCB

• 8,900/8,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCS10DCB

• 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCS12DCB

• 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts



- High-mount cool only • ENERGY STAR-qualified
- Mechanical controls • Variable position thermostat
- Four-way air direction • Up-front, washable air filter
- 2 cool/2 fan speeds



AJCH08ACB

• 8,000 BTU, 9.5 EER, 115 Volts

AJCH10ACB

• 9,900 BTU, 9.5 EER, 115 Volts

AJCH10DCB

• 9,900/9,700 BTU, 9.5/9.5 EER, 230/208 Volts

AJCH12DCB

• 11,600/11,400 BTU, 9.5/9.5 EER, 230/208 Volts



- Standard-mount heat/cool • Mechanical controls
- Variable position thermostat • Four-way air direction
- Up-front, washable air filter • 2 cool/2 heat/2 fan only speeds

AJES12DCB

• 11,600/11,400 BTU cool, 11,600/9,480 BTU heat, 9.5/9.5 EER, 230/208 Volts

GE Zoneline® Air Conditioners



Freeze Sentinel™ provides automatic protection against freezing by switching the unit to heat should the temperature of an unoccupied room drop to 41°F.



Preset cooling and heating limits with 7 independent cooling and 7 heating limits—saves energy by preventing over-cooling or over-heating of rooms.



With **“Smart Fan”** fan cycle selection you can choose fan cycle or fan continuous independently for heating and cooling.




Ability to turn the unit “on” or “off” from a remote location.



Two **upfront filters** are part of roomside cabinet for easy access and maintenance.



2500 Series Deluxe Resistance Heat Standard Microcomputer Controls

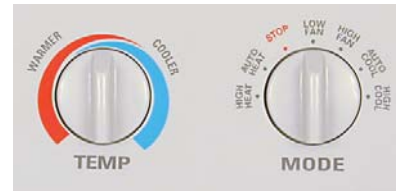

Resistance Heat Models

GE Zoneline packaged terminal units with resistance heat are especially **suited for any installation.**

Heat Pump Models

Zoneline units with heat pump operation offer **economical year-round comfort** for zonal comfort conditioning. Heating is provided by a high-efficiency heat pump. The heat pump operation is backed up with resistance heat for those times when outdoor temperatures fall below the heat pump capacity.

Deluxe Line

The Deluxe Line is a high-efficiency, two fan motors, microcomputer controlled line of cooling with resistance heat, and cooling with heat pump operation and resistance heat backup. **Energy savings**, plus standard features, make these units an **excellent value.**

Dry Air 25—The newest innovation from GE

The Dry Air 25 Series centers around **GE's exclusive** use of the patented Dinh® Dehumidifier Heat Pipe from Heat Pipe Technology, Inc. This innovative NASA spin-off technology enables the Dry Air 25 to **remove 25% more moisture** from the air than standard units. The Dry Air 25 is perfect for high-humidity climates. Available on 7000, 9000 and 12,000 BTU Resistance Heat models.

Note: Use of drain kit RAD10 is recommended.

Premium Line

The Premium Line features high-efficiency, two fan motors, full-featured, microcomputer controlled line, cooling with heat pump and resistance heat backup. The microprocessor, with solid-state sensors, **offers a variety of features for energy savings and reliable operation.**

Easy Installation

Zoneline models are designed for easy installation, whether in new construction, renovation or for replacement of old units. Unless specified by code, they **require no sub-base** and may be installed flush with the finished floor.


All models are **adaptable to remote and central desk control.** Zoneline units may even be placed in unusual locations, such as transom or common area installations. Compatibility with existing Zoneline wall cases simplifies retrofit installations. A new chassis simply slides into the already installed wall case. A new matching rear grille should be used.

And the exclusive, Quick Connect power supply kit for Premium Line models, allows the unit to be **installed on various amperage circuits.**

Dry Air 25 Series Deluxe Resistance Heat Standard Microcomputer Controls



3500 Series Deluxe Heat Pumps Standard Microcomputer Controls

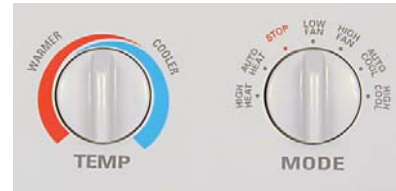

5500 Series Premium Heat Pumps Highly-Featured Microcomputer Controls



Not all features available on all models.

For additional features, specifications and color availability, refer to pages 47-48.



(Premium Line
Chassis Shown)

Features	Resistance Heat		Heat Pump	
	Deluxe 2500 Series	Deluxe Dry Air 25	Deluxe 3500 Series	Premium 5500 Series
Standard Microcomputer Controls	Standard	Standard	Standard	—
Highly Featured Microcomputer Controls	—	—	—	Standard
Rotary Control Knobs	Standard	Standard	Standard	—
Tactile Touch Pad Controls with LED	—	—	—	Standard
Universal Heaters/Power Connection Kit	—	—	—	Standard
Solid-State Thermostat	Standard	Standard	Standard	Standard
Concealed Manual Vent Control	Standard	Standard	Standard	Standard
Upfront Filter	Standard	Standard	Standard	Standard
Automatic Indoor Frost Control	Standard	Standard	Standard	Standard
Corrosion Treated Chassis	Optional	Standard	Optional	N/A
2-Position Discharge Grille	Standard	Standard	Standard	Standard
Fan Motors	2	2	2	2
Fan Cycle Switch	Standard	Standard	Standard	Standard
Fan Only Setting — 2-Speed	Standard	Standard	Standard	Standard
Indoor Fan Speed	Hi/Auto	Hi/Auto	Hi/Auto	Hi/Low/Auto
Staged Heating	—	—	2	3
Freeze Sentinel™	Standard	Standard	Standard	Standard
Temperature Limiting	Electronic 7 Step	Electronic 7 Step	Electronic 7 Step	Electronic 7 Step
Remote Control Compatibility	Standard	Standard	Standard	Standard
Central Desk Control Compatibility	Standard	Standard	Standard	Standard
Service Indicator LED	—	—	—	Standard
Heat Pump with resistance heat back-up	—	—	Standard	Standard
Heat Pump with supplemental resistance heat	—	—	—	Standard
Automatic Emergency heat	—	—	Standard	Standard
Electric Resistance heat lock-out	—	—	—	Standard
Heat Pump Defrost system	—	—	Passive	Reverse Cycle
Internal Condensate Removal (ICR)	—	—	Optional	Optional
Quick Heat Recovery	—	—	Standard	Standard
Self-Diagnostics	—	—	—	Standard
Auto Power Recovery	Standard	Standard	Standard	Standard
"Smart Fan"	Standard	Standard	Standard	Standard



Listed by
Underwriters
Laboratories



All Zoneline Units Feature Superseal

Air leakage into living space wastes energy and creates an uncomfortable environment. All Zoneline units meet the rigid air infiltration specifications of ASTM E283-91 which requires 7 CFM infiltration or less with a 25 mile per hour wind velocity. With optional ICR the specification is 10 CFM.

Water infiltration into a room could cause serious structural or furnishing damage.


All Zoneline units are tested to ASTM E331-86 specifications which require no water infiltration when exposed to 8" per hour rainfall at 63 mile per hour wind velocity for 15 minutes. Superseal means room comfort and energy saving.

Special Corrosion Protected Units

To help extend the life of the Zoneline in seacoast areas, some Deluxe Zonelines may be ordered with a special corrosion protection treatment on outdoor components and use stainless steel hardware. Zonelines with optional Corrosion Protection have a 'C' in the 10th character of the model number.

Internal Condensate Removal

Available on the 3500 and 5500 heat pumps, this feature drips the heat pump condensate over the warm indoor coil to help dissipate water from heat pump operation and associated defrost cycles. The installation of an internal or external drain system is recommended if no dripping of condensate to the outdoors is desired. ICR must not be installed in seacoast or corrosive applications.

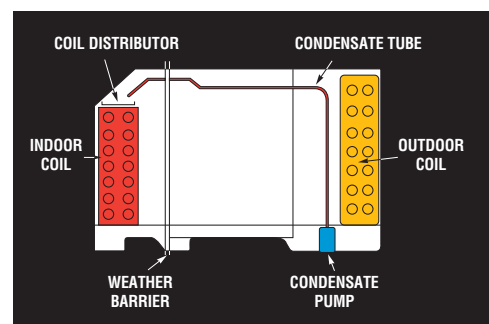

Hotpoint® Side-by-Side Refrigerators

HSM25GFRSA

- Silver Metallic exterior
- 24.9 cu. ft. capacity
- Upfront electronic dial temperature controls
- Tall LightTouch! dispenser
- Adjustable glass shelves
- Sealed vegetable/fruit crisper
- Sealed deli pan

HSS25GFP

- 24.9 cu. ft. capacity
- Upfront electronic dial temperature controls
- Adjustable glass shelves
- GE SmartWater™ filtration system
- Sealed vegetable/fruit crisper
- Sealed deli pan
- Available in White on white



HSM25GFRSA



HSS25GFP

Hotpoint Top-Freezer Refrigerators



Gallon door storage
accommodates gallon containers for quick access to most-used items.

HTM18IBPSA

- Silver Metallic exterior
- 17.9 cu. ft. capacity
- Illuminated upfront slimline temperature controls
- Adjustable glass shelves
- Clear vegetable/fruit crispers
- Gallon door storage
- Rounded doors

HTM16BBRSA (not shown)

- Silver Metallic exterior
- 15.8 cu. ft. capacity
- Upfront temperature controls
- Adjustable wire shelves
- Vegetable/fruit crispers
- Tall bottle door storage
- NeverClean™ condenser



HTM18IBPSA



HTS18GCR

HTS18GCR

- 17.9 cu. ft. capacity
- Upfront temperature controls
- Two full-width, adjustable glass shelves
- Two full-width door shelves (1 with gallon storage)
- Two clear vegetable/fruit crispers
- Equipped with factory-installed icemaker

- Deluxe quiet design
- NeverClean™ condenser
- Available in White on white

HTS18GBR (not shown)

- Similar features and appearance as HTS18GCR without factory-installed icemaker.
- Available in White on white

Not all features available on all models.
See page 6 in GE section for side-by-side refrigerator models.
See pages 7-9 in GE section for top-freezer refrigerator models.
For detailed features and specifications, refer to pages 50-51.

Hotpoint Top-Freezer Refrigerators

HTS18BCP

- 17.9 cu. ft. capacity
- Upfront illuminated temperature controls
- Two full-width, adjustable wire cabinet shelves
- Three fixed door shelves (2 with gallon storage)
- Two classic white vegetable/fruit crispers
- Equipped with factory-installed icemaker
- Spillproof freezer floor
- Deluxe quiet design
- NeverClean condenser
- Available in White on white

HTS18BBP (not shown)

- Similar features and appearance as HTS18BCP without factory-installed icemaker.
- Available in White on white or Bisque on bisque

HTS17BCR

- 17.2 cu. ft. capacity
- Upfront temperature controls
- Two full-width, adjustable wire cabinet shelves
- Two fixed door shelves with tall bottle storage
- Two classic white vegetable/fruit crispers
- Equipped with factory-installed icemaker
- Deluxe quiet design
- NeverClean condenser
- Available in White on white

HTS17BBR (not shown)

- Similar features and appearance as HTS17BCR without factory-installed icemaker.
- Available in White on white or Bisque on bisque

HTR17BBR

- Similar features and appearance as HTS17BBR except recessed door handles.
- Available in White on white or Bisque on bisque

HTS16BCR (not shown)

- Similar features and appearance as HTS17BCR except 15.8 cu. ft. capacity
- Available in White on white

HTS16BBR (not shown)

- Similar features and appearance as HTS17BCR except 15.8 cu. ft. capacity and without factory-installed icemaker.
- Available in White on white or Bisque on bisque

HTR16BBR (not shown)

- Similar features and appearance as HTR17BBR, except 15.8 cu. ft. capacity.
- Available in White on white or Bisque on bisque



HTS18BCP



HTS17BCR



HTR17BBR

HTS15BCR (not shown)

- Similar features and appearance as HTS17BCR, except 14.9 cu. ft. capacity.
- Available in White on white

HTS15BBR (not shown)

- Similar features and appearance as HTS17BBR, except 14.9 cu. ft. capacity.
- Available in White on white or Bisque on bisque

HTR15BBR (not shown)

- Similar features as HTS17BBR except 14.9 cu. ft. capacity and recessed door handles.
- Available in White on white or Bisque on bisque

HTH15BBR (not shown)

- Similar features as HTS15BBR except ENERGY STAR-qualified.
- Available in White on white or Bisque on bisque



HTR15ABR (not shown)

- 14.9 cu. ft. capacity
- Two full-width, adjustable wire cabinet shelves
- Two fixed door shelves with tall bottle storage
- One full-width, white vegetable/fruit crisper
- Equipped for optional icemaker
- Deluxe quiet design
- NeverClean condenser
- Available in White on white or Bisque on bisque

Not all features available on all models.
See pages 7-9 in GE section for top-freezer refrigerator models.
For detailed features and specifications, refer to page 51.

Hotpoint® Electric Ranges



Lift-up cooktop

Cooktop lifts up to allow easy cleanup of hard-to-reach spots underneath.



Plug-in surface elements

Unplug to remove drip bowls and clean in the dishwasher. Recessed areas are designed to catch spillovers and make cleaning simple.

30" electric ranges

RB790SHSA

- Silver metallic exterior
- Self-clean oven
- Ceramic glass cooktop
- Ribbon heating elements
- Super-large oven capacity
- Electronic oven controls
- Big View™ window

RB540SHSA

- Silver metallic exterior
- Standard clean oven
- Super-large oven capacity
- One 8" and two 6" Calrod® heating elements
- Electronic clock and timer
- Big View window
- Porcelain upswept cooktop
- Porcelain-enameled drip bowls

RB787WH

- White on white model
- Self-clean oven
- Smooth, easy-to-clean fingerprint- and scratch-resistant patterned ceramic-glass cooktop
- Two 8" and two 6" ribbon heating elements
- Hot surface indicator lights
- Single oven controls knob

RB787CH (not shown)

- Bisque on bisque model
- Same features and appearance as RB787WH.

RB787BH (not shown)

- Black on black model
- Same features and appearance as RB787WH.



RB790SHSA
Self-Clean Oven



RB540SHSA
Standard Clean Oven



RB787WH
Self-Clean Oven

Not all features available on all models.
See pages 10 and 11 in GE section for electric range models.
For detailed features and specifications, refer to page 52.

30" electric ranges

RB757WH

- White on white model
- Auto oven shut-off
- Self-clean oven
- Two 8" and two 6" plug-in Calrod® heating elements with removable one-piece chrome drip bowls
- Lift-up cooktop
- Frameless black glass oven door with window
- Designer-style handle

RB757CH (not shown)

- Bisque on bisque model
- Same features and appearance as RB757WH.

RB757EH (not shown)

- Black on black model
- Same features and appearance as RB757WH.

RB757BH (not shown)

- White or bisque model
- Same features as RB757WH, except has black door and control panel.

RB536WH/CH (not shown)

- White on white or Bisque on bisque
- Standard clean oven
- Electronic clock/timer
- Lift-up cooktop
- Two 8" and two 6" plug-in heating elements
- Frameless glass oven door with window
- Designer-style handle

RB525BH

- White or Bisque model
- Standard clean oven
- One 8" and three 6" plug-in heating elements
- Frameless solid black glass oven door
- Chrome visor door handle

RB525H (not shown)

- White or Bisque model
- Same features and appearance as RB525BH, except has color-matched painted oven door.



RB757WH
Self-Clean Oven



RB525BH
Standard Clean Oven

24" free-standing electric range

RA624F

- White model
- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights

20" free-standing electric range

RA620F

- White or Bisque model
- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights



RA624F



RA620F

Hotpoint® Gas Ranges



Square grates

Burner grates feature durable porcelain-enamel finish; square design creates a continuous cooking platform.



Lift-up cooktop with easy-clean subtop

Standard burner models have a cooktop that lifts up for easy access to porcelain-enameled subtop. Twin rod supports allow cooktop to lift and lock into place. No pipes or wires to interfere with cleanup.

30" free-standing gas ranges

RGB790SEHSA

- Silver metallic exterior
- Self-clean oven
- Extra-large oven capacity
- Sealed cooktop burners
- Performance Plus burner
- Simmer burner
- All purpose burners

RGB540SEHSA

- Silver metallic exterior
- Standard clean oven
- Extra-large oven capacity
- Sealed cooktop burners
- Performance Plus burner
- Simmer burner
- All purpose burners

RGB745WEH

- White on white model
- Extra-large, self-clean oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy steel grates
- In-oven broiling
- Frameless white glass oven door with window
- EasySet IV clock and oven timer
- Removable grey porcelain-enameled drip pans
- Removable storage drawer

RGB745EEH (not shown)

- Black on black
- Same features and appearance as RGB745WEH.

RGB745BEH

- White or Bisque model
- Same features as RGB745WEH, except has black control panel and black glass oven door.

RGB528PEH

- White on white model
- Extra-large standard-clean oven
- White porcelain-enameled oven door with window
- Electronic clock/timer
- Twin cooktop burners
- Lift-up cooktop



RGB790SEHSA
Self-Clean Oven



RGB540SEHSA
Standard Clean Oven



RGB745WEH
Self-Clean Oven



RGB745BEH
Self-Clean Oven



RGB528PEH
Standard Clean Oven

Not all features available on all models.
See page 13 in GE section for gas range models.
For detailed features and specifications, refer to page 53.

30" free-standing gas ranges

RGB524PEH

- White or Bisque model
- Extra-large standard clean oven
- Solid color-matched porcelain-enameled oven door
- Slide-out broiler drawer
- Electronic pilotless ignition system

RGB524PPH

- White or Bisque model
- Same features as RGB524PEH, except with standing pilot ignition system.

RGB508PEH

- White or Bisque model
- Extra-large standard clean oven
- Solid color-matched porcelain-enameled oven door
- Drop-down broiler drawer
- Electronic pilotless ignition system

RGB508PPH

- White or Bisque model
- Same features as RGB508PEH, except with standing pilot ignition system.



RGB524PEH/PPH

RGB508PEH/PPH



RGA624EF/PF

RGA620EF/PF

24" compact gas ranges

RGA624EF

- White model
- Standard clean oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Rectangular burner grates
- Push-to-turn controls

RGA624PF

- White model
- Same features as RGA624EF, except with standing pilot ignition system.

20" compact gas ranges

RGA620EF

- White model
- Standard clean oven
- Electronic pilotless ignition system
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Rectangular burner grates
- Push-to-turn controls

RGA620PF

- White model
- Same features as RGA620EF, except with standing pilot ignition system.

Hotpoint® Microwave Ovens



The design of the Counter Saver Plus microwave oven complements any kitchen. In the place of a range hood, enjoy the convenience of microwave cooking with eye-level controls directly above your range or cooktop, increasing the livability of your apartment.

Over-the-range microwave ovens

RVM1625SJ

- Silver metallic exterior
- 1.6 cu. ft. oven cavity
- 1000 watts*
- Turntable
- Convenience cooking controls
- Auto and Time Defrost
- Time Cook I & II
- Full-view cooktop lighting

RVM1435BD

- Black on black
- 1.4 cu. ft. oven cavity
- 950 watts*
- Clock with AM/PM pad
- Concurrent programming
- Turntable
- Instant On controls
- Auto/Time Defrost
- 10 power levels
- Child lockout
- Full-view cooktop lighting

RVM1435WH (not shown)

- White on white
- Similar features and appearance as RVM1435BD

*IEC-705 Test Procedure



RVM1625SJ



RVM1435BD



REM25SJ



Countertop microwave oven

REM25SJ

- Silver metallic exterior
- 1.0 cu. ft. oven cavity
- 800 watts*
- Convenience cooking controls
- Auto and Time Defrost
- Optional hanging kit included
- Child lockout
- Add 30 seconds

Hotpoint Hood

RN328HSA

- Silver metallic exterior
- Non-vented
- Variable two-speed fan control
- Cooktop light
- Removable grease filter



Not all features available on all models.
See pages 14-15 in GE section for microwave oven models.
For detailed features and specifications, refer to pages 52-54.
See page 12 in GE Section for hood models.



Balance Pro™ Suspension System

An innovative rod and spring floating suspension system designed to handle off-balanced loads on any type of floor. All Hotpoint washers are 100% front serviceable.



Double-coated drum interior

Provides long-lasting dependability and durability.

Washer and dryer pairs

VBSR3100D

- 3.2 cu. ft. Super capacity washer
- 3 water levels
- 10 cycles
- 3 wash/spin speed combinations
- 3 wash/rinse temperature settings
- FlexCare™ agitator
- Bleach dispenser
- Fabric softener dispenser
- Available in White on white

VVSR1070D

- 3.2 cu. ft. Super capacity washer
- 3 water levels
- 7 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- FlexCare agitator
- Available in White on white

VBXR1090D

- 2.7 cu. ft. Extra-large capacity washer
- 3 water levels
- 9 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- FlexCare agitator
- Bleach dispenser
- Available in White on white or Bisque on bisque

NBXR463EB (Electric)

NBXR463GB (Gas)

- 6.0 cu. ft. Extra-large capacity dryer
- Automatic dry control
- 6 cycles
- 4 heat selections
- Upfront lint filter
- Reversible door
- Available in White on white

NVLR333EE (Electric)

NVLR333GE (Gas)

- 5.8 cu. ft. Extra-large capacity dryer
- Automatic dry control
- 3 cycles
- 3 heat selections
- Upfront lint filter
- Reversible door
- Available in White on white or Bisque on bisque



VBSR3100D



VVSR1070D



VBXR1090D



NBXR463EB/GB



NVLR333EE/GE (Available July '04)

Note: Electric dryer cord kit sold separately.

Not all features available on all models.

See pages 16-20 in GE section for washer and dryer models.

For detailed features and specifications, refer to page 55.

Hotpoint® Dishwashers

Hotpoint dishwashers offer new features for today's customers



Durable tub and door liner
Built to endure years of proper usage while resisting corrosion to extend the life of the dishwasher.



Power Wash II system
Provides three-level wash action with powerful water jets to effectively remove food soils.



Toe kick and access panel insulation
Fiberglass insulation in toe kick and access panel minimizes operating noise.



QuietPower™ motor
Runs quietly and efficiently to keep the kitchen peaceful.



Hot PreWash option
Preheats water before the main wash cycle for excellent performance time after time.



HDA3740GSA



HDA3740GSA
ENERGY STAR®-qualified
• Silver metallic exterior
• Trimless door design
• Power Wash II system

- Hot PreWash option
- QuietDesign™ sound package
- TouchTap™ controls

- 1–5-hour delay start
- Super upper rack
- Deluxe lower rack



HDA3400GBB
ENERGY STAR®-qualified
• Trimless door design
• Power Wash II system
• Hot PreWash option
• QuietPower motor

- Pushbutton controls
- Super upper rack
- Deluxe lower rack
- 5 cycles/22 options
- Pots & Pans cycle

- Water Saver cycle
- Plate Warmer cycle
- Hi-Temp Wash
- Deluxe silverware basket

HDA3400GWW – White on white
HDA3400GCC – Bisque on bisque



HDA2000GBB
ENERGY STAR®-qualified
• Trimless door design
• Deluxe lower rack
• Hot PreWash option
• QuietPower motor

- 4 cycles/9 options
- Heavy Wash cycle
- Water Saver cycle
- Rinse Only cycle
- Heated Dry

- Deluxe silverware basket
- HDA2000GWW – White on white
HDA2000GCC – Bisque on bisque



Not all features available on all models. For detailed features and specifications, refer to page 54. See pages 21-22 in GE section for dishwasher models.


Top-Freezer Refrigerators

	GE "D" Series		GE "B" Series								GE "A" Series
	GTH18DCR GTS18DCP	GTH18DBR GTS18DBP	GTR18BBR	GTS17BBR GTS17BCR	GTR17BBR	GTS16BBR	GTH15BBR GTH15BBR	GTS15BCR	GTR15BBR	GTS12BBP	GTR11AAP
Capacity											
Total (cu. ft.)	17.9	17.9	17.9	17.2	17.2	15.8	14.9	14.9	14.9	11.9	11.44
Fresh food (cu. ft.)	12.89	12.89	13.62	13.05	13.05	11.69	10.77	10.77	10.77	8.94	8.45
Freezer (cu. ft.)	5.03	5.03	4.01	3.86	3.86	3.86	3.86	3.86	3.86	2.95	2.99
Shelf area (sq. ft.)	22.2	22.6	18.0	17.5/16.7	17.5	17.2	17.2	16.4	17.2	12.1	13.4
Fresh Food Features											
Upfront temperature controls	Illuminated	Illuminated	●	●	●	●	●	●	●		
Cabinet shelves	2 Wire, 1 Glass	2 Wire, 1 Glass	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire
Adjustable	1 F/W, 1 Split wire, 1 Split glass	1 F/W, 1 Split wire, 1 Split glass	2 F/W	2 F/W	2 F/W	2 F/W	2 F/W	2 F/W	2 F/W	2 F/W	2 F/W
Vegetable/fruit crisper(s)	2 White	2 White	2	2	2	2	2	2	2	1 F/W Divided	1 F/W
Snack pan	White	White									
Pivot-out pan removal system	Slide-out Slide over	Slide-out Slide over									
Door shelves	1 Split w/gallon, 2 F/W w/gallon	1 Split w/gallon, 2 F/W w/gallon	2 (Tall Bottle)	2 (Tall Bottle)	2 (Tall Bottle)	2 (Tall Bottle)	2 (Tall Bottle)	2 (Tall Bottle)	2 (Tall Bottle)	2-1/2 (1 Tall Bottle)	4 (1 Tall Bottle)
Dairy compartment	●	●	●	●	●	●	●	●	●	●	
Interior light system	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Quiet Design	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Standard	Standard
NeverClean™ condenser	●	●	●	●	●	●	●	●	●		
ENERGY STAR®	● / -	● / -					- / ●				
Freezer Features											
Factory-installed icemaker and bin	●	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A) / ●	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	●	Opt. (IM4A)	Opt. (IM4A)	
Ice 'N Easy trays		2	2	2 / -	2	2	2		2	1	2
Spillproof freezer floor	●	●									
Wire freezer compartment shelves	Step	Step									1 F/W
Fixed door shelves	2	2	2	2	2	2	2	2	2	2	2
Exterior											
Color(s) available*	WW, CC, BB	WW, CC, BB	WW, CC	WW, CC	WW, CC	WW, CC, BB	WW, CC, BB WW, CC	WW, CC	WW, CC	WW, CC	WW
Door handle(s)*	CM	CM	CM Recessed	CM	CM Recessed	CM	CM	CM	CM Recessed	CM	CM Recessed
Customer installed handles	●	●									
Exterior design	Rounded Doors	Rounded Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Rounded Doors	Contoured Doors
Reversible doors	●	●	●	●	●	●	●	●	●	●	●
Choose right or left door opening	●	●		●	●	●	●	●	●	●	
Adjustable rollers	Front	Front	Front	Front	Front	Front	Front	Front	Front	Front	
Weights & Dimensions											
Height to top of hinge (in.) A	66-5/8	66-5/8	67-3/8	67-3/8	67-3/8	64-1/4	61-3/4	61-3/4	61-3/4	60-1/2	57-7/8
Height to top of case (in.) B	66-1/8	66-1/8	66-7/8	66-7/8	66-7/8	64-3/4	61-1/4	61-1/4	61-1/4	60	57-3/8
Height to mid-freezer (in.)	53-15/16	53-15/16	57	57	57	54-3/8	51-3/8	51-3/8	51-3/8	52	50
Case depth w/door (in.) C	27-1/2	27-1/2	26-3/4	26-3/4	26-3/4	25-7/8	25-7/8	25-7/8	25-7/8	27-3/4	28-1/4
Case depth less door handle (in.) D	30-1/4	30-1/4	30-1/2	30	30	29-1/8	29-1/8	29-1/8	29-1/8	30-5/8	31-1/8
Case depth with door handle (in.) E	32-1/8	32-1/8	30-1/2	31-7/8	30	31	31	31	29-1/8	32-3/8	31-1/8
Depth w/fresh food door open 90° (in.) F	58-1/8	58-1/8	56-3/8	55-3/4	55-3/4	54-7/8	54-7/8	54-7/8	54-7/8	51-5/8	52-3/4
Width (in.) G	29-1/2	29-1/2	28	28	28	28	28	28	28	23-7/8	23-7/8
Width w/door open 90° w/door handle (in.) H	32	32	28-7/8	30-1/2	28-5/8	30-1/2	30-1/2	30-1/2	28-5/8	26-1/2	25-1/8
Air clearances Each side (in.)	1/8	1/8	3/4	3/4	3/4	3/4	3/4	3/4	3/4	1	1
Top (in.)	1	1	1	1	1	1	1	1	1	4	4
Back (in.)	1	1	1	1	1	1	1	1	1	2	3
Approx. shipping weight (lbs.)	228	223	178	179 / 184	178	166	166	171	165	170	163
Power/Ratings	120V, 60Hz, 15Amps										

*Color(s) available: WW = White on white, CC = Bisque on bisque, BB = Black on black, CM = Color-Matched.

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Top-Freezer No-Frost Refrigerator



Note: All Top-Freezer No-Frost Right-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right. All Top-Freezer No-Frost Left-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.

Side-By-Side Refrigerator

	GE "D" Series GSS20DBP
Capacity	
Total (cu. ft.)	19.9
Fresh food (cu. ft.)	12.87
Freezer (cu. ft.)	7.04
Shelf area (sq. ft.)	18.1
Fresh Food Features	
Upfront electronic temperature controls	●
Cabinet shelves	3 wire Everwhite
Adjustable	3
Meat drawer	1 sealed opaque
Vegetable/fruit crisper	1 sealed opaque
Fixed door bins	4 (2 w/ gallon storage)
Dairy compartment	●
Interior light system	Single-level
Quiet Design	Deluxe
NeverClean™ condenser	●
Freezer Features	
FrostGuard™ technology	●
Factory-installed electronic icemaker and bin	Opt. (IM5SS)
Wire cabinet shelves	4 (3 Adj.)
Storage bin(s)	1
Door shelves	6
Interior light	●
Appearance	
Color(s) available*	WW, CC
Deluxe door handle(s)	CM*
Textured steel door and case	●
Adjustable rollers	Front
Weights & Dimensions	
Height to top of hinge (in.) A	67-1/2
Height to top of case (in.) B	66-1/2
Case depth without door (in.) C	28
Case depth less door handle (in.) D	31-1/4
Case depth with door handle (in.) E	33-9/16
Depth with fresh food door open 90° (in.) F	47-3/8
Width (in.) G	31-1/2
Width w/door open 90° with door handle (in.) H	33-15/16
Air clearances Each side (in.)	1/8
Top (in.)	1
Back (in.)	1
Approx. shipping wt. (lbs.)	306

*Color(s) available: WW = White on white, CC = Bisque on bisque, CM = Color-Matched.

Add 9/16" for water hook-up. Hook-up fits in 5/8" back air clearance when calculating installation depth. If installed against a wall, allow clearance of 10-3/4" on 20 cu. ft. models.

To remove fresh food pans, remove door bins.

Clearances required to remove fresh food full-size pan without disassembling: 13-1/2" on 20 cu. ft.

Allow additional space for any necessary leveling adjustments.

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Built-In Electric Cooktops

	GE	
	JP201CB	JP202D
Features		
Cooktop surface	Stainless Steel	Porcelain-Enameled
8" heating elements	1 Plug-in	1 Plug-in
6" heating elements	1 Plug-in	1 Plug-in
One-piece removable drip bowls	Chrome	Chrome
Infinite heat rotary controls	●	●
Control panel location	Upfront	Upfront
Surface element "ON" indicator light	●	●
Appearance		
Color appearance*	SS	WW
Weights & Dimensions		
Cooktop width (in inches)	21-1/4	21-1/4
Approx. shipping wt. (lbs.)	18	18
Power/Ratings		
KW rating @ 240V	3.4	3.4
208V	2.5	2.5
Amps @ 240V	20	20
208V	20	20

*Color(s) available: SS = Stainless Steel, WW = White on white.


Spacemaker® Compact Refrigerators

	GE		
	GMR06AAP	GMR04AAM	GMR02BAN
Capacity			
Total (cu. ft.)	6.0	4.3	1.7
Fresh food (cu. ft.)	5.51	3.89	1.49
Freezer (cu. ft.)	.49*	.42*	.16*
Shelf area (sq. ft.)	8.8	5.6	2.9
Features			
Ice 'N Easy trays	2 Mini	1 Mini	1 Mini
Manual defrost	●	●	●
Cabinet shelves (wire)	2 (1 Adj.)	2	1
Can rack	●	●	●
Door shelves	1 F/W, 2 Half-width	2 F/W, 1 Half-width	1 F/W, 1 Half-width
Interior light	●	●	●
Economical/Quiet			
Cabinet/door insulation	Foam	Polystyrene	Foam
Cabinet/door liner	HIPS	ABS	ABS
Appearance			
Color(s) available	White, Black	White, Black	White, Black
Door handles	White or Black Visor	Color-Matched Recessed	Color-Matched Recessed
Rounded doors	●	●	●
Reversible doors	●	●	●
Weights & Dimensions			
Height (in.) A	34-1/4	32-1/8	18-15/16
Width (in.) B	23-5/8	20-1/16	17-1/2
Depth with handle (in.) C	25-7/8	21-7/8	19-1/4
Depth with door open 90° (in.) D	47-1/2	39-1/4	35-1/2
Air clearances Each side (in.)	0 1/2	1/2	1/2
Top (in.)	0	2	2
Back (in.)	0	2	2
Approx. shipping weight (lbs.)	88	77	51
Accessories			
Custom Trim (optional)	TPK6-Black only		


*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about **two weeks**. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.

† If installed against a wall, allow 1-1/4" on hinge side to allow for proper door opening.

Side-By-Side Refrigerator




Front View




Top View

Spacemaker Refrigerator

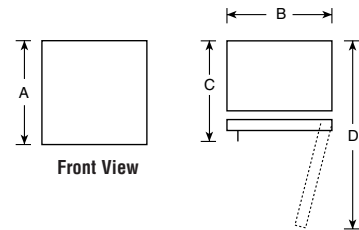


Front View



Top View


Counter Installation Dimensions (in inches)

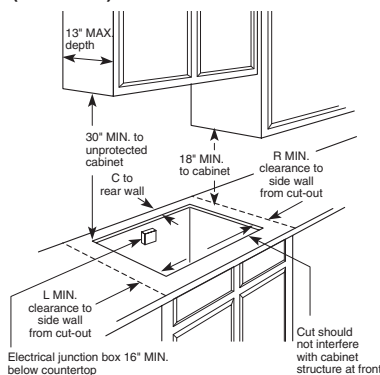

Dimensions (in inches)

	Overall		Cutout		Minimum Spacing To Nearest Combustible Wall			To Edge of Front Counter (Min.)
Model	W	D	A	B	C	R	L	F
JP202	21-1/4	16-5/8	20-1/8	16-1/8	2	2	2	2-3/4
JP201	21-1/4	16-5/8	20-1/8	16-1/8	2	2	2	2-3/4

Built-In Cooktop Dimensions (in inches)



30" Free-Standing Electric Ranges

	GE						
	JBP26WH JBP26CH JBP26BH	JBP24WH JBP24EH JBP24BH	JBP21WH JBP21BH	JBS27SH JBS27WH JBS27CH JBS27BH	JBS07H	JBS15H	JBS03BH JBS03H
Features							
Oven cleaning	Self-Clean	Self-Clean	Self-Clean	Standard	Standard	Standard	Standard
Oven capacity (cu. ft.)	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Oven racks	2	2	2	2	2	2	2
Upswept porcelain-enameled cooktop	•	•	•	•	•	•	•
Clean-Well™ cooktop system	•	•	•	•	•	•	•
Lift-up cooktop w/dual support rods	•	•	•	•	•	•	•
8" heating elements	2 (5 turns)	2 (5 turns)	2 (5 turns)	2 (5 turns)	1 (5 turns)	1 (5 turns)	1 (5 turns)
6" heating elements	2 (4 turns)	2 (4 turns)	2 (4 turns)	2 (4 turns)	3 (4 turns)	3 (4 turns)	3 (4 turns)
Infinite heat controls	•	•	•	•	•	•	•
Plug-in Calrod® heating elements	•	•	•	•	•	•	•
Removable 1-piece drip bowls	Black	Chrome	Chrome	Black Chrome Chrome Black	Chrome	Chrome	Chrome
TrueTemp™ system	•						
SmartLogic™ controls	•						
Six-pass power bake element	•						
Convenience controls	•	•	•				
QuickSet oven controls	QuickSet IV	QuickSet III	QuickSet III				
Digital temperature display	•	•	•				
Auto oven shut-off	w/override	w/override	w/override				
Delay bake	•						
Oven light pad	•	•					
Delay clean option	•	•					
Auto self-clean	•	•	•				
Self-clean cool down display	•	•	•				
Audible preheat signal	•	•	•				
Certified Sabbath mode	•	•	•				
Clock and minute timer	•	•	•	•			
Dual element bake	•	•	•	•	•	•	•
Heating element "ON" indicator light	•	•	•	•	•	•	•
Interior oven light	Pad	Pad		Switch	Switch	Switch	
Preheated oven light	•	•	•				
Removable full-width storage drawer	White Bisque Black	White Black CM*	White CM*	Stainless steel CM* CM* CM*	White/Bisque/Black	CM*	CM*
Broiler pan	•	•	•	•	•	•	•
Appearance							
Color appearance*	WW CC BB	WW BB WH/CT	WW WH/CT	SS WW CC BB	WW/CC/BB	WW/CC/BB	WH/CT WH/CT
Frameless glass oven door*	White Bisque Black	White Black Black	White Black	Stainless steel White Bisque Black	Porcelain CM*	Porcelain CM*	Black Glass Porcelain CM*
Oven door with window	ClearView™	ClearView		ClearView	ClearView	ClearView	
Removable oven door	•	•	•	•	•	•	•
Designer-style handle	•	•	•	•	•	•	Visor
Textured steel side panels	•	•	•	•	•	•	•
Weights & Dimensions							
Overall oven interior dimensions (WxHxD in inches)	← 24-1/4 x 19 x 19 →		← 23-3/4 x 19 x 18-1/2 →			22-3/4 x 15-3/4 x 17	23-3/4 x 19 x 18-1/2
Approx. shipping weight (lbs.)	172	170	144	158	141	157	154
Power/Ratings							
KW rating @ 240V	11.7	11.7	11.7	12.6	11.5	11.2	11.4
208V	8.8	8.8	8.1	9.9	9.1	6.9	9.0
Amp rating @ 240V / 208V	40	40	40	40	40	40	40

*WW = White with white door, CC = Bisque with bisque door, BB = Black with black door, WH = White with black door, CT = Bisque with black door, CM = Color-Matched indicates color of oven door or storage drawer matches range cooktop (either white, black, bisque or almond).

30" Slide-In Electric Ranges 30" Free-Standing Gas Ranges

	GE	
	JSP26BD	JSS16PD
Features		
Self-clean oven with Delay Clean option	●	Standard-Clean
Variable cleaning time	●	
Automatic self-clean oven door lock	●	
Oven racks	2	2
Overhanging cooktop	●	●
Plug-in Calrod™ heating elements	●	●
8" heating elements	2 Plug-in	2 Plug-in
6" heating elements	2 Plug-in	2 Plug-in
Infinite heat controls	●	●
SmartSet Controls	●	
Temperature display	●	
Start pad	●	
Delay Bake option w/Cook & Hold	●	
C° or F° programmable	●	
Audible preheat signal	●	
Auto oven shut-off w/override	●	
Control lock capability	●	
Electronic clock and kitchen timer	●	●
Heating element "ON" indicator light	●	●
Interior oven light	●	●
Storage drawer	CM*	CM*
Broiler pan with grid	●	●
Appearance		
Color appearance*	WH/CT	WH/CT
Frameless glass oven door	CM*	Painted
Oven door with window	●	●
Oven door handle	Black	Black
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	← 22-3/4 x 15-3/4 x 17 →	
Approx. shipping wt. (lbs.)	175	160
Power/Ratings		
KW rating @240V	10.8	10.8
208V	8.1	8.1
Amps @ 240V	40	40
208V	40	40
Broiler/Bake Wattage	3400/2585	3400/2585
Accessories		
Optional backguard (available at additional cost)	JXS33/31	JXS33/31

*Color(s) available: WH = White, CT = Bisque, CM = Color-matched indicates color of the oven door matches range cooktop and drawer face (either White or Bisque).

30" and 27" Drop-In Electric Ranges

	GE	
	JDP36	JMS08BD
Features		
Oven cleaning	Self-Clean	Standard-Clean
Oven shelves	2	2
Lift-up overhanging cooktop	●	White or Bisque Porc.-Enam.
8" heating elements	2	1
6" heating elements	2	3
Plug-in Calrod™ heating elements	●	●
Infinite heat controls	●	●
Removable one-piece drip bowls	●	Chrome
Heating element "ON" indicator light	●	●
Interior oven light	●	●
Broiler pan with grid	●	●
Appearance		
Color appearance*	WH/CT	WH/CT
Frameless oven door	Black Glass	Black Glass
Oven door with window	●	Big ClearView
Lift-off oven door		●
Designer-style handle	●	●
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	22-3/4 x 15-3/4 x 17	19 x 15 x 18
Approx. shipping wt. (lbs.)	144	119
Power/Ratings		
KW rating @240V	11.6	10.1
208V	8.7	7.6
Amps @ 240V	40	40
208V	40	40

*Color(s) available: WH = White, CT = Bisque.

Optional backguard in white or black is available at additional cost for all models. JX27RWH = White, JX27RBK = Black.

	GE				
	Standard Burner Models				
	JGBP24BEH	JGBS20WEH JGBS20BEH	JGBS17PEH	JGBS07PEH	JGBS04BEH JGBS04PPH
Capacity					
Extra-large 4.8 cu. ft. oven	●	●	●	●	●
Features					
Oven cleaning	Self-Clean	Standard-Clean	Standard-Clean	Standard-Clean	Standard-Clean
Cooktop burners	Std./Twin	Std./Twin	Std./Twin	Std./Twin	Std./Twin
All-purpose burners (Nat.)	(4) 9,100/850 BTU	(4) 9,100/850 BTU	(4) 9,100/850 BTU	(4) 9,100/850 BTU	(4) 9,100/850 BTU
Valves (degree of turn)	270	140	140	140	140
Electronic clock and timer		●	●		
Porcelain-enameled cooktop	One-Piece Upswept	One-Piece Upswept	One-Piece Upswept	●	●
Lift-up cooktop	●	●	●	●	●
Easy-clean porcelain-enameled subtop	●	●	●	●	●
One-piece drip pans	Porc.-Enam.	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.
Removable square grates	Black Standard Porcelain-Steel	Grey Standard Black Standard Porcelain-Steel	Black Standard	Grey/Taupe/Black Standard Porcelain-Steel	Black Standard Porcelain-Steel
Ignition system	Electronic	Electronic	Electronic	Electronic	Electronic Pilot†
Oven racks	2	2	2	2	2
Six embossed rack positions	●	●	●	●	●
One piece broiler pan	●	●	●	●	●
Porcelain-enameled backguard	●	●	●	●	●
Interior oven light	●	●	●	●	
Broiler drawer	●	●	●	●	●
Appearance					
Color appearance*	WH/CT	WW WH/CT	WH/CT	WW/CC/BB	WH/CT WW/WH/CT
Frameless oven door	Solid Black Glass	White Glass Black Glass	CM* Porcelain-Enameled	White/Bisque/Black Porcelain-Enameled	Black Glass CM* Porcelain-Enameled
Oven door with window		ClearView	ClearView	ClearView	
Designer-style handle	●	●	●	●	● / Chrome Visor
Weights & Dimensions					
Overall oven interior dimensions (WxHxD in inches)	← 24 x 18.5 x 19 →				
Approx. shipping weight (lbs.)	200	175	175	165	165
Power/Ratings					
Top burners (000's BTU's) Nat/LP	← (4) 9.1/8.0 →				
Oven/broiler burners (000's BTU's) Nat/LP	16.0/16.0 Oven 12.5/12.0 Broil	← 18.0/16.5 →			
Gas range electrical rating**	← 120V, 60Hz., 5A →				
LP conversion kit (included)	●	●	●	●	●

*WW = White with white door, CC = Bisque with bisque door, BB = Black with black door, WH = White with black door, CT = Bisque with black door, CM = Color-Matched (indicates color of oven door matches cooktop either white or bisque).

**Electrical rating not applicable to standing pilot models.

†JGBS04PPH has a standing pilot ignition.

Factory set for Natural Gas. A set of LP orifices is included with each range for LP conversion.

30" Standard Hoods

	GE	
	JV338H	JN327H
Features		
Two-speed fan control	●	●
Vertical exhaust (CFM)	170	
Optional damper accessory (round)	JXDA22	
Sones rating: Top exhaust	5.5	
Removable grease filters	1'	Disposable 1-Pc. Filter†
Filter size (sq. in.)	90	90
Cooktop light*	1	1
3-1/4" x 10" rectangular duct	●	
7" round duct	●	
Non-vented		●
Appearance		
Color appearance**	WW/CC/BB	WW/CC/BB
Weights & Dimensions		
Approx. shipping wt. (lbs.)	17	19
Power/Ratings		
Current rating amps @ 120V	2.5	2.5

†WB02X9381 replacement grease filter and WB02X10700 replacement charcoal filter are available at additional cost. Call toll-free 800-626-2002.

*Light bulbs not furnished.

**WW = White on white, CC = Bisque on bisque, BB = Black on black.

Spacemaker® Over-The-Range Microwave Ovens

	GE		
	JVM1630WJ JVM1631WJ* JVM1630CJ JVM1631CJ* JVM1630BJ JVM1631BJ*	JVM1440SH JVM1441SH* JVM1440WH JVM1441WH* JVM1440BH JVM1441BH*	JVM1430WD JVM1430BD
Capacity			
Oven cavity (cu. ft.)	1.6	1.4	1.4
Features			
Watts (IEC-705 Test Procedure)	1000	950	950
Electronic touch controls	●	●	●
SmartControl system w/interactive display	●	●	●
Scrolling display	1 Line	1 Line	
Clock and AM/PM pad	●	●	●
Variable scroll speed	●	●	●
Help pad	●	●	●
Concurrent programming	●	●	●
Convenience Beverage controls	●	●	●
Popcorn	●	●	●
Reheat	●	●	●
Express Cook (1-6 min.)	●	●	●
Instant On controls	●	●	●
Time Cook	I & II	I & II	I & II
Add 30 seconds	●	●	●
Auto/Time Defrost	●/●	●/●	●/●
Power levels	10	10	10
Delay Start	●	●	●
Reminder	●	●	●
CircuWave™ cooking system	●	●	●
Turntable	●	●	●
Turntable On/Off	●	●	●
Full-View cooktop lighting	●	●	●
Night light	●	●	●
Timer On/Off	●	●	●
Cooking complete reminder	●	●	●
Child lockout	●	●	●
300-CFM exhaust fan	●	2-Speed	2-Speed
Easy mount installation	●	●	●
Appearance			
Color appearance**	WW/CC/BB	SS/WW/BB	WW/BB
Case color	White/Bisque/Black	Black/White/Black	White/Black
Big View window	●	●	●
Weights & Dimensions			
WxHxD (in inches) Cavity	20-1/4 x 9-9/32 x 14-13/32	19-5/16 x 9-5/16 x 13-3/16	
Exterior †	29-7/8 x 16-15/32 (rear) x 15	29-7/8 x 16-1/2 (rear) x 14-15/16	29-7/8 x 15-7/8 x 14-15/16
Approx. shipping wt. (lbs.)	67	67	67
Power/Ratings			
Frequency (MHz)	2450	2450	2450
Electrical input Watts	1480	1480	1480
@ 120V Amperage	15	15	15

* Non-vented model.
 ** Color(s) available: SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.
 † Exterior dimensions: depth excludes handle.

Spacemaker II™ Microwave Ovens

	GE	
	JEM25WF	JEM25BF
Capacity		
Oven cavity (cu. ft.)	.9	.9
Features		
Watts (IEC-705 Test Procedure)	800	800
Electronic touch controls	●	●
Electronic digital display w/clock	●	●
Beverage/Cook/Popcorn/Reheat/Snacks	●	●
Express Cook	●	●
Instant On controls	●	●
Time Cook I & II	●	●
Add 30 Seconds	●	●
Auto/Time Defrost	●	●
Power levels	10	10
Turntable On/Off	●	●
Kitchen timer	●	●
Cooking complete reminder	●	●
Delay Start/reminder	●	●
Child lockout	●	●
Appearance		
Door color	White	Black
Case color	White	Black
Weights & Dimensions		
Approx. shipping wt. (lbs.)	40	40
WxHxD Cavity (in inches) Exterior †	16-1/2 x 7-7/16 x 11-1/4 23-25/32 x 11-3/16 x 12-9/32	
Power/Ratings		
Frequency (MHz)	2450	2450
Electrical input Watts	1300	1300
@ 120V Amperage	11.5	11.5
Accessories		
Hanging kit (Pub. No. 4-A019)*	Optional	Optional
Optional built-in trim kit	JX827WN	JX827BN/JX827SS

* Pub. No. 4-A019 is available at additional cost.
 † Exterior dimensions: height includes feet.

Microwave Ovens

	GE	
	JE740WH JE740BH	JE620WF JE620BF
Capacity		
Oven cavity (cu. ft.)	.7	.6
Features		
Watts (IEC-705 Test Procedure)	700	650
Electronic touch controls	●	●
Electronic digital display w/clock	●	●
Beverage/Cook/Popcorn/Reheat/Snacks	●	
Express Cook	●	
Instant On controls	●	
Time Cook	I & II	●
Add 30 seconds	●	
Auto/Time Defrost	●	-/●
Power levels	10	10
Turntable	●	●
Kitchen timer	99-M./99-S.	
Sound On/Off	●	
Cooking complete reminder	●	●
Delay Start/reminder	●	
Child lockout	●	
Appearance		
Color appearance*	WW/BB	WW/BB
Door color	White/Black	WW/BB
Case color	White/Black	White/Black
Weights & Dimensions		
WxHxD (in inches) Cavity	12-1/16 x 7-11/16 x 12-1/16	11-13/32 x 7-3/64 x 12-7/16
Exterior **	19-1/4 x 10-13/16 x 13-9/16	18-9/64 x 9-23/32 x 12-27/32
Approx. shipping wt. (lbs.)	33	24.4
Power/Ratings		
Frequency (MHz)	2450	2450
Electrical input Watts	1150	1000
@ 120V Amperage	10.5	9.5
Accessories		
Hanging kit (Pub. No. 4-A019)†	Optional	Optional


* Color(s) available: WW = White on white, BB = Black on black.
 ** Exterior dimensions: height includes feet.
 † Pub. No. 4-A019 is available at additional cost.

Washers

	GE	
	WCSR4170D	WCSR2090D
Capacity		
Capacity (cu. ft.)	Super Plus 3.2	Super 3.2
Features		
Controls	Rotary	Rotary
Wash/rinse temps	3	3
Wash/spin speed combinations	4	2-Pulsed
Water levels	4	3
Fabric softener dispenser	●	
Bleach dispenser	●	●
Agitator	GentlePower™	FlexCare™
Number of wash cycles	17	9
Cycles	Cottons Regular	Whites
	Heavy Soil	●
	Medium Soil	●
	Light Soil	●
	Extra Light	●
	Auto Soak (15 Min.)	●
	Auto Soak (30 Min.)	●
Easy Care	Heavy Soil	●
	Medium Soil	●
	Light Soil	●
	Extra Light Soil	●
	Auto Soak (15 Min.)	●
Casuals – Pulsed	Heavy Soil	●
	Medium Soil	●
	Light Soil	●
Delicate	Light Soil	●
	Extra Light Soil	●
Spin Only	●	●
Rinse and Spin (Quick Rinse)	●	●
Color lid instructions	●	
Washer basket type	ExtraAction™	PermaTuf® II
Quiet		
Quiet performance	Quiet-By-Design™	Quiet-By-Design
Appearance		
Colors available*	WW, CC	WW, CC
Weights		
Approx. shipping weight (lbs.)	160	160

*Color(s) available: WW = White on white, CC = Bisque on bisque.

Washer Dimensions (in inches)

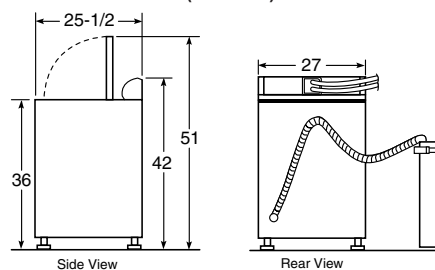

Washer Specifications

Circuit Requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

Electrical Rating:

115V, 60Hz, 10A

Washer Note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Dryers

	Electric Gas	GE			
		DBXR463ED DBXR463GD	DJXR433EC DJXR433GC	DBL333EB DBL333GB	DLSR483EE DLSR483GE
Capacity					
Capacity		Extra-large	Extra-large	Extra-large	Super
Cubic feet		6.0	6.0	5.7	7.0
Features					
Rotary controls		●	●	●	●
Automatic Dry control		●	●	●	●
Long vent capability					up to 150 ft.
Heat selections		4	4	3	4
Number of cycles		6	3	3	8
Auto Cottons					
Auto Cottons Cycle		●	●	●	●
Optional wrinkle care					●
Easy Care					
Auto Easy Care		●	●	●	●
Optional wrinkle care					●
Timed Dry					
Actual minutes on timer		80	60	80	80
Damp Dry		●			●
Dewrinkle		●			●
Quick Fluff (no heat)		●			●
Dryer interior light		●			●
Painted interior				●	
DuraDrum™ interior		●	●		●
Quiet					
Quiet-By-Design™		●	●	●	●
Appearance					
Color(s) available*		WW, CC	WW, CC	WW, CC	WW, CC
Weights					
Approx. shipping wt. (lbs.)	Electric	112	112	125	120
	Gas	115	115	130	125

*Color(s) available: WW = White on white, CC = Bisque on bisque.

GE electric dryers are available with long-ducting capability.

Note: DBLR333EE and DBLR333GE available July 2004.

Dryer Specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom

Gas: For 6.0 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom. For 5.7 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, right and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit Requirements:

Electric: An individual, properly-grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

Electric Dryer Rating:

240V, 5600W, 24A, 60Hz
208V, 4400W, 22A, 60Hz

Gas: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

Gas Dryer Electric Rating:

120V, 60Hz, 6A

Gas (BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit, 5.8 and 6.0 cu. ft. model kit is WE25X0217. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Spacemaker® Portable/Stationary Washers and Dryers

Individual Spacemaker Washers	GE		
	Stationary WLS1100D	Portable WSLP1100D	Stationary WSKS2060W
Capacity			
Capacity	2.5 Extra-large	2.5 Extra-large	2.0 Large
Features			
Wash/spin speed combinations	1	1	2
Wash/rinse temperatures	3	3	3
Water levels	4	4	4
Number of cycles	10	10	6
Cycle countdown	Digital	Digital	
Regular			
Heavy Soil	●	●	●
Medium Soil	●	●	●
Perm. Press			
Medium Soil	●	●	●
Light Soil	●	●	●
Delicates	●	●	●
Spin only	●	●	●
One touch load sensing	●	●	
Automatic cool down	●	●	
Bleach dispenser	●	●	●
Fabric softener dispenser	●	●	
Automatic detergent dispenser	●	●	
Lint filter	2 Removable	2 Removable	●
Washer lid type	Bi-fold	Bi-fold	Bi-fold
Quiet pump	●	●	●
Easy-roll rollers		●	
Unicouple connector		●	
Basket material	Stainless Steel	Stainless Steel	Porcelain-on-steel
Appearance			
Color(s) available*	WW	WW	White with granite-look top
Weights & Dimensions			
Circuit requirements	120V, 60 Hertz, 15 or 20 Amps		
Dimensions (HxWxD in inches)**	37-1/2 x 23-5/8 x 26	38 x 23-5/8 x 26	34-1/4 x 22-1/4 x 24
Approx. shipping wt. (lbs.)	114	116	109

*Color(s) available: WW = White on white.

**Depth measured from front of control knob.

†With leveling legs extended.

Individual Spacemaker Dryers	GE	
	Stationary DSKS433EB	Portable/Stationary DSKP333EC* DSKS333EC
Capacity		
Capacity (cu. ft.)	3.6	3.6
Features		
Dry control	Automatic	Automatic
Heat selections	4	3 (timer)
Number of dry cycles	3	3
Auto. Perm. Press & Delicate	●	
Auto. Reg.	●	●
Timed Regular (min.)	140	150
Air Fluff (min.)	(Heat Selection)	30
Separate start switch	●	●
Control location	Mid-Band	Top Mid-Band
Lint filter	Upfront	Upfront
Appearance		
Color(s) available**	WW, WH	WW
Weight & Dimensions		
Exhaust options***	4-Way	4 way-Rear, Bottom, Left, Right
Circuit requirements	240/208V†, 60 Hertz, 30 Amp	120V, 60 Hertz, 15 Amp
Power cord	No cord	6 feet
Dimensions (HxWxD in inches)	33-1/4 x 23-7/8 x 24-1/2	33-1/4 x 23-7/8 x 24-1/2
Approx. shipping wt. (lbs.)	108	108

*DSKP333EC dryer comes equipped with casters and stationary leveling legs.

**Color(s) available: WW = White on white, WH = White with black controls.

***DSKS433EB and DSKP333EC are shipped exhausted through the top.

†Rear-mounted outlet on DSKS433EB (120V, 60 Hertz, 10 Amp) DSKS433EB and DSKS333EC are approved for use with washer/dryer stack rack DSDR24D.


Circuit Requirements: An individual, properly-grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

Commercial Coin Front-Loading Washer/Matching Dryer


	GE
	WCCH404VWW
Capacity	
Capacity (cu. ft.)	16 pound (2.7—3.1 per IPC)
Features	
Efficiency	ENERGY STAR® Rated
Wash/Rinse Temp.	3/1
Automatic Water Levels	●
Wash Program	Std. Wash + 3 rinses (26 min. excl. fill times)
Wash Options	
Color Cottons	●
Permanent Press	●
White Cottons	●
Delicates	●
Extraction	850rpm/210 G's
Automatic Dispensing Opt.	Detergent, Liquid Bleach, Fabric Softener
Suspension	Soft Mount
Drain Pump	13 gpm @ 36 in head
Leveling System	Front Leveling Legs/ Rear Rollers
Wash Drum	Stainless Steel
Door Style	Glass
Appearance	
Color available	White
Control panel	Brushed alum./ black/burgundy
Weights & Dimensions	
Dimensions (HxWxD inches)	36 x 26-3/4 x 24-3/4 (without coin box)
Approx. shipping weight (lbs.)	217
Power Ratings	
Electrical Requirements	120v, 60hz, 12.0 amps

Note: Coin Box Requires assembly to washer, per enclosed Pub. No. 31-15484. Includes accumulator. Coin slides, drops, or smart card accessory must be ordered from supplier separately.

Washer Dimensions (in inches)




Rear View




Side View

	GE
	DCCH43EV/GV
Capacity	
Cubic feet	Extra-large (5.7)
Features	
Heat selections	3
Dry cycles	3
High Heat	●
Medium Heat	●
Low Heat	●
Lockable lint filter	●
Door swing	Reversible
Drum finish	White DuraDrum™
Front serviceable	●
Appearance	
Color available	White
Control panel	Brushed alum./ Black/Burgundy
Weights & Dimensions	
Approx. shipping weight (lbs.)	Electric 116, Gas 116

Dryer Dimensions (in inches)



Side View



Rear View

Front-Loading Washer/Matching Dryer

	GE
Washer	WSXH208A
Capacity	
Capacity	Extra-large
Cubic feet	3.1 IEC
Features	
Wash/rinse temperatures	4
Water levels	Automatic Adjustment
Standard rinse cycles	3
Motor speeds	Variable
Combinations*	HC, WW, WC, CC
Detergent dispenser (liquid/powder)	●
Bleach dispenser	●
Fabric softener dispenser	●
End-of-cycle signal	Adjustable
Final spin/speed selections	Automatic
Number of wash cycles	8
Cotton	
Heavy Soil	●
Medium Soil	●
Light Soil	●
Easy Care	
Medium Soil/Perm. Press	●
Delicates/Ultra Care	●
Pre-Wash	●
Extra-Rinse Cycle/Auto Option	2
Leveling legs	●
Stainless steel wash basket	●
Appearance	
Color available	White on white
Weight	
Approx. shipping wt. (lbs.)	217
Flexible installation	Undercounter, Stacked, Side-by-Side

*HC = Hot-Cold, WW = Warm-Warm, WC = Warm-Cold, CC = Cold-Cold.

Front Loading Installation Information

Undercounter Installation

- Accessory mounting kits are required for undercounter installation. To order, call 1-800-848-7722.
- Washer—Order Pub. No. 14-A037
- Dryer—Order Pub. No. 14-A008

Stacked Installation

- Brackets for stacking dryer over washer are included with the dryer.

Dryer Exhausting Information — Excluding DSXH43EA/GA

For complete information see installation instructions packed with dryer.

Ducting Materials

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If "all rigid metal" duct cannot be used, then "flexible all metal" venting can be used, but it will reduce the maximum recommended duct length. The following kit or parts are available from your local service organization. Kit WX8X75—7' aluminum duct and 4' hood, short tail. (OR individual parts):

WX8X65 7' aluminum flex duct only

WX8X58 4' clamps (2)

WX8X67 4' exhaust hood

See installation instructions for complete information.

Exhaust length calculation:

- Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
- The maximum length of 4' rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. The maximum lengths for flexible ducts are less than for rigid duct. See table in installation instructions. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

	GE
Dryer	DSXH43EA/GA
Capacity	
Capacity	Extra-large
Cubic feet	5.7
Features	
Tumble drying	●
Time Dry cycles	1
Auto Dry cycles	2
Temperature options	4
Regular/Cotton	●
Medium/Perm. Press	●
Low/Delicates	●
Air Fluff/No Heat (Cool Down)	●
Drying rack	●
Auto Dry cycles	
Cottons	●
Easy Care	●
Cool Down	●
Quick Clean lint screen	●
End-of-Cycle signal	Adjustable
Drum light	●
Reverse-A-Door	●
Dura Finish top and drum	●
Spill-Saver top	●
Poly tumbling vanes	●
Leveling legs	●
Total front serviceability	●
Exhaust options (Electric/Gas)	4/3
Heavy-duty suspension system	●
Appearance	
Color available	White on white
Weights & Dimensions	
Dimensions (HxWxD in inches)	36 x 26-7/8 x 25-3/4
Approx. shipping wt. (Elec/Gas)	116
Flexible installation	Undercounter, Stacked, Side-by-Side

Electrical Requirements: 240V, 3 wire, 5600W, 24A, 60Hz
208V, 3 wire, 4400W, 22A, 60Hz

Gas Requirements: 120V, 60Hz, 6A

Dryer Specifications

Exhaust length calculation:

Undercounter Installation

- Electric:** 4-way via rear, right, left and bottom.
 - Gas:** 3-way via rear, right and bottom. Dryer is shipped exhausted to the rear.
 - Exhaust Elbow Kit: Order Pub. No. 14-A018.
- See installation instructions for alcove, closet, bathroom or bedroom installations.**

Exhausting the dryer to the outside is strongly recommended

to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down. Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

Spacemaker® Unitized Washers and Dryers

	GE			
	Electric		Gas	
	WSM2700D		WSM2420D	
	WSM2780D		WSM2480D	
Washer	Washer	Dryer	Washer	Dryer
Capacity				
Capacity	X-Large	X-Large	Compact	Compact
Features				
Wash/spin speed combinations	1		2	
Wash/rinse temperatures	3		3	
Water levels	3		3	
Number of wash cycles	3		3	
Regular	●		●	
Perm. Press	●		●	
Delicates	●		●	
Unbalanced load control	●		●	
Lint filter	●		●	

Dryer

Features				
Automatic dry control		●		●
Number of dry cycles		4		4
Auto Regular		●		●
Auto Perm Press				●
Delicates		●		
Timed		●		●
Air Fluff		●		●
Control location		Mid-Band		Mid-Band
Exhaust options		Rear		Rear/Sides

Appearance	WW, CC		WW, CC	
Color(s) available*	WW		WW	
Weight & Dimensions				
Dimensions (HxWxD in inches)	75-1/2 x 27 x 30-13/16**		71-3/4 x 23-7/8 x 27-1/4**	
Approx. shipping wt. (lbs.)	300		238	

*Color(s) available: WW = White on white, CC = Bisque on bisque.

**Depth dimension assumes water hook-up is recessed in the wall.

Note: The third prong on the WSM2780W plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.

Electrical Requirements

WSM2700D: Electric Dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

WSM2420D: Electric Dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.

NOTE: THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.

WSM2480D: Gas Dryer—This appliance should be connected to an individual, properly-grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60 Hz electrical service and should be protected by 15- or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot long flexible U.L. listed 20-amp power cord to match a 15-amp receptacle.

Gas Rated input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.

WSM2780D: Gas Dryer—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60 Hz electrical service and should be protected by 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot long flexible U.L. listed 20-amp power cord to match a 20-amp receptacle.

Gas Rated input 20,000 BTU/HR. Factory equipped for natural gas.

LP gas supply requires a conversion kit.

Kits: WSM2780D – WE25X206

WSM2480D – WE25X219

Have a qualified gas technician install a conversion kit before use.

For complete information see installation instructions packed with the product.

See installation instructions packed with product for alcove or closet installations.

Commercial Washers and Dryers

	GE Washers	
	WCCD2050D	WCCB1030D
Capacity		
Capacity (cu. ft.)	Super Plus (3.2)	Super Plus (3.2)
Features		
LED cycle countdown	●	
Wash/spin speed combinations	2	1
Wash/rinse temperatures	3	3
Water levels	3 adjustable	3 adjustable
GentlePower™ Agitator	●	●
ExtraAction™ Basket	●	●
Number of wash cycles	5	3
Cottons White	●	●
Cottons Colored	●	
Permanent Press	●	●
Delicates	●	●
Bright Colors	●	
Color lid instructions	●	●
100% front serviceable	●	●
Appearance		
Color(s) available*	WH, CC	WH, CC
Weight & Dimensions		
Approx. shipping wt. (lbs.)	174	174
Dimensions (HxWxD in inches)	42 x 27 x 25-1/2	42 x 27 x 25-1/2

*Color(s) available: WH = White, CC = Bisque.

Energy Saving:

All wash cycles include energy-saving cold water rinse. Connector in backsplash can be joined for warm rinse. Total cycle time—24 minutes plus fill time. Actual wash time is 8 minutes with a final spin speed of approximately 630 RPM.

Circuit Requirement:

An individual, properly grounded 15- or 20-amp branch circuit is required.

Electric Rating: 115V, 60Hz

See Pub. No. 31-15400 for installation instructions.

Note: Coin slide or coindrop, coin vault, and locks for cover and meter case access door are not provided with washer.

	Electric Gas	GE Dryers	
		DCCB330ED DCCB330GD	DCCD330ED DCCD330GD
Capacity			
Capacity (cu. ft.)		Super Plus 7.0	Super Plus 7.0
Features			
LED cycle countdown			●
Automatic dry control		●	●
Painted drum interior		●	●
Upfront lint filter		●	●
Reverse-A-Door		●	●
Heat selections		3	3
Number of cycles		3	3
Cottons		●	●
Permanent Press		●	●
Synthetic Knits		●	●
100% front serviceable		●	●
Appearance			
Color(s) available*		WH, CC	WH, CC
Weights & Dimensions			
Approx. shipping	Electric	125	125
wt. (lbs.)	Gas	135	135
Dimensions (HxWxD in inches)		42 x 27 x 25-1/2	42 x 27 x 25-1/2

*Color(s) available: WH = White, CC = Bisque.

GE electric dryers are available with long-ducting capability.

Exhaust Options: Electric:

4-way venting: left, right, bottom and rear. Maximum recommended exhaust duct length is 45 feet of 4" rigid ducting with two 90° elbows and 4" dampered wall cap.

Gas: 3-way venting: left, bottom and rear. Maximum recommended exhaust duct length is 15 feet of 4" rigid ducting with two 90° elbows and a dampered wall cap.

Dryer is shipped with exhaust to the rear. (See Installation Instructions.)

See Pub. No. 31-1746 for installation instructions.

Circuit Requirements:

Electric An individual branch circuit fused for 30 amps is required for each dryer.

Electric Dryer Rating:

240V, 60Hz, 5600W, 24A
208V, 60Hz, 4400W, 22A

Gas: An individual branch circuit fused for 15- or 20-amp is required for each dryer.

Gas Dryer Rating: 120V, 60Hz

Gas (BTU/Hr): 22,000. Factory equipped for natural gas. Tested for LP gas. A conversion kit is required for LP gas. Check installation instructions for correct kit number. Have a qualified technician install the conversion kit. Equipped with energy saving Glo-Bar ignition.

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Note: Dimensions and specifications shown here are correct at the time this sheet was printed. Before proceeding with construction or rough-in, check installation instructions that came with your unit. Specifications, dimensions and design are subject to change without notice.

Stacked Commercial Dryers

	Electric Gas	GE Dryers	
		DDC4400S	DDC4500S
Capacity			
Capacity (cu. ft.)		Large (5.4)	
Features			
Automatic Dry Control		●	
Upfront lint filter		●	
Heat selections		3	
Number of cycles		3	
Cottons		●	
Permanent Press		●	
Delicates/Synthetic/Knits		●	
100% front serviceable		●	
Reverse-A-Door		●	
Heavy-duty 1/4 HP motor		●	
Appearance			
Colors available		White	
Weight & Dimensions			
Approx. shipping	Electric	275	
weight (lbs.)	Gas	275	
Stacked (HxWxD in inches)		77 x 27 x 27	

Exhaust Options:

Electric: 3-way venting: left, right, or rear. Maximum recommended exhaust duct length is 25 feet of 4" rigid ducting with two 90° elbows and 4" dampered wall cap.

Gas: 2-way venting: left or rear. Maximum recommended exhaust duct length is 15 feet of 4" rigid ducting with two 90° elbows and a dampered wall cap.

Dryer is shipped with exhaust to the rear. (See Installation Instructions.)

Circuit Requirements:

Electric: An individual branch circuit fused for 30 amps is required for each dryer.

Electric Dryer Rating:

240V, 60Hz, 5600W, 24A
208V, 60Hz, 4400W, 22A

A special 208-volt heater, part number WE11X0101, is available to reduce drying time in 208-volt installations.

Gas: An individual branch circuit, properly grounded for a 3-prong outlet, fused for 15 or 20 amp, is required for each dryer.

Gas Dryer Rating: 115V, 60Hz

Gas (BTU/Hr): Maintains thermostatically controlled heat flow to dry clothes gently. Longer cool-down period on Permanent Press cycle helps prevent heat-set wrinkles. Separate thermostat controls lower temperatures for Knit cycle drying. Factory equipped for natural gas. Tested for LP gas. A conversion kit, WE25X0217, is required for LP gas. Check installation instructions for correct kit number. Have a qualified technician install the conversion kit.

See Pub. No. 31-1723 for DDC4400S and Pub. No. 31-1724 for DDC4500S installation instructions.

Note: Dimensions and specifications shown here are correct at the time this sheet was printed. Before proceeding with construction or rough-in, check installation instructions that came with your unit. Specifications, dimensions and design are subject to change without notice.

Note: Wall anchor chain provided for gas models only.

Non-Coin-Op Commercial Washer and Dryer

	GE Washer
	WNRD2050D
Capacity	
Capacity (cu. ft.)	3.5 Stainless steel
Features	
Motor	2 speed
Wash/spin speed combinations	3
Wash/rinse temperatures	3
Water levels	4
Digital cycle countdown	●
Number of wash cycles	5
White cottons	●
Colored cottons	●
Bright colors	●
Permanent Press	●
Delicate	●
Spin only	●
Bleach dispenser	●
Fabric softener dispenser	●
Quiet performance	Deluxe Quiet
Lid instructions	●
LED indicators	●
Appearance	
Color available	White
Weights & Dimensions	
Approx. shipping wt. (lbs.)	160

	GE Dryer
	DNCD450EA/GA
Capacity	
Capacity (cu. ft.)	Super (7.0)
Features	
Dry cycles	5
Cottons/high heat	●
Mixed loads/high heat	●
Perm press/medium heat	●
Knits/low heat	●
Delicates/extra low heat	●
Temperatures	4
Air Dry	●
Digital cycle countdown	●
Quiet performance	Hush quiet
Lockable lint filter	●
LED indicators	●
Door swing	Reversible
Drum material	White DuraDrum™
Appearance	
Color available	White
Weights & Dimensions	
Approx. shipping wt. (lbs.)	125

Commercial Smart Card Washers and Dryers

	GE Washer
	WNCK2050D
Capacity	
Capacity (cu. ft.)	Extra-large (2.7)
Features	
Motor speed	2
Wash/spin speed comb.	3
Wash/rinse temperatures	3
Water levels	4 Adjustable
Digital cycle countdown	●
Number of wash cycles	5
White cottons	●
Colored cottons	●
Bright colors	●
Permanent Press	●
Delicate	●
Quiet package	●
Lid instructions	●
LED indicators	●
Smart Card Features	
SmartLaundry™ Reader	BridgePoint
Alphanumeric display	●
Control card	●
Appearance	
Color available	White
Control panel	Brushed alum./ black/burgundy
Weights & Dimensions	
Approx. shipping wt. (lbs.)	170
Dimensions (HxWxD in inches)	42 x 27 x 25-1/2

	GE Dryer
	DNCK440EA/GA
Capacity	
Capacity (cu. ft.)	Super (7.0)
Features	
Heat selections	4
Dry cycles	4
High Heat	●
Medium Heat	●
Low Heat	●
Cool down	w/High Heat
Digital cycle countdown	●
Quiet package	●
Lockable lint filter	●
LED indicators	●
Door swing	Reversible
Drum finish	White DuraDrum
Smart Card Features	
SmartLaundry™ Reader	ESD
Alphanumeric display	●
Control card	●
Appearance	
Color available	White
Control panel	Brushed alum./ black/burgundy
Weights & Dimensions	
Approx. shipping wt. (lbs.)	130
Electric	125
Gas	
Dimensions (HxWxD in inches)	42 x 27 x 28-1/4

Nautilus™ Built-In Dishwashers

	GE®			
	ENERGY STAR®	ENERGY STAR	ENERGY STAR	ENERGY STAR
	GSD3200JWW GSD3200JCC GSD3200JBB	GSD2200GWW GSD2200GCC GSD2201GWW*	GSD2000JWW GSD2000JCC GSD2000JBB GSD2001JWW*	GSD1900JWH
Features				
Wash system	Power Scrub	Standard	Standard	Standard
Wash levels	5	2	2	2
Water filtration	Dual			
Food disposer	Piranha™	●	●	●
Cycles	5	5	4	4
Pots & Pans	●	●		
Heavy Wash			Dial	Dial
Normal Wash	●	●	Dial	Dial
Short Wash	Dial	Dial	Dial	Dial
Plate Warmer	Dial	Dial		
Rinse Only	Dial	Dial	Dial	Dial
Options	22	12	9	9
Heated Dry	●	●	Rocker	Rocker
Hi-Temp Wash	●			
HotStart™	Dial	Dial	Dial	Dial
Racks, shelf & basket				
Upper rack	Deluxe	Standard	Standard	Standard
Lower rack	Deluxe	Deluxe	Deluxe	Deluxe
Silverware basket	Deluxe	Deluxe	Deluxe	Deluxe
Control type	Turn-to-start	Turn-to-start	Turn-to-start	Turn-to-start
Cycle progress indicator(s)	Dial	Dial	Dial	Dial
Pushbuttons	6	4		
Hard countertop installation	GPF65	GPF65	GPF65	GPF65
Optional heavy door spring	GPF100	GPF100	GPF100	GPF100
Rinse aid dispenser	●	●	●	●
Center throw door latch	●	●	●	●
Quiet				
Sound insulation package	QuietPower I	QuietDesign™	Standard	Standard
PermaTuf® tub/door liner	●	●	●	●
QuietPower™ motor	●	●	●	●
Appearance				
Color(s) available**	WW, CC, BB	WW, CC, BB	WW, CC, BB	WH
Color panels-door & access	Trimless	Trimless	Trimless	Trimless
Weights & Dimensions				
Height w/legs retracted (in.)	34	34	34	34
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16	33-13/16
Overall width (in.)	24	24	24	24
Overall depth (in.)	25-3/4	25-3/4	25-3/4	25-3/4
Approx. shipping wt. (lbs.)	80	80	80	80
Accessories				
Requires kit for 1/4" panel capability with trim	GPF325W/C/B	GPF325W/C/B	GPF325W/C/B	GPF325W
Requires kit for trimless 3/4" panel capability	GPF375	GPF375	GPF375	GPF375

Disposall® Food Waste Disposers

	GE			
	Continuous Feed Models			
	GFC520F	GFC525F	GFC320F	GFC325F
Features				
Motor horsepower	1/2	1/2	1/3	1/3
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch
Feed type	Continuous	Continuous	Continuous	Continuous
Power connection	Direct Wire	Line Cord	Direct Wire	Line Cord
Impellers	Dual swivel	●	●	●
Jam resistant	●	●	●	●
Stainless steel	●	●	●	●
Armature shaft material	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel
Grinding speed (RPM's)	2,600	2,600	1,900	1,900
Capacity	Large	Large	Large	Large
Mounting type	EZ-Mount	EZ-Mount	EZ-Mount	EZ-Mount
Turntable material	Galv. Steel	Galv. Steel	Galv. Steel	Galv. Steel
2-level pre-cutter	●	●	●	●
Stainless steel sink flange	●	●	●	●
Manual reset overload protector	●	●	●	●
Splash guard	●	●	●	●
Sink stopper	●	●	●	●
Dishwasher drain connector	●	●	●	●
Drain elbow	●	●	●	●
Quiet				
Sound insulation package	Standard	Standard	Standard	Standard
Weights & Dimensions				
Approx. shipping wt. (lbs.)	8.8	9.1	8.4	8.7
Net wt. (lbs.)	7.8	8.1	7.4	7.7
Dishwasher inlet diameter (in.)	1	1	1	1
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2
Power Ratings				
Volts, Hertz, Amps	120, 60, 4.5	120, 60, 4.5	120, 60, 4.0	120, 60, 4.0

All GE dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

*GSD2201GWW and GSD2001JWW available with power cord attached.

**Color(s) available: WW = White on white, CC = Bisque on bisque, BB = Black on black, WH = White door w/black control panel.

Spacemaker® 18" Built-In Dishwasher

	GE
	ENERGY STAR
	GSM1800JWW GSM1800JBB
Features	
Tub and door liner	Stainless steel
Wash levels	2
Cycles	7
Pots & Pans	Dial
Heavy Wash	Dial
Normal Wash	Dial
Light Wash	Dial
China/Crystal	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	12
Heated Dry	Rocker
Racks (upper/lower)	Nylon
Removable upper rack	●
Utility shelves	●
Silverware basket	Standard
Control type	Turn-to-start
Cycle progress indicator	Dial
Hard countertop installation	N/A
Rinse aid dispenser	w/adjustment
120°F inlet water capability	●
Leveling screws	●
Economical/Quiet	
Tub insulation	Standard
Appearance	
Color(s) available	WW, BB
Weights & Dimensions	
Height w/legs retracted (in.)	32
Overall width (in.)	18
Overall depth (in.)	22-1/2
Approx. shipping weight (lbs.)	100
Accessories	
Requires kit for 1/4" panel capability with trim	GPF18W/B

*Color(s) available: WW = White on white, BB = Black on black.

Spacemaker® Under-The-Sink Dishwashers

Features	GE
	ENERGY STAR®
	GSM2100GWW
	GSM2100GCC
Features	GSM2100GBB*
	2
	●
	5
Pots & Pans	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	12
Heated Dry	●
HotStart	Dial
Racks, shelf & basket	
Upper rack	Spacemaker
Lower rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-to-start
Cycle progress indicator	Dial
Pushbuttons	4
Hard countertop installation	GPF65
Optional heavy door spring	GPF100
Rinse aid dispenser	●
Steel door	●
Center throw door latch	●
Quiet	
PermaTuf tub and door liner	●
QuietPower motor	●
Appearance	
Color(s) available*	WW, BB, CC
Color panels—door & access	Trimless
Weights & Dimensions	
Approx. shipping wt.(lbs.)	72
Height w/legs retracted (in.)	34
Overall width / Overall depth (in.)	24 / 25-3/4

*Color(s) available: WW = White on white, CC = Bisque on bisque, BB = Black on black (available June 2004).

Stainless Steel Sinks Single and Double Bowl Models (Dimensions in Inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2" Radius Corners		No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2

Note: Drain opening size is 3-1/2".

Above models are fully sound deadened.

*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.

Optional Dishwasher Accessories:

GPF65—Brackets for under non-wood countertop installation (Spacemaker Under-the-Sink only)

GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs.

Built-In “J” Series— Heat/Cool and Heat Pumps

Model	GE®
	Heat/Cool Units
	AJES12DCB
	230/208
Cooling Capacity	
BTUH-AHAM	11600/11400
Amps-AHAM	5.8/6.3
Watts Input	1220/1200
EER	9.5/9.5
Dehumidification (Pts./Hr.)	3.4
Electric Resistance Heating	
BTUH	11600/9500
Amps	16.0
Watts Input @ 230V	3680/3020
Features	
Line Cord Plug	Perp.
Recommended Circuit Protection (Time Delay)	20 Amps
Fan Cycle Switch	●
Fan Speeds, Heating/Cooling	2/2
Fan Only Setting	2
Air Flow (CFM) Roomside Hi/Low	304/279
Air Exchange Exhaust	●
Rotary Compressor	●
Slide-Out Chassis	●
Installation	In Wall
Wall Case Required	RAB46/47/48
Window Installation Kit	Optional
Approximate Net Weight (Lbs.)	80
Approximate Shipping Wt. (Lbs.)	90

All cooling with electric heat models and heat pumps are corrosion treated. Specifications and design subject to change without notice. *These units are not intended to be the primary source of heat.

Built-In “J” Series—Cool Only

Models	GE®									
	Mechanical Units						High-Mount Units			
	AJCS06LCB	AJCS08ACB	AJCS10ACB	AJCS09DCB	AJCS10DCB	AJCS12DCB	AJCH08ACB	AJCH10ACB	AJCH10DCB	AJCH12DCB
ENERGY STAR®	●	●	●	●	●	●	●	●	●	●
Voltage	115	115	115	230/208	230/208	230/208	115	115	230/208	230/208
Cooling Capacity										
BTUH-AHAM	6000	8000	9900	8900/8700	9900/9700	11600/11400	8000	9900	9900/9700	11600/11400
Amps-AHAM	5.7	7.9	9.7	4.2/4.6	4.9/5.3	5.8/6.3	7.9	9.7	4.9/5.3	5.8/6.3
Watts Input	600	840	1040	935/915	1040/1020	1220/1200	840	1040	1040/1020	1220/1200
EER	10.0	9.5	9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5	9.5	9.5/9.5	9.5/9.5
Dehumidification (Pts./Hr.)	1.4	2.1	2.9	2.5	2.9	3.4	2.1	2.9	2.9	3.4
Features										
Line Cord Plug	Parallel	Parallel	Parallel	Tandem	Tandem	Tandem	Parallel	Parallel	Tandem	Tandem
Recommended Circuit Protection (Time Delay)	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps
Fan Speeds	2	2	2	2	2	2	2	2	2	2
Fan Only Setting	2	2	2	2	2	2	2	2	2	2
Air Flow (CFM) Roomside Hi/Low	212/184	240/212	282/254	282/254	282/254	304/279	240/212	282/254	282/254	304/279
Air Exchange Exhaust	●	●	●	●	●	●	●	●	●	●
Fan Cycle Switch	●	●	●	●	●	●	●	●	●	●
Rotary Compressor	●	●	●	●	●	●	●	●	●	●
Slide-Out Chassis	●	●	●	●	●	●	●	●	●	●
Installation	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall	In Wall
Wall Case Required	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48
Approximate Net Weight (Lbs.)	63	68	77	69	77	79	69	78	78	80
Approximate Shipping Wt. (Lbs.)	72	77	86	79	86	88	78	87	87	89

Zoneline® Specifications—Heater Wattage and Power Connection Kits

Deluxe Line: 2500, Dry Air 25 and 3500 Series

Models are manufactured with fixed heater wattages with the appropriate power cord attached (all 265 volt models are permanently connected).

5.0 KW heaters are not available on 7,000 BTUH models.

Voltage	Heater Amps	Heater Designator	Watts	KWH	Minimum Ampacity	BTUH
230/208	11.1/10.0	2	2550/2090	2.55/2.09	15	8600/7100
230/208	15.0/13.6	3	3450/2820	3.45/2.82	20	11,700/9600
230/208	21.7/19.7	5	5000/4090	5.00/4.09	30	17,000/13,900
265	9.7	3	2550	2.55	15	8600
265	14.0	4	3700	3.7	20	12,600
265	18.9	5	5000	5.0	30	17,000

Premium Line: 5500 Series and Vertical 7500 Series

Power Connection Kits are REQUIRED on Premium Zoneline Chassis. (See chart.)

The correct kit for the installation is determined by the voltage and amperage of the electrical circuit and the means of connecting the unit to the building wiring. If the unit is to be plugged into a receptacle, a line cord kit would be used; if the unit is to be permanently connected, a permanent connection kit would be used.

Note: 265 volt cord set units must be installed in compliance with National Electrical Code*.

230/208 Volt—Line Cord Connected Units			
Power Connection Kit	RAK3152	RAK3202	RAK3302
Heater KW	2.55/2.09	3.45/2.82	5.00/4.09
Watts	2550/2090	3450/2820	5000/4090
BTUH	8600/7100	11,700/9600	17,000/13,900
Amps	11.1/10.0	15.0/13.6	21.7/19.7
Min. Circuit Amps	15	20	30
Recommended Protective Device	15 Amp Time Delay Fuse or Breaker	20 Amp Time Delay Fuse or Breaker	30 Amp Time Delay Fuse or Breaker

5500 Series Only

265 Volt—Permanent Connected Units* (Cord Set)

Power Connection Kit	RAK5152	RAK5172	RAK5202	RAK5302
Heater KW	1.7	3.0	3.7	5.0
Watts	1700	3000	3700	5000
BTUH	5800	10,200	12,600	17,000
Amps	6.4	11.3	14.0	18.9
Min. Circuit Amps	15	15	20	30
Recommended Protective Device	15 Amp Time Delay Fuse	15 Amp Time Delay Fuse	20 Amp Time Delay Fuse	30 Amp Time Delay Fuse

*To be used with sub-base.

Sub-bases


	RAK204U	RAK204D20	RAK204D30	RAK204E15	RAK204E20	RAK204E30
Voltage	N/A	230/208	230/208	265	265	265
Amps	N/A	15/20	30	15	20	30
Receptacle	N/A	NEMA6-20R	NEMA6-30R	NEMA7-15R	NEMA7-20R	NEMA7-30R

265 Volt units are to be direct connected. Cordset through enclosed chaseway into interior sub-base receptacle meets the NEC requirements.


Power Connection Kit

Required on premium models. See specification sheet for heater KW and branch circuit ampacity.


Receptacles/Sub-bases




Tandem
230/208V 15 Amp
NEMA6-20R




Perpendicular
230/208V 20 Amp
NEMA6-20R




Large Tandem
230/208V 30 Amp
NEMA6-30R




265V 15 Amp
NEMA7-15R;
receptacle used on
265V sub-base GE0715



265V 20 Amp
NEMA7-20R;
receptacle used on
265V sub-base GE0720-3



265V 30 Amp
NEMA7-30R;
receptacle used on
265V sub-base GE073



RAK3152/3202/3302
230/208 volt Line
Cord Connection Kit

Zoneline Packaged Terminal Unit Specifications

GE							
Deluxe Series—Cooling and Electric Heat				Dry Air 25			
2500 Series Units				Dry Air 25			
230/208V Models	AZ25E07D	AZ25E09D	AZ25E12D	AZ25E15D	AZ25E07D*P	AZ25E09D*P	AZ25E12D*P
Capacity							
Cooling BTUH	7,100/6,900	9,000/8,800	11,700/11,500	14,600/14,300	6,800/6,600	8,600/8,400	11,200/11,000
EER (BTU/Watt)	11.8/11.8	11.5/11.5	10.9/10.9	9.6/9.6	11.1/11.1	10.8/10.8	10.2/10.2
Dehumidification Pts/Hr	1.7	2.7	3.6	4.5	2.2	3.4	4.5
Features							
CFM, Indoor Fan High	240	260	270	310	230	230	240
CFM, Indoor Fan Low	210	230	240	280	200	200	210
Vent CFM	40/35	65/60	70/65	70/65	40/35	65/60	70/65
Power/Ratings							
Power Factor	95	96	97	94	95	96	97
Sensible Heat Ratio @ 230 Volts	75%	68%	67%	67%	66%	58%	57%
Watts	600/585	785/765	1075/1055	1520/1490	600/585	785/765	1075/1055
Amperes, F.L.	2.8/3.0	3.6/3.9	4.9/5.3	7.0/7.5	2.8/3.0	3.6/3.9	4.9/5.3
Amperes, L.R.	19.0	21.0	33.0	38.0	19.0	21.0	33.0
Weight (Net/Ship)**	92/108	93/109	101/117	111/127	98/114	99/115	107/123

265V Models	AZ25E07E	AZ25E09E	AZ25E12E	AZ25E15E	AZ25E07E*P	AZ25E09E*P	AZ25E12E*P
Capacity							
Cooling BTUH	7,100	9,000	11,700	14,600	6,800	8,600	11,200
EER (BTU/Watt)	11.8	11.5	10.9	9.6	11.1	10.8	10.2
Dehumidification Pts/Hr	1.7	2.7	3.6	4.5	2.2	3.4	4.5
Features							
CFM, Indoor Fan High	240	260	270	310	230	230	240
CFM, Indoor Fan Low	210	230	240	280	200	200	210
Vent CFM	40	65	70	70	40	65	70
Power/Ratings							
Power Factor	96	94	94	96	96	94	94
Sensible Heat Ratio @ 265 Volts	75%	68%	67%	67%	66%	58%	57%
Watts	600	785	1075	1520	600	785	1075
Amperes, F.L.	2.4	3.2	4.4	6.0	2.4	3.2	4.4
Amperes, L.R.	16.0	18.0	24.0	31.0	16.0	18.0	24.0
Weight (Net/Ship)**	92/108	93/109	100/117	111/127	98/114	99/115	107/123

* For Dry Air 25 model number, designate respective heater number using chart above, followed by the letter "P".

** ICR adds 3 pounds to unit weight.

Zonline® Packaged Terminal Unit Specifications (cont.)

	GE®							
	Deluxe Series—Heat Pump Units				Premium Series—Heat Pump Units			
	3500 Series Units				5500 Series Units			
230/208V Models	AZ35H07D	AZ35H09D	AZ35H12D	AZ35H15D	AZ55H07D	AZ55H09D	AZ55H12D	AZ55H15D
Capacity								
Cooling BTUH	7,100/6,900	9,000/8,800	11,700/11,500	14,600/14,300	7,100/6,900	9,000/8,800	11,800/11,600	14,700/14,400
EER (BTU/Watt)	11.8/11.8	11.5/11.5	10.9/10.9	9.6/9.6	12.0/12.0	11.5/11.5	10.9/10.9	10.0/10.0
Dehumidification (pints/hr.)	1.7	2.7	3.6	4.5	1.7	2.8	3.6	4.8
Features								
CFM, Indoor Fan High	250	260	280	310	240	290	330	350
CFM, Indoor Fan Low	220	230	250	280	220	270	310	330
Vent CFM	40/35	65/60	70/65	70/65	40/35	65/60	70/65	70/65
Power/Ratings								
Power Factor	95	96	97	94	95	96	94	95
Sensible Heat Ratio @ 230 Volts	75%	68%	67%	67%	75%	67%	68%	65%
Watts	600/585	785/765	1075/1055	1520/1490	590/565	785/765	1085/1065	1470/1440
Amperes, F.L.	2.8/3.0	3.6/3.9	4.9/5.3	7.0/7.5	2.7/2.9	3.6/3.9	5.1/5.5	6.7/7.3
Amperes, L.R.	19.0	21.0	33.0	38.0	19.0	21.0	33.0	38.0
Reverse Cycle Heat BTUH	6400/6200	8400/8200	10900/10700	13400/13200	6,400/6,200	8,400/8,200	10,900/10,700	13,400/13,200
COP	3.5/3.5	3.5/3.5	3.3/3.3	3.1/3.1	3.5/3.5	3.5/3.5	3.3/3.3	3.1/3.1
Watts	535/520	705/685	970/950	1265/1250	535/520	700/685	970/950	1,265/1,250
Amps	2.4/2.6	3.1/3.4	4.3/4.7	5.8/6.3	2.4/2.6	3.1/3.3	4.3/4.7	5.8/6.3
Weight (Net/Ship)*	96/112	99/115	111/127	121/137	101/117	106/122	116/132	123/139

265V Models	AZ35H07E	AZ35H09E	AZ35H12E	AZ35H15E	AZ55H07E	AZ55H09E	AZ55H12E	AZ55H15E
Capacity								
Cooling BTUH	7,100	9,000	11,700	14,600	7,100	9,000	11,800	14,700
EER (BTU/Watt)	11.8	11.5	10.9	9.6	12.0	11.5	10.9	10.0
Dehumidification (pints/hr.)	1.7	2.7	3.6	4.5	1.7	2.8	3.6	4.8
Features								
CFM, Indoor Fan High	250	260	280	310	240	290	330	350
CFM, Indoor Fan Low	220	230	250	280	220	270	310	330
Vent CFM	40	65	70	70	40	65	70	70
Power/Ratings								
Power Factor	96	94	94	96	96	94	94	96
Sensible Heat Ratio @ 265 Volts	75%	68%	67%	67%	75%	67%	68%	65%
Watts	600	785	1075	1520	590	785	1085	1470
Amperes, F.L.	2.4	3.2	4.4	6.0	2.3	3.2	4.5	5.8
Amperes, L.R.	16.0	18.0	24.0	31.0	16.0	18.0	24.0	31.0
Reverse Cycle Heat BTUH	6,400	8,400	10,900	13,400	6,400	8,400	10,900	13,400
COP	3.5	3.5	3.3	3.1	3.5	3.5	3.3	3.1
Watts	535	700	970	1265	535	705	970	1,265
Amps	2.2	2.8	3.9	5.0	2.2	2.8	3.9	5.0
Weight (Net/Ship)**	96/112	99/115	111/127	121/137	101/117	106/122	116/132	123/139

*ICR adds 3 pounds to unit weight.

GE Warranties

The condensed list below is a convenient overview of the written warranties offered on various GE appliances described in this catalog. For complete warranty details on a specific GE appliance model, contact your nearest GE appliance supplier, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

Appliance	Length	Type	Warranty Covers	Parts Or Labor	Where Serviced*
Refrigerators (All models, except GMR02BAN, GMR04BAN, GMR06AAM)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrigeration System, Compressor	Both	In-Home
GMR02BAN, GMR04BAN, GMR06AAM	1-Year	Limited	Entire Appliance	Parts	In-Home**
	Additional 4-Year (5 years total)	Limited	Compressor	Part	In-Home**
GE Washers and Non-Coin Commercial Washer (WNRD2050D)	1-Year	Full	Entire Appliance	Both	In-Home
	5-Year	Limited	Transmission, Suspension Rod Spring Assembly, Washer Lid or Cover	Parts	In-Home**
	10-Year	Limited	Outer Tub	Parts	In-Home**
	20-Year	Limited	Basket	Parts	In-Home**
GE Spacemaker Washers	1-Year	Full	Entire Appliance	Both	In-Home
	5-Year	Limited	Transmission, Electronics	Parts	In-Home**
GE Front-Loading Washers	1-Year	Full	Entire Appliance	Both	In-Home
	5-Year	Limited	Suspension Strut, Assembly, Motor, Washer Door or Door Panel, Rust-Through	Parts	In-Home**
	10-Year	Limited	Outer Tub	Parts	In-Home**
	20-Year	Limited	Basket	Parts	In-Home**
GE Coin Commercial Washers & Dryers (WNCK2050D, DNCK440EA/GE, WCCB1030D, WCCD2050D, WCC4404V, DCCD330ED/GD, DCCB330ED/GD)	3-Year	Limited	Entire Appliance	Parts	In-Home**
	5-Year	Limited	Outer Tub, Inner Basket, Dryer Drum and Cabinet Rust-Through	Parts	In-Home**
Dryers (Extra-Large, Spacemaker, GE Front-Loading Dryers and model DNCD450EA/GE)	1-Year	Full	Entire Appliance	Both	In-Home
GE Coin Front-Loading Dryer (DCC43EV/GV)	3-Year	Limited	Entire Appliance	Parts	In-Home**
Cooktop	1-Year	Full	Entire Appliance	Both	In-Home
Electric and Gas Ranges	1-Year	Full	Entire Appliance	Both	In-Home
Hoods	1-Year	Full	Entire Appliance	Both	In-Home
Over-the-Range Microwave Ovens and JEM25WF/BF	1-Year	Full	Entire Appliance	Both	In-Home
JE740WH/BH	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	In-Home***
	1-Year	Limited	Entire Appliance	Both	Carry-In**
JEB20BF/WF	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	Carry-In**
	1-Year	Limited	Entire Appliance	Both	Carry-In**
Dishwashers GSD3200JWW/CC/BB, GSD2200GWW/CC/BB, GSD2000JWW/CC/AA/BB, GSD1900JWH, GSM2100GWW/CC/BB	Additional 4-Year (5 years total)	Limited	Magnetron Tube	Part	Carry-In**
	1-Year	Full	Entire Appliance	Both	In-Home
Disposers GFC520F, GFC525F, GFC320F, GFC325F, GFC329G	Additional 1-Year (2 years total)	Limited	Water Distribution System	Parts	In-Home***
	Additional 9-Year (10 years total)	Full	PermaTuf® Tub and Door Liner	Both	In-Home
GFC520F, GFC525F	1-Year	Full	Entire Appliance	Both	In-Home*
	Additional 1-Year (2 years total)	Extended/Limited	Entire Appliance	Parts	In-Home*
Air Conditioners (Vertical and Zoneline®)	1-Year	Full	Entire Appliance	Both	In-Home
	5-Year	Full	Sealed Refrigeration System	Both	In-Home
	Additional 4-Year (5 years total)—Zoneline only	Limited	Fan Motors, Switches, Thermostat, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing	Parts	In-Home*
	Additional 4-Year (5 years total)—Vertical Zoneline only	Limited	Fan Motors, Switches, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing	Parts	In-Home*
Air Conditioners (Built-In Units)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrigeration System	Both	In-Home

*Except in Alaska. See written warranty for complete details.

**In-Home service available at extra cost.

***Does not include service trip and labor charges.

Capacity		
Total (cu. ft.)	24.9	25.0
Fresh food (cu. ft.)	15.44	15.40
Freezer (cu. ft.)	8.56	9.56
Shelf area (sq. ft.)	22.3	22.4
Features		
Upfront electronic temperature controls	●	●
Electronic sensors	●	●
Hotpoint™ Water Filter	●	
LightTouch! dispenser	Crushed ice, Cubes, Water	Crushed ice, Cubes, Water
Light	●	●
Cabinet shelves	3 Glass	3 Glass
(adjustable)	3	3
Vegetable/fruit crisper(s)	2 Clear	Sealed
Door shelves	4 (2 adj. w/gallon storage)	4 (2 adj. w/gallon storage)
Dairy compartment	Opaque	
Adjustable temperature deli pan	●	
Quiet Package	Deluxe	
NeverClean™ condenser	●	●
Freezer Features		
FrostGuard™ technology	●	
Factory-installed icemaker & bin	●	●
Wire cabinet shelves	3 (2 adj.)	3
Storage bin	●	●
Door shelves	5 Fixed	5 Fixed
Interior light	●	●
Appearance		
Color(s) available*	WW	SA
Deluxe door handles	Color-Matched short	Black
Textured steel door and case	●	
Adjustable rollers	Front	
Weights & Dimensions		
Height to top of hinge (in.) A	69-3/4	69-3/4
Height to top of case (in.) B	68-3/4	68-3/4
Case depth without door (in.) C	28	28
Case depth less door handle (in.) D	31-1/4	32-1/4
Case depth with door handle (in.) E	33-9/16	33-9/16
Depth w/fresh food door open 90° (in.) F	49-3/8	49-3/8
Width (in.) G	35-3/4	35-3/4
Width w/door open 90° less door handle (in.) H	38-3/16	35-7/8
Air clearances		
Each side (in.)	1/8	1.8
Top (in.)	1	1
Back (in.)	1	1
Approx. shipping wt. (lbs.)	344	338

ALL MODELS AVAILABLE IN U.S. AND CANADA.

The diagram shows two orthographic views of a mechanical part. The **Front View** on the left is a vertical rectangle with a central vertical slot. It has dimension lines for overall height **A**, height to the top of the slot **B**, and a small base thickness. The **Top View** on the right shows the plan of the object. It has a rectangular top surface with width **H** and depth **C**. Below this is a narrower section with width **G** and depth **D**. The total depth of the object is **E**, and the total height from the top surface to the bottom of the base is **F**. Hidden edges are indicated with dashed lines.




Listed by
Underwriters
Laboratories, Inc.

Top-Freezer Refrigerators	HTM18IBP	HTM16BBR	HTS18GCR HTS18GBR	HTS18BCP HTS18BBP	HTS17BCR HTS17BBR	HTR17BBR	HTS16BCR HTS16BBR	HTR16BBR	HTS15BCR HTS15BBR	HTH15BBR HTR15BBR	HTR15ABR
Capacity											
Total (cu. ft.)	17.9	15.8	17.9	17.9	17.2	17.2	15.8	15.8	14.9	14.9	14.9
Fresh food (cu. ft.)	12.89	11.69	13.62	12.89	13.05	13.05	11.69	11.69	10.77	10.68/10.77	10.77
Freezer (cu. ft.)	5.03	4.11	4.26	5.03	4.11	4.11	4.11	4.11	3.86	3.86	3.86
Shelf area (sq. ft.)	21.8	17.2	20.3	21.2	16.7/17.2	17.5	16.4/17.2	17.2	16.4/17.2	17.2	16.1
Features											
Upfront temperature controls	Illuminated	●	●	●	●	●	●	●	●	●	●
Cabinet shelves	2 Glass	2 Wire	2 Glass	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire	2 Wire
(adjustable)	1 Full-Width, 2 Split	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width	2 Full-Width
Vegetable/fruit crisper(s)	2	2	2	2	2	2	2	2	2	2	1 Full-Width
Snack pan	●		●								
Fixed door bins	2 Full-Width gallon storage										
Fixed door shelves	1 split w/gallon storage	2 tall bottle storage	2 full-width (1 w/ gallon storage)	3 (2 with gallon storage)	2 tall bottle storage	2 tall bottle storage	2 tall bottle storage	2 tall bottle storage	2 tall bottle storage	2 tall bottle storage	2 tall bottle storage
Dairy compartment	●	●	●	●	●	●	●	●	●	●	●
Interior light system	Dual	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Quiet Package—Quiet Design	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
NeverClean™ condenser	●	●	●	●	●	●	●	●	●	●	●
Freezer Features											
Factory-installed icemaker & bin	Opt. (IM4A)	Opt. (IM4A)	● / Opt. (IM4A)	● / Opt. (IM4A)	● / Opt. (IM4A)	Opt. (IM4A)	● / Opt. (IM4A)	Opt. (IM4A)	● / Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)
Ice 'N Easy trays	2	2	— / 2	— / 2	— / 2	2	— / 2	2	— / 2	2	1
Ice storage bin	Ice Bucket	Ice Bucket	Ice Bucket / —	Ice Bucket / —	Ice Bucket / —		Ice Bucket / —		Ice Bucket / —		
Ice shelf	●	●				●		●		●	
Spillproof freezer floor	●			●							
Wire freezer compartment shelves	Step		Step	Step							
Fixed door shelves	2	2	2	2	2	2	2	2	2	2	2
Exterior											
Color(s) available*	SA	SA	WW	WW/ WW, CC	WW/ WW, CC	WW, CC	WW/ WW, CC	WW, CC	WW/ WW, CC	WW/ WW, CC CM	WW, CC
Door handle(s)*	CM	CM	CM	CM	CM	CM Recessed	CM	CM Recessed	CM	CM Recessed	CM Recessed
Customer installed handles	●			●							
Exterior design	Rounded Doors	Square Doors	Square Doors	Rounded Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors	Square Doors
Reversible doors	●	●	●	●	●	●	●	●	●	●	●
Choose right or left door opening				●	●	●	●	●	●	●	●
Adjustable rollers	Front	Front	Front	Front	Front	Front	Front	Front	Front	Front	Front
Weights & Dimensions											
Height to top of hinge (in.) A	66-5/8	64-3/4	67-3/8	66-5/8	67-3/8	67-3/8	64-3/4	64-3/4	61-3/4	61-3/4	61-3/4
Height to top of case (in.) B	66-1/8	64-1/4	66-7/8	66-1/8	66-7/8	66-7/8	64-1/4	64-1/4	61-1/4	61-1/4	61-1/4
Case depth without door (in.) C	27-1/2	25-7/8	26-3/4	27-1/2	26-3/4	26-3/4	25-7/8	25-7/8	25-7/8	25-7/8	25-7/8
Case depth less door handle (in.) D	30-1/4	29-1/8	30-1/2	30-1/4	30	30	29-1/8	29-1/8	29-1/8	29-1/8	29-1/8
Case depth with door handle (in.) E	32-1/8	31	32-3/8	32-1/8	31-7/8	30	31	29-1/8	31	29-1/8	29-1/8
Depth w/fresh food door open 90° (in.) F	58-1/8	54-7/8	56-3/8	58-1/8	55-3/4	55-3/4	54-7/8	54-7/8	54-7/8	54-7/8	54-7/8
Width (in.) G	29-1/2	28	28	29-1/2	28	28	28	28	28	28	28
Width w/door open 90° with door handle (in.) H	32	30-1/2	30-3/4	32	30-1/2	28-5/8	30-1/2	28-5/8	30-1/2	30-1/2 28-5/8	28-5/8
Air clearances Each side (in.)	1/8	3/4	1/8	1/8	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Top (in.)	1	1	1	1	1	1	1	1	1	1	1
Back (in.)	1	1	1	1	1	1	1	1	1	1	1
Approx. shipping wt. (lbs.)	198	170	206	203/198	184/179	183	175/170	169	171/166	165	163

*Color(s) available: WW = White on white, CC = Bisque on bisque, SA = Silver Metallic, CM = Color-Matched.

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Top-Freezer No-Frost Refrigerator

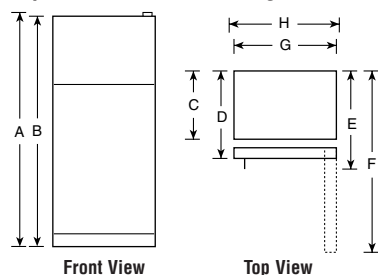

Note:
All Top-Freezer No-Frost Right-Hand Refrigerator Doors:
 As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.

All Top-Freezer No-Frost Left-Hand Refrigerator Doors:
 As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.



Listed by
Underwriters
Laboratories, Inc.

30" electric ranges	RB790SHSA	RB540SHSA	RB787WH RB787CH RB787BH	RB757WH RB757CH RB757EH RB757BH	RB536WH RB536CH	RB525BH	RB525H
Features							
Self-clean oven	●		●	●			
Oven capacity	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Cleaning time	Variable		Variable				
Standard-clean oven		●			●	●	●
Oven shelves	2	2	2	2	2	2	2
Porcelain-enameled upswept cooktop	Radiant	Coil	Radiant	Coil	Coil	Coil	Coil
Patterned cooktop	●		●				
Lift-up cooktop		●		●	●	●	●
8-inch heating elements	2 (2000W)	2	2 (2000W)	2	2	1	1
6-inch heating elements	2 (1500W)	2	2 (1500W)	2	2	3	3
Ribbon heating elements	●		●				
Plug-in Calrod® heating elements		●					
Removable one-piece drip bowls		Chrome		Chrome	Chrome	Chrome	Chrome
Electronic oven control	Easy Set III		Easy Set III	Easy Set III	●	●	●
Electronic clock and minute timer	●	●	●				
Electronic automatic oven timer	●		●	●	●		
Oven temperature display	●		●				
Auto oven shut-off	w/override		w/override	w/override	●	●	●
Audible preheat signal	●		●	●			
Hot surface indicator lights	●		●				
Heating element "ON" indicator lights	●	●	●	●	●	●	●
Oven cycling light	●	●	●				
Interior oven light	Control	Switch	Control	Control	Switch	●	●
Self-clean cool down time display	●		●				
Auto self-clean	●		●				
Delay Clean option	●		●				
Delay start	●		●				
Broiler pan	●	●	●				
Appearance							
			WW CC BB	WW CC BB WH/CT	WW CC	WH/CT	WH/CT
Color appearance*	Silver Metallic	Silver Metallic					
Oven door with window	●	●	●	●	●		
Door handle	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Visor	Visor
			White Glass Bisque Glass Black Glass	White Glass Bisque Glass Black Glass	White Glass Bisque Glass	Black Glass	CM*
Lift-off oven door	Black Glass	Black Glass					
Full-width storage drawer	Removable	Removable	●	●	●	●	

*BB = Black with black door, WW = White with white door, CC = Bisque with bisque door, WH = White with black door, CT = Bisque with black door, CM = Oven door is color-matched to cooktop and drawer front (either White or Bisque).

24" and 20" electric ranges	RA624F	RA620F
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	●	●
Porcelain-enameled subtop	●	●
8-inch heating elements	1 Plug-in	1 Plug-in
6-inch heating elements	3 Plug-in	3 Plug-in
Removable drip bowls	Chrome	Chrome
Push-to-turn controls	●	●
Heating element "ON" indicator light	●	●
Oven cycling light	●	●
Broiler pan with grid	●	●
Appearance		
Color appearance	WH*	WH/CT*
Porcelain-enameled oven door	Solid CM*	Solid CM*
Four leveling legs	●	●
Removable oven door	●	●
Weights & Dimensions		
Overall oven interior dimensions (W x H x D in inches)	18-1/2 x 13-3/4 x 16-3/4	15-3/4 x 13-3/4 x 16-3/4
KW rating @ 240V	8.43	8.43
208V	6.47	6.47
Approx. shipping wt. (lbs.)	127	120

*WH = White with color-matched door, CT = Bisque with color-matched door, CM = Oven door is color-matched to cooktop and drawer front (either White, Bisque or Almond).

Hood	RN328HSA
Features	
Two-speed fan control	●
Removable grease filters	Disposable 1-Pc. Filter†
Filter size (sq. in.)	90
Cooktop light(s)*	1
Non-vented	●
Appearance	
Color appearance	Silver Metallic
Weights & Dimensions	
Approx. shipping weight (lbs.)	19
Overall height, width and depth (in inches)	5-1/2 x 29-7/8 x 17-1/2
Power/Ratings	
Current rating amps @ 120V	2.5

*Light bulbs not furnished.

†WB02X9381 replacement grease filter and WB02X10700 replacement charcoal filter are available for additional cost. Call toll-free 800.626.2002 (Models RN328HSA).

Note: Typical overhead cabinets are 12" deep. For cabinets of greater depth, place spacer of non-combustible material behind hood.

30" gas ranges	RGB790SEHSA	RGB540SEHSA	RGB745WEH RGB745EEH RGB745BEH	RGB528PEH	RGB524PEH RGB524PPH	RGB508PEH RGB508PPH
Features						
Extra-large oven	Self-clean	Standard-clean	Self-clean	Standard-clean	Standard-clean	Standard-clean
Cooktop burners	Sealed	Sealed	Sealed	Twin	Twin	Twin
Performance Plus burner (Nat.)	(1) 12,000/ 1,000 BTU	(1) 12,000/ 1,000 BTU				
Simmer 600 burner (Nat.)	(1) 5,000/600 BTU	(1) 5,000/600 BTU				
All purpose sealed burners (Nat.)	(2) 9,500/ 850 BTU	(2) 9,500/ 850 BTU				
Oven controls	EasySet IV	Electron. Clock/Timer	EasySet IV	Electron. Clock/Timer	Knob	Knob
Automatic oven timer	Electronic					
Porcelain-enameled cooktop	Upswept	Upswept	Upswept	Upswept	●	●
Lift-up cooktop				●	●	●
Easy-clean subtop				●	●	●
Valves (degree of turn)	270°	270°	270°	140°	140°	140°
Removable drip pans	Grey Porc.-Enam. Black Porc.-Enam. Black Porc.-Enam.	Opt. Access.	Grey Porc.-Enam. Black Porc.-Enam. Black Porc.-Enam.	Opt. Access.	Opt. Access.	Opt. Access.
Removable square grates	Grey Heavy Steel Black Heavy Steel Black Heavy Steel	Grey Taupe	Grey Heavy Steel Black Heavy Steel Black Heavy Steel	Grey	Black Electronic Pilot	Black Electronic Pilot
Ignition system	Electronic	Electronic	Electronic	Electronic	Electronic Pilot	Electronic Pilot
Oven shelves	2	2	2	2	2	2
Six embossed rack positions	●	●				
Interior oven light	●	●				
In-oven broiling	●	●				
Slide-out broiler drawer		●		●	●	Drop down door
Removable storage drawer	●					
Appearance						
Color appearance*	Silver Metallic	Silver Metallic	WW BB WH/CT	WW	WH/CT WH/CT	WH/CT WH/CT
Frameless oven door	Black Glass	Black Glass	White Glass Black Glass Black Glass	White Porc.-Enam.	Solid CM Porc.-Enam.	Solid CM Porc.-Enam.
Oven door with window	●	●				
Handle style	Designer-Style	Designer-Style	Designer-Style	Visor	Visor	Visor
Removable oven door	●	●				
Weights & Dimensions						
Overall oven interior dimensions (WxHxD in inches)	24 x 18.5 x 19					
Approx. shipping wt. (lbs.)	210	185	210	165	147	166
Power/Ratings						
Gas range electrical rating†	120V, 60 Hz, 5A					
Top burners** (000's BTU's) NAT/LP	(1)-12.0/11.0 (1)-5.0/5.0 (2)-9.5/9.5	(1)-12.0/11.0 (1)-5.0/5.0 (2)-9.5/9.5	(1)-12.0/11.0 (1)-5.0/5.0 (2)-9.5/9.5		9.1/8.0	
Oven/broiler burners** (000's BTU's) NAT/LP	16.0/16.0–Oven 12.5/12.0–Broil	18.0/16.5	16.0/16.0–Oven 12.5/12.0–Broil		18.0/16.5	
Accessories						
LP conversion kit	●	●	●	●	●	●

*WW = White on white, WH = White, CT = Bisque, CM = Indicates color of oven door (either White or Almond).

**Factory set for natural gas. A set of LP orifices is included with each range for LP gas conversion.

†Electrical rating not applicable to standing pilot models RGB524PPA/RGB508PPA.

24" and 20" gas ranges	RGA624EF/PF	RGA620EF/PF
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	●	●
Porcelain-enameled subtop	●	●
Rectangular grates	●	●
Ignition system	Electronic/Pilot	Electronic/Pilot
Push-to-turn controls	●	●
Broiler pan with grid	●	●
Separate broiler drawer (with tip down door)	●	●
Appearance		
Color appearance*	WH	WH
Porcelain-enameled oven door	Solid color-matched	Solid color-matched
Removable oven door	●	●
Four leveling legs	●	●
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	19 x 14 x 19	14-7/8 x 16 x 19-1/2
Burner BTU's:		
Top (Nat/LP)	9,000/8,000	9,000/8,000
Oven (Nat/LP)	18,000/18,000	18,000/18,000
Gas range electrical rating**	120V, 60 Hz, 5A	120V, 60 Hz, 5A
Approx. shipping wt. (lbs.)	140	124

*WH = White with color-matched door

**Electrical rating not applicable to standing pilot models RGA624PF and RGA620PF.

Factory set for natural gas. Can be converted to LP by a qualified technician.

Over-the-range microwave oven		RVM1625SJ	RVM1435WH RVM1435BD
Features			
Oven cavity (cu. ft.)		1.6	1.4
Watts (IEC-705 Test Procedure)		1000	950
Power levels		10	10
Electronic touch controls		●	●
Interactive display system		●	●
Electronic scrolling digital display		●	
Clock and AM/PM Pad		●	●
Variable scroll speed		●	
Concurrent programming		●	●
Display On/Off		●	●
Turntable		●	
Time Cook		I & II	I & II
Auto/Time Defrost		●	●
Popcorn Pad		●	●
Reheat Pad		●	●
Express Cook Pads (1-6 minutes)		●	●
Instant On controls		●	●
Cooking complete reminder		●	●
Delay Start		●	●
Timer On/Off		●	●
Reminder		●	
Child lockout		●	●
Full-View cooktop lighting		●	●
Two-speed high-capacity exhaust fan		300 CFM	300 CFM
Easy Mount installation		●	●
Appearance			
Color appearance		Silver Metallic	White on white Black on black
Door color		Silver Metallic	White Black
Case color		Black	White Black
Weights and Dimensions			
	Cavity	20-1/4 x 9-1/4 x 14-13/32	19-5/16 x 9-5/16 x 13-3/16
	Exterior	29-7/8 x 15-1/4 x 16 (16-13/32 rear)	29-7/8 x 15-7/8 x 14-5/16
	Approx. shipping wt. (lbs.)	67	73
Power Ratings			
	Frequency (MHz)	2450	2450
	Watts	1480	1480
	Electrical input @ 120V Amps	15	15

Countertop microwave oven		REM25SJ
Features		
Oven cavity (cu. ft.)		1.0
Watts (IEC-705 Test Procedure)		800
Electronic touch controls		●
Electronic digital display w/clock		●
Convenience controls	Beverage	●
	Cook	●
	Popcorn	●
	Reheat	●
	Snacks	●
Express Cook		●
Instant On controls		●
Time cook I & II		I & II
Add 30 Seconds		●
Auto/Time Defrost		●
Power levels		●
Turntable On/Off		●
Kitchen timer		●
Cooking complete reminder		●
Delay Start		●
Reminder		●
Child lockout		●
Appearance		
Color appearance		Silver Metallic
Door color		Silver Metallic
Case color		Black
Weights & Dimensions		
	Approx. shipping wt. (lbs.)	40
	Cavity	16-1/2 x 8-1/16 x 12-5/32
	Exterior*	23-25/32 x 11-3/16 x 12-9/32
Power/Ratings		
	Frequency (MHz)	2450
	Watts	1300
	Electrical input @ 120V Amps	11.5
Accessories		
Cooking guide label		●
Hanging kit (Pub. No. 4-A019)**		Included
Right-angle plug		

*Exterior dimensions: height includes feet, depth does not include handle.

**Pub. No. 4-A019 is available at additional cost.

Built-in dishwashers	ENERGY STAR® HDA3740GSA	ENERGY STAR	ENERGY STAR
		HDA3400GWW	Contract Only HDA2000GWW
		HDA3400GCC	HDA2000GCC
Features	HDA3400GBB	HDA3400GBB	HDA2000GBB
Power Wash II System	●	●	
Self-cleaning filter	●	●	
Food disposer	●	●	●
Wash levels	3	3	2
Cycles/Options	6/31	5/22	4/9
Pots & Pans cycle	●	●	
Heavy Wash cycle	●		Dial
Normal Wash cycle	●	●	Dial
Water Saver cycle	Dial	Dial	Dial
Plate Warmer cycle	Dial	Dial	
Rinse Only cycle	Dial	Dial	Dial
Delay Start	1-5 hr.		
Heated Dry	●	●	Rocker
Hi-Temp Wash	●	●	
Hot PreWash option	●	Dial	Dial
Control Type	TouchTap™ w/Dial	Pushbutton w/Dial	Dial w/Rocker
Touchpads	7		
Pushbuttons		6	
Cycle progress indicator	1 "cycle on"		
Rack System	Upper	Super	Standard
	Lower	Deluxe	Deluxe
Silverware basket	Deluxe	Deluxe	Deluxe
Hard countertop installation	GPF65	GPF65	GPF65
Rinse aid dispenser	●	●	●
Center throw door latch	●	●	●
Economical/Quiet			
Sound insulation package	QuietDesign™	Standard	Standard
QuietPower™ motor	●	●	●
Appearance			
Colors available*	Silver Metallic	WW, CC, BB	WW, CC, BB
Door	Trimless	Trimless	Trimless
Access	Trimless	Trimless	Trimless
Weights & Dimensions			
Height w/legs retracted (in.)	34	34	34
Overall width (in.)	24	24	24
Overall depth (in.)	25-3/4	25-3/4	25-3/4
Approx. shipping wt. (lbs.)	80	80	80
Accessories			
Requires kit for 1/4" panel capability (w/trim)	GPF425W/C/B	GPF325W/C/B	GPF325W/C/B
Requires kit for 3/4" panel capability (trimless)	GPF475	GPF375	GPF375

*Colors available: WW = White on white, CC = Bisque on bisque, BB = Black on black, WH = White door with black control panel.

Dishwasher accessories

Side panel for all models:

Contains one panel and adjustable toe-kick for end cabinet installation of built-in model.

Does not attach to dishwasher.

Specify color: GPS5CC—Bisque GPS5WW—White

Optional dishwasher accessories:

GPF65—Brackets for under non-wood countertop installation

GPF95—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on right; elbow and strainer included

GPF96—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on left; elbow and strainer included

GPF97—Stainless sink for Spacemaker® dishwasher—double bowl 21-1/4" x 33" elbow and strainer included

GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs.

GPF310—Trimless panel kit for pushbutton models

GPF410—Trimless panel kit for touchpad model

Wood panel capability:

Model: HDA3740

GPF425W/C/B—1/4" panel trim kit (door and access)

GPF475—3/4" trimless panel trim kit (door and access);

GPF100—heavy-duty spring kit included

Models: HDA3400 and HDA2000

GPF325W/C/B—1/4" panel trim kit (door and access)

GPF375—3/4" trimless panel trim kit (door and access);

GPF100—heavy-duty spring kit included

Washers	VBSR3100D	VVSR1070D	VBXR1090D
Features			
Capacity/cubic feet	Super Plus/3.2	Super/3.2	Extra-Large/2.7
Wash/spin speed combination(s)	3	1	1
Wash/rinse temperatures	3	3 (timer)	3
Number of wash cycles	10	7	9
Water levels	3	3	3
Cotton			
Extra-heavy soil	●		●
Heavy soil	●	●	●
Normal soil	●	●	●
Light soil	●	●	●
Easy Care			
Heavy soil	●		●
Normal soil	●	●	●
Light soil	●	●	●
Extra-light soil			●
Rinse & spin	●		
Casuals—Pulsed			
Heavy soil			●
Normal soil			●
Light soil			●
Delicate			
Normal soil	●	●	
Light soil	●	●	
GentlePower™ Agitator	●		
FlexCare™ agitator		●	●
Bleach dispenser	●		●
Basket	ExtraAction™	PermaTuf® II	PermaTuf II
Sound package	Quiet-by-Design™	Quiet-by-Design	Quiet-by-Design
Front serviceable	●	●	●
Colors available*	WW	WW	WW, CC
Approx. shipping wt. (lbs.)	160	160	160

*Colors available: WW = White on white, CC = Bisque on bisque.

Washer specifications

Electrical rating: 115V, 60 Hz, 10 amps

Circuit requirements:

An individual property-grounded branch circuit, with a three prong grounding-type receptacle protected by a 15- or 20-amp circuit breaker or time-delay fuse, is required.

Dryers	NBXR463EB NBXR463GB	NVLR333EE NVLR333GE
Features		
Capacity/cubic feet	Extra-Large/6.0	Extra-Large/5.8
Auto Dry Control	●	●
Number of dry cycles	6	3
Heat selections	4	3
Cottons		
Automatic Dry Cottons	●	●
Wrinkle free		
Automatic Dry Easy Care	●	●
Timed dry		
Actual minutes on timer	80	70
Dewrinkle	●	
Sound package	Quiet-by-Design	Quiet-by-Design
Front serviceable	●	●
Colors available*	WW	WW, CC
Approx. shipping wt. (lbs.)		
Electric	112	112
Gas	115	115

*Colors available: WW = White on white, CC = Bisque on bisque.

Dryer specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom.

Gas: 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit requirements:

Electric: An individual properly-grounded branch circuit protected by a 24-amp circuit breaker or time-delay fuse, is required.

Gas: An individual, properly-grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse, is required. (BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires a conversion kit. 5.8 and 6.0 cu. ft. model kit is WE25X0217. Check installation instructions for correct kit and have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Electric dryer rating: 240V, 5600W, 60 Hz, 24 Amp
208V, 4400W, 22A, 60 Hz

Gas dryer electric rating: 120V, 60 Hz, 6 Amp

Hotpoint Warranties

The condensed list below is a convenient overview of the written warranties offered on various Hotpoint and GE® appliances described in this catalog. For complete warranty details on a specific appliance model, contact your nearest Hotpoint/GE appliance dealer, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

Appliance	Length	Type	Warranty Covers	Parts Or Labor	Where Serviced*
Refrigerators (All models except, GMR02BAN, GMR04BAN, GMR06AAN)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Sealed Refrigeration System, Compressor	Both	In-Home
GMR02BAN, GMR04BAN, GMR06AAN	1-Year	Limited	Entire Appliance	Both	Carry-In***
	Additional 4-Year (5 years total)	Limited	Compressor	Part	Carry-In***
Washers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Transmission	Parts	In-Home**
	Additional 19-Year (20 years total)	Limited	Tuf Tub™ Basket	Parts	In-Home**
Dryers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Extra-Large Capacity Drum	Parts	In-Home**
Ranges	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Ceramic cooktop, pattern, radiant elements	Parts	In-Home**
Over-the-Range and Countertop Microwave Ovens	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Magnetron Tube	Part	In-Home**
Dishwasher	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Full	Polypropylene Tub and Door Liner	Both	In-Home

*See written warranty for complete details.

**Does not include service trip and labor charges.

***In-Home service available at additional cost.

GE makes property managers' lives easier.

GE gives you the practical tools and personal support to help you manage and grow.



- An industry-leading company committed to customer satisfaction
- Knowledgeable and dedicated sales support
- Builders and remodelers #1 choice for 8 years in a row.*
- America's #1 preferred appliance brand**
- A nationwide network of sales professionals and service technicians **800.GE.CARES**.

* Professional Builder Brand Use Study, 2003.

Professional Remodeler Brand Use Study, 2003.

**GE is the appliance brand most often mentioned among the brands rated as offering the best products and services in America. Source: The Harris Poll 2003.



- 24-hour accessibility through award-winning technology
 - **GECustomerNet.com**
 - **Zoneline.com**
 - **GEAppliances.com**
 - **Hotpoint.com**
- ADA compliant—Appliances that accommodate special needs tenants
- GE Answer Center® saves you time by providing answers on product features. **800.626.2000**.

Quick Reference Guide Directory

GE ASM	Name	Phone
GE Telesales ASM	Name	Phone
Parts Orders	800.851.6200	Account #
Appliance Orders	800.523.7277	Account #

Factory Service **800.GE.CARES (800.432.2737)**

Local Delivery Co. _____
Name _____ Phone _____

GE Answer Center® **800.626.2000**

Other _____

As an ENERGY STAR® partner, GE has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2004 GE Company
Pub. No. 24-C264 PC37827