




JTP56BD/CD/SD/WD - GE Profile™ 30" Built-In Double Convection/Thermal Wall Oven


Cabinet Installation Dimensions (in inches)

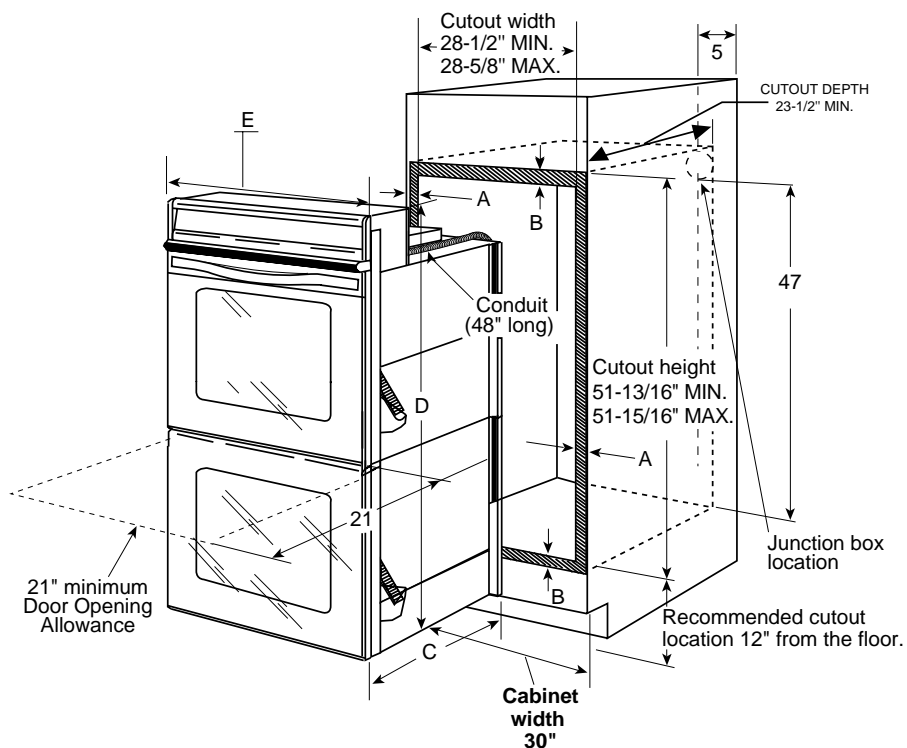

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT
THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least 194° temperature rating.

Cabinet	
A—Overlap of Oven Over Side Edges of Cutout	11/16"–3/4"
B—Overlap of Oven at Top and Bottom of Cutout	1"
Oven	
C—Overall Depth	23-1/2"
D—Overall Height	52-7/8"
E—Overall Width	29-3/4"

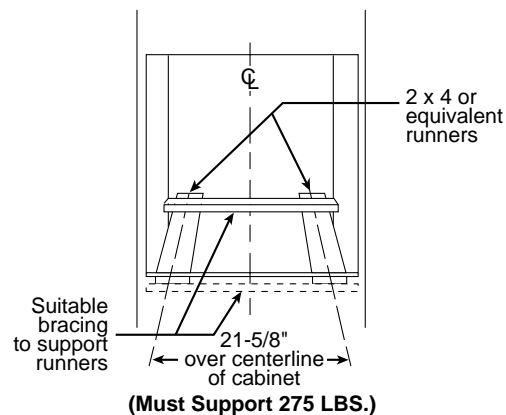

KW Rating	
240V	7.2
208V	5.4
Breaker Size	
240V	40 Amps
208V	30 Amps

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.




Listed by
Underwriters
Laboratories



Profile™

JTP56BD/CD/SD/WD - GE Profile™ 30" Built-In Double Convection/Thermal Wall Oven

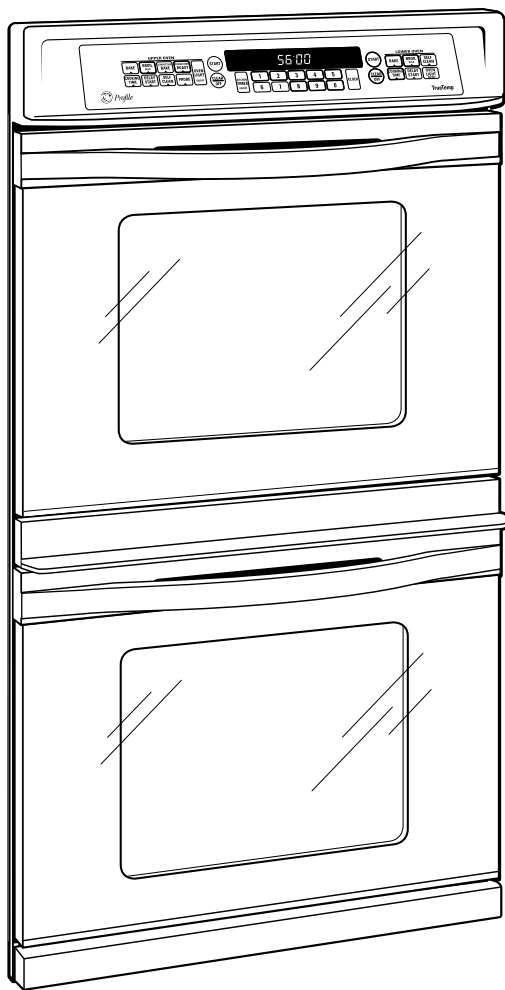

Features and Benefits

- Upper Oven - Convection Bake and Convection Roast with Convection Conversion
 - Extra Large 4.1 cu. ft. Capacity Self-Cleaning Convection Oven with Delay Clean Option
 - 3 Heavy Duty Oven Racks with 7 Embossed Positions and Roasting Rack
- Lower Oven - Extra Large 4.4 cu. ft. Capacity Self-Cleaning Thermal Oven with Delay Clean Option
 - 2 Heavy Duty Oven Racks with 6 Embossed Positions
- SmartSet Electronic Oven Controls with Digipad; Sabbath Mode/Proofing Mode
- True Frameless Glass Oven Doors with Big ClearView™ Windows and Halogen Interior Light
- Model JTP56WDWW - White on white
- Model JTP56BDBB - Black on black
- Model JTP56CDCC - Bisque
- Model JTP56SDSS - Stainless Steel