




Monogram®

ZFSB23DN – GE Monogram Free-Standing Side-by-Side Refrigerator

Dimensions and Specifications (in inches)

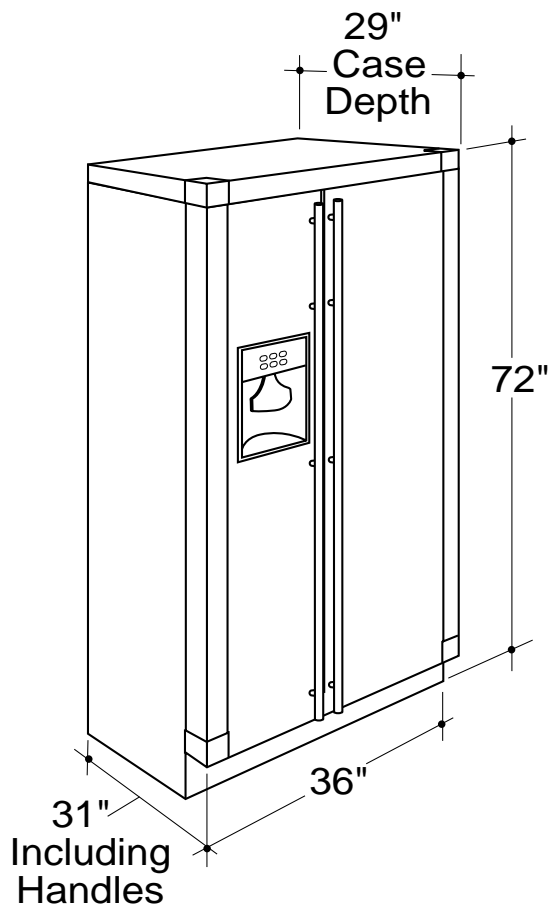


This Monogram free-standing refrigerator requires the following clearances for proper air circulation, plumbing and electrical connections.

Air Circulation Clearances:

- 1/8" on each side
- 1" at the top
- 1" at the back

Installation in a corner:

- Allow 4" clearance on each side to an adjacent wall for a 90° opening and access to drawers.

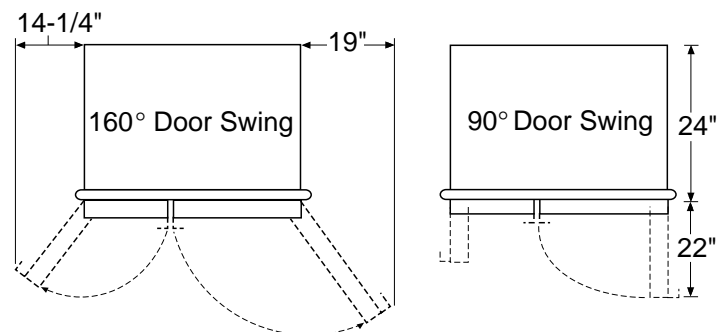

- On the freezer side, allow 14-1/4" min. clearance for removal of ice bin.
- On the fresh food side, allow 19" min. clearance to wall for removal of drawers.



Listed by
Underwriters
Laboratories

For answers to your Monogram® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.




Monogram®

ZFSB23DN – GE Monogram Free-Standing Side-by-Side Refrigerator

The Installation Space

The opening width must be 36-1/2".

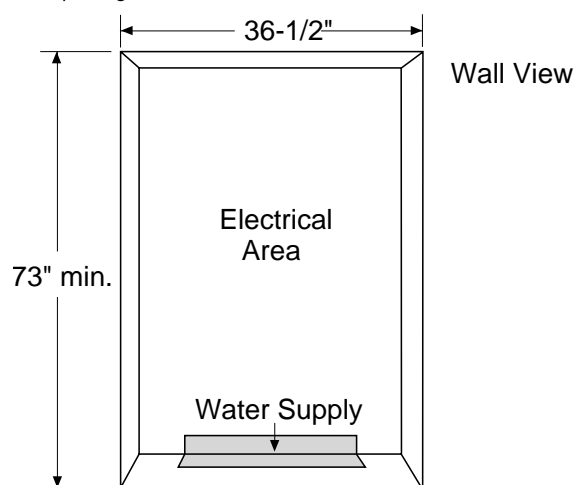

Tools Required

- Tinsnips to cut banding
- Stepladder
- Bucket
- Level
- Appliance Hand Truck
- Tubing cutter
- #2 Phillips screwdriver
- Drill and appropriate bits
- 3/8", 5/16" and 7/16" socket with 3" extension for ratchet
- Safety glasses
- Torx® T-20

Materials Required

- 1/4" O.D. compression nut and 2 ferrules (sleeves)

Flooring

For proper installation, this refrigerator must be placed on a level surface of hard material that is at the same height as the rest of the flooring. This surface should be strong enough to support a fully loaded refrigerator.

IMPORTANT NOTE: Protect the finish of the flooring. Cut a large section of the cardboard carton and place under the refrigerator where you are working.

Water and Electrical Locations

The opening must be prepared with the electrical and water supply located as shown.

Additional Specifications

- A 115 volt 60Hz., 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.

Note: GFI (ground fault interrupter) is not recommended.

- Water line can enter the opening through the floor or through an adjacent cabinet, as close to the back wall as possible. The water line should be 1/4" O.D. copper tubing between the cold water line and water connection location at the rear of the refrigerator. Installation of an easily accessible shut off valve in the water line is recommended.

Grounding the Refrigerator

IMPORTANT – (Please read carefully)

FOR PERSONAL SAFETY, THIS APPLIANCE MUST BE PROPERLY GROUNDED.

The power cord of this appliance is equipped with a 3-prong (grounding) plug which mates with a standard 3-prong (grounding) wall receptacle to minimize the possibility of electric shock hazard from this appliance.


Have the wall outlet and circuit checked by a qualified electrician to make sure the outlet is properly grounded.

Where a standard 2-prong wall outlet is encountered, it is your personal responsibility and obligation to have it replaced with a properly grounded 3-prong wall outlet.

DO NOT, UNDER ANY CIRCUMSTANCES, CUT OR REMOVE THE THIRD (GROUND) PRONG FROM THE POWER CORD.

DO NOT USE AN ADAPTER PLUG TO CONNECT THE REFRIGERATOR TO A 2-PRONG OUTLET.

DO NOT USE AN EXTENSION CORD WITH THIS APPLIANCE.




Listed by
Underwriters
Laboratories

For answers to your Monogram® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Monogram®

ZFSB23DN – GE Monogram Free-Standing Side-by-Side Refrigerator

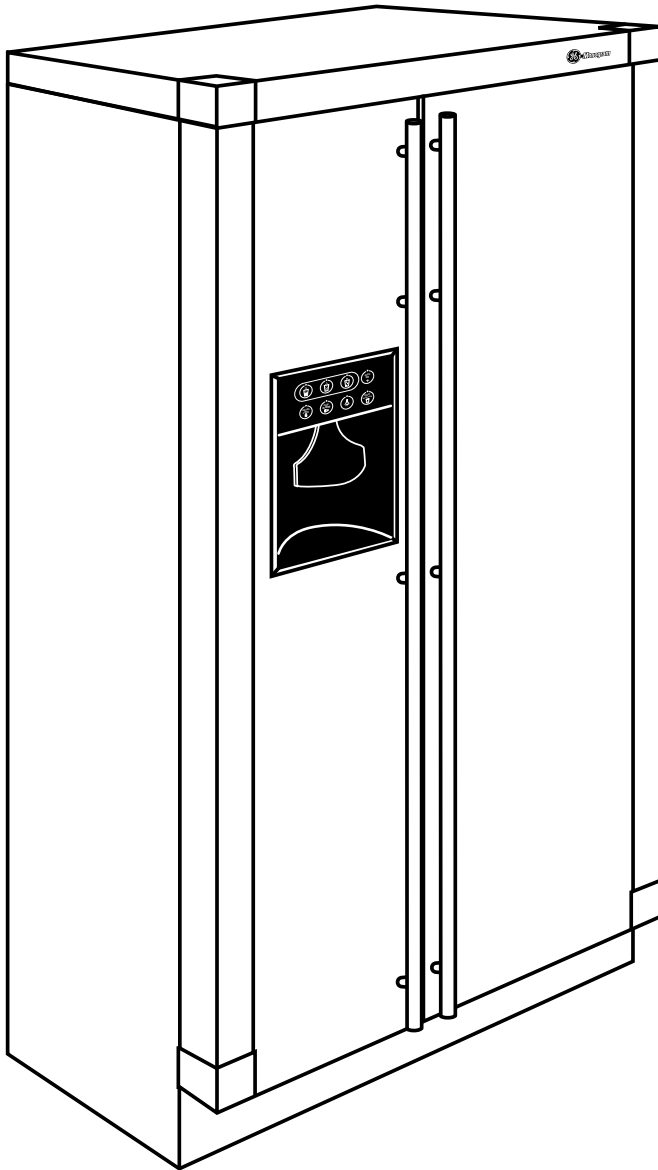

Features and Benefits

- 22.6 cu ft Capacity (Fresh Food 14.4 cu. ft./ Freezer 8.2 cu. ft.)
- ENERGY STAR® Qualified
- Upfront Electronic Controls with Digital Readouts
- Tri-Level Light System
- Multi-Shelf Air Management Tower
- Climate Control Drawer with Express Chill, Express Thaw and Select Temp
- LightTouch! Tall Dispenser Delivers Chilled Water, Cubed and Crushed Ice Through the Door
- Model ZFSB23DNSS – Stainless steel