



state-of-the-art design • whisper quiet • 2004 retail sales product specifications • energy efficient • easy maintenance

GE Quiet-AireTM Room Air Conditioners

#1 Preferred Brand of Room Air Conditioners

imagination at work



GE® Electronic Room Air Conditioners

These models include • 3 cool/3 fan speeds • Electronic thermostat with remote control and 24-hour timer • EZ Mount window kit
• Power interruption restart



ASL24DA

• 23,700/23,100 BTU • 8.5/8.5 EER • 230/208 Volt



AGL10AC

• 10,000 BTU • 9.8 EER • 115 Volt

AGL08FB

• 8,000 BTU • 9.8 EER • 115 Volt



AGL18DC


• 18,000/17,500 BTU • 9.7/9.7 EER • 230/208 Volt

AGL14AC

• 13,800 BTU • 10.0 EER • 115 Volt

AGL12AD

• 12,000 BTU • 9.8 EER • 115 Volt

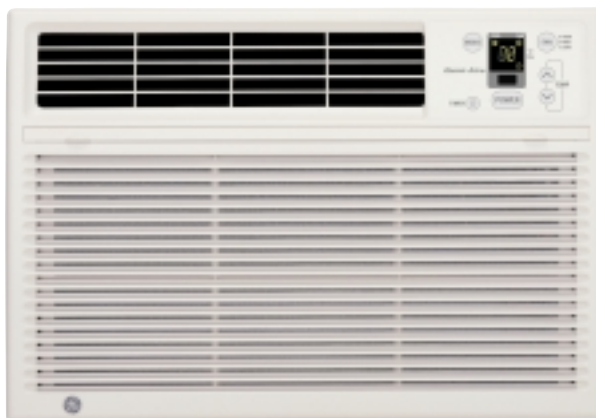


ASL06LC

• 6,100 BTU • 9.7 EER • 115 Volt

ASL05LA

• 5,200 BTU • 9.8 EER • 115 Volt

Wall Case Dimensions

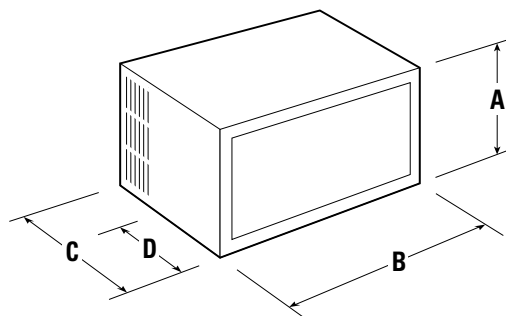

D = Distance from front of case to side louvers (excluding grille).

Note: When installing slide out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.


GE® Mechanical Room Air Conditioners

These models include • 3 cool/2 fan speeds • 8-position thermostat



ASN24DB

• 23,700/23,100 BTU • 8.5/8.5 EER • 230/208 Volt

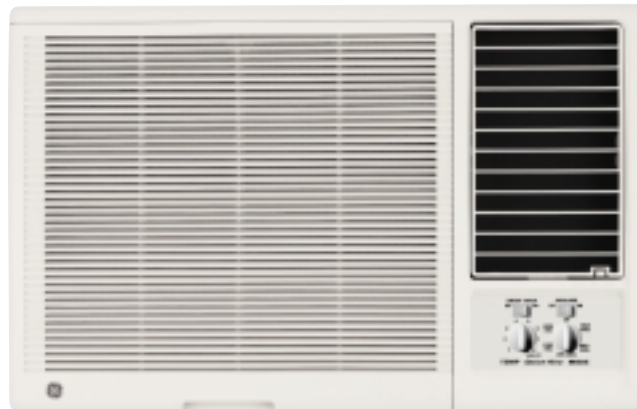

AGN10AE

• 10,000 BTU • 9.8 EER • 115 Volt


AGN08FE

• 8,000 BTU • 9.8 EER • 115 Volt



AGN18DD

• 18,000/17,500 BTU • 9.7/9.7 EER • 230/208 Volt

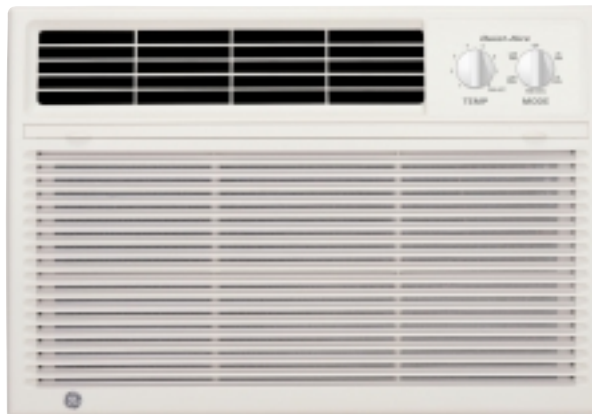

ASN06LC

• 6,100 BTU • 9.7 EER • 115 Volt

ASN05LA

• 5,200 BTU • 9.8 EER • 115 Volt



AGN14AE

• 13,800 BTU • 10.0 EER • 115 Volt

AGN12AE

• 12,000 BTU • 9.8 EER • 115 Volt

Wall Outlets

All wiring including installation of receptacle must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum building wiring may pose special problems — consult a qualified electrician.



Parallel
115V.
15 Amp



Tandem
230/208V.
15 Amp



Perpendicular
230/208V.
20 Amp



Large Tandem
230/208V.
30 Amp

Features & Specifications

Electronic

	ASL24DA	AGL18DC	AGL14AC	AGL12AD	AGL10AC	AGL08FB	ASL06LC	ASL05LA
Features								
BTUH	23,700/23,100	18,000/17,500	13,800	12,000	10,000	8,000	6,100	5,200
Voltage	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	10.0	9.8	9.8	9.8	9.7	9.8
Amps	12.0/13.0	8.2/8.9	12.0	11.0	9.2	7.6	5.7	4.8
Watts	2,700/2,630	1,850/1,800	1,380	1,220	1,020	820	630	530
Plug Type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver Feature	●	●	●	●	●	●		
Dehumidification (pints/hr.)	7.2	5.5	4.6	3.3	3.0	2.3	1.7	1.5
Circulaire™	●	●	●	●	●	●		
Fan Speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (High Shown)	510	440	350	310	250	230	140	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust		
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter Type	One Touch Lift-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	17-3/8	18	16	16	14	14	12-7/8	12-7/8
Window Opening Width (in inches) min.	28-2/5	29	27	27	22	22	22	22
max.	39-2/5	41	39	39	36	36	36	36
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions								
Height (in inches) A	16-3/4	16-27/32	15	15	13-7/8	13-7/8	12-7/32	12-7/32
Width (in inches) B	24-2/5	26	23-5/8	23-5/8	18-7/16	18-7/16	16-11/16	16-11/16
Depth (in inches) C	23-2/3	24-15/16	20-9/32	20-9/32	19-5/32	19-5/32	12-7/16	12-7/16
Depth to louvers (in inches) D	9-1/4	10-5/16	8-5/8	8-5/8	8-1/4	8-1/4	4-1/4	4-1/4
Net Weight (lbs.)	TBD	117	87	79	69	60	42	41
Approx. Shipping Weight (lbs.)	TBD	127	96	87	75	66	46.3	45.2

*See written warranty for details.

Mechanical

	ASN24DB	AGN18DD	AGN14AE	AGN12AE	AGN10AE	AGN08FE	ASN06LC	ASN05LA
Features								
BTUH	23,700/23,100	18,000/17,500	13,800	12,000	10,000	8,000	6,100	5,200
Voltage	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	10.0	9.8	9.8	9.8	9.7	9.8
Amps	12.0/13.0	8.2/8.9	12.0	11.0	9.2	7.6	5.7	4.8
Watts	2,700/2,630	1,850/1,800	1,380	1,220	1,020	820	630	530
Plug Type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver Feature	●	●	●	●	●	●		
Dehumidification (pints/hr.)	7.2	5.5	4.6	3.3	3.0	2.3	1.7	1.5
Circulaire™	●	●	●	●	●	●		
Fan Speeds (Cool/Fan Only)	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2
CFM (High Shown)	510	440	350	310	250	230	140	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust		
Thermostat	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position
Filter Type	One Touch Lift-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	17-3/8	18	16	16	14	14	12-7/8	12-7/8
Window Opening Width (in inches) min.	28-2/5	29	27	27	22	22	22	22
max.	39-2/5	41	39	39	36	36	36	36
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions								
Height (in inches) A	16-3/4	16-27/32	15	15	13-7/8	13-7/8	12-7/32	12-7/32
Width (in inches) B	24-2/5	26	23-5/8	23-5/8	18-7/16	18-7/16	16-11/16	16-11/16
Depth (in inches) C	23-2/3	24-15/16	20-9/32	20-9/32	19-5/32	19-5/32	12-7/16	12-7/16
Depth to louvers (in inches) D	9-1/4	10-5/16	8-5/8	8-5/8	8-1/4	8-1/4	4-1/4	4-1/4
Net Weight (lbs.)	TBD	117	87	79	69	60	42	41
Approx. Shipping Weight (lbs.)	TBD	127	96	87	75	66	46.3	45.2

*See written warranty for details.



GE Appliances



Listed by
Underwriters
Laboratories



Water removal rating is
calculated by the Association
of Home Appliance
Manufacturers' standards.



Total capacity and E.E.R.
ratings are calculated based on
the Association of Home
Appliance Manufacturers
standards.

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2003 General Electric Company
Pub. No. 26-S014 OTT2252

GE Consumer Products
General Electric Company
Louisville, Kentucky 40225
GEAppliances.com