




**GE Appliances**

## ASV18DB—GE 115 Volt Window Room Air Conditioner with Mechanical Controls


### Wall Case Dimensions (in inches)

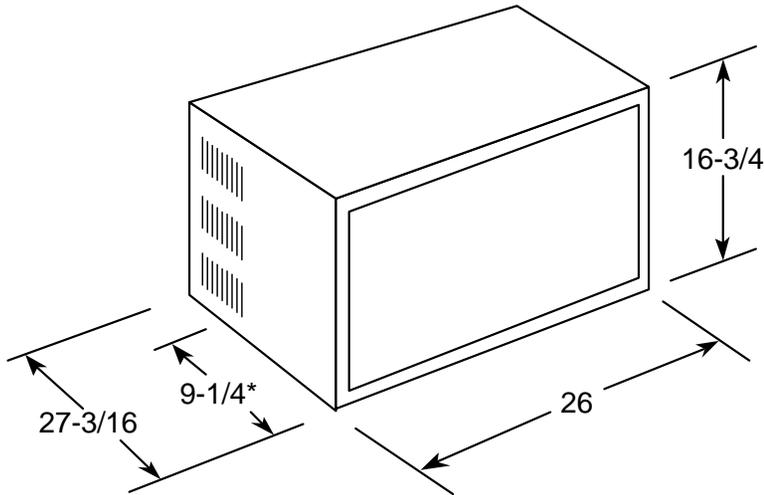

\*Distance from front of case to side louvers (excluding grille).

**Note:** When installing slide-out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

Tandem



230/208V  
15 Amp

**Wall Outlets:** All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

**Note:** Aluminum building wiring may pose special problems—consult a qualified electrician.

Specification Created 5/01

For answers to your Monogram<sup>®</sup> GE Profile<sup>™</sup> or GE appliance questions, visit our website at [GEAppliances.com](http://GEAppliances.com) or call GE Answer Center<sup>®</sup> service, 800.626.2000.



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.




Listed by Underwriters Laboratories



**GE Appliances**

## **ASV18DB—GE 115 Volt Window Room Air Conditioner with Mechanical Controls**

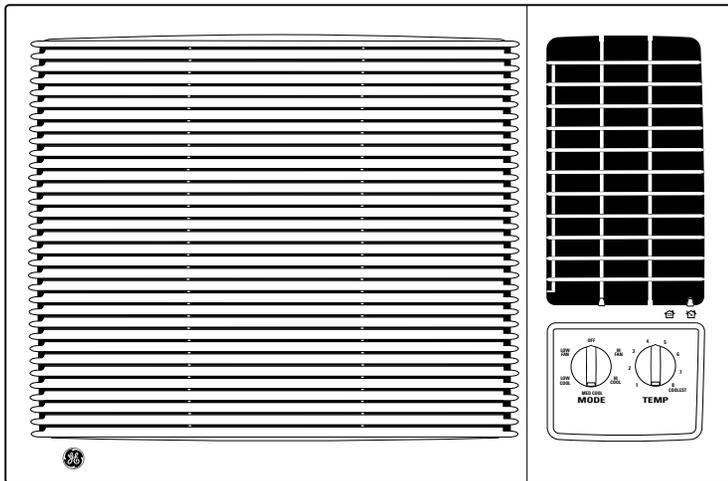

### **Features and Benefits**

- 18,000/17,500 BTUH, 230/208 Volts
- 9.7/9.7 E.E.R.
- Mechanical Controls with 8-Position Thermostat
- 3 Cooling / 2 Speed Fans
- Slide-Out Chassis
- 510 CFM
- 1,855/1,805 Watts / 8.5/9.1 Amps
- 5.5 Dehumidification (pints/hr)
- Rigid Frame Slide-Out Filter
- Plug Type - Tandem
- EZ Mount Window Installation
- Model ASV18DB