




dishwashers

Retail Sales

New product introductions January 2007
GE® tall tub built-in dishwashers



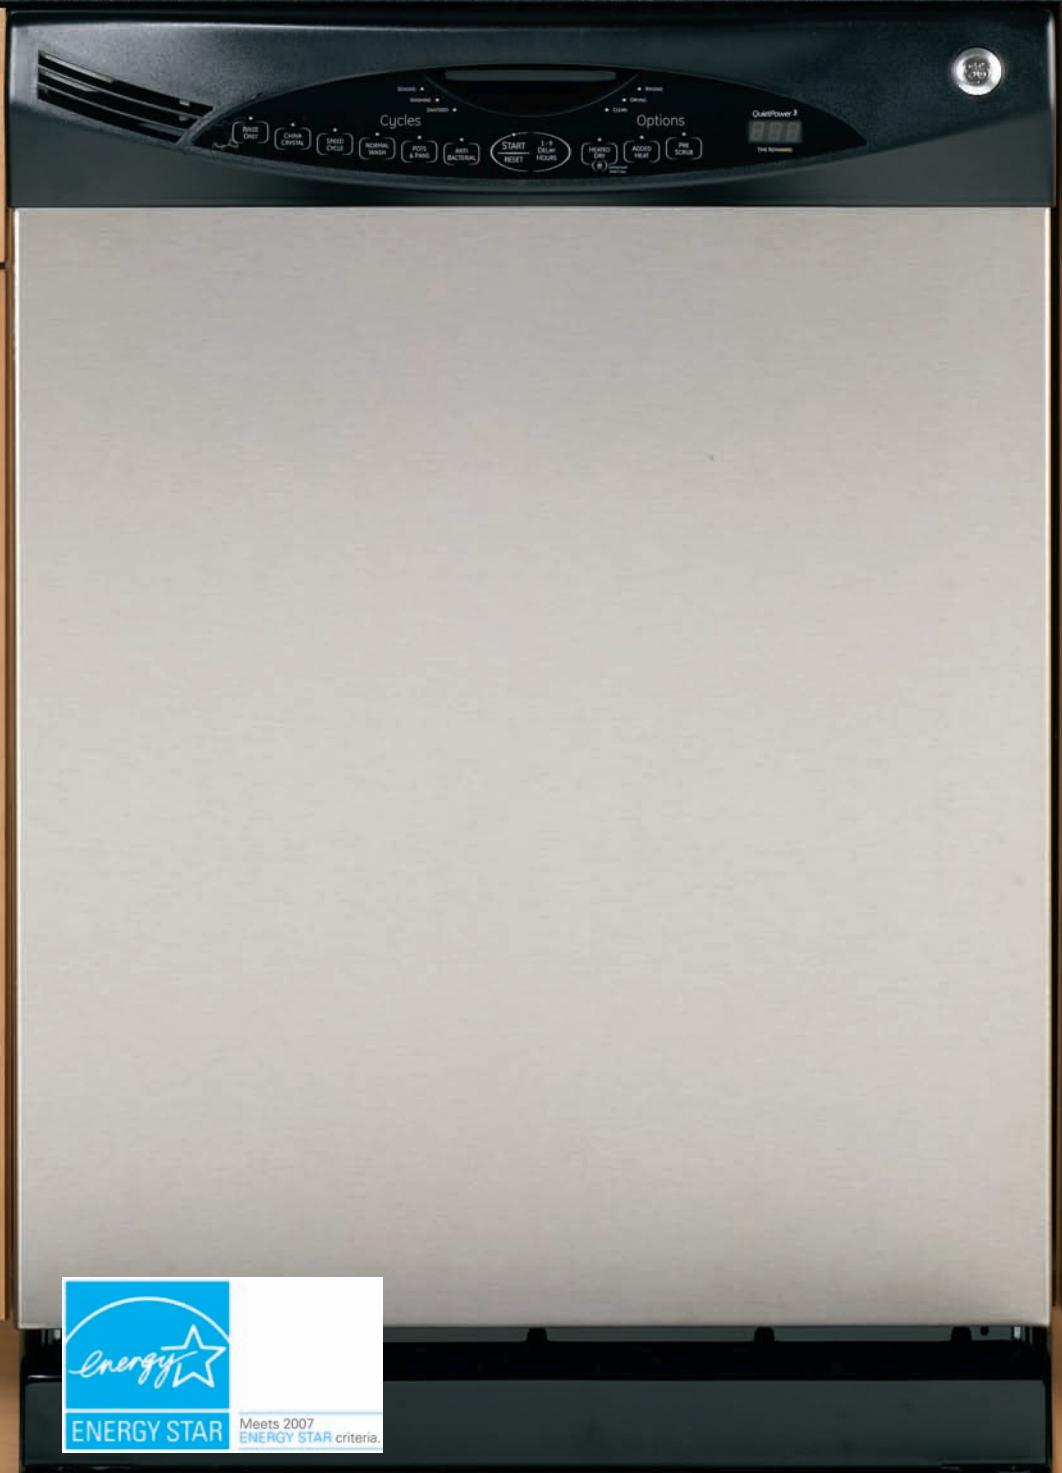

Meets 2007
ENERGY STAR criteria.

GE® model GLD6860NSS

GE dishwasher quick pitch

High-performance and convenience with a fresh new style.



Giant capacity

A **giant tub** with maximum capacity **nylon racks**, washes even the largest cookware. Washes up to 16 place settings.



Peacefully quiet

GE QuietPower™ motor and BrilliantClean wash system work together to reduce noise.



Stylish appearance

A **full-length door**, **easy-to-read**, angled control panel, and bright white racks with **silver touchpoints** create a modern look.



High-performance

BrilliantClean™ towerless wash system with **CleanSensor™** directs water where it belongs—on the dishes. With BrilliantClean, nothing gets in the way of cleaning.

What's new: GE® tall tub built-in dishwashers



Nylon racks

- Heavy-duty design secures and protects dishes during each cycle.
- Four-position adjustable upper rack moves up, down, and diagonally for maximum loading flexibility.

(Available on GLD6000N series models.)



QuietPower™3 sound package

- Now at 57 dBA.
- Reduces noises.



G	L	D	5	9	5	0	N	C	S
Model year designator _____									

ENERGY STAR

- Dishwashers with the "N" year designator meet or exceed 2007 ENERGY STAR® guidelines.
- Remember N = ENERGY STAR
- For example: GLD5950NCS



Dishwashers that meet or exceed 2007 ENERGY STAR® standards

- 2007 ENERGY STAR dishwashers must be at least 41% more efficient than federal energy efficiency standards*.
- The BrilliantClean™ wash system saves energy by powering dishes clean with direct feed wash spray arms to clean more efficiently.
- GE also adjusted wash cycles and dry cycles to help meet energy qualifications.

a product of
ecomaginationSM

*Department of Energy Press Release March 2, 2006

Feature gallery: GE® tall tub built-in dishwashers GLD6000N series




Maximum capacity
4 position adjustable
nylon racking with
StemSafe™ and 1 set
of fold down tines in
upper rack

Washes even the largest
cookware in durable
racks and washes up to
16 place settings.



Light-touch electronic controls

Require only gentle
pressure to start your
preferred cycle. Wipes
clean easily.



CleanSensor™

Continually monitors the
temperature and soil level
in every cycle, adjusting
for the optimal clean.



3-digit countdown display with 1-9-hour Delay Start

Signals remaining cycle
time at a glance and
makes it easier than ever
to wash dishes at any hour.



SpeedCycle™

Cuts the length of the
normal cycle in half,
effectively washing and
drying lightly soiled dishes
in 35 minutes.



3-pc. silverware basket with 3 silver cell covers and ExtraBasket™

Provides the ultimate
flexibility, keeping
silverware and small
items separate and
secure while allowing
the baskets to be placed
in either the upper or
lower rack.

Feature gallery: GE tall tub built-in dishwashers GLD5000N series



Maximum capacity racking

Washes even the largest cookware in durable racks and washes up to 16 place settings at once.



Electronic controls

Provide a smooth, easy-to-use, easy-to-clean surface.

SaniSensor™

Continually measures water temperature to ensure that 155°F temperature is achieved in the rinse cycle to meet NSF certification standards.

SaniWash cycle

Certified by NSF to sanitize the dish load.



2/4/8-hour Delay Start

Makes it easier than ever to wash dishes at any hour.

1-pc. silverware basket with 3 silver cell covers

Provides the ultimate flexibility, keeping silverware and small items separate and secure while allowing the baskets to be placed in either the upper or lower rack.

Feature gallery: GE® tall tub built-in dishwashers GLD4000N series



Super capacity racking
Washes up to 15 place settings at once, with room for cookie sheets, platters and other tall items.



Electronic controls

Easy-to-clean surface makes it easy to select from a wide range of cycles.



Delay Start

Makes it easier than ever to wash dishes at any hour.



China/Crystal cycle

Protects delicate glassware and dishes by lowering the water temperature during the cycle.



BrilliantClean™ wash system

Quietly and efficiently powers dishes clean using remarkably less water and energy.



1-pc. silverware basket with 3 silver cell covers

Provides extra room for washing silverware, measuring spoons and other utensils.

Feature gallery: GE tall tub built-in dishwashers

Features available on all GLD6000N, GLD5000N and GLD4000N series models



Full-length flat door

Blends almost seamlessly with adjacent cabinetry.



Angled control panel

Angled, modern design makes it easy to read and select cycles.



Giant tub

Holds tall and oversized dishware, with plenty of room to wash large items in both the top and bottom racks.



Squeeze latch

Opens and closes the door with a light touch.



2007 ENERGY STAR® qualified

Can reduce utility bill by using less energy to get dishes clean.



Last Cycle Memory

Recalls last cycle run with the touch of a button for a quick and easy start.



Wood panel capabilities

Accepts custom wood panels for a complete designer look. Requires trim kit.



HotStart™

Preheats water before the main wash cycle for dependable performance every time.

*option on 4000/5000 series

The inside story

It's all about quiet




With today's hectic lifestyles, everyone appreciates some peace and quiet in the kitchen. That's why GE designs our dishwashers to quietly power dishes clean. With extremely quiet components, innovative engineering and thoughtfully placed insulation, these are dishwashers that won't intrude into quiet time.



6-level towerless wash system

Quietly powers dishes clean with six wash levels and three wash arms washing every dish precisely.




Quiet water valve

Valve body is acoustically designed to lessen flow noise and reduce the "hissing" sounds during fill.



GE QuietPower™ motor

Runs quietly and efficiently to keep the kitchen peaceful.



Dual pumps and motors

Provide excellent wash performance by quietly circulating water throughout the wash system and removing food soils during drain.




Toe kick insulation

Keeps noise inside the dishwasher to keep the kitchen quiet.



Insulation blanket

Softens wash sounds by covering the top and sides of the dishwasher.



Door mastic

Mastic is placed in acoustically specific areas to reduce noise.

QuietPower³ sound package

ONLY
57 dBA

57 dBA	•
BrilliantClean™ wash system	•
GE QuietPower™ motor	•
Quiet drain pump	•
Toe kick insulation	•
Insulation blanket	•
Door mastic	•
Quiet water valve	•

Dare to compare

Flexibility



GE GLD6000N series

- Great flexibility allows loading of platters, pitchers and various sizes of dishes.



Frigidaire



Whirlpool



Maytag

Competitive comparison – Capacity

	Capacity place settings*
GE GLD6000N series	16
Frigidaire PLD2850	14
Whirlpool GU2200X	14
Maytag MDB5601A	14

*As shown in competitive literature as of October 2006.

Flexibility



GE GLD5000N series

- Great flexibility allows loading of platters, pitchers and various sizes of dishes.



Frigidaire



Whirlpool



Maytag

Competitive comparison – Capacity

	Capacity place settings*
GE GLD5000N series	16
Frigidaire FDB2000	14
Whirlpool DU1100	14
Maytag MDB4657	14

*As shown in competitive literature as of October 2006.

Dare to compare

Quiet



Competitive comparison

		dBA
GE®	GLD6800N	57
Maytag	MDB6601A	58
Maytag	MDB7601	58
Kenmore	17032	59
Whirlpool	GU2451X	59
GE	GLD5900	57
Kenmore	17022	59
Frigidaire	PLD2850	60
GE	GLD4600	57
Frigidaire	FDB232	58
Whirlpool	DU1055X	62

Data Source: Owens-Corning IEC-60704 lab testing, 2005
Latest store shop—September 2006

- GE specifically designs dishwashers to quietly power dishes clean. Advanced engineering, plus simple touches like extra insulation, create dishwashers with lower dBA levels that won't intrude into quiet time.

Control panel demo kit



Pub. No. 5-D543

P.O.P.



GLD6000N series

Exterior Mix P.O.P.

Pub. No. 5-D236



GLD5000N series

Exterior Mix P.O.P.

Pub. No. 5-D226



GLD4000N series

Exterior Mix P.O.P.

Pub. No. 5-D216



GLD6000N series

Interior Mix P.O.P.

Pub. No. 5-D266



GLD5000N series

Interior Mix P.O.P.

Pub. No. 5-D256



GLD4000N series

Interior Mix P.O.P.

Pub. No. 5-D246

GE® tall tub built-in dishwashers

Available new models



GE tall tub built-in dishwasher—GLD6800N

- Giant PermaTuf® tub with maximum capacity nylon racking
- **4 utility shelves** in upper rack, two with StemSafe™
- 6-level BrilliantClean™ towerless wash system with CleanSensor™
- Light-touch electronic controls with 6 cycles/**4 options**
- Countdown display with 1–9-hour Delay Start
- QuietPower™³ sound package
- **PreScrub option**
- Maximum capacity 3-piece silverware basket with 3 cell covers and **ExtraBasket™**
- Available in stainless steel, white on white, bisque on bisque and black on black



GE tall tub built-in dishwasher—GLD6760N

- Giant PermaTuf tub with maximum capacity nylon racking
- 2 utility shelves in upper rack with **StemSafe**
- 6-level BrilliantClean towerless wash system with CleanSensor
- Light-touch electronic controls with 6 cycles/3 options
- Countdown display with 1–9-hour Delay Start
- QuietPower³ sound package
- SpeedCycle™
- Available in stainless steel, white on white, bisque on bisque and black on black



GLD6860N interior



GE® tall tub built-in dishwashers

Available new models



GE tall tub built-in dishwasher—GLD5960N

- Giant tub with maximum capacity racking
- Electronic controls with **6 cycles**/4 options
- 6-level BrilliantClean™ towerless wash system
- SaniSensor™
- 2 utility shelves in upper rack
- QuietPower™³ sound package
- 2/4/8-hour Delay Start
- Available in stainless steel, CleanSteel™, white on white, bisque on bisque and black on black



GE tall tub built-in dishwasher—GLD5600N

- Giant tub with **maximum capacity** racking
- Electronic controls with **5 cycles**/4 options
- **6-level** BrilliantClean towerless wash system
- SaniSensor™
- **2 utility shelves in upper rack**
- QuietPower³ sound package
- **2/4/8-hour Delay Start**
- Available in stainless steel, white on white, bisque on bisque and black on black



GLD5900N interior



GE tall tub built-in dishwasher—GLD4600N

- Giant tub with super capacity racking
- **Pots & Pans cycle**
- **2/4/8-hour Delay Start**
- 100% triple water filtration
- QuietPower³ sound package
- **Child lock pad**
- Available in stainless steel, white on white, bisque on bisque and black on black



GE tall tub built-in dishwasher—GLD4450N

- CleanSteel full-length flat door
- Electronic controls with 4 cycles/4 options
- Giant tub with super capacity racking
- 6-level BrilliantClean towerless wash system
- 100% triple water filtration
- QuietPower³ sound package
- 2/4-hour Delay Start
- Available in stainless steel, CleanSteel, white on white, bisque on bisque and black on black



GLD4600N interior



GE Profile™ stainless interior dishwashers with hidden controls

	GE Profile	PDW9980NSS PDW9900WW PDW9900NBB	PDW9700NII	PDW9280NSS PDW9200WW PDW9200NBB
ENERGY STAR®	2007	2007	2007	2007
Features				
SmartDispense™ technology	●	●	●	
Tub and door liner	Stainless steel	Stainless steel	Stainless steel	
Giant tub	●	●	●	
Front appearance	Contour door	Panel-ready door	Contour door	
Upscale flush design	●	●	●	
Full-length door design	Fully integrated	Fully integrated	Fully integrated	
Wash system	BrilliantClean™	BrilliantClean	BrilliantClean	
Wash arms	3 direct-feed	3 direct-feed	3 direct-feed	
Wash levels	6-towerless	6-towerless	6-towerless	
Water filtration	100% triple w/ExtraFine™ filter	100% triple w/ExtraFine filter	100% triple w/ExtraFine filter	
Dual pumps and motors	●	●	●	
Hard food disposer	Piranha™	Piranha	Piranha	
Sensor	CleanSensor™	CleanSensor	CleanSensor	
Automatic temp. control	●	●	●	
Rinse aid dispenser	w/indicator and adjustment	w/indicator and adjustment	w/indicator and adjustment	
Electronic controls	Light-touch, hidden controls	Light-touch, hidden controls	Light-touch, hidden controls	
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights	1 "Clean" light, 1 "Sanitized" light	
Touchpads	Top controls	Top controls	Top controls	
Selections/Enhancements	Variable*	Variable*	Variable*	
Last cycle memory	●	●	●	
Audible end-of-cycle signal	●	●	●	
Selections				
Single Rack Wash™	●	●		
Anti-bacterial (NSF*)	●	●	●	
Cookware	●	●	●	
Normal Wash	●	●	●	
China/Crystal	●	●	●	
Plastics Cycle	●	●	●	
SpeedCycle™ (wash & dry)	●	●		
Rinse Only	●	●	●	
Enhancements				
Delay Start	1-24-hour	1-24-hour	2/4/8-hour	
Hi-Temp Wash	Added heat	Added heat	Added heat	
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat	Auto w/added heat	
PreWash	●	●		
Heated Dry	●	●	●	
HotStart™	Automatic	Automatic	Automatic	
Child lock	●	●	●	
Racking				
Maximum capacity nylon racking	Pearlescent™	Pearlescent	Color-matched	
Adjustable upper rack with CleanTip tines	4-position	4-position		
Removable upper rack†	Nylon deep-tiered	Nylon deep-tiered	Nylon deep-tiered	
Upper rack handle	●	●		
Lower rack handle	●	●		
Fold-down tine flexibility	Angled Rack Dry; 100% and adaptable bowl tines, lower	Angled Rack Dry; 100% and adaptable bowl tines, lower	2 lower	
Utility shelves	3 Pearlescent StemSafe™ upper	3 Pearlescent StemSafe upper	2 upper	
Silverware basket	Maximum capacity 3-pc. with ExtraBasket	Maximum capacity 3-pc. with ExtraBasket	1-pc. super capacity with 3 cell covers	
Cutlery tray	●	●		
Hard countertop installation	Included	Included	Included	
Door handle	Sculptured	Handle required	Sculptured	
DryIndex				
Calrod® heating element	Multi-wattage	Multi-wattage	Multi-wattage	
Convection airflow	●	●	●	
Fan-assist dry	●	●	●	
Angled Rack Dry™ system	●	●		
Quiet				
Sound insulation package	QuietPower™-47 dBA	QuietPower™-47 dBA	QuietPower™-48 dBA	
Tub insulation	Thinstall™ Plus with heat-bonded bitumen	Thinstall Plus with heat-bonded bitumen	Thinstall with heat-bonded bitumen	
Door insulation	Bitumen and foam	Bitumen and foam	Bitumen	
QuietPower™ motor	●	●	●	
ActiveVent system	Concealed	Concealed	Concealed	
Tub collar trim	●	●	●	
Quiet water valve	●	●	●	
Appearance				
Colors available***	SS, WW, BB	Panel required	SS, WW, BB	
Weights and Dimensions				
Height w/legs retracted (in.)	34	34	34	
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16	
Overall width (in.)	24	24	24	
Overall depth (in.)	24-3/4††	24††	24-3/4††	
Approx. shipping wt. (lbs.)	105	105	105	
Accessories				
Requires kit for trimless 3/4" panel capability	N/A	Panel ready‡	N/A	

All GE dishwashers are equipped with the following: 120°F inlet water capacity, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

*Sensor controlled. **Certified by National Sanitation Foundation.

***SS = Stainless steel, WW = White on white, BB = Black on black.

†For best results, use shower nozzle attachment when upper rack is removed.

††Add 1/2" for deepest part of contour door. Allow an additional 2 inches for the handle.

††Add 3/4" for custom panel and additional room for custom handle.

‡The most common panel dimensions are 30-1/4"H x 23-3/4"W. See template Pub. No. 5-X063 supplied with dishwasher for details on other custom sizes.

GE Profile™ stainless interior dishwashers

GE Profile				
	PDW8980NSS PDW8900NWW PDW8900NBB	PDW8700NWW PDW8700NBB	PDW8680NSS PDW8600NWW PDW8600NCC PDW8600NBB	PDW8280NSS PDW8200NWW PDW8200NBB
ENERGY STAR®	2007	2007	2007	2007
Features				
SmartDispense™ technology	●	●	●	
Tub and door liner	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Giant tub	●	●	●	●
Front appearance	Contour door	Flat door	Contour door	Contour door
Upscale flush design	●	●	●	●
Full-length door design	One-piece color wrap	●	One-piece color wrap	One-piece color wrap
Wash system	BrilliantClean™	BrilliantClean	BrilliantClean	BrilliantClean
Wash arms	3 direct-feed	3 direct-feed	3 direct-feed	3 direct-feed
Wash levels	6-towerless	6-towerless	6-towerless	6-towerless
Water filtration	100% triple with ExtraFine™ filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter	100% triple with ExtraFine filter
Dual pumps and motors	●	●	●	●
Hard food disposer	Piranha™	Piranha	Piranha	Piranha
Sensor	CleanSensor™	CleanSensor	CleanSensor	CleanSensor
Automatic temperature control	●	●	●	●
Rinse aid dispenser	w/indicator & adjustment	w/indicator & adjustment	w/indicator & adjustment	w/indicator & adjustment
Electronic controls	Light-touch	Light-touch	Light-touch	Light-touch
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights	Countdown display with 6 status lights	1 "Clean" light, 1 "Sanitized" light
Touchpads	12	12	9	9
Selections/Enhancements	Variable*	Variable*	Variable*	Variable*
Last cycle memory	●	●	●	●
Selections				
Single Rack Wash™	●			
Anti-bacterial (NSF**)	●	●	●	●
Cookware	●	●	●	●
Normal Wash	●	●	●	●
China/Crystal	●			
Glasses Cycle		●		
Plastics Cycle	●	●		
SpeedCycle™ (wash & dry)	●	●		
Rinse Only	●	●	●	●
Enhancements				
Delay Start	1-24-hour	1-24-hour	2/4/8-hour	2/4/8-hour
Hi-Temp Wash	Added heat	Added heat	Added heat	Added heat
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat	Auto w/added heat	Auto w/added heat
PreWash	●	●		
Heated Dry	●	●	●	●
HotStart™	Automatic	Automatic	Automatic	Automatic
Child lock	●	●	●	●
Racking				
Maximum capacity nylon racking	Pearlescent™	Pearlescent	Color-matched	Color-matched
Adjustable upper rack with CleanTip tines	4-position	4-position		
Removable upper rack†	Nylon deep-tiered	Nylon deep-tiered	Nylon deep-tiered	Nylon deep-tiered
Upper rack handle	●	●		
Lower rack handle	●			
Fold-down tine flexibility	Angled Rack Dry; 100% and adaptable bowl tines, lower	4 sets w/2 multi-position upper; 100% and adaptable bowl tines, lower	2 lower	2 lower
Utility shelves	3 Pearlescent StemSafe™ upper	3 Pearlescent StemSafe upper	2 with StemSafe upper	2 upper
Silverware basket	Maximum capacity 3-pc. with ExtraBasket™	Maximum capacity 3-pc. with ExtraBasket	Super capacity 1-pc. with 2 cell covers	Super capacity 1-pc. with 3 cell covers
Cutlery tray	●	●		
Hard countertop installation	Included	Included	Included	Included
Latch	Squeeze	Squeeze	Squeeze	Squeeze
DryIndex				
Calrod® heating element	Multi-wattage	Multi-wattage	Multi-wattage	Multi-wattage
Convection airflow	●	●	●	●
Angled Rack Dry™ system	●			
Quiet				
Sound insulation package	QuietPower5-50 dBA	QuietPower5-50 dBA	QuietPower5-50 dBA	QuietPower5-50 dBA
Tub insulation	Thinstall™ with heat-bonded bitumen	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen	Thinstall with heat-bonded bitumen
Door insulation	With bitumen	With bitumen	With bitumen	With bitumen
QuietPower™ motor	●	●	●	●
ActiveVent system	●	●	●	●
Tub collar trim	●	●	●	●
Electronic control system	●	●	●	●
Quiet water valve	●	●	●	●
Appearance				
Colors available***	SS, WW, BB	WW, BB	SS, WW, CC, BB	SS, WW, BB
Weights & Dimensions				
Height w/legs retracted (in.)	34	34	34	34
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16	33-13/16
Overall width (in.)	24	24	24	24
Overall depth (in.)	24-3/4††	24-3/4	24-3/4	24-3/4††
Approx. shipping weight (lbs.)	105	105	105	105
Accessories				
Requires kit for 1/4" panel capability w/trim	N/A	GPF825W/B	N/A	N/A
Requires kit for trimless 3/4" panel capability	N/A	GPF875W/B	N/A	N/A

All GE dishwashers are equipped with the following: 120°F inlet water capacity, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

**Sensor controlled.

**Certified by National Sanitation Foundation.

***SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

†For best results, use shower nozzle attachment when upper rack is removed.

††Add 1/2" for deepest part of contour door.

GE Profile built-in dishwashers

GE Profile		
	PDW788ONSS	PDW738ONSS
ENERGY STAR	2007	2007
Features		
Tub and door liner	PermaTuf®	PermaTuf
Giant tub	●	●
Front appearance	Contour door	Contour door
Upscale flush design	●	●
Full-length door design	One-piece color wrap	One-piece color wrap
Wash system	BrilliantClean	BrilliantClean
Wash arms	3 direct-feed	3 direct-feed
Wash levels	6-towerless	6-towerless
Water filtration	100% triple with ExtraFine filter	100% triple with ExtraFine filter
Dual pumps and motors	●	●
Hard food disposer	Piranha	Piranha
Sensor	CleanSensor	CleanSensor
Automatic temperature control	●	●
Rinse aid dispenser	w/indicator & adjustment	w/indicator & adjustment
Electronic controls	Light-touch	Light-touch
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights
Touchpads	12	11
Selections/Enhancements	Variable*	Variable*
Last cycle memory	●	●
Selections		
Anti-bacterial (NSF**)	●	●
Cookware	●	●
Normal Wash	●	●
China/Crystal	●	●
Glasses Cycle	●	
SpeedCycle (wash & dry)	●	●
Rinse Only	●	●
Enhancements		
Delay Start	1-9-hour	1-9-hour
Hi-Temp Wash	Added heat	Added heat
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat
PreWash	●	●
Heated Dry	●	●
HotStart	Automatic	Automatic
Child lock	●	●
Racking		
Maximum capacity nylon racking	Color-matched	Color-matched
Adjustable upper rack with CleanTIP tines	4-position deep-tiered	4-position deep-tiered
Fold-down tine flexibility	4 sets w/2 multi-position; upper; 100% lower	2 sets w/1 multi-position upper; 2 lower
Utility shelves	4 w/StemSafe upper	4 w/StemSafe upper
Silverware basket	Maximum capacity 3-pc. with ExtraBasket	Maximum capacity 3-pc. w/3 cell covers
Hard countertop installation	Included	Included
Latch	Squeeze	Squeeze
DryIndex		
Calrod heating element	Multi-wattage	Multi-wattage
Convection airflow	●	●
Quiet		
Sound insulation package	QuietPower ⁴ -54 dBA	QuietPower ⁴ -54 dBA
Tub insulation	Thinstall Plus	Thinstall Plus
Door insulation	Mastic and insulation	Mastic and insulation
QuietPower motor	●	●
ActiveVent system	●	●
Tub collar trim	●	●
Electronic control system	●	●
Quiet water valve	●	●
Appearance		
Colors available***	SS, WW, CC, BB	SS, WW, CC, BB
Weights & Dimensions		
Height w/legs retracted (in.)	34	34
Height w/legs removed (in.)	33-13/16	33-13/16
Overall width (in.)	24	24
Overall depth (in.)	24-3/4†	24-3/4†
Approx. shipping weight (lbs.)	90	90

All GE dishwashers are equipped with the following: 120°F inlet water capacity, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

*Sensor controlled.

**Certified by National Sanitation Foundation.

***SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

†Add 1/2" for deepest part of contour door.

GE® tall tub built-in dishwashers

GE		
	GSD6960NSS GSD6900NWW GSD6900NCC GSD6900NBB	GLD6860NSS GLD6800NWW GLD6800NCC GLD6800NBB
ENERGY STAR	2007	2007
Features		
Tub and door liner	PermaTuf	PermaTuf
Giant tub	●	●
Front appearance	Contour door	Flat door
Full-length door design	●	●
Wash system	BrilliantClean	BrilliantClean
Wash arms	3 direct-feed	3 direct-feed
Wash levels	6-towerless	6-towerless
Water filtration	100% triple with ExtraFine filter	100% triple with ExtraFine filter
Dual pumps and motors	●	●
Hard food disposer	Piranha	Piranha
Sensor	CleanSensor	CleanSensor
Automatic temp. control	●	●
	w/indicator & adjustment	w/indicator & adjustment
Rinse aid dispenser	Light-touch	Light-touch
Electronic controls		
Cycle progress indicators	Countdown display with 6 status lights	Countdown display with 6 status lights
Touchpads	10	10
Cycles/Options	6/3	6/4
Last cycle memory	●	●
Cycles		
Anti-bacteria (NSF*)	●	●
Pots & Pans	●	●
Normal Wash	●	●
China/Crystal	●	●
SpeedCycle (wash & dry)	●	●
Rinse Only	●	●
Options		
Delay Start	1-9-hour	1-9-hour
Hi-Temp Wash	ExtraHot Wash	ExtraHot Wash
Added Heat	●	●
Hi-Temp Rinse	Auto w/ExtraHot Wash	Auto w/ExtraHot Wash
Heated Dry	●	●
HotStart	Automatic	Automatic
Child lock	●	●
PreScrub		●
Racking		
Maximum capacity racking	Nylon	Nylon
Upper rack	4 position, adjustable deep-tiered	4 position, adjustable deep-tiered
Fold-down tine flexibility	1 multi-position upper; 2 lower	1 multi-position upper
Utility shelves	4 upper	4 w/2 StemSafe
Silverware basket	Maximum capacity 3-pc. w/3 silver cell covers and ExtraBasket	Maximum capacity 3-pc. w/3 silver cell covers and ExtraBasket
Hard countertop installation	Included	GPF65
Low profile installation		●
Latch	Squeeze	Squeeze
DryIndex		
Calrod heating element	Multi-wattage	Multi-wattage
Convection airflow	●	●
ActiveVent system	●	
Quiet		
Sound insulation package	QuietPower ³ -57 dBA	QuietPower ³ -57 dBA
Tub insulation	●	●
Mastic	●	●
QuietPower motor	●	●
Appearance		
Colors available**	SS, WW, CC, BB	SS, WW, CC, BB
Weights & Dimensions		
Height w/legs retracted (in.)	34	34
Height w/legs removed (in.)	33-13/16	33-3/4
Overall width (in.)	24	24
Overall depth (in.)	25-1/4 max.	25 max.
Approx. shipping wt. (lbs.)	90	90
Accessories		
1/4" panel kit	N/A	GPF525W/C/B
3/4" panel kit	N/A	GPF575

All GE dishwashers are equipped with the following: 120°F inlet water capacity, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

*Certified by National Sanitation Foundation.

**SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

GE® tall tub built-in dishwashers

GE				
	GLD5960NSS GLD5950NCS GLD5900NWW GLD5900NCC GLD5900NBB	GLD5660NSS GLD5600NWW GLD5600NCC GLD5600NBB	GLD4660NSS GLD4650NCS GLD4600NWW GLD4600NCC GLD4600NBB	GLD4460NSS GLD4450NCS GLD4400NWW GLD4400NCC GLD4400NBB
ENERGY STAR®	2007	2007	2007	2007
Features				
Tub and door liner	PermaTuf®	PermaTuf	PermaTuf	PermaTuf
Giant tub	●	●	●	●
Front appearance	Flat door	Flat door	Flat door	Flat door
Full-length door design	●	●	●	●
Wash system	BrilliantClean™	BrilliantClean	BrilliantClean	BrilliantClean
Wash arms	3 direct-feed	3 direct-feed	3 direct-feed	3 direct-feed
Wash levels	6-towerless	6-towerless	6-towerless	6-towerless
Water filtration	100% triple w/ ExtraFine™ filter	100% triple w/ ExtraFine filter	100% triple w/ ExtraFine filter	100% triple w/ ExtraFine filter
Dual pumps and motors	●	●	●	●
Hard food disposer	Piranha™	Piranha	Piranha	Piranha
Sensor	SaniSensor™	SaniSensor	SaniSensor	SaniSensor
Rinse aid dispenser	w/indicator and adjustment	w/indicator and adjustment	w/indicator and adjustment	w/indicator and adjustment
Control type	Electronic	Electronic	Electronic	Electronic
Cycle progress indicators	1 "Clean" and 1 "Sanitized"	1 "Clean" and 1 "Sanitized"	1 "Clean"	1 "Clean"
Touchpads	11	10	9	9
Cycles/Options	6/4	5/4	4/4	4/4
Last cycle memory	●	●	●	●
Cycles				
SaniWash (NSF*)	●	●		
Pots & Pans	●	●	●	
Heavy Wash				●
Normal Wash	●	●	●	●
Light Wash	●	●	●	●
China/Crystal	●	●	●	
Rinse Only	●	●	●	●
Options				
Delay Start	2/4/8-hour	2/4/8-hour	2/4/8-hour	2/4-hour
Heated Dry	●	●	●	●
HotStart™	●	●	●	●
Hot Wash	●	●	●	●
Child lock	●	●	●	
Racking	Maximum capacity	Maximum capacity	Super capacity	Super capacity
Upper rack	Maximum	Maximum	Super	Super
Lower rack	Super	Super	Super	Super
Utility shelves	2 upper	2		
Silverware basket	Super capacity 1-pc. w/3 silver cell covers	Super capacity 1-pc. w/3 silver cell covers	Super capacity 1-pc. w/3 silver cell covers	Super capacity 1-pc. w/3 silver cell covers
Hard countertop installation	GPF65	GPF65	GPF65	GPF65
Low profile installation	●	●	●	●
Latch	Squeeze	Squeeze	Squeeze	Squeeze
DryIndex				
Calrod® heating element	Multi-wattage	Multi-wattage	Multi-wattage	Multi-wattage
Convection airflow	●	●	●	●
Quiet				
Sound insulation package	QuietPower®-57 dBA	QuietPower®-57 dBA	QuietPower®-57 dBA	QuietPower®-57 dBA
Tub insulation	●	●	●	●
Mastic	●	●	●	●
QuietPower™ motor	●	●	●	●
Appearance				
Colors available**	SS, CS, WW, CC, BB	SS, WW, CC, BB	SS, CS, WW, CC, BB	SS, CS, WW, CC, BB
Weights & Dimensions				
Height w/legs retracted (in.)	34	34	34	34
Height w/legs removed (in.)	33-3/4	33-3/4	33-3/4	33-3/4
Overall width (in.)	24	24	24	24
Overall depth (in.)	25 max.	25 max.	25 max.	25 max.
Approx. ship. weight (lbs.)	90	90	90	90
Accessories				
1/4" panel kit	GPF525W/C/B GPF575	GPF525W/C/B GPF575	GPF525W/C/B GPF575	GPF525W/C/B GPF575

All GE dishwashers are equipped with the following: 120°F inlet water capacity, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

*Certified by National Sanitation Foundation.

**SS = Stainless steel, CS = CleanSteel™, WW = White on white, CC = Bisque on bisque, BB = Black on black.

GE built-in dishwashers

GE				
	GSD3960LSS GSD3900LWW GSD3900LCC GSD3900LBB	GSD2600GWW GSD2600GCC GSD2600GBB	GSD1000GWW	
ENERGY STAR®	2006	2006		
Features				
Wash system	PowerScrub™	Standard	Standard	
Wash levels	5	2	2	
Water filtration	Dual			
Hard food disposer	Piranha	●		
Rinse aid dispenser	w/indicator	●	●	
Control type	Electronic	Turn-to-start	Turn-to-start	
Cycle progress indicator(s)	1 "Clean"	Dial	Dial	
Touchpads	11			
Pushbuttons		6		
Cycles/Options	5/4	5/3	4/2	
Pots & Pans	●			
Heavy Wash		●	Dial	
Normal Wash	●	●	Dial	
Light Wash	●	Dial		
China/Crystal	●			
Plate Warmer		Dial	Dial	
Rinse Only	●	Dial	Dial	
Options				
Delay Start	2/4/8-hour			
Heated Dry	●	●	●	●
Hi-Temp Wash	●	●		
High-Temp Rinse	●			
HotStart™		Dial	Dial	
Child lock	●			
Racking				
Upper rack	Deluxe	Standard	Standard	
Lower rack	Deluxe	Deluxe	Deluxe	
Silverware basket	Deluxe	Deluxe	Deluxe	
Hard countertop installation	GPF65	GPF65	GPF65	
Optional heavy door spring	GPF100	GPF100	GPF100	
Latch	●	●	●	
DryIndex				
Calrod heating element	●	●	●	
Convection airflow	●	●	●	
Quiet				
Sound insulation package	QuietPower	QuietDesign	Standard	
PermaTuf tub and door liner	●	●	●	
QuietPower motor	●	●	●	
Appearance				
Colors available*	SS, WW, CC, BB	WW, CC, BB	WW	
Color panels—door & access	Trimless	Trimless	Trimless	
Weights & Dimensions				
Height w/legs retracted (in.)	34	34	34	
Height w/legs removed (in.)	33-13/16	33-13/16	33-13/16	
Overall width (in.)	24	24	24	
Overall depth (in.)	25-3/4	25-3/4	25-3/4	
Approx. shipping wt. (lbs.)	80	80	100	
Accessories				
Requires kit for 1/4" panel capability with trim		GPF325W/C/B	GPF325W	

All GE dishwashers are equipped with the following: 120°F inlet water capacity, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

GE convertible dishwashers

GE		
	GSC3400JWW	GSC3200JWW
	GSC3400JBB	GSC3200JBB
ENERGY STAR	2006	2006
Features		
Wash system	PowerScrub	PowerScrub
Wash levels	5	5
Water filtration	Dual	Dual
Hard food disposer	Piranha	Piranha
Rinse aid dispenser	w/indicator	●
Cycles	7	5
Pots & Pans	●	●
Heavy Wash	●	
Normal Wash	●	●
China/Crystal	●	
Short Wash	Dial	Dial
Plate Warmer	Dial	Dial
Rinse Only	Dial	Dial
Options	5	3
Delay Start	1-6-hour	
Heated Dry	●	●
Energy Saver	●	
Hi-Temp Wash	●	●
HotStart	●	Dial
Racking (upper/lower)	Deluxe Plus/Deluxe	Deluxe Plus/Deluxe
Silverware basket	Deluxe	Deluxe
Cycle progress indicator(s)	1 "Cycle On"	Dial
TouchTap controls	8	
Pushbuttons		6
Hard countertop installation	GPF65	GPF65
Center throw door latch	●	●
DryIndex		
Calrod heating element	●	●
Convection airflow	●	●
Quiet		
Sound insulation package	QuietDesign	QuietDesign
PermaTuf tub and door liner	●	●
QuietPower motor	●	●
Appearance		
Colors available*	WW, BB	WW, BB
Color panels—door & access	Trimless	Trimless
Decorative wood laminate top	Woodgrain	Woodgrain
Weights & Dimensions		
Overall height w/legs extended (in.)	36-3/8	36-3/8
Overall width (in.)	24-7/8	24-7/8
Overall depth (in.)	27	27
Approx. shipping weight (lbs.)	130	130
Accessories		
Requires kit for 1/4" panel capability with trim	GPF325W/B	GPF325W/B

*WW = White on white, BB = Black on black (with bisque side panels).

GE Spacemaker® built-in 18" dishwasher

GE		
	GSM1860JSS	GSM1800JWW
	GSM1800JBB	
ENERGY STAR	2007	●
ADA-compliant for height		
Features		
Tub and door liner	Stainless steel	
Wash levels	4	
Rinse aid dispenser	w/adjustment	
Cycles	7	
Pots & Pans	Dial	
Heavy Wash	Dial	
Normal Wash	Dial	
Light Wash	Dial	
China/Crystal	Dial	
Plate Warmer	Dial	
Rinse Only	Dial	
Options	1	
Heated Dry	Rocker	
Racking (upper/lower)	Nylon	
Removable upper rack	●	
Utility shelves	●	
Silverware basket	Standard	
Control type	Turn-to-start	
Cycle progress indicator(s)	Dial	
Hard countertop installation	N/A	
120°F inlet water capability	●	
Leveling screws	●	
DryIndex		
Calrod heating element	●	
Convection airflow	●	
Quiet		
Tub insulation	Standard	
Appearance		
Colors available*	SS, WW, BB	
Weights & Dimensions		
Height w/legs retracted (in.)	32-1/2	
Overall width (in.)	18	
Overall depth (in.)	22-1/2	
Approx. shipping weight (lbs.)	100	
Accessories		
Requires kit for 1/4" panel capability with trim	GPF18B	

*SS = Stainless steel, WW = White on white, BB = Black on black

GE Spacemaker® under-the-sink dishwasher

	GE® GSM2100GWW GSM2100GCC GSM2100GBB
ENERGY STAR®	2006
Features	
Tub door liner	PermaTuf®
Wash levels	2
Food disposer	●
Cycles	5
Pots & Pans	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	2
Heated Dry	●
HotStart™	Dial
Racking	
Upper rack	Spacemaker
Lower rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-to-start
Cycle progress indicator	Dial
Pushbuttons	4
Hard countertop installation	GPF65
Optional heavy door spring	GPF100
Rinse aid dispenser	●
Steel door	●
Center throw door latch	●
DryIndex	
Calrod® heating element	●
Convection airflow	●
Quiet	
QuietPower™ motor	●
Appearance	
Colors available*	WW, CC, BB
Color panels—door & access	Trimless
Weights & Dimensions	
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	25-3/4
Approx. shipping weight (lbs.)	72
Accessories	
Requires kit for 1/4" panel capability with trim	GPF325W/C/B

*WW = White on white, CC = Bisque on bisque, BB = Black on black.
Note: Under-the-sink dishwashers can be installed under GE cooktop models JP201C and JP202D. Refer to cooktop installation instructions.

GE ADA-compliant dishwasher

GE	GLDA696MSS GLDA690MWW GLDA690MBB
ENERGY STAR	2006
ADA-compliant for height	●
Features	
Tub and door liner	Stainless steel
Front appearance	Flat door
Full-length door design	●
Wash arms	3 direct-feed
Wash levels	6 – towerless
Water filtration	100% triple filtration
Dual pumps and motors	●
Manual clean filter	●
Rinse aid dispenser	w/indicator and adjustment
Control type	Electronic
Cycle progress indicator(s)	Countdown display w/1 "Clean"
Touchpads	9
Cycles/Options	4/4
Last cycle memory	●
Cycles	
Pots & Pans	●
Normal Wash	●
Light Wash	●
Rinse Only	●
Options	
Delay Start	2/4/8-hour
Heated Dry	●
Hot Start	●
Hot Wash	●
Child lock	●
Racking	Nylon
Upper rack	Super
Lower rack	Deluxe
Utility shelves	2 w/1 StemSafe™
Silverware basket	Deluxe
Hard countertop installation	●
Latch	●
DryIndex	
Calrod heating element	Dual-wattage
Quiet	
Sound insulation package	QuietPower®
Tub insulation	Full wrap blanket
Door insulation	Mastic and sound coat
QuietPower motor	●
Tub collar trim	●
Appearance	
Colors available**	SS, WW, BB
Weights & Dimensions	
Height w/legs retracted (in.)	32-11/32
Overall width (in.)	24
Overall depth (in.)	24
Approx. shipping weight (lbs.)	132

*Sensor controlled
**SS = Stainless steel, WW = White on white, BB = Black on black

GE Disposall®—food waste disposer

	GE® continuous feed								batch feed
	GFC1020F	GFC720F	GFC530F	GFC535F	GFC520F	GFC525F	GFC320F	GFC325F	GFB760F
Features									
Motor horsepower	1	3/4	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Control method	Wall switch	Stopper							
Feed type	Continuous	Batch							
Power connection	Direct wire	Direct wire	Direct wire	Line cord	Direct wire	Line cord	Direct wire	Line cord	Direct wire
Impellers									
Dual-swivel	●	●	●	●	●	●	●	●	●
Jam resistant	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●
Armature shaft material	Cold-rolled carbon steel								
Grinding speed (RPMs)	2,800	2,700	2,600	2,600	2,600	2,600	1,900	1,900	2,700
Capacity	Super	Super	Extra-large	Extra-large	Large	Large	Large	Large	Super
Mounting type	EZ-mount								
Turntable material	Stainless	Stainless	Stainless	Stainless	Galv. steel	Galv. steel	Galv. steel	Galv. steel	Stainless
Two-level precutter	●	●	●	●	●	●	●	●	●
Stainless steel sink flange	●	●	●	●	●	●	●	●	●
Manual reset overload protector	●	●	●	●	●	●	●	●	●
Splash guard	●	●	●	●	●	●	●	●	●
Sink stopper	●	●	●	●	●	●	●	●	●
Dishwasher drain connector	●	●	●	●	●	●	●	●	●
Drain elbow	●	●	●	●	●	●	●	●	●
Quiet									
Sound insulation package	QuietPower™	QuietPower	QuietPower	QuietPower	Standard	Standard	Standard	Standard	QuietPower
Weights & Dimensions									
Approx. shipping weight (lbs.)	14.9	12.45	9.6	9.9	8.8	9.1	8.4	8.7	13.75
Net weight (lbs.)	13.2	10.7	8.05	8.35	7.8	8.1	7.4	7.7	11
Dishwasher inlet diameter (in.)	1	1	1	1	1	1	1	1	1
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
Power Ratings									
Volts, Hertz, Amps	120; 60; 7.0	120; 60; 6.0	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.0	120; 60; 4.0	120; 60; 6.0
Warranty									
One-year limited warranty*	●	●	●	●	●	●	●	●	●

*See written warranty for details.

Built-in compactors

	GE Profile™		
	GCG1580LSS	GCG1500LWW	GCG1500LB
	GCG1700LII		
Features			
Cycle time	30 seconds maximum	30 seconds maximum	
Drive system	2-Point	2-Point	
Motor horsepower	1/3	1/3	
Compression ratio (average)	75% reduction of volume	75% reduction of volume	
Ram force (lb.) (max.)	2,300	2,300	
Front level legs and rear wheels	●	●	
Capacity	1.4 cu. ft.	1.4 cu. ft.	
Side release bin	●	●	
Toe/foot pedal drawer opener	●	●	
Lock/start control w/removable key	●	●	
Automatic anti-jam	●	●	
Slide-out drawer	●	●	
Appearance			
Color appearance*	SS, WW, BB	Panel required	
Color-matched	●	●	
Hidden controls	●	●	
Handle	Sculptured	Handle required	
Weights & Dimensions			
Total shipping weight (lbs.)	152	152	
Total appliance weight (lbs.)	141	141	
Overall height (in.)	33-3/4 to 35	33-3/4 to 35	
Overall width (in.)	14-7/8	14-7/8	
Overall depth (in.)	24	23	
Cutout dimensions H x W x D (in.)	34-1/4 x 15-1/8 x 24-3/4	34-1/4 x 15-1/8 x 24-3/4	
Clearance for drop-down drawer side	6" or more on right side	6" or more on right side	
Drawer extension for removal	23" or more in front of appliance	23" or more in front of appliance	
Accessories			
Compactor bags (5 included)	WC60X5017	WC60X5017	
Warranty			
One-year limited warranty**	●	●	

* Colors available: SS = Stainless steel, WW = White on white, BB = Black on black.

**See written warranty for details.

Dishwasher nomenclature

G	L	D	5	9	5	0	N	C	S
Product type PDW=Profile GLD=GE long door GSD=GE short door HDA=Hotpoint GSC=GE convertible GSM=GE Spacemaker® 21" & 18"									
Platform 1=leader 2-3=standard 4-6=GE tall tub 7=Profile PermaTuf® tub 8=Profile stainless tub 9=Profile fully integrated									
Feature package									
Door 0=color door 5=CleanSteel™ 6=stainless door 8=full stainless wrap door									
Model year designator									
Exterior color SS=stainless steel CS=CleanSteel WW=white on white CC=bisque on bisque BB=black on black WH=white panel with black escutcheon II=requires custom panel and handle									



Stylish appearance

A **full-length door**, **easy-to-read, angled control panel**, and bright white racks with **silver touchpoints** create a modern look.



High performance

BrilliantClean™ towerless wash system with **CleanSensor™** directs water where it belongs—on the dishes. With BrilliantClean, nothing gets in the way of cleaning.



Giant capacity

A **giant tub** with maximum capacity **nylon racks**, washes even the largest cookware. Washes up to 16 place settings.



A century of quality and innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

GE Consumer & Industrial
Appliances
General Electric Company
Louisville, KY 40225
ge.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2006 GE Company
Pub. No. 5-X076 PC46468