



GSD3600GWW/CC/BB—GE Nautilus[™] Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)

Rough-In Installation Information (in inches)

Wood Insert Cut-Out Dimensions (in inches)



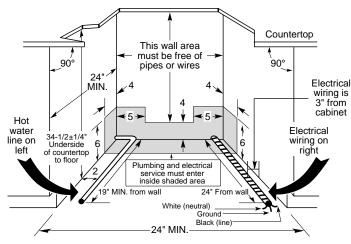


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	6.2
Calrod [®] heater watts	
For use on adequately wired 120-volt, 1	15-amp

circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.



				Panel	
Models/Kits	Α	В	C	Thickness	
GE Models					
GPF425 Kit	19-3/4"	23-9/16"	3-11/16"	1/4"	
-			4-1/4" to		
GPF475 Kit	19-7/8"	23-5/8"*	3-11/16"**	3/4"	
*Bottom of papel must be notched 1-1/2" x 1/2" to clear					

Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel


**Adjustment required to match adjcent cabinets fronts due to leveling leg adjustment, 4" nominal.

For answers to your Monogram,® GE Profile[™] or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center[®] service, 800.626.2000.





GSD3600GWW/CC/BB—GE Nautilus[™] Built-In Dishwasher

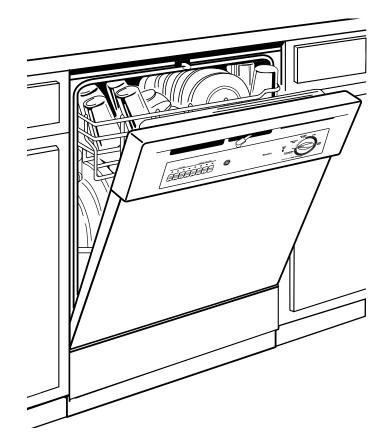

Features and Benefits

- PowerScrub[™] Wash System with Five Wash Levels
- Dual Filtration System
- Piranha[™] Hard Food Disposer
- Dial & TouchTap[™] Controls
- Deluxe Plus Upper Rack
- Deluxe Lower Rack
- Deluxe Silverware Basket
- 7 Cycle Selections: Pots & Pans, Normal Wash, Light Wash, Short Wash, Plate Warmer, China/Crystal and Rinse Only
- 39 Options: Delay Start (1-6-Hours), Heated Dry, Hi-Temp Wash and HotStart™
- Rinse Aid Dispenser with Indicator
- QuietPower[™] Motor
- QuietPower[™] I Sound Insulation Package
- Trimless Design
- Model GSD3600GSS Stainless/Black
- Model GSD3600GWW White on white
- Model GSD3600GCC Bisque on bisque
- Model GSD3600GBB Black on black