



electric ranges

New product introductions—July 2005
GE Profile™ and GE® free-standing electric ranges



imagination at work



Free-standing electric range quick pitch

The maximum in cooking performance and versatility



Superb Performance

The **Precise Air™ convection system** delivers optimal heat circulation and temperature accuracy in the oven for perfectly browned and evenly baked foods.



Exceptional Versatility

A variety of **adjustable elements** are available to achieve optimal results and convenience.



Distinguished Appearance

Full stainless steel door and gloss handle and trim on color models deliver an attractive cutting-edge design that coordinates and complements other appliances and kitchen décor.



Remarkable Cleanability

Glass-touch controls, hidden bake oven interior, self-clean oven racks and removable lower oven liner make cleaning simple.


What's new: GE Profile™ free-standing electric range

The maximum in cooking performance and versatility



Lower oven

- Adds additional 1.2 cu. ft. of cooking capacity
- 140°–450° capability for warming and baking
- Upper and lower heating elements
- Provides additional storage when not in use
- Easy-to-clean removable porcelain-enameled drawer liner
- Available on JB968

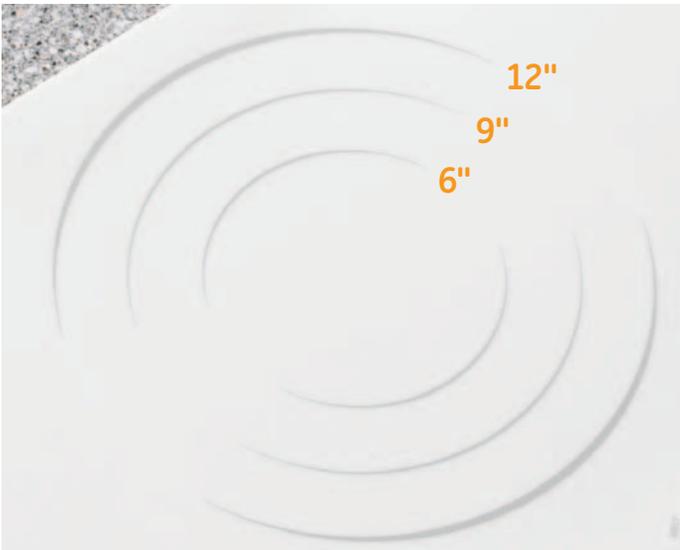

12"/9"/6" tri-ring element

- Three cooking areas in one element
- 3,000 watt element
- Accommodates various-sized pots and pans
- Available on JB988 and JB968

12"/9" dual element (not shown)

- Two cooking areas in one element
- 3,000 watt element
- Available on JB910 and JB900



Largest total cooking capacity—6.5 cu. ft.

- 5.3 cu. ft. upper oven
- 1.2 cu. ft. lower oven
- Available on model JB968

Not all features available on all models.



Larger oven window

- Enhanced Big ClearView™ window is one of the largest in the industry
- 10% more viewing area than previous GE Profile models
- Available on all GE Profile models



Warming drawer

- Keeps meals ready to serve at temperatures from 140° to 220°
- Variable temperature settings
- Removable porcelain-enameled drawer liner
- Available on JB910 and JB900



Enhanced appearance

- Stainless sculptured handles available on all stainless GE Profile models
- Gloss handles and vents on all GE Profile white, bisque and black models

Self-clean oven racks and drip bowls (not shown)

- Durable construction
- Approved for use during self-clean oven mode
- Self-clean oven racks available on all GE Profile models and self-clean drip bowls available on JBP49

What's new: GE® free-standing electric range

The maximum in cooking performance and versatility



5.3 cu. ft. capacity

- Extra-large oven capacity
- Room to cook more at once
- Available on all GE models



12 1/8" Dual element

- Two cooking areas in one element
- 3,000 watt element
- Accommodates various-sized pots and pans
- Available on JBP84, JBP81, JBP80 and JBP70



Hidden bake oven interior

- Delivers a clean interior appearance
- Available on JBP84

Not all features available on all models.



Warming drawer

- Keeps meals ready to serve
- Variable temperature settings
- Removable porcelain-enameled drawer liner
- Available on JBP84 and JBP81



Enhanced appearance

- Big hearth-shaped window is 14% larger than previous models available on JBP84, JBP81, JBP80, JBP70, JBP66, JBP65, JBS55, JBP35 and JBP24
- Full length stainless steel door and stainless steel handle available on stainless models
- Gloss handles and vent trim on all GE white, bisque and black models



Self-clean oven racks and drip bowls

- Durable construction
- Approved for use during self-clean oven mode
- No-hassle cleaning
- Self-clean oven racks available on JBP84, JBP81 and JBP80
- Self-clean oven racks and drip bowls available on JBP35

Feature gallery: GE Profile™ free-standing electric ranges




Precise Digital Control System™

Delivers accurate control on the cooktop, ensuring even heating and less temperature variation. Model JB988 only.



Dual purpose elements

Can be used for conventional cooking or precision warming. Model JB988 only.

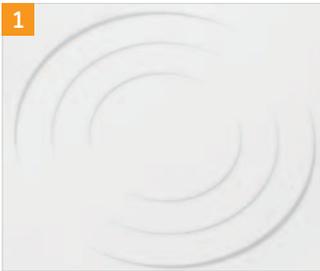

12"/"9"/"6" tri-ring element

Accommodates various-sized pots or pans for the ultimate in cooking versatility.



Stainless sculptured handle

Provides a sleek and contemporary look that coordinates with other GE Profile Appliances.



Lower oven

Offers an additional 1.2 cu. ft. of capacity for convenient baking and warming from 140°–450°.



Big ClearView™ window

Makes monitoring the progress of food easy.



GE Profile model JB968SK

*Traditional QuickSet VI controls on stainless models.
Not all features available on all models.



GE Profile model JB910WK

CleanDesign cooktop

Provides a seamless design to make cleaning quick and easy.



Adjustable elements

Offers a convenient choice of using 9"/12" or 6"/9" heating element, depending on the size of the pan.



Bridge element

Combines three elements into one large cooking area, ideal for oversized pans.



Warming zone

Provides low heat capability to keep foods warm and ready to serve.



New gloss handle and vent trim

Adds a touch of subtle elegance that blends naturally with any appliance color.



Warming drawer

Provides variable temperature control from 140° to 220° to keep foods warm.



Feature gallery: GE® free-standing electric ranges



QuickSet V oven controls

Feature easy to use electronic touch pads to simplify oven operation.



Bridge element

Combines three elements into one large cooking area, ideal for oversized pans.



Warming zone

Provides low heat capability for foods keeping them warm and ready to serve.



Adjustable elements

Offers a convenient choice of using 9"/12" or 6"/9" heating element, depending on the size of the pan.



CleanDesign cooktop

Provides a seamless design to make cleaning quick and easy.



Warming drawer

Provides variable temperature control from 140° to 220° to keep foods warm.



GE model JBP84SK



GE model JBP80TK

New gloss handle and vent trim

Adds a touch of subtle elegance that blends naturally with any appliance color.



Stainless steel door and handle

Provides a modern exterior appearance that complements surrounding décor.



True color cooktop

Mirrors the color of the range body to provide a uniform appearance from top to bottom.



Self-clean drip bowls

Provide no-hassle cleaning by simply placing them in the oven during self-clean mode.



Storage drawer

Convenient drawer can be used for storing cookware or kitchen accessories.



Big hearth-shaped window

An extra-large window makes monitoring the progress of food easy.



The inside story: GE Profile™ and GE® free-standing electric ranges

GE Profile upper oven interior



5.3 cu. ft. upper oven capacity

Gives consumers the room they need to cook large meals.

Precise Air™ convection system

Uses an innovative fan that reverses direction for optimal baking performance.

Auto Recipe™ conversion

Automatically converts standard recipe temperatures to proper convection settings.

Multiple mode convection

Offers three specialized modes for different cooking needs: single-rack convection baking, multi-rack convection baking, and convection roasting.

Self-clean oven with Hidden bake interior

Conveniently cleans the oven cavity without the need for scrubbing, and the hidden bake element makes cleanup even easier.




TrueTemp™ system

Provides even heat distribution and precise oven control.



Certified Sabbath mode

Allows consumers to keep cooked foods warm on the Jewish Sabbath and Jewish holidays.

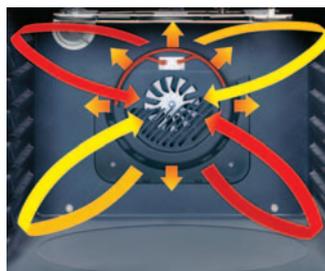

GE upper oven interior



6-pass PowerBake

Loops throughout the oven, delivering evenly cooked foods.




Heavy-duty self-clean oven racks

Double-coated porcelain racks provide extra support and no longer require hand cleaning.



True European convection

Use a third dual loop heating element to deliver uniform and savory results.

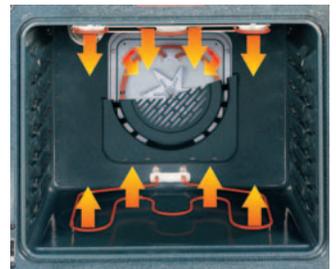

Dual element bake

Alternates the upper broiling element and the lower baking element for even heating and optimal results.



Oven meat probe

Displays the internal temperature and signals when meats are cooked to perfection.



Six embossed rack positions

Allows consumers to take full advantage of the oven capacity and adjust racks for oversized cookware.



Broiler Pan

Helps confine drippings that collect during roasting or broiling.

The inside story: GE Profile™ and GE® free-standing electric ranges

Lower oven interior - An additional 1.2 cu. ft. capacity adds a second oven to bake at a separate temperature.



Bake

140° to 450° warming and baking makes it ideal for pizzas, breads or casseroles.



Warm

Prepared foods can stay warm and ready to serve.



Store

Cookware can be stored when the lower oven is not in use.



Removable drawer liner

Provides additional convenience for quick and easy cleaning.



Full-extension drawer

Allows users to pull out the drawer to the fullest length for easy loading, unloading and cleaning.



Dual element bake

Upper and lower elements provide even heating and optimal results.

Warming drawer interior



Multiple settings

Provide added convenience with low, medium and high.



Warming capability

Helps keep meals coordinated, warm and ready for the table.



Storage space

Allows cookware to be placed in one organized location.



Lower warming element



Removable drawer liner

Provides additional convenience for quick and easy cleaning.

Dare to compare

Lower oven capacity



GE Profile™ double oven range – Model JB968

Frigidaire Double Oven range – Model GLEFM397

- GE Profile lower oven has a total capacity of 1.2 cu. ft.
- GE Profile lower oven is large enough for two 9 x 13 casserole dishes
- GE Profile lower oven is on full-extension AccuRide™ ball bearing slides
- **GE delivers all the cooking capacity you need**

- Frigidaire lower oven is too small for two 9 x 13 casserole dishes
- Frigidaire lower oven does not fully extend
- **Frigidaire delivers less than GE**

Cooktop versatility



GE Profile double oven range – Model JB968

- GE Profile electric range are designed to use the entire cooktop, providing ample cooking space
- Cooktop versatility is dominant on the GE Profile cooktop with:
 - 12"/9"/6" tri-ring element
 - 6" elements
 - Bridge element
 - Fifth warming element
- Cookware shown:
 - 12" grill pan, Two-4qt. sauce pans, Two-3qt. sauce pans
- **GE delivers all the cooking capacity you need**



Frigidaire Double Oven range – Model GLEFM397

- Frigidaire double oven cooktop does not have:
 - 12" element or
 - Bridge element or
 - Fifth warming element
- In this example, the 12" grill pan is too large for the Frigidaire 9" element and does not have a fifth element
- **Frigidaire delivers less than GE**

Cleanability



GE Profile™ double oven range – Model JB968

- GE oven racks are:
 - Self-clean
 - Double coated porcelain
 - Heavy-duty
 - heavy twin cross bars
 - 50% thicker tines running front to back
- **GE provides the ultimate in cleanability**



Frigidaire Double Oven Range – Model GLEFM397

- Frigidaire oven racks are:
 - NOT self-clean (must hand clean)
 - Chrome plated
 - Not heavy-duty
 - No twin crossbars
 - No thick tines
- **Frigidaire provides less than GE**

Show and tell



Lower oven demo

- Use 120v demo cord kit Pub. No. 3-A029.
- Plug in range to any standard 120-volt outlet.
- Place two 9 x 13 casserole dishes in the lower oven on the baking rack.
- Show the consumer the huge 5.3 cu. ft. upper oven, point to the graphic on the backsplash "Double Oven Range." Show them the knob control for the oven and tell them it is an electric oven that bakes from 140 to 450 degrees. Then pull open the lower oven.
- Tell the consumer that this range has two ovens. Both ovens can be used at the same time to cook two different dishes at different temperatures. Lift out the casserole dish and hand it to the customer and tell them the lower oven is ideal for a 9 x 13 casserole, as well as pies, cookies, rolls, biscuits, muffins, and pizza.
- Lift out the lower oven liner to show them it can be removed for easy cleaning.
- Order and use lower oven POP Pub. No. 3-D155.



Warming drawer demo

- Use 120v demo cord kit Pub. No. 3-A029.
- Plug in range to any standard 120-volt outlet.
- Place two 9 x 13 casserole dishes in the drawer.
- Show the consumer the huge 5.3 cu. ft. upper oven, point to the graphic on the backsplash "Warming drawer." Show them the knob control for the drawer and tell them it warms from 140 to 220 degrees. Then pull open the drawer.
- Tell the consumer that both the oven and the drawer can be used at the same time to cook/warm two different dishes at different temperatures. Lift out the casserole dish and hand it to the customer.
- Lift out the drawer liner to show them it can be removed for easy cleaning.



Sales demo mode

- Plug the range into any standard 120 volt outlet.
- Press and hold both the BAKE and BROIL pads at the same time, hold until SF appears in the display.
- Then, at the same time, touch the CLOCK and KITCHEN TIMER pads.
- The control will then continuously scroll through each oven function.
- To end the sales display mode touch the START pad.

With the range plugged in, the following can be demonstrated:

- Oven Light & the Big ClearView™ Window
- Digital time and temperature displays
- Hi/Lo broil settings
- Variable self clean time
- Automatic self clean door latch
- Convection bake control setting fan operates
- Convection roast control setting fan operates
- Reminder timer



Tubular free-standing display

Designed to display a free-standing range and an Advantium™ or Spacemaker® microwave oven.
72-1/2"H x 32-1/4"W x 25"D
Pub. No. 4-D001



Free-standing or slide-in/drop-in display

Designed to display a free-standing, slide-in or drop-in range and an Advantium or Spacemaker microwave oven.
82"H x 44"W x 26-3/4"D
Pub. No. 3-D131



Pub. No. 3-D241



Demonstration cord kit

For use with 30" free-standing electric ranges with electronic controls. Provides power to the controls, convection fan and lights, but will not energize heating elements. Kit contains one cord and instructions
Pub. No. 3-A029

GE Profile™ free-standing electric ranges

Available new models



GE Profile 30" free-standing electric range JB988

- Self-clean oven
- Super-large 5.3 cu. ft. oven capacity
- PreciseAir™ convection system
- Hidden bake oven interior
- 12"/9"/6" tri-ring element
- Fifth element warming zone
- Precise Digital Control System™
- Self-clean heavy-duty oven racks
- TrueTemp™ system
- Dual purpose elements

GE Profile 30" free-standing double-oven electric range JB968

- 6.5 cu. ft. total capacity
- Self-clean oven
- PreciseAir convection system
- Hidden bake oven interior
- Lower oven
- 12"/9"/6" tri-ring element
- Bridge element
- Fifth element warming zone
- Self-clean heavy-duty oven racks
- QuickSet VI glass touch controls**
- TrueTemp system
- Stainless steel sculptured handle
- Gloss handle and vent trim on white, bisque and black models

GE Profile 30" free-standing electric range JB910

- Self-clean oven
- Super-large 5.3 cu. ft. oven capacity
- PreciseAir convection system
- Hidden bake oven interior
- Warming drawer
- Self-clean heavy-duty oven racks
- 12"/9" dual element
- Bridge element
- QuickSet VI glass touch controls*

GE Profile cooktop colors



True white



True bisque



Black/stainless steel

**Traditional QuickSet VI controls on stainless models.
Not all features available on all models.*



GE Profile
30" free-standing electric range
JB900

- Self-clean oven
- Super-large 5.3 cu. ft. oven capacity
- TrueTemp system
- Warming drawer
- 12"/9" dual element
- 9"/6" dual element
- Fifth element warming zone
- Self-clean heavy-duty oven racks
- QuickSet V oven controls

GE Profile
30" free-standing electric range
JBP49

- Self-clean oven
- Super-large 5.3 cu. ft. oven capacity
- TrueTemp system
- QuickSet V oven controls
- Coil heating elements
- Big ClearView™ window
- Hidden bake oven interior
- Self-clean heavy-duty oven racks and drip bowls
- Dual element bake

GE's QuickSet oven controls



QuickSet V

- QuickSet IV, plus:
- Auto self-clean
 - Large digital temperature display
 - Variable broil
 - Warming drawer



QuickSet VI

- QuickSet V, plus:
- Temperature probe
 - Extra-large graphics and touch pads

GE® free-standing electric ranges

Available new models



GE
30" free-standing electric range
JBP84

- Self-clean oven
- True European convection system
- Hidden bake oven interior
- TrueTemp™ system
- Bridge element
- 12"/9" dual element
- Fifth element warming zone
- Warming drawer
- Self-clean heavy-duty oven racks
- Quickset V oven controls



GE
30" free-standing electric range
JBP81

- Self-clean oven
- Super-large 5.3 cu. ft. oven capacity
- TrueTemp system
- 12"/9" dual element
- 9"/6" dual element
- Warming drawer
- Fifth element warming zone
- Self-clean heavy-duty oven racks



GE
30" free-standing electric range
JBP70

- Self-clean oven
- 12"/9" dual element
- 9"/6" dual element
- Super-large 5.3 cu. ft. oven capacity
- TrueTemp system
- Ceramic glass cooktop
- Big hearth-shaped window
- Quickset IV oven controls

GE
30" free-standing electric range
JBP80

- Similar features as JBP81 except there is no warming drawer.

GE cooktop colors




True white



White



True bisque



Bisque



Stainless/black



GE
30" free-standing electric range
JBP66

- Self-clean oven
- Super large 5.3 cu. ft. capacity oven
- TrueTemp system
- 9"/6" dual element
- Ceramic glass cooktop
- Big hearth-shaped window
- Quickset IV oven controls



GE
30" free-standing electric range
JBP65

- Self-clean oven
- Super large 5.3 cu. ft. capacity oven
- Ceramic glass cooktop
- Big hearth-shaped window
- Dual element bake
- Quickset III oven controls



GE
30" free-standing coil range
JBP35

- Self-clean oven
- Super large 5.3 cu. ft. capacity oven
- Coil heating elements
- Two 8" and two 6" burners
- Self-clean oven racks and drip bowls
- Big hearth-shaped window

GE's QuickSet oven controls



QuickSet III

- Dual element bake
- Digital temperature display with recall
- Oven preheat light
- Electronic digital clock
- Electronic reminder timer, up to 12 hours
- Audible preheat signal
- 12-hour automatic oven shut-off
- Self-clean countdown digital display, including cool down
- Auto self-clean



QuickSet IV

- QuickSet III, plus:
- Delay bake
 - Delay self-clean
 - Adjustable self-clean cycle time



QuickSet V

- QuickSet IV, plus:
- Auto self-clean
 - Large digital temperature display
 - Variable broil
 - Warming drawer

30" free-standing CleanDesign™ electric ranges

	GE Profile™				GE®							
	JB988SK JB988TK JB988KK JB988BK	JB968SK JB968TK JB968KK JB968BK	JB910SK JB910TK JB910KK JB910BK	JB900SK JB900TK JB900KK JB900BK	JBP84SK JBP84TK JBP84KK JBP84BK	JBP81SK JBP81TK JBP81KK JBP81BK	JBP80SK JBP80TK JBP80KK JBP80BK	JBP72SK JBP72TK JBP72KK JBP72BK	JBP70SK JBP70TK JBP70KK JBP70BK	JBP66SK JBP66TK JBP66KK JBP66BK	JBP65SK JBP65TK JBP65KK JBP65BK	JBS55SK JBS55TK JBS55KK JBS55BK
Features												
Self-clean oven	Convection	Convection	Convection	●	Convection	●	●	●	●	●	●	Standard-clean
Self-clean latch	Auto	Auto	Auto	Auto	Auto	●	●	●	●	●	●	
Oven capacity (cu. ft.) (upper/lower)	5.3	5.3 / 1.2	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3 / 5.2	5.3
Hidden bake oven interior	●	●	●	●	●	●	●	●	●	●	●	
Oven racks	3 heavy-duty	3 heavy-duty	3 heavy-duty	2 heavy-duty	3 heavy-duty	2 heavy-duty	2 heavy-duty	2	2	2	2	2
Self-clean oven racks	●	●	●	●	●	●	●	●	●	●	●	●
Ceramic-glass cooktop	Black True white True bisque Black	Black True white True bisque Black										
One-piece upswept cooktop	●	●	●	●	●	●	●	●	●	●	●	●
6"/9"/12" tri-ribbon heating element	1 (3000W)	1 (3000W)										
9"/12" dual-ribbon heating element			1 (3000W)									
6"/9" dual-ribbon heating element				1 (2500W)		1 (2500W)	1 (2500W)		1 (2500W)		1 (2500W)	
8" ribbon heating element	1 (2000W)							1 (2000W)		1 (2000W)	2 (2000W)	2 (2000W)
7" ribbon heating element		2 (1800W)	2 (1800W)		2 (1800W)							
Bridge element		1 (800W)	1 (800W)		1 (800W)							
Total wattage		4400	4400		4400							
6" ribbon heating element	3 (1500W)	1 (1500W)	1 (1500W)	2 (1500W)	1 (1500W)	2 (1500W)	2 (1500W)					
6" warming zone	4 cook/warm (1) 8" and (3) 6"	1 (120W)										
Infinite heat controls	●	●	●	●	●	●	●	●	●	●	●	●
TrueTemp™ system	●	●	●	●	●	●	●	●	●	●	●	●
Six-pass power bake element	●	●	●	●	●	●	●	●	●	●	●	●
True European convection	Precise Air™ Multi-/ single-rack	Precise Air Multi-/ single-rack	Precise Air Multi-/ single-rack									
Convection bake	●	●	●	●	●	●	●	●	●	●	●	●
Convection roast	●	●	●	●	●	●	●	●	●	●	●	●
Surface unit controls	Dig. glass touch	Knob	Knob									
QuickSet oven controls	Precise Digital Cont. System™	QuickSet VI glass touch	QuickSet VI	QuickSet V	QuickSet V	QuickSet IV	QuickSet III	QuickSet III				
Proof mode/Warm mode	●/●	●/●	●/●	-/●								
Digital temperature display	●	●	●	●	●	●	●	●	●	●	●	●
Oven function icons	●	●	●	●	●	●	●	●	●	●	●	●
Digipad numeric entry	●	●	●	●	●	●	●	●	●	●	●	●
Delay bake	●	●	●	●	●	●	●	●	●	●	●	●
Oven light pad	●	●	●	●	●	●	●	●	●	●	●	●
Control lock capability	Oven/cooktop	Oven	Oven		Oven							
Self-clean cool-down time display	●	●	●	●	●	●	●	●	●	●	●	●
Light self-clean option	●	●	●	●	●	●	●	●	●	●	●	●
Delay clean option	●	●	●	●	●	●	●	●	●	●	●	●
Auto oven shut-off	w/override	w/override										
Certified Sabbath mode	●	●	●	●	●	●	●	●	●	●	●	●
Audible preheat signal	●	●	●	●	●	●	●	●	●	●	●	●
Dual element bake	●	●	●	●	●	●	●	●	●	●	●	●
Oven meat probe	●	●	●	●	●	●	●	●	●	●	●	●
Hot surface lights	Cooktop	●	●	●	●							
Oven "ON" light	●	●	●	●	●	●	●	●	●	●	●	●
Self-clean cycle light	●	●	●	●	●	●	●	●	●	●	●	●
Interior oven light	Auto/pad	Auto/pad	Auto/pad	Auto/pad	Pad	Pad						
Lower oven (140° to 450°)		●	●	●	●	●	●	●	●	●	●	●
Dual element bake		●	●	●	●	●	●	●	●	●	●	●
Removable liner		●	●	●	●	●	●	●	●	●	●	●
Warming drawer (140° to 220°)		●	●	●	●	●	●	●	●	●	●	●
Removable liner		●	●	●	●	●	●	●	●	●	●	●
Storage drawer	●	●	●	●	●	●	●	●	●	●	●	●
Broiler pan with grid	●	●	●	●	●	●	●	●	●	●	●	●
Roasting rack/Convection cookbook	●/●	●/●	●/—									
Appearance												
Color appearance*	SS / WW / CC / BB	SS / WW / BB	SS / WW / CC / BB / WH, CT	SS / WW / WW / CC	SS / WW / BB							
Frameless glass oven door	Stainless steel White Bisque Black	Stainless steel White Bisque Black										
Oven door with window	Big ClearView™	Big ClearView	Big ClearView	Big ClearView	Big hearth	Big hearth						
Designer-style handle	Sculptured	Sculptured	Sculptured	Sculptured	●	●	●	●	●	●	●	●
Weights & Dimensions												
Overall oven interior dimensions (WxHxD in inches)	← 24-1/8 x 19-1/2 x 19-3/8 →										24-1/8 x 19-1/2 x 19-3/8 24-1/8 x 19-1/2 x 19-1/4	24-1/2 x 19-1/2 x 19-3/8
Approx. shipping weight (lbs.)	206	238	225	211	223	201	198	184	181	175	174	174
Power/Ratings												
KW rating @	13.4	14.2	13.7	13.3	13.7	12.9	12.1	11.6	12.0	11.0	10.5	10.5
240V												
208V	10.1	10.7	10.3	10	10.3	9.7	9.1	8.7	9.0	8.3	7.9	7.9
Amp rating @	40	40	40	40	40	40	40	40	40	40	40	40
240V / 208V												

*SS = Stainless steel with black accents, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door, WH = White with black glass door, CT = Bisque with black glass door, CM = Color-matched indicates color of drawer matches range cooktop (either white or bisque).

All ranges are shipped with cooktop cleaning creme & pad.

30" free-standing QuickClean™ electric ranges

	GE Profile		GE							
	JBP49WK JBP49CK JBP49BK	JBP35WK JBP35CK JBP35BK	JBP27WK JBP27CK JBP27BK	JBP24WK JBP24EK JBP24BK	JBP21WK JBP21BH	JBS27SH JBS27WH JBS27CH JBS27BH	JBS07H	JBP15WJ JBP15CJ JBP15BJ	JBS15H	JBS03BH JBS03H
Features										
Oven cleaning	Self-clean	Self-clean	Self-clean	Self-clean	Self-clean	Standard	Standard	Self-clean	Standard	Standard
Oven capacity (cu. ft.)	5.3	5.3	5.3	5.3 / 5.0	5.0	5.0	5.0	5.0	5.0	5.0
Oven racks	2 heavy-duty	2 heavy-duty	2	2	2	2	2	2	2	2
Self-clean oven racks	●	●								
Self-clean dripbowls	●	●								
Upswept porcelain-enameled cooktop	●	●	●	●	●	●	●	●	●	●
Clean-Well™ cooktop system	●	●	●	●	●	●	●	●	●	●
Lift-up cooktop w/dual support rods	●	●	●	●	●	●	●	●	●	●
8" heating elements	2 (6 turns)	2 (6 turns)	2 (5 turns)	2 (5 turns)	2 (5 turns)	2 (5 turns)	1 (5 turns)	1 (5 turns)	1 (5 turns)	1 (5 turns)
6" heating elements	2 (5 turns)	2 (5 turns)	2 (4 turns)	2 (4 turns)	2 (4 turns)	2 (4 turns)	3 (4 turns)	3 (4 turns)	3 (4 turns)	3 (4 turns)
Warming option	●									
Infinite heat controls	●	●	●	●	●	●	●	●	●	●
Plug-in Calrod® heating elements	●	●	●	●	●	●	●	●	●	●
Removable 1-piece drip bowls	Grey Black Black	Black Grey Black Black Black	Chrome Chrome Black	Chrome	Chrome	Black Chrome Chrome Black	Chrome	Chrome Black	Chrome	Chrome
Self-clean oven racks	●	●								
TrueTemp™ system	●	●	●							
Six-pass power bake element	●	●	●							
Convenience controls	●	●	●	●	●					
QuickSet oven controls	QuickSet V	QuickSet IV	QuickSet IV	QuickSet III	QuickSet III					
Digital temperature display	●	●	●	●	●					
Electronic oven controls	●	●	●	●	●					
Auto oven shut-off	w/override	w/override	w/override	w/override	w/override					
Delay bake	●	●	●							
Oven light pad	●	●	●	●						
Start pad	●	●	●	●						
Delay clean option	●	●	●							
Auto self-clean	●	●	●	●	●					
Self-clean cool down time display	●	●	●	●	●					
Audible preheat signal	●	●	●	●	●					
Certified Sabbath mode	●	●	●	●	●					
Clock and minute timer	●	●	●	●	●	●				
Dual element bake	●	●	●	●	●	●	●	●	●	●
Heating element "ON" indicator light	●	●	●	●	●	●	●	●	●	●
Interior oven light	Auto/switch	Pad	Pad	Pad		Switch	Switch	Switch	Switch	
Preheated oven light	Display	●	●	●	●					
Removable full-width storage drawer	White Bisque Black	Stainless steel CM* CM* CM* CM*	White Bisque Black	White Black CM*	White CM*	Stainless steel CM* CM* CM*	White/ Bisque/Black	CM*	CM*	CM*
Broiler pan with grid	●	●	●	●	●	●	●	●	●	●
Appearance										
Color appearance*	WW CC BB	SS WW CC BB WH/CT	WW CC BB	WW BB WH/CT	WW WH/CT	SS WW CC BB	WW/CC/BB	WW CC BB	WW/CC/BB	WH/CT WH/CT
Frameless glass oven door*	White Bisque Black	Stainless steel White Bisque Black Black	White Bisque Black	White Black Black	White Black	Stainless steel White Bisque Black	Porcelain CM*	Porcelain CM*	Porcelain CM*	Black glass Porcelain CM*
Oven door with window	Big ClearView	Big hearth	Big hearth	Big hearth ClearView		ClearView	ClearView	Big ClearView	ClearView	
Removable oven door	●	●	●	●	●	●	●	●	●	●
Designer-style handle	Sculptured	●	●	●	●	●	●	●	●	Visor
Textured steel side panels	●	●	●	●	●	●	●	●	●	●
Weights & Dimensions										
Overall oven interior dimensions (WxHxD in inches)	← 24-1/8 x 19-1/2 x 19-3/8 →			24-1/8 x 19-1/2 x 19-3/8	23-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	23-3/4 x 19 x 18-1/2	24 x 18-1/2 x 19	24 x 18-1/2 x 19	23-3/4 x 19 x 18-1/2
Approx. shipping weight (lbs.)	186	173	172	170	144	158	141	157	157	154 / 141
Power/Ratings										
KW rating @ 240V	11.7	11.7	11.7	11.7	11.7	12.6	11.5	11.2	11.2	11.4
KW rating @ 208V	8.8	8.8	8.8	8.8	8.1	9.9	9.1	6.9	6.9	9.0
Amp rating @ 240V / 208V	40	40	40	40	40	40	40	40	40	40

*WW = White with white door, CC = Bisque with bisque door, BB = Black with black door, WH = White with black door, CT = Bisque with black door, CM = Color-Matched indicates color of oven door or storage drawer matches range cooktop (either white, black or bisque).


30" free-standing electric ranges (continued)

Dimensions (in inches)

Model	A	B	C*	D
JB988	29-7/8	46-1/2	25-3/8	47-5/8
JB968	29-7/8	46-1/2	25-3/8	47-5/8
JB910	29-7/8	46-1/2	25-3/8	47-5/8
JB900	29-7/8	46-1/2	25-3/8	47-5/8
JBP49	29-7/8	46-1/2	25-3/8	47-5/8
JBP84	29-7/8	46-7/8	25-3/8	47-5/8
JBP81	29-7/8	46-7/8	25-3/8	47-5/8
JBP80	29-7/8	46-7/8	25-3/8	47-5/8
JBP72	29-7/8	46-7/8	25-3/8	47-5/8
JBP70	29-7/8	46-7/8	25-3/8	47-5/8
JBP66	29-7/8	46-7/8	25-3/8	47-5/8
JBP65	29-7/8	46-7/8	25-3/8	47-5/8
JBP64	29-7/8	46-7/8	25-3/8	47-5/8
JBS55	29-7/8	46-7/8	25-3/8	47-5/8
JBP35	29-7/8	46-7/8	25-3/8	47-5/8
JBP27	29-7/8	46-7/8	25-3/8	47-5/8
JBP24	29-7/8	46-7/8	25-3/8	47-5/8

*Dimension from wall to front of closed oven door handle is 27-3/8" on models JB988/968/910/900 and 27-3/4" on models JBP84/81/80/72/70/66/65/64/49/35/27/24 and JBS55.


Installation information (in inches)

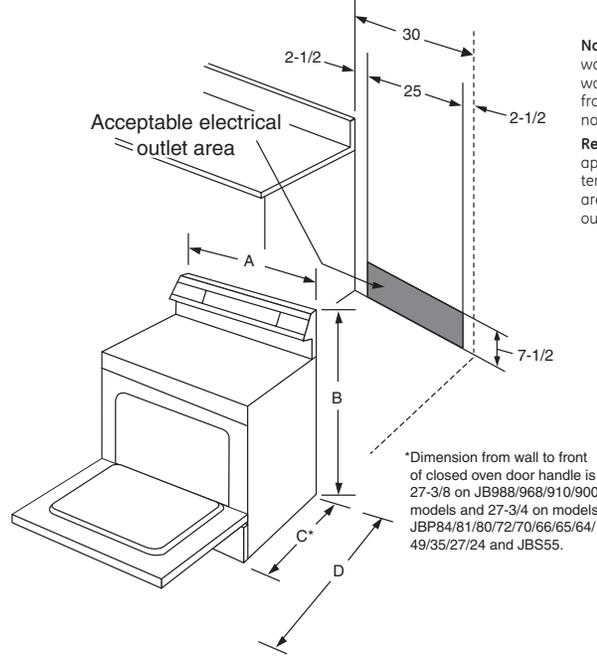

Note: Conforms to U.L. requirements for 0" spacing for adjacent walls below countertops. To reduce possibility of scorching of walls, it is recommended a minimum of 1-1/2" spacing be allowed from adjacent side walls to allow for possible extended, high-heat, no-load heating element operation.

Receptacle locations: For 30" Free-Standing Ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against wall.

Dimensions and installation information (in inches) for models JBP22/21 and JBS27/07/03

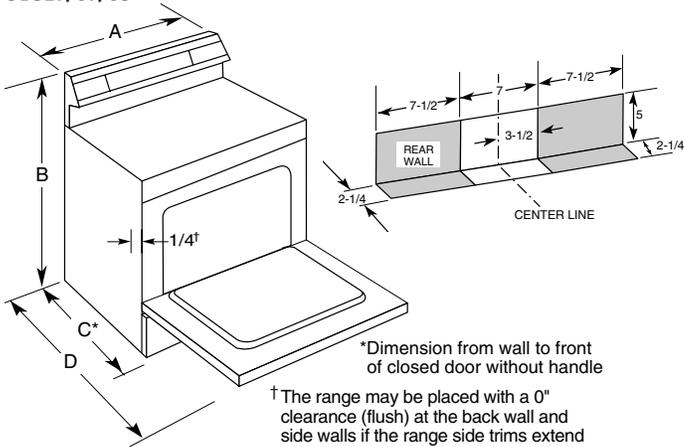

*Dimension from wall to front of closed door without handle

† The range may be placed with a 0" clearance (flush) at the back wall and side walls if the range side trims extend beyond the cabinet fronts at least 1/4". Self-clean models only.

Dimensions (in inches)


Model	A	B	C*	D
JBP22	29-7/8	46-7/8	26-3/8	46-3/8
JBP21	29-7/8	46-7/8	26-3/8	46-3/8
JBS27	29-7/8	46-7/8	26-1/4	46-1/4
JBS07	29-7/8	46-7/8	26-1/4	46-1/4
JBS03BH	29-7/8	46-7/8	26-3/8	46-3/8
JBS03H	29-7/8	46-7/8	26-1/4	46-1/4

*Dimension from wall to front of closed oven door handle is 28-1/2" on model JBP22/21, JBS27/03BH, 28-3/8" on JBS07, 28" and JBS03H.

Note: 30" ranges conform to U.L. requirements for 0" spacing from adjacent walls below countertops. To reduce possible scorching of walls, engineering recommends a minimum of 1-1/2" spacing to allow for possible extended, high heat, no-load heating element operation.

Receptacle locations: Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against wall.

Dimensions and installation information (in inches) for models JBP15 and JBS15

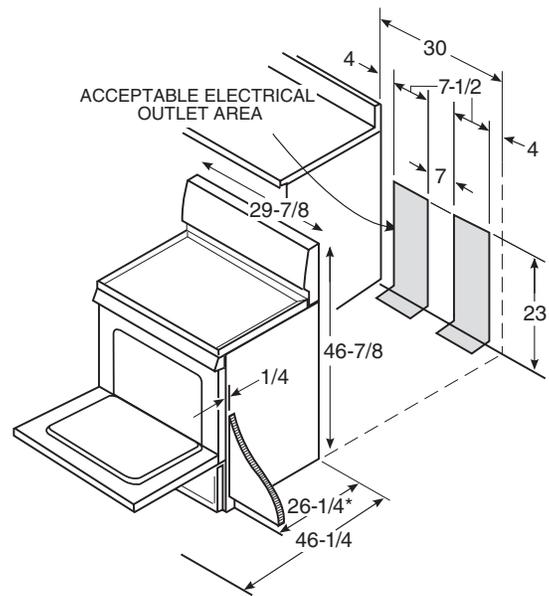

Dimensions (in inches)

Model	A	B	C*	D
JBP15	29-7/8	46-7/8	26-3/8	46-3/8
JBS15	29-7/8	46-7/8	26-1/4	46-1/4

*Dimension from wall to front of closed oven door handle is 28-1/2" on model JBP15 and 27-1/8" on model JBS15.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Electric free-standing range

Anti-tip bracket (Part No. 164D3799P002)

JB988/968/910/900, JBP84/81/80/72/70/66/65/64/49/35/27/24/22 and JBS55

Anti-tip bracket (Part No. 183D6270P001)



JBS27/07/15/03 and JBP21/15

40" electric ranges

GE®	
JCP67F	
Features	
Oven cleaning	Master oven—self-clean Companion oven—standard
Oven racks	Master oven—2 Companion oven—1
8" heating elements	2
6" heating elements	2
Removable drip bowls	One-piece chrome
Clock and minute timer	Electronic
Automatic oven timer	Master
Heating element "ON" indicator light	●
Interior oven light	●
Oven cycling light	2
Storage drawer	●
Broiler pan	Master oven—1 Companion oven—1
Appearance	
Color appearance*	WW
Oven door with window	Master oven
Weights & Dimensions	
Overall oven interior dimensions (WxHxD in inches)	Master oven—22-5/8 x 15-7/8 x 18-1/8 Companion oven—9-9/16 x 16 x 19-1/2
Approx. shipping weight (lbs.)	224
Power/Ratings	
KW rating @ 240V	14.2
208V	10.7
Amp rating 240V / 208V	40

*WW = White on white.


40" range dimensions and installation information (in inches)

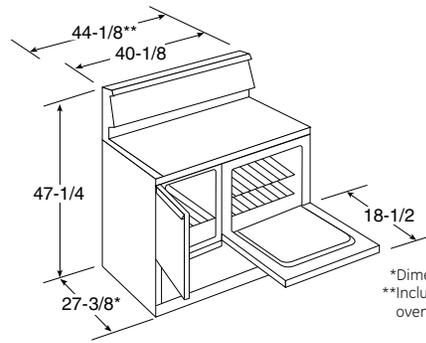

*Dimension from wall to front of closed oven door handle.
**Includes required 4" door swing allowance for side-hinged oven or storage compartment door.


Receptacle locations: For all 40" Free-Standing Ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Electric free-standing range Anti-tip bracket (part no. 164D3799P002)
JB988/968, JB910/900, JBP84/81/80/72/70/66/65/64/49/35/27/24/21, JBS15
Anti-tip bracket (part no. 183D6270P001) JBS27/26/07/03

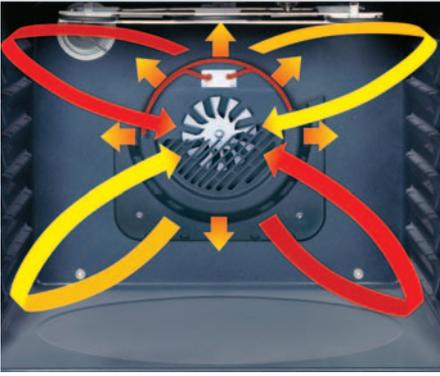

Superb Performance

The **Precise Air™ convection system** delivers optimal heat circulation and temperature accuracy in the oven for perfectly browned and evenly baked foods.



Exceptional Versatility

A variety of **adjustable elements** are available to achieve optimal results and convenience.



Distinguished Appearance

Full stainless steel door and gloss handle and trim on color models deliver an attractive cutting-edge design that coordinates and complements other appliances and kitchen décor.



A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.