




GE Appliances

AJES10DSA—GE 230 Volt "J Series" Window/Wall Mount Heat and Cool Unit with Mechanical Controls


Wall Case Dimensions (in inches)

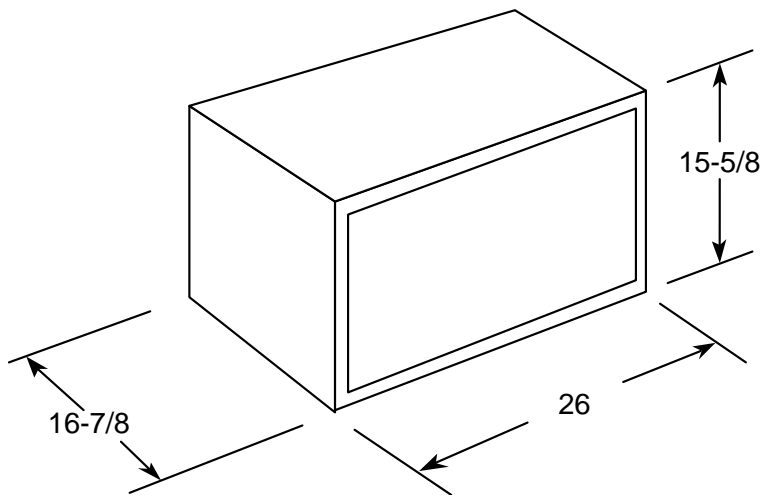

Note: When installing slide-out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas.

Note: This unit is **not** intended to be the primary source of heat.

Perpendicular



230/208V
20 Amp

Specification Created 5/01

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.




Listed by
Underwriters
Laboratories



GE Appliances

AJES10DSA—GE 230 Volt "J Series" Window/Wall Mount Heat and Cool Unit with Mechanical Controls

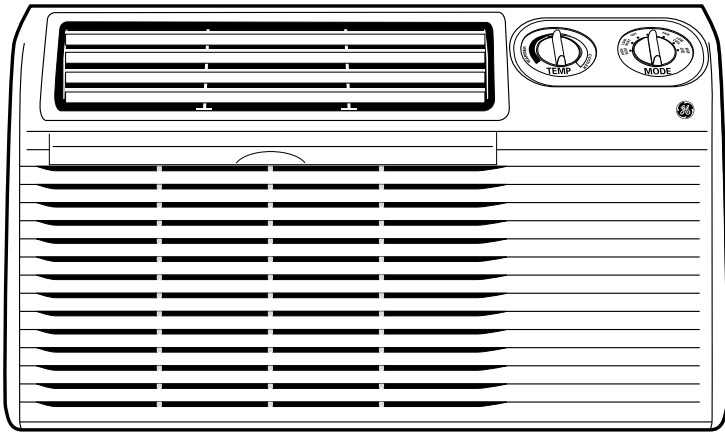

Features and Benefits

- 9,900/9,700 BTUH (Cooling), 11,600/9,480 BTUH (Electric Heat), 230/208 Volts
- 9.2/9.2 E.E.R.
- Mechanical Controls with Variable Setting Thermostat
- 2 Cooling/2 Heating Fan Speeds (2 Fan Positions)
- Fan Cycle Switch
- Slide-Out Chassis
- 1075/1055 Cooling Watts/4.9/5.3 Cooling Amps
- 2.6 Dehumidification (pints/hr)
- 250 CFM
- Hidden Controls Provide Clean, Contemporary Appearance
- Slide-Out Filter
- Exhaust for Air Exchange
- Plug Type—Perpendicular
- Standard Window Mounting
- Rotary Compressor
- Model AJES10DSA