



electric cooktops

2007 GE Profile™ and GE®
electric cooktops




imagination at work

sell: performance



12"/9"/6" tri-ring element

Accommodates various-sized pots or pans for the ultimate in cooking versatility.

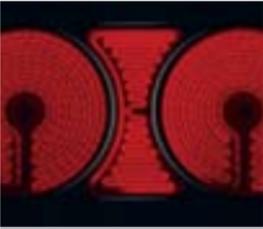

Bridge element

Combines two elements into one large cooking surface—delivering a total of 4,400 watts.



Adjustable elements

- 12"/9"
- 6"/9"
- 5"/8"

Lets you heat the area that is needed for either a large or small pan.



Warming zone

Provides low heat capability keeping food that has just been cooked hot and ready to serve.



Installation flexibility

- a. Common cutouts
- b. Can be installed over a wall oven
- c. Can be installed over a warming drawer

sell: versatility



PowerBoil™ element

Provides up to 3000 watts of power to speed the boiling process.



Melt option

Optimized for melting chocolate, this setting delivers the low gentle heat needed.*

*Home economists advise that for best results chocolate temperature should be between 104-113 degrees.



Simmer option

Ideal for making delicate sauces or melting butter, and ensures a food-safe temperature of at least 140°.



12" element

Offers a large 12" heating surface, wide enough to handle bigger pots and pans and accommodate family meals of any size.



Control lock capability

Provides the ability to lock the cooktop's controls, helping protect from unintended activation.

sell: appearance



Heavy-duty knobs

1/4-lb. of solid metal provides durability and delivers a quality message to your customers. Available on selected stainless steel models only.



Stainless appearance knobs

Delivers the sleek metallic color of stainless steel for a universally appealing look.



Framed stainless steel Profile ceramic-glass cooktop

Now looks even more stylish with an added stainless steel border and control panel. Available on stainless steel models only.



Stainless steel trim on GE models

Brings an added touch of style to any décor and perfectly complements all other stainless steel appliances in the kitchen. Available on stainless steel models only.




Electronic touch controls

Replaces traditional dial controls with digital buttons that are precise and easy to use.


Fourteen 30" cooktop models fit one cutout

| Gas models | Electric models |
|------------|-----------------|
| JGP945 | PP950 |
| JGP940 | PP945 |
| JGP933 | PP942 |
| JGP337 | PP932 |
| JGP330 | PP912 |
| JGP328 | JP356 |
| JGP321 | JP346 |

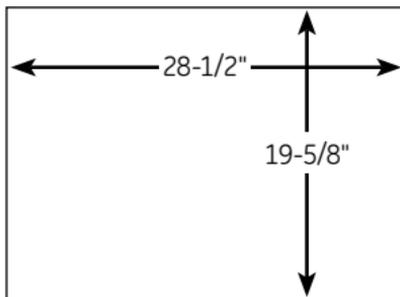

Eleven 36" cooktop models fit one cutout

| Gas models | Electric models |
|------------|-----------------|
| JGP975 | PP980 |
| JGP970 | PP975 |
| JGP963 | PP972 |
| JGP637 | PP962 |
| JGP630 | JP655 |
| JGP628 | |

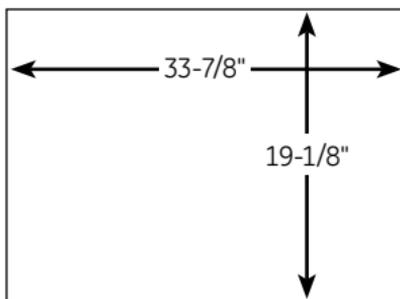


| GE Profile™ | | | | GE® | | |
|--|--|---|---|--|--|---|
| PP945SM PP945WM PP945BM | PP942SM PP942TM PP942BM | PP932SM PP932TM PP932KM PP932BM | PP912SM PP912TM PP912KM PP912BM | JP655SM JP655TM JP655BM | JP356SM JP356WM JP356BM | JP346WM JP346CM JP346BM |
| | | | | ● | | |
| Pattern. black True white Pattern. black | Pattern. black True white Pattern. black | Pattern. black True white True bisque Pattern. black | Pattern. black True white True bisque Pattern. black | Pattern. black True white Pattern. black | Pattern. black Pattern. white Pattern. black | Pattern. white Pattern. bisque Pattern. black |
| 4 ribbon | 4 ribbon | 4 ribbon | 4 ribbon | 5 ribbon | 4 ribbon | 4 ribbon |
| 1 ribbon (3000W) | 1 ribbon (3000W) | | | | | |
| | | | 1 ribbon (2700W) | | 1 ribbon (2700W) | |
| | | 1 PowerBoil (3000W) | | 1 ribbon (2500W) | | |
| 1 PowerBoil (2400W) | 1 PowerBoil (2400W) | | | | | |
| | | | | | | 1 ribbon (2700W) |
| | | | 1 PowerBoil (2500W) | 1 ribbon (2000W) | 1 PowerBoil (2500W) | 1 PowerBoil (2500W) |
| | | 2 ribbon (1800W) | | 1 ribbon (1500W) | | |
| | | 1 ribbon (800W) 4400W | | | | |
| 2 ribbon (1200W) | 2 ribbon (1200W) | 1 ribbon (1200W) | 2 ribbon (1200W) | 2 ribbon (1200W) | 2 ribbon (1200W) | 2 ribbon (1200W) |
| | ● | ● | ● | ● | ● | ● |
| | ● | ● | ● | ● | ● | ● |
| 4 | 4 | 4 | 4 | 5 | 4 | 1 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| ● | ● | ● | ● | | | |
| | ● | ● | ● | ● | ● | ● |
| | | | | | | |
| SS WW BB | SS WW BB | SS WW CC BB | SS WW CC BB | SS WW BB | SS WW BB | WW CC BB |
| WW/BB | WW/BB | WW/CC/BB | WW/CC/BB | WW/BB | WW/BB | WW/CC/BB |
| SS models only | SS models only | SS models only | SS models only | | | |
| | SS models only | SS models only | | | | |
| | | | | | | |
| 30 | 30 | 30 | 30 | 36 | 30 | 30 |
| 38 | 38 | 39 | 38 | 44 | 38 | 37 |
| | | | | | | |
| 7.8 | 7.8 | 8.6 | 7.6 | 8.4 | 7.6 | 7.6 |
| 5.9 | 5.9 | 6.5 | 5.7 | 6.3 | 5.7 | 5.7 |
| 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| 30 | 30 | 40 | 30 | 40 | 30 | 30 |

features

| | GE Profile™ | | | | |
|---------------------------------|--|---|--|---|--|
| | PP980SM PP980WM PP980BK | PP975SM PP975WM PP975BM | PP972SM PP972TM PP972BM | PP962SM PP962TM PP962KM PP962BM | PP950SM PP950WM PP950BM |
| ADA-compliant | ● | ● | ● | ● | |
| Features | | | | | |
| Ceramic-glass surface | Pattern, black Pattern, white Pattern, black | Pattern, black True white Pattern, black | Pattern, black True white Pattern, black | Pattern, black True white True bisque Pattern, black | Pattern, black Pattern, white Pattern, black |
| Number of elements | 5 ribbon | 5 ribbon | 5 ribbon | 5 ribbon | 4 ribbon |
| 12"9"/6" tri-ring element | | 1 ribbon (3000W) | 1 ribbon (3000W) | 1 ribbon (3000W) | |
| 9"/12" dual heating element | | | | | |
| 6"/9" dual heating element | 1 ribbon (2500W) | | | | 1 ribbon (2500W) |
| 5"/8" dual heating element | 1 ribbon (2200W) | 1 ribbon (2200W)/ 1 PowerBoil™ (2400W) | 1 ribbon (2200W)/ 1 PowerBoil (2400W) | 1 ribbon (2200W) | 1 ribbon (2200W) |
| 12" heating elements | | | | | |
| 8" heating elements | | | | | |
| 7" heating elements | 1 ribbon w/warmer (1500W) | | | 2 ribbon (1800W) | 1 ribbon (1500W) |
| Bridge element | | | | 1 ribbon (800W) | |
| Total bridge wattage | | | | 4400W | |
| 6" heating elements | 2 ribbon (1200W) | 1 ribbon (1200W) | 1 ribbon (1200W) | | 1 ribbon (1200W) w/warmer |
| 6" warming zone | | 1 ribbon (120W) | 1 ribbon (120W) | 1 ribbon (120W) | |
| Melt setting | | | ● | | |
| Simmer setting | | | | ● | |
| Hot surface indicator lights | 5 | 5 | 5 | 5 | 4 |
| Precise Digital Control System™ | ● | | | | ● |
| Pan presence sensor | ● | | | | ● |
| Pan size sensor | ● | | | | ● |
| Kitchen timer | ● | | | | ● |
| Control lock capability | ● | ● | ● | ● | ● |
| Dishwasher-safe knobs | | | ● | ● | |
| Appearance | | | | | |
| Color appearance* | SS WW BB | SS WW BB | SS WW BB | SS WW CC BB | SS WW BB |
| Frameless | WW/BB | WW/BB | WW/BB | WW/CC/BB | WW/BB |
| Stainless steel frame | SS models only | SS models only | SS models only | SS models only | SS models only |
| Heavy-duty knobs | | | SS models only | SS models only | |
| Weight & Dimensions | | | | | |
| Cooktop width (in inches) | 36 | 36 | 36 | 36 | 30 |
| Approx. shipping wt. (lbs.) | 45 | 44 | 44 | 44 | 38 |
| Power/Ratings | | | | | |
| KW rating @ 240V | 8.6 | 8.9 | 8.9 | 9.4 | 7.4 |
| 208V | 6.5 | 6.7 | 6.7 | 7.1 | 5.6 |
| Amps @ 240V | 40 | 40 | 40 | 40 | 40 |
| 208V | 40 | 40 | 40 | 40 | 30 |

*SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

reading electric cooktop nomenclature

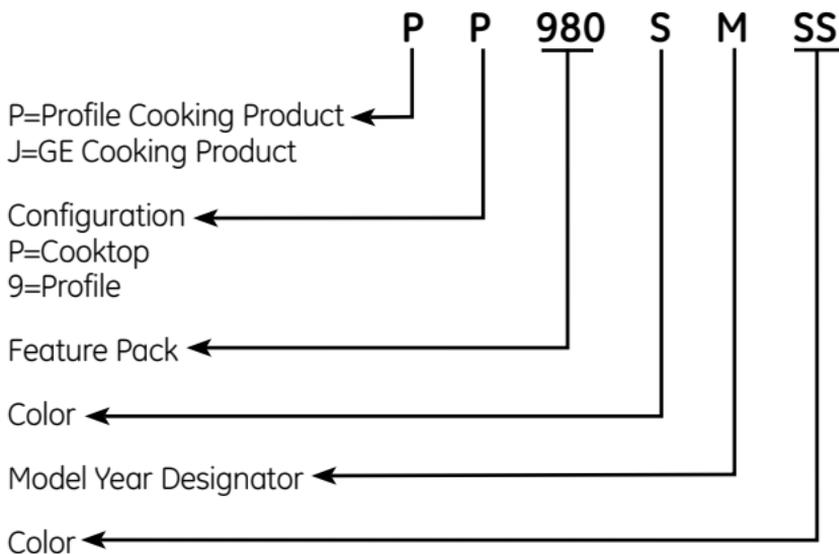

GE Consumer & Industrial
Appliances
General Electric Company
Louisville, KY 40225
ge.com