WJSR4160G GE® 3.2 Cu. Ft. Super Capacity Washer


Dimensions and Installation Information (in inches)

Circuit Requirements: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

Electrical Rating: 115V, 60Hz, 10A

Note: Washer wall outlet must be located within 36" of service code entry. Wall outlet must not be located behind dryer.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

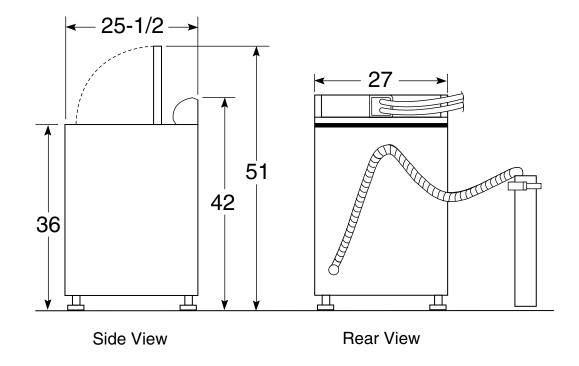

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.





WJSR4160G

GE® 3.2 Cu. Ft. Super Capacity Washer

Features and Benefits

- 3.2 Cu. Ft. Super Plus ExtrAction™ Wash Basket Offers increased surface area to "squeeze" more water from clothes during the spin cycle, resulting in reduced dry times
- HydroWave[™] Wash System Has variable speeds to match the wash action to the clothing type. Longer, slower travel through the water improves cleaning performance and is gentler on your clothes
- Four Wash/Spin Speed Combinations Speeds vary according to fabric type for better clothes care
- 16 Wash Cycles Offer fabric-specific clothes care
- Four Wash/Rinse Temperatures Washer cleans at the exact temperature needed to remove dirt and reduce wear
- Four Water Levels Offers water and energy savings
- Prewash Cycle Allows clothing additional time to soak and agitate to help remove stubborn stains
- 2nd Rinse Option Helps protect delicate fabrics and sensitive skin
- Auto Soak Soaks dirty clothes for 15 or 30 minutes before the wash cycle, Eso there's no need for an extra cycle
- Model WJSR4160GWW White on white

