


## GSD3650FCC—GE Nautilus<sup>™</sup> Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)

# Rough-In Installation Information (in inches)

### Wood Insert Cut-Out Dimensions (in inches)




Countertop This wall area must be free of 90 90° pipes or wires 24" MIN. Electrical wiring is 3" from cabinet Hot water Electrical 34-1/2±1/4" Underside of countertop to floor line on wiring on left right Plumbing and electrical service must enter inside shaded area 24" Fro MIN, from wal White (neutral) Ground Black (line) 24" MIN.

**Note:** Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

#### **Electrical Rating**

Voltage AC	120
Hertz	60
Total connected load amperage	8.6
Calrod <sup>®</sup> heater watts	500
For use on adequately wired 120-volt,	15-amp

circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.



				Panel	
Models/Kits	A	В	С	Thickness	
GE Models					
GPF425 Kit	19-3/4"	23-9/16"	3-11/16"	1/4"	
			4-1/4" to		
GPF475 Kit	19-13/16"	23-5/8"*		3/4"	
*Bottom of papel must be notched 1-1/2" x 1/2" to clear					

\*Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel

\*\*Adjustment required to match adjcent cabinets fronts due to leveling leg adjustment, 4" nominal.


For answers to your Monogram,® GE Profile<sup>™</sup> or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center<sup>®</sup> service, 800.626.2000.



**Specification Created 7/01** 



## **GSD3650FCC**—**GE** Nautilus<sup>™</sup> Built-In Dishwasher

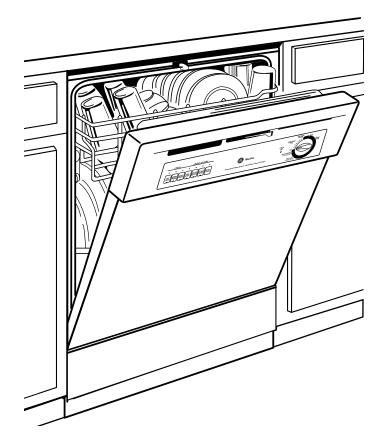

## **Features and Benefits**

- PowerScrub<sup>™</sup> Wash System with 3 Wash Levels
- Dual Filtration System
- Piranha<sup>™</sup> Hard Food Disposer
- Dial & TouchTap<sup>™</sup> Controls
- Deluxe Upper Rack
- Deluxe Lower Rack
- Deluxe Silverware Basket
- 6 Cycle / 31 Option Selections: Pots & Pans, Normal Wash, Light Wash, Short Wash, Plate Warmer and Rinse Only
- Options: Delay Start (1-6 Hours), Heated Dry On/Off, Energy Saver On/Off, Hi-Temp Wash and HotStart<sup>™</sup>
- Rinse Aid Dispenser
- QuietPower<sup>™</sup> Motor
- QuietPower<sup>™</sup> I Sound Insulation Package
- Trimless Appearance
- Model GSD3630FWW White on white
- Model GSD3620FBB Black on black
- Model GSD3610FAA Almond on almond
- Model GSD3650FCC Bisque