Café[™] 30" Five in One Oven with 240V Advantium[®] Technology

CSB923P4NW2 / CSB923P2NS1 / CSB923P3ND1



ALSO AVAILABLE IN





CSB923P3ND1 Matte Black with Brushed Stainless handle

FEATURES & BENEFITS

Unmatched versatility to unleash your imagination - Enjoy a whole new level of cooking flexibility with a single oven that can be used in five different ways. Use it as a Convection Oven, Microwave, Toaster Oven, Warming/ Proofing Oven, and Precision Cook Oven with Advantium Technology.

Cook smarter, not longer - Achieve oven-quality results in a fraction of the time as halogen light, microwave energy and True European Convection work together to provide the exact amount and type of heat your food needs, precisely when it needs it

Brighten up life in the kitchen - Easily navigate wall oven settings using a stunning full color display that adds an unexpected touch of style to your kitchen

Say goodbye to rubbery leftovers - Achieve crispy results at microwave speed with more than 20 reheat programs that make leftovers taste like new

The perfect marriage of quality and speed - Eliminate the need for preheating and cook your favorite foods four to eight times faster than a conventional oven

Healthy meals without the fuss - Fresh vegetables and rice are perfectly prepared with a steam cook option that simplifies the entire process

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

Clean-up has never been easier - Keep your oven looking like new at all times with steam clean

The perfect fit you've always dreamed of - When you're updating your kitchen, attention to detail is a priority. That's why Café Advantium wall ovens are guaranteed for an exact fit for an easy and seamless replacement.

APPEARANCE

Color Appearance	Matte White
Handle	Café Pro Style

FEATURES

Microwave; Proof, Warm Built-In 7" Full Color LCD Touch Control Yes
7" Full Color LCD Touch Control
Yes
Stainless Steel
950
16 in
Add 30 Sec; Over 175 Programmed Menu Selections
5 in 1 Oven with 240V Advantium
Yes
Wire Oven Rack

CAPACITY

Total Capacity (cubic feet)	1.7

POWER / RATINGS

6300
208
240
240V; 60Hz
30
2400W

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	92 lb
Cavity (W x H x D)	20-1/16 x 8-1/2 x 17 in
Height (Front)	20-1/8 in
Net Weight	82 lb
Overall Height	20-1/8 in
Overall Width	29-3/4 in
Overall Depth	
(Includes Control Panel Thickness)	21-1/2 in
Cabinet Width	30 in

ACCESSORIES

Metal Oven Pan	Yes - Precision Cooking Tray
----------------	------------------------------

CAFÉ

Café[™] 30" Five in One Oven with 240V Advantium® Technology



23-1/2"

Cutout depth

4-3/16"

CSB923P4NW2 / CSB923P2NS1 / CSB923P3ND1

WARRANTY

Parts Warranty	Limited 1-Year Entire Appliance Limited 5-Year Magnetron Tube
Labor Warranty	Limited 1-Year Entire Appliance
Warranty Notes	See Written Warranty for Full Details

DIMENSIONS AND INSTALLATION INFORMATION


Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: 2" minimum between cutouts when installed above warming drawer or single wall oven.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Note: Advantium 240 volt models cannot be installed under 36 inches height.

Note: Use of the accessory drawer will replace the bottom trim piece for applicable installations. Please see installation instructions for full details.

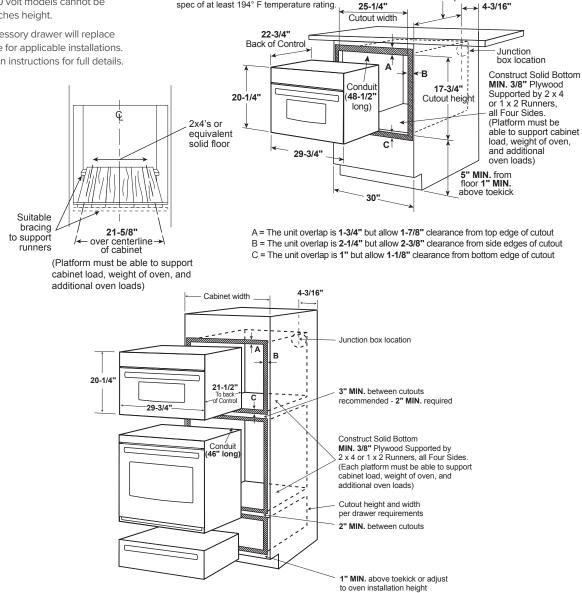

Note: Cabinets installed adjacent

to wall ovens must have an adhesion

spec of at least 194° F temperature rating.

Café[™] 30" Five in One Oven with 240V Advantium[®] Technology

CSB923P4NW2 / CSB923P2NS1 / CSB923P3ND1

DIMENSIONS AND INSTALLATION INFORMATION

Prepare the opening: The Advantium Built-In Oven can be installed in combination with other appliances. Always follow each product's Installation Instructions to compete the installation.

Single oven installation: Order a 30" wide single oven cabinet or cut the opening in a wall to the dimensions shown.

- * For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.
- Always maintain 36-3/4" minimum height from the floor to the cutout in any single or combined installation.
- The unit overlap on the top is 1–3/4" but allow 1–7/8" clearance from top edge of cutout. The unit overlap on each side is 2–1/4" but allow 2–3/8" clearance from side edges of cutout. The unit overlap on the bottom is 1" but allow 1–1/8" clearance from bottom edge of cutout.
- Oven overlaps will conceal cut edges on all sides of the opening.

Preparation with a Warming Drawer

When installed over a single oven or a warming drawer, allow at least 2" between the two openings. This separation will provide clearance for bottom overlap of the Advantium Built-In Oven and the other appliance overlaps.

Construct a solid oven floor of 3/8" min. thick plywood supported by 2×4 or 2×2 runners on all sides.

- the support must be level and rigidly mounted, flush with the bottom edge of the cutout.
- * For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.

Note: Additional clearances between the cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior depth and height. See Warming Drawer installation instructions for details.

Installation Over a Wall Oven and Warming Drawer:

* For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.

Note: Additional clearances between the cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior depth and height. See Warming Drawer installation instructions for details.

Caution: For personal safety, the mounting surface must be capable of supporting the cabinet load, in addition to the added weight of the oven and drawer, plus additional oven loads.

ADDITIONAL ACCESSORIES





CXWS0H0PMSS Brushed Stainless 1 handle (Standard on Matte Black)



CXWS0H0PMBT Brushed Black 1 handle



1 handle








CXWS0H0PMCG CX Brushed Brass 1 handle

CXWS0H0PMFB Flat Black 1 handle



supported by 2x4 or 2x2 runners all four sides.

Installation over Warming Drawer:

36-3/4

Min

