
HOTPOINT

RVM1425WA—Counter Saver Plus™ Over-The-Range Microwave Oven

Dimensions (in inches)

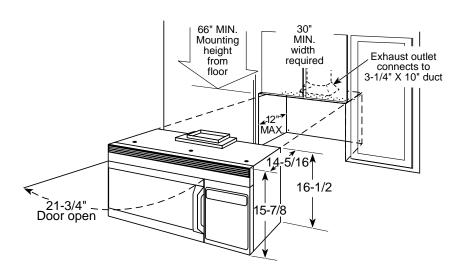

Important Information: When installing the Counter Saver Plus[™] microwave oven over a range, allow minimum of 2" from bottom of Counter Saver Plus[™] microwave oven to top of range backguard to allow for removal of light covers.

Installation Information: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

Optional Accessories (Available at additional cost)

12" Filler Panel Kits JX41-Black Filler Panel Kit JX40WH- White Filler Panel Kit 15" Filler Panel Kit JX46BL-Black Filler Panel Kit JX46WH-White Filler Panel Kit

When replacing a 36" or 42" range hood, this kit fills in the additional width to provide a custom, built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two, 3"-wide filler panels. Two kits are needed for a 42" opening.

JX81A-Recirculating Charcoal Filter Kit
To be used when the Counter Saver Plus™ microwave oven cannot be vented to the outside.

Ventilation Options: The Counter Saver Plus[™] microwave oven is designed for adaptation for the following three types o ventilation:

Outside Exhaust (Vertical—as shown above)

Outside Exhaust (Horizontal)

Recirculating Exhaust (Non-vented ductless—see Filter Kit Drawing)


Note: Before Installing, comsult installation instructions for curent dimensional data on these therr types of ventilation

For answers to your Monogram, GE Profile Performance Series, GE Profile, and GE appliance questions, call GE Answer Center service, 800,626,2000.



HOTPOINT

RVM1425WA—Counter Saver Plus[™] Over-The-Range Microwave Oven

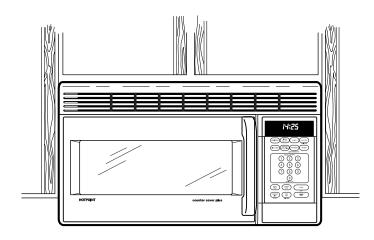

Features and Benefits

- 1.4 cu. ft. Oven Cavity
- Powerful 900 Watts[®]
- Interactive Display System
- Electronic Scrolling Digital Display with Clock and AM/PM Pad
- Variable Scroll Speed
- Popcorn and Reheat Pads
- Time Cook I & II
- Auto Defrost / Time Defrost
- Express Cook with Instant On Controls
- Cooking Complete Reminder
- Delay Start / Reminder
- Concurrent Programming
- Display On/Off
- Timer On/Off
- Child Lock-Out
- 10 Power Levels
- Turntable
- Full-View Cooktop Lighting
- Two-Speed, High-Capacity Exhaust Fan
- Model RVM1425WA-White
- Model RVM1425BA–Black

[©] IFC-705 Test Procedure