
PEP9036DT GE Profile[™] 36" Built-In Touch-Control Electric Cooktop

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.


NOTE: 36" Ribbon cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/ electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. **Before installing consult installation**

Before installing, consult installation instructions packed with product for current dimensional data.



To insure accuracy, it is best to make a template when cutting the opening in the counter

INSTALLATION ABOVE A WALL OVEN



VOLTAGE (60HZ AC)	240V	208V
CONNECTED LOAD (MAX.)	10.9kW	8.2kW
CURRENT DRAW (MAX.)	45.4 Amps	39.4 Amps
RECOMMENDED CIRCUIT BREAKER	50 Amps	40 Amps

*NOTE: Check local codes for required breaker size.

13" MAX. depth of unprotected

30" MIN. Clearance from

countertop to unprotected

overhead surface

2" MIN. Clearance

from cutout to

nearest vertical

wall or cabinet on

left side of the unit below the 15" MIN.

clearance height.

36" MIN. for

36" cooktop

overhead cabinets





For answers to your Monogram, GE Café[™], GE Profile[™] or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center[®] Service, 800.626.2000.

Specification Revised 03/23

1 1/2" MIN. (30") and

from cutout to nearest

vertical wall or cabinet

on right side of the unit

below the 15" MIN

clearance height.

15" MIN. height

from countertop

cooktop

to nearest cabinet

(including light rails) on both sides of


2" MIN. (36") Clearance

PEP9036DT

GE Profile[™] 36" Built-In Touch-Control Electric Cooktop

FEATURES AND BENEFIT

Power Boil on Two Tri-Ring Elements Precision Temperature Control Guided Cooking Glide Touch Controls - 19 Control Levels Easy Clean Surface Smart Cookware Rebate for 11" Smart Pan Built-in WiFi Synchronized Elements Chef Connect Keep Warm Setting Control Lock Hot Surface Indicator Lights Fit Guarantee Model PEP9036DTBB – Black on black

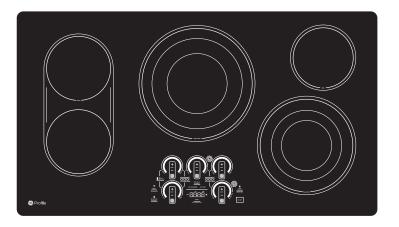

GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.

Visit geappliances.com for more info.

SMART COOKWARE REBATE

Smart pans easily pair with this smart cooktop to ensure you get the perfect cooking results. Earn a rebate for a free 11" Hestan Cue Smart Pan.

