


GE Appliances

GSD5300G - GE Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)




Electrical Rating

Voltage AC	120
Hertz	. 60
Total connected load amperage	. 8.2
Calrod® heater watts max	725

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Specification Created 6/02

Installation Information (in inches)



Dishwasher Rough-In Information


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Note: If a flush look is needed, a 25" base cabinet needs to be used.

The power cord and connections must comply with the National Electrical Code Section 422 and/or local codes and ordinances. The cord must be no longer than 6 ft. from the junction box to the receptacle.



Wood Insert Cut-Out Dimensions (flat door models only)



Kit	Α	В	C	D – Panel Thickness
GPF425	19-3/4"	23-9/16"	3-11/16"	1/4"
			3-11/16" to	
GPF475	19-7/8"	23-5/8"*	4-1/4"**	3/4"

^{*}Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)


For answers to your Monogram, GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service. 800.626.2000.

^{**}Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.



GE Appliances

GSD5300G - GE Built-In Dishwasher

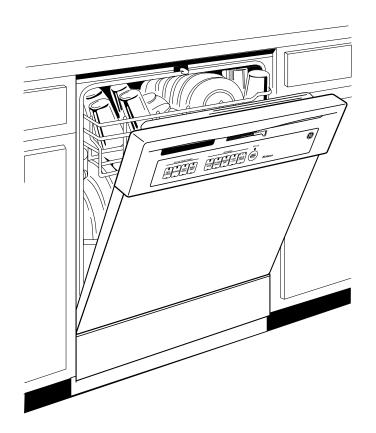

Features and Benefits

- Tri-Clean™ Wash System, 6 Wash Levels, 100% Water Filtration, Dual Pumps and Motors, and Piranha™ Hard Food Disposer
- Electronic Controls with 10 Touchpads and "Clean Light" Cycle Progress Indicator
- Super Upper and Lower Racks with Accessory Basket; Super Capacity Silverware Basket with One Cell Cover
- 4 Cycle Selections and 26 Enhancements including Pots & Pans, Normal Wash, Light Wash, Rinse Only, 4/6/8-Hr. Delay Start, Hi-Temp Wash and Hi-Temp Rinse
- Rinse Aid Dispenser with Indicator
- QuietPower™ I Sound Insulation Package
- Warranty 1 Yr. Full, Limited 2 Yr. Entire Appliance, Limited 5 Yr. Racks/Electronic Controls, Lifetime Tub
- Model GSD5300GBB Black on black
- Model GSD5300GCC Bisque on bisque
- Model GSD5300GWW White on white