


### VP1-280B

Valve Pipe Box for MRV 5 Heat Recovery Systems  
8 Ton

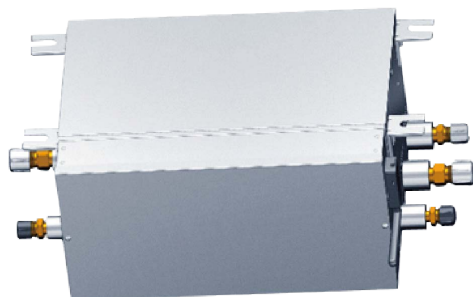

Job Name: \_\_\_\_\_

Location: \_\_\_\_\_

Date: \_\_\_\_\_

Tag: \_\_\_\_\_

Reference

Approval

Construction

### Specifications

#### Performance

Connected Indoor Unit Capacity	61,400 - 96,000 Btu/h
Max Connected Indoor Units	8

#### Electrical

Voltage (V / Ø / Hz)	208-230 / 1 / 60
----------------------	------------------

#### Dimensions

Height	7 7/8" (200 mm)
Width	15 1/4" (420 mm)
Depth	10 7/8" (154 mm)
Weight	20.5 lb. (9.3 kg)

#### Piping

Refrigerant Type	R410A
Refrigerant - Liquid - Indoor Side	3/8" Flare
Refrigerant - Suction - Indoor Side	7/8" Flare
Refrigerant - Liquid - Outdoor Side	3/8" Flare
Refrigerant - Suction - Outdoor Side	7/8" Flare
Refrigerant - HP Gas - Outdoor Side	3/8" Flare

### Features and Benefits

- Allows for simultaneous cooling and heating operation with MRV 5 Heat Recovery systems
- Connect one or more indoor units to the Indoor Side piping connections
- Controls the refrigerant flow and operation mode of the indoor units "downstream"
- Galvanized steel exterior construction
- Refrigerant control via electronic expansions valves
- Pressure equalization circuit reduces refrigerant noise during mode changeover
- Foamed internal construction eliminates the need for a drain piping connection
- Supports auto-addressing
- Compatible with Haier MultiLink wireless communication system

### Notes

1. Refer to installation manual for complete installation requirements.
2. Unit ships charged with dry nitrogen.


**MRV5**  
DC INVERTER



### Dimensional Drawings

Dimensions: inch (mm)

VP1-112B

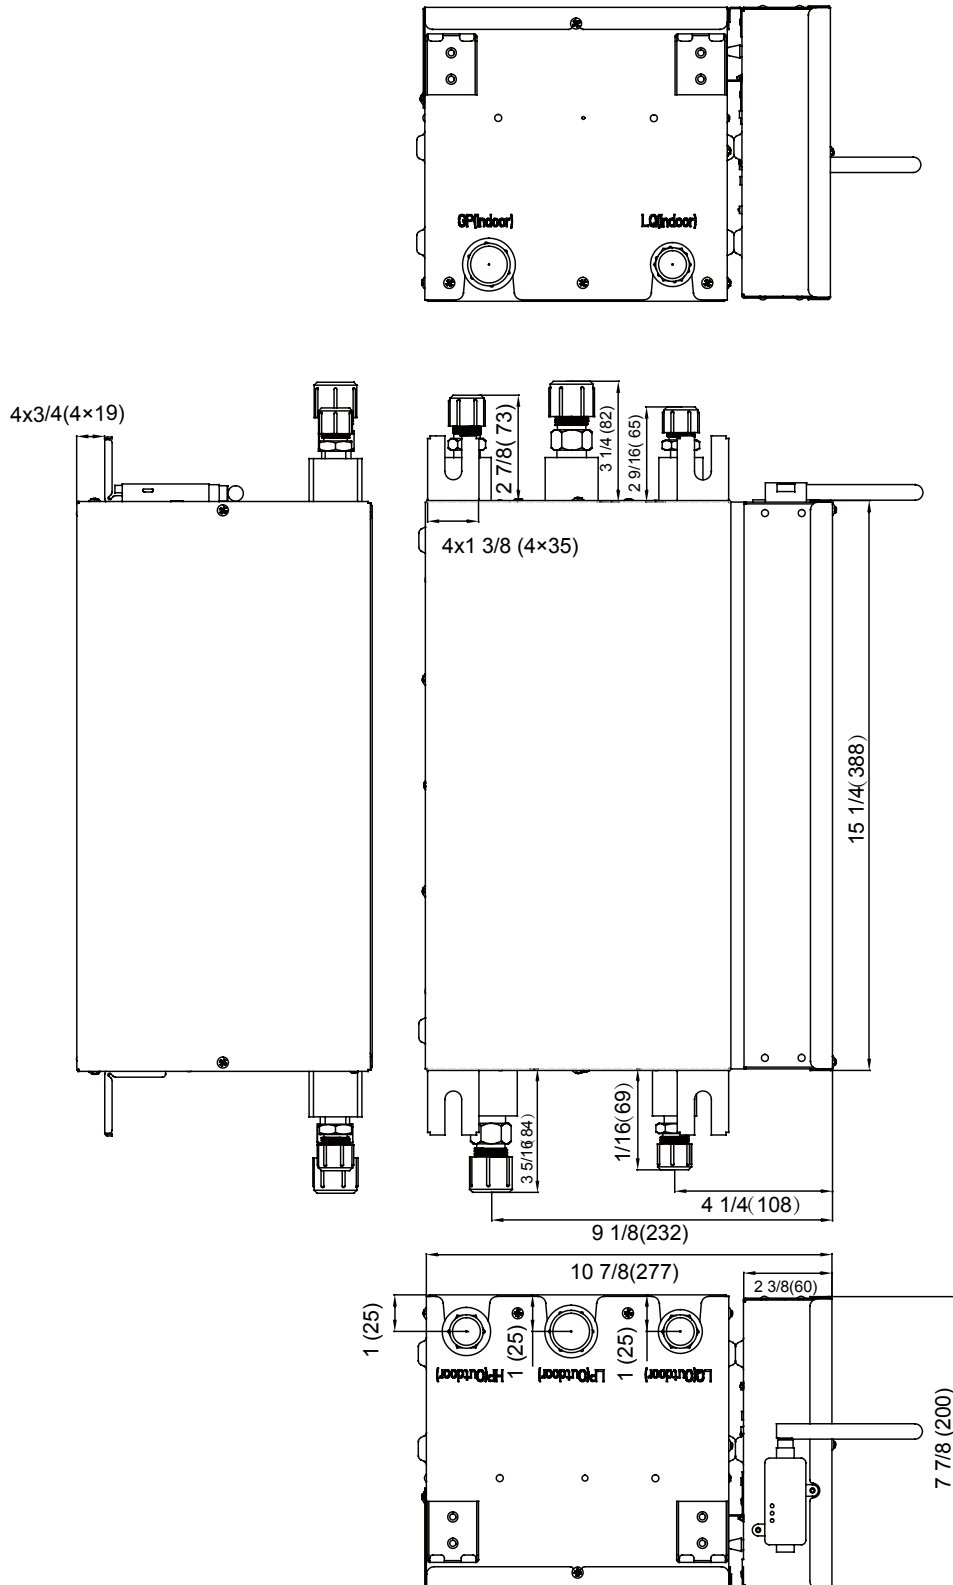

Note: Shown with optional MultiLink wireless communication antenna