





GE Appliances

JP326AV—GE Built-In Electric Cooktop

Counter Installation (in inches)

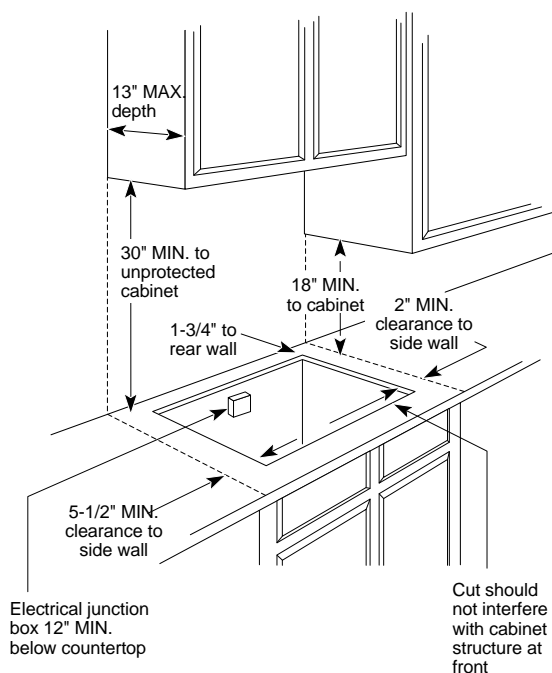

Cooktop Dimensions (in inches)

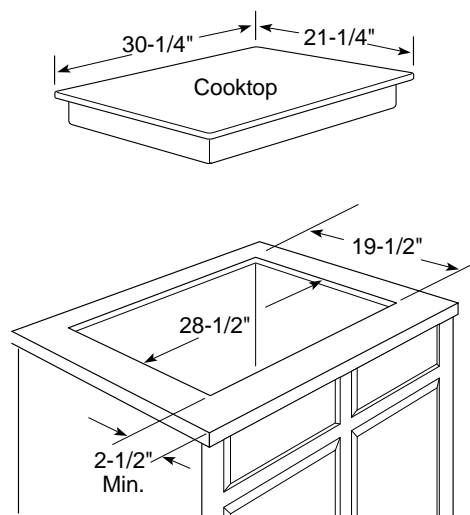

KW Rating	
240V	7.4
208V	5.6
Breaker Size	
40 Amps [†]	

[†]**Note:** Check local codes for required breaker size

Note: Built-In Electric Cooktops require 5" free area between the bottom of the cooktop and any combustible material, i.e., shelving. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

Note: If installed with a GE Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

Filler Trim Kit: When replacing a GE Model Cooktop JP651, JP661 with Model JP326WV, use this one-piece trim kit (JXTR30W) to fill in over-size hole left by JP651 or JP661. Available at additional cost.

Installation With Single Wall Oven Information: This model is approved for use over select GE 27" or 30" Single Wall Ovens. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Installation Information: Before installing, consult installation instructions [Pub. No. 31-10114] packed with product for current dimensional data.

For answers to your Monogram[®],
GE Profile Performance Series,[™]
GE Profile[™] or GE appliance questions, call
GE Answer Center[®] service, 800.626.2000.




Listed by
Underwriters
Laboratories



GE Appliances

JP326AV—GE Built-In Electric Cooktop

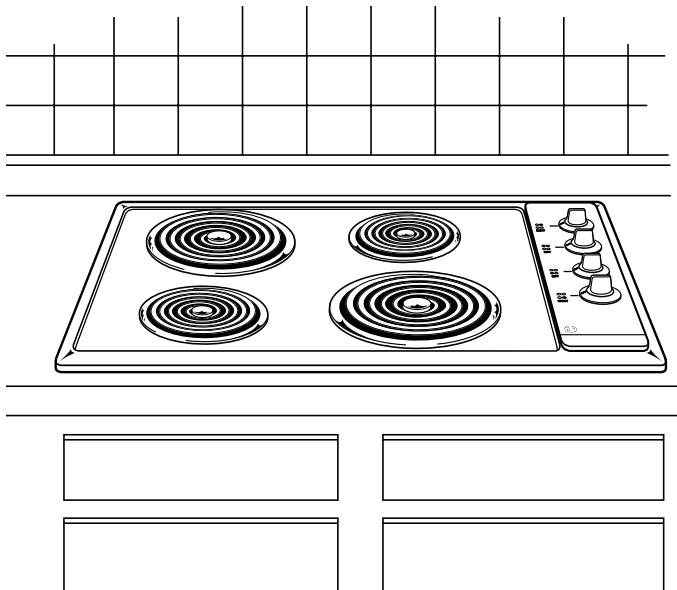

Features and Benefits

- Almond on almond Model
- 30" Porcelain-Enameled Life-Up Cooktop
- Two 8" and Two 6" Plug-In Calrod® Heating Elements
- Infinite Heat Rotary Controls
- Removable One-Piece Chrome Drip Bowls
- Heating Element "On" Indicator Light
- Also Available In White on white as Model JP326WV, Black on black as Model JP326BV, and Brushed-Chrome as Model JP326BC