





GE Appliances

GSD3330CWW—GE Built-In Potscrubber® Dishwasher

Built-In Dishwasher Dimensions (in inches)

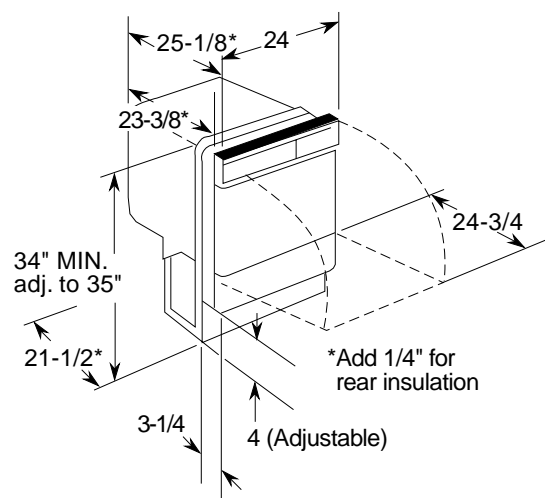

Rough-In Installation Information (in inches)

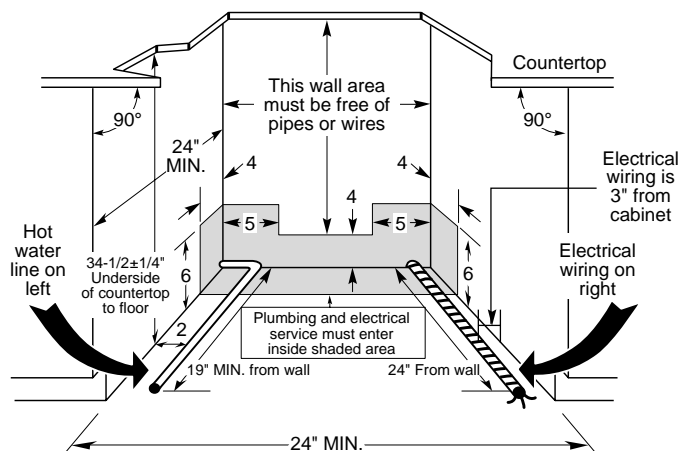


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Electrical Rating

Voltage AC.....120
Hertz60
Total connected load amperage.....8.6
Calrod® heater watts.....500
For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Wood Insert Cut-Out Dimensions (in inches)

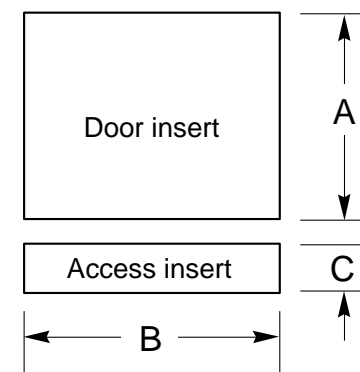

Models/Kits	A	B	C	Panel Thickness
GE Models				
GPF325 Kit	18-7/8"	23-9/16"	3-11/16"	1/4"
GPF375 Kit	18-15/16"	23-5/8"*	4-1/4" to 3-3/4"***	3/4"

*Bottom of panel must be notched 1-1/2" x 1/2" to clear across panel

**Adjustment required to match adjacent cabinets fronts due to leveling leg adjustment, 4" nominal.

For answers to your Monogram®,
GE Profile Performance Series™,
GE Profile™ or GE appliance questions, call
GE Answer Center® service, 800.626.2000.




Listed by
Underwriters
Laboratories



GE Appliances

GSD3330CWW—GE Built-In Potscrubber® Dishwasher

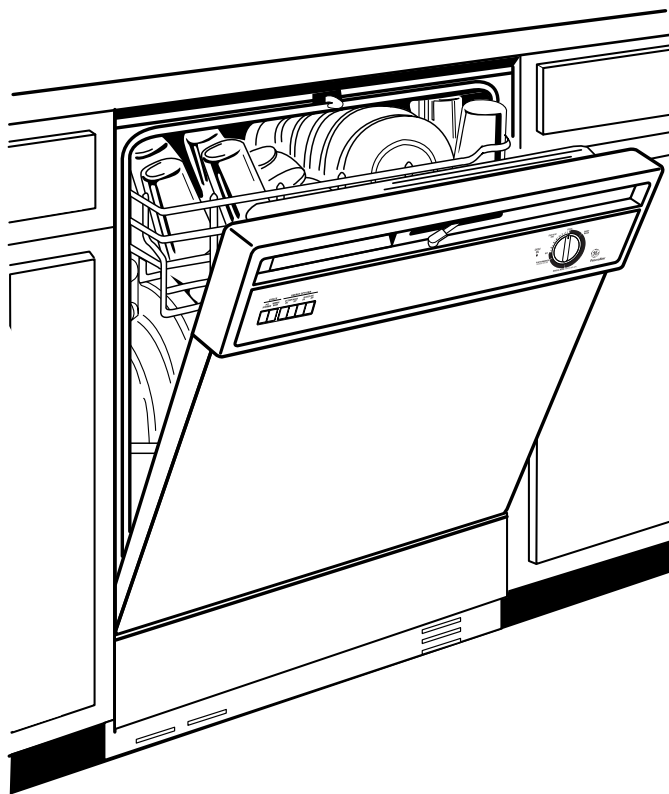

Features and Benefits

- SureClean™ Wash System
- Dual Filtration System
- 5 Cycles / 14 Options
- 5 Cycle Selections: POTSCRUBBER, Normal Wash, Short Wash (Dial), Plate Warmer (Dial) and Rinse Only/Hold (Dial)
- Options: Hi-Temp Wash, Heated Dry On/Off, 6-Hr. Delay Start
- Deluxe Upper Rack
- Deluxe Lower Rack
- Deluxe Silverware Basket
- GE Motor
- Standard Sound Insulation
- Trimless Appearance
- 6 Push Buttons
- GSD3330CWW - White on white
- GSD3320CBB - Black on black
- GSD3310CAA - Almond on almond