



# cooking products

**Retail and Contract Sales**

October 2005 new product introductions



imagination at work

# Contents



## **3** Slide-in/Drop-in electric ranges

**57** Specifications & installation

---



## **19** Slide-in gas ranges

**62** Specifications & installation

---



## **33** Dual-fuel ranges

**63** Specifications & installation



# electric slide-in and drop-in ranges

New product introductions October 2005

GE Profile™ and GE® slide-in and drop-in electric ranges



imagination at work







## Slide-in and drop-in electric range quick pitch

The maximum in cooking performance and versatility



### Distinguished Appearance

**Heavy-duty knobs and gloss handles and vents** provide an enhanced design balance. Coupled with the built-in appearance, the range blends with kitchen cabinetry for an overall sophisticated look.



### Remarkable Cleanability

**Self-clean, hidden bake oven interior and glass touch controls** make cleaning incredibly quick and easy.



### Superb Performance

The **PreciseAir™ convection system** delivers optimal heat circulation and temperature accuracy in the oven for perfectly browned and evenly baked foods.




### Exceptional Versatility

A variety of **adjustable elements** and a **multi-rack convection oven** help to achieve optimal results and convenience.

## What's new: GE Profile™ slide-in and drop-in electric ranges

The maximum in cooking performance and versatility

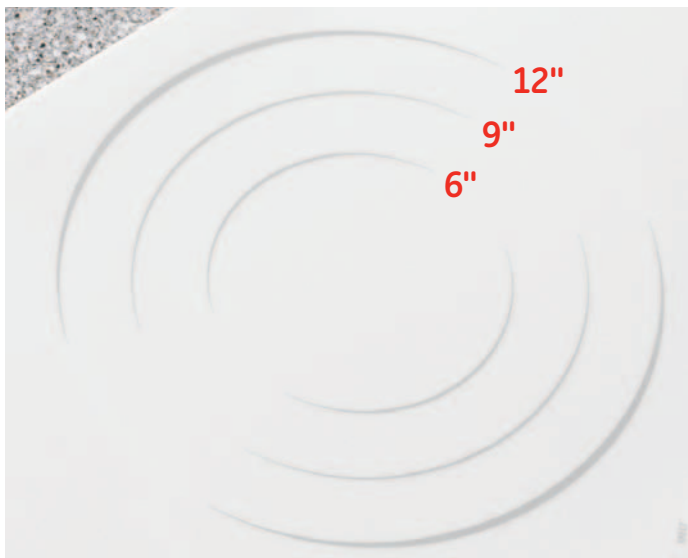

### 12"/9"/6" tri-ring element

- Three cooking areas in one element
- 3,000 watt element
- Accommodates various-sized pots and pans
- Available on JS968 and JD968



### Heavy-duty knobs (Stainless steel models only)


- Robust construction for long-lasting durability
- Enhances overall stainless appearance
- Available on JS998, JS968, JS905 and JD968



### Profile stainless sculptured handles

- Durable stainless steel construction
- Sculptured handle coordinates with other GE Profile appliances
- Available on JS998, JS968, JS905 and JD968

*Not all features available on all models.*

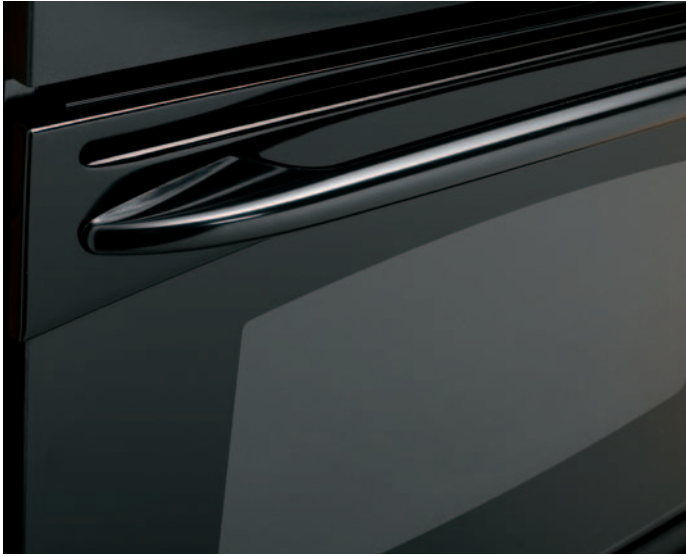

### Enhanced appearance

- Gloss handles and vents on all GE Profile white, bisque and black models
- Available on JS998, JS968, JS905 and JD968



### Self-clean oven racks

- Heavy-duty porcelain-enameled construction
- Approved for use during self-clean oven mode
- No-hassle cleaning
- Available on JS968 and JD968



# Feature gallery: GE Profile™ slide-in and drop-in electric ranges



**Glass touch controls**  
Feature a smooth glass design that is easy to clean.




**Hot surface indicator lights**  
Illuminates when the cooking surface is hot, adding convenience and safe caution.



**12"/9"/6" tri-ring element**  
Accommodates various-sized pots or pans for the ultimate in cooking versatility.



**Stainless sculptured handle**  
Provides a sleek and contemporary look that coordinates with other GE Profile appliances.

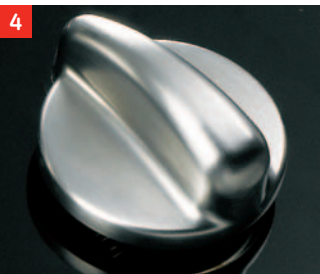

**Heavy-duty knobs**  
Add durability and brushed chrome for enhanced style and performance.



**Big ClearView™ window**  
Makes monitoring the progress of food easy.



GE Profile model JS968SK

Not all features available on all models.



### CleanDesign cooktop

Provides a seamless design to make cleaning quick and easy.



### Adjustable elements

Offers a convenient choice of using a 6" or 9" heating element, depending on the size of the pan.



### Bridge element

Combines three elements into one large cooking area, ideal for oversized pans.




### Warming zone

Provides low heat capability to keep foods warm and ready to serve.



### Gloss handle and vent trim

Adds a touch of subtle elegance that blends naturally with any appliance color.

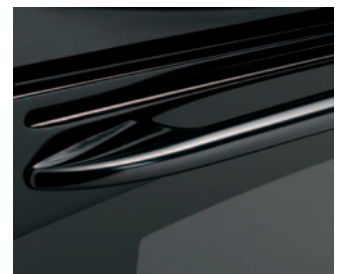

### Storage drawer

Offers additional space for cookware or kitchen accessories.






# The inside story: GE Profile™ slide-in and drop-in electric ranges



**Extra-large oven capacity**  
Gives consumers the room they need to cook large meals.

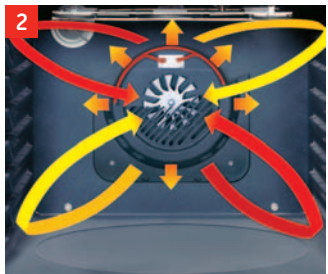

**PreciseAir™ convection system**  
Uses a third dual loop heating element and an innovative fan that reverses direction for optimal baking performance.



**Auto Recipe™ conversion**  
Automatically converts standard recipe temperatures to proper convection settings.



**Multiple mode convection**  
Offers three specialized modes for different cooking needs: single-rack convection baking, multi-rack convection baking, and convection roasting.

## Trivection™ technology



Uses a combination of three heating methods: thermal, convection and microwave, to produce succulent foods up to five times faster than a conventional oven.  
*Model JS998 only.*



**TrueTemp™ system**  
Provides even heat distribution and precise oven control.



**Certified Sabbath mode**  
Allows consumers to keep cooked foods warm on the Jewish Sabbath and Jewish holidays.





### Self-clean oven with Hidden bake interior

Conveniently cleans the oven cavity without the need for scrubbing, and the hidden bake element makes cleanup even easier.

### Heavy-duty self-clean oven racks

Double-coated porcelain racks provide extra support and no longer require hand cleaning.

### Dual element bake

Alternates the upper broiling element and the lower baking element for even heating and optimal results.

### Oven meat probe

Displays the internal temperature and signals when meats are cooked to perfection.



### Six embossed rack positions

Allows consumers to take full advantage of the oven capacity and adjust racks for oversized cookware.



### Broiler pan

Helps confine drippings that collect during roasting or broiling.

## Show and tell



### 12"/9"/6" tri-ring element

- Have a qualified technician hook-up the GE Profile electric slide-in range according to all installation instructions.
- Have the consumer turn on the large tri-ring element. Explain to them it is three elements in one—12", 9" or 6".
- Then have them turn the selector knob to see the change in the size of the heated surface. Tell them that the 12" element will accommodate pans up to 14" in diameter.
- Show them the second adjustable 5"/8" dual element and that it operates the same way.



### Sales demo mode

- Plug the range into any standard 120-volt outlet using **Pub. No. 3-A029** demo cord kit.
- Press and hold both the BAKE and BROIL pads at the same time, hold until SF appears in the display.
- Then, at the same time, touch the CLOCK and KITCHEN TIMER pads.
- The control will then continuously scroll through each oven function.
- To end the sales display mode touch the START pad.

#### **With the range plugged in, the following can be demonstrated:**

Oven Light & the Big ClearView™ Window

Digital time and temperature displays

Hi/Lo broil settings

Variable self clean time

Automatic self clean door latch

Convection bake control setting fan operates

Convection roast control setting fan operates

Reminder timer



Pub. No. 3-D241



### Tubular slide-in or drop-in display

Designed to display a Spacemaker® microwave or Advantium® oven and a slide-in or drop-in range.

72-1/2"H x 44"W x 25"D

**Pub. No. 4-D371**



### Free-standing or slide-in/drop-in display

Designed to display a free-standing, slide-in or drop-in range and an Advantium or Spacemaker microwave oven.

82"H x 44"W x 26-3/4"D

**Pub. No. 3-D131**



### Slide-in or drop-in display

Designed to display a slide-in or drop-in range.

44-3/4"H x 42"W x 27-1/2"D

**Pub. No. 3-D222**



### Trivection wall oven and slide-in demonstration cord kit

For use with 30" single/double wall ovens and slide-in ranges with Trivection technology. Provides power to Chef's Guide controls, convection fan, and lights but will not energize heating elements. Kit contains one cord, wire nuts, electrical tape and instructions.

**Pub. No. 3-A063 Trivection wall oven**

**Pub. No. 3-A073 Trivection slide-in**



### Free-standing and slide-in demonstration cord kit

For use with 30" free-standing electric and slide-in electric ranges with electronic controls. Provides power to the controls, convection fan and lights, but will not energize heating elements. Kit contains one cord and instructions.

**Pub. No. 3-A029**



### Built-in wall oven and drop-in demonstration cord kit

For use with 30", 27" and 24" single/double wall ovens and drop-in ranges with electronic controls. Provides power to the controls, convection fan and lights but will not energize heating elements. Kit contains one cord, wire nuts, electrical tape and instructions.

**Pub. No. 3-A011**



## GE Profile™ and GE® slide-in electric ranges

Available new models



GE Profile  
30" slide-in range  
JS998

- **Trivection™ technology**
- **Speed cook/Speed broil**
- Single-rack and multi-rack convection baking
- Auto Recipe conversion
- **Chef's Guide™ glass touch controls**
- Heavy-duty knobs
- Gloss handle and vent trim on color models
- Self-clean oven
- Extra-large 4.3 cu. ft. oven capacity
- PreciseAir™ convection system
- 6"/9" dual element
- Available in Stainless steel, True white and Black on black



GE Profile  
30" slide-in range  
JS968

- Self-clean oven
- **PreciseAir convection system**
- **Single-rack and multi-rack convection baking**
- **12"/9"/6" tri-ring element**
- Bridge element
- Heavy-duty knobs
- Stainless steel sculptured handle
- Gloss handle and vent trim on color models
- Available in Stainless steel, True white, True Bisque and Black on black



GE Profile  
30" slide-in range  
JS905

- Self-clean oven
- **Bridge element**
- Fifth element warming zone
- **Heavy-duty knobs**
- Stainless steel sculptured handle
- Gloss handle and vent trim on color models
- Available in Stainless steel, True white and Black on black

### GE Profile cooktop colors



True white



True bisque



Black/stainless steel

*Not all features available on all models.*



GE Profile  
30" slide-in range  
JS900

- **Profile appearance**
- Self-clean oven
- TrueTemp™ system
- 6"/9" dual element
- **Stainless steel sculptured handle**
- Gloss handle and vent trim on color models
- Available in Stainless steel, White on white, Bisque on bisque and Black on black



GE  
30" slide-in range  
JSP42

- Self-clean oven
- Electronic oven controls
- **6"/9" dual element**
- Super-large oven capacity
- **Ribbon heating elements**
- **Ceramic glass cooktop**
- Two oven racks
- Available in Stainless steel, White on white, Bisque on bisque and Black on black



GE  
30" slide-in coil range  
JSP39

- Self-clean oven
- Electronic oven controls
- Coil heating elements
- Super-large oven capacity
- Big ClearView™ window
- Frameless glass oven door
- Dual element bake
- Available in Stainless steel, White on white, Bisque on bisque and Black on black

#### GE® cooktop colors



True white




White on white



True bisque



Bisque on bisque



Black/stainless steel

## GE Profile™ and GE® drop-in electric ranges

Available new models



GE Profile  
30" drop-in range  
JD968

- Self-clean oven
- **PreciseAir™ convection system**
- **Single-rack and multi-rack convection baking**
- **12"/9"/6" tri-ring element**
- **Bridge element**
- **Heavy-duty knobs**
- Stainless steel sculptured handles
- Gloss handle and vent trim on color models
- Available in Stainless steel, True white, True bisque and Black on black



GE Profile  
30" drop-in range  
JD900

- Self-clean oven
- TrueTemp™ system
- 9"/6" dual element
- Stainless steel sculptured handles
- Gloss handle and vent trim on color models
- **Ribbon heating elements**
- **Ceramic glass cooktop**
- Available in Stainless steel, White on white, Bisque on bisque and Black on black



GE  
30" drop-in range  
JDP39

- **Self-clean oven**
- Electronic oven controls
- Coil heating elements
- Big ClearView™ window
- Lift-up porcelain cooktop
- Chrome drip bowls
- Frameless glass oven door
- Certified Sabbath mode
- Available in White on white, Bisque on bisque and Black on black





GE  
30" drop-in range  
JDS28

- Standard-clean oven
- Coil heating elements
- Electronic clock and timer
- Big ClearView window
- Lift-up porcelain cooktop
- Dual element bake
- Audible preheat signal
- Available in White on white and Bisque on bisque



Superb Performance

The **PreciseAir™ convection system** delivers optimal heat circulation and temperature accuracy in the oven for perfectly browned and evenly baked foods.



Exceptional Versatility

A variety of **adjustable elements** and a multi-rack convection oven help to achieve optimal results and convenience.



Distinguished Appearance

**Heavy-duty knobs and gloss handles and vents** provide an enhanced design balance.



# gas slide-in ranges

New product introductions October 2005  
GE Profile™ and GE® slide-in gas ranges



imagination at work





## Slide-in gas range quick pitch

The maximum in cooking performance and flexibility




### Distinguished Appearance

**Heavy-duty knobs and gloss handles and vents** provide an enhanced design balance. Coupled with the built-in appearance, the range blends with kitchen cabinetry for an overall sophisticated look.



### Easy Cleanability

**Sealed burners, self-clean oven and glass touch controls** make cleaning incredibly quick and easy.

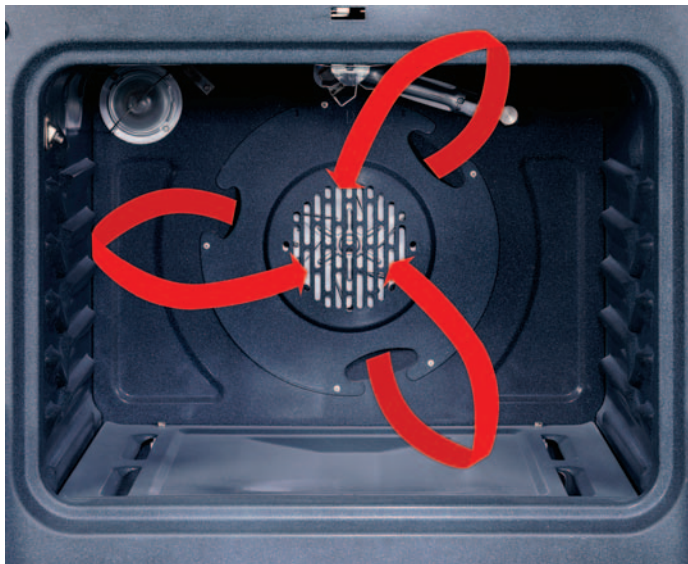

### Superior Performance

**Two-speed gas convection and PowerBoil™ 15,000 BTU and Precise Simmer burners** offer high-performance capabilities to help cooks do more at once.



### Remarkable Versatility

**With a variety of burner sizes and extra-large oven capacity,** every size cookware can be accommodated and several dishes can be cooked at once.



## What's new: GE Profile™ Slide-in gas ranges

The maximum in cooking performance and flexibility



### PowerBoil™ burner

- Maximum 15,000 BTU output
- Accelerates boiling
- Available on J2S968, JGS968 and JGS905



### Stainless sculptured handles

- Durable stainless steel construction
- Sculptured handle coordinates with other GE Profile appliances
- Available on J2S968, JGS968 and JGS905




### Heavy-duty knobs (stainless steel models only)

- Robust construction for long-lasting durability
- Enhances overall stainless appearance
- Available on J2S968, JGS968 and JGS905

Not all features available on all models.



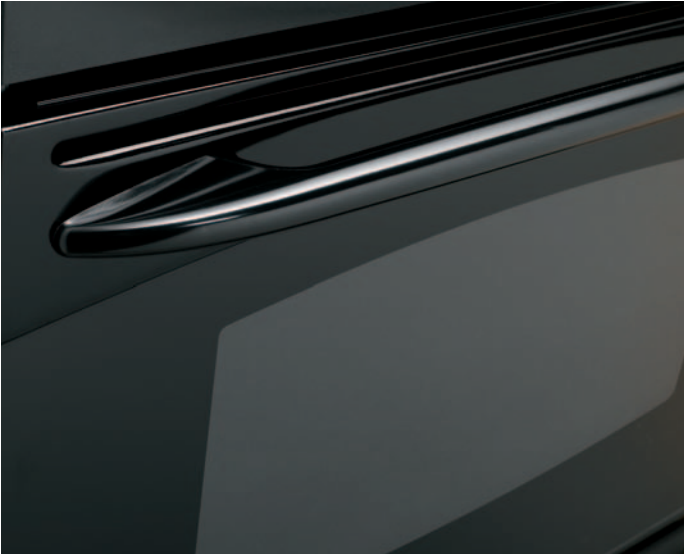

### Enhanced appearance

- Gloss handles and vents on all GE Profile white, bisque and black models
- Available on J2S968, JGS968 and JGS905



### Self-clean oven racks

- Heavy-duty porcelain-enameled construction
- Approved for using during self-clean mode
- No-hassle cleaning
- Available on J2S968 and JGS968

# Feature gallery: GE Profile™ slide-in gas ranges



**Glass touch controls**  
Feature a smooth glass design that is easy-to-operate and easy-to-clean.



**Gas on glass cooktop**  
Features a seamless ceramic glass surface that is easy-to-clean.



**Continuous grates**  
Allow for easy movement of pots and pans between burners.



**Precise simmer burner**  
Delivers a low setting of 140°, ideal for delicate foods and sauces.



**Storage drawer**  
Allows cookware to be placed in one organized location.



**Big ClearView™ window**  
Allows monitoring the progress of food easy.



GE Profile model JGS968SEK





### Heavy-duty knobs

Add durability and brushed chrome for enhanced style and performance.



### PowerBoil™ burner

Delivers 15,000 BTUs of forceful heat for rapid boiling.



### Dishwasher-safe grates

Feature durable construction for worry-free and effortless cleaning and maintenance.



### Gloss handle and vent trim

Adds a touch of subtle elegance that blends naturally with any appliance color.



### Sealed cooktop burners

Contain spills and make cleaning quick and easy.





# The inside story: GE Profile™ slide-in gas ranges



**Extra-large oven capacity**  
Gives consumers the room they need to cook large meals.



**Two-speed gas convection oven**  
Circulates air throughout the oven ensuring even baking and roasting results.



**Auto Recipe™ conversion**  
Automatically converts standard recipe temperatures to proper convection settings.



**Oven meat probe**  
Displays the internal temperature and signals when meats are cooked to perfection.



**TrueTemp™ system**  
Provides even heat distribution and maximum oven control.



**Certified Sabbath mode**  
Allows consumers to keep cooked foods warm on the Jewish Sabbath and Jewish holidays.







### In-oven broiling

Features a low and high setting for broiling foods inside the oven.



### Interior oven light

Makes viewing of the progress of cooking easy and convenient.



### Heavy-duty self-clean oven racks

Double coated porcelain racks provide extra support and no longer require hand cleaning.



### Proof mode

Creates the ideal temperature conditions for yeast activation.



### Warm mode

Keeps cooked foods warm before serving.



### Six embossed rack positions

Allows consumers to take full advantage of the oven capacity and adjust racks for oversized cookware.



## Show and tell



### Precise Simmer burner demo\*

- Have a qualified technician convert the range to LP and adjust the flame size according to installation instructions.
- Place a few squares of Baker's Semisweet chocolate in a thick-bottomed pan. Ignite the Precise Simmer burner and turn the flame down to the lowers setting.
- Stir periodically. After approximately 7 minutes the chocolate will be melted. Test the results by dipping a cookie for your customers.
- Explain that the low 140° temperature is ideal for melting chocolate or butter and simmering delicate sauces—virtually eliminating the risk of scorching.



### Continuous grates demo

- Using a large stock pot or a heavy cast-iron skillet, demonstrate how easy it is to slide the pot or pan from one burner to another.
- Explain that the connected grate design eliminates the need to lift and carry heavy pots and pans between burners.



### Sales demo mode

- Plug the range into any standard 120-volt outlet using **Pub. No. 3-A029** demo cord kit.
- Remove all tape, plastic and paper from inside the oven (just in case the oven control is left on bake or broil which can activate the glowbar igniter).
- Press and hold both the BAKE and BROIL pads at the same time, hold until SF appears in the display.
- Then, at the same time, touch the CLOCK and KITCHEN TIMER pads.
- The control will then continuously scroll through each oven function.
- To end the sales display mode touch the START pad.

#### With the range plugged in, the following can be demonstrated:

Oven Light & the Big ClearView™ Window

Digital time and temperature displays

Hi/Lo broil settings

Standard and Light self-clean settings

Automatic self-clean door latch

Convection bake control setting—fan operates low speed

Convection roast control setting—fan operates high speed

Reversing fan operation J2S968 PreciseAir™ convection system

Control Lock

Reminder timer





### Free-standing or slide-in/drop-in display

Designed to display a free-standing, slide-in or drop-in range and an Advantium or Spacemaker microwave oven.

82"H x 44"W x 26-3/4"D

**Pub. No. 3-D131**



### Tubular slide-in or drop-in display

Designed to display a slide-in or drop-in range and an Advantium™ or Spacemaker® microwave oven.

72-1/2"H x 44"W x 25"D

**Pub. No. 4-D371**



### Slide-in or drop-in display

Designed to display a slide-in or drop-in range.

44-3/4"H x 42"W x 27-1/2"D

**Pub. No. 3-D222**



### Free-standing and slide-in demonstration cord kit

For use with 30" free-standing electric and slide-in electric ranges with electronic controls. Provides power to the controls, convection fan and lights, but will not energize heating elements. Kit contains one cord and instructions.

**Pub. No. 3-A029**

## Slide-in gas ranges

Available new models



### GE Profile

#### 30" Slide-in dual-fuel range

J2S968

- **PreciseAir™ electric convection oven**
- **Electric convection bake/roast**
- Self-clean oven
- Glass touch controls
- PowerBoil™ 15,000 BTU burner
- Precise Simmer burner
- Dishwasher-safe grates
- Heavy-duty knobs on stainless model
- Gloss handle and vent trim on color models
- Available in Stainless Steel, True White, True Bisque and Black on black

### GE Profile

#### 30" Slide-in gas range

JGS968

- **Two-speed gas convection oven**
- **Convection bake/roast**
- Self-clean oven
- Glass touch controls
- PowerBoil 15,000 BTU burner
- Precise Simmer burner
- Dishwasher-safe grates
- Heavy-duty knobs on stainless model
- Gloss handle and vent trim on color models
- Available in Stainless Steel, True White, True Bisque and Black on black



GE Profile  
30" Slide-in gas range  
JGS905


- Self-clean oven
- **PowerBoil 15,000 BTU burner**
- Precise Simmer burner
- Extra-large oven capacity
- Electronic oven controls
- Dishwasher-safe grates
- Ceramic glass cooktop
- **Heavy-duty knobs on stainless model**
- Gloss handle and vent trim on color models
- Available in Stainless Steel, True White, True Bisque and Black on black



GE  
30" Slide-in gas range  
JGSP28

- Self-clean oven
- Sealed cooktop burners
- Electronic oven controls
- Continuous grates
- Two oven racks
- ClearView™ window



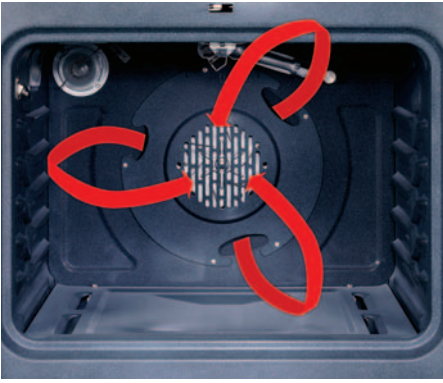

Superior Performance

**Two-speed gas convection and PowerBoil™ 15,000 BTU and Precise Simmer burners** offer high-performance capabilities to help cooks do more at once.



Remarkable Versatility

**With a variety of burner sizes and extra-large oven capacity,** every size cookware can be accommodated and several dishes can be cooked at once.



Distinguished Appearance

**Heavy-duty knobs and gloss handles and vents** provide an enhanced design balance. Coupled with the built-in appearance, the range blends with kitchen cabinetry for an overall sophisticated look.



# dual- fuel ranges

New product introductions October 2005  
GE Profile™ free-standing and slide-in dual-fuel ranges



# Dual-fuel. The best of both worlds!

Cook like a pro with  
the responsiveness of  
gas on the cooktop  
and the performance  
of electric in the oven!



—Alton Brown Host/Writer  
of Food Network's  
Good Eats and author  
of "I'm Just Here for the Food"




## Gas on the cooktop

Fast and responsive gas burners deliver instant heat and precise temperature control.



## Electric in the oven

Upper and lower element baking provides even browning and roasting.

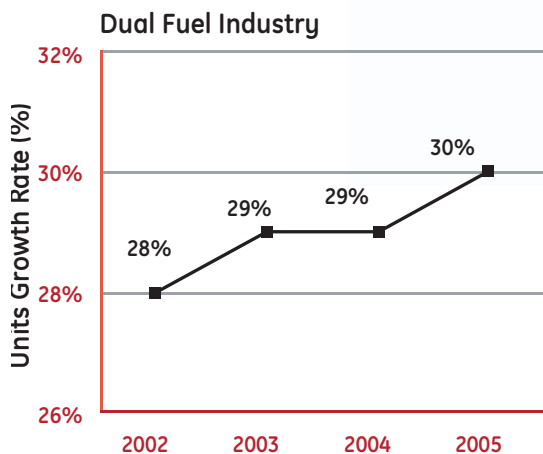

## Growing demand

Dual-fuel represents a small segment of the market, however it is one of the fastest growing segments. It has averaged close to 30% year-over-year increases since 2002.





## Free-standing and slide-in dual fuel ranges quick pitch

The best of both cooking worlds



### Enhanced Appearance

**Heavy-duty knobs and gloss handles and vent trim** incorporate modern styling and durable construction to create a high-end appearance that's impressive and practical.



### Easy Cleanability

**Sealed burners, self-clean oven and dishwasher-safe grates** make cleaning incredibly quick and easy, helping maintain the attractive appearance of the range.



### Advanced Performance

Dual-fuel ranges offer the responsiveness of gas on the cooktop with the performance of an electric oven.



### Remarkable Versatility

**PowerBoil™ and Precise simmer burners** offer high-performance capabilities to help cooks do more at once.

## What's new: GE Profile™ free-standing 120-volt dual-fuel range—J2B912

The maximum in cooking performance and versatility

Only GE has it!



### 120-volt installation

- Plug into any standard 120V/15amp electrical outlet
- Available on J2B912



### PowerBoil™ burner

- Maximum 17,000 BTU output
- Accelerates boiling
- Available on J2B912



### Warming drawer

- Helps keep meals coordinated, warm and ready to serve
- Provides multiple settings from 140° to 220°.
- Available on J2B912

*Not all features available on all models.*





### Profile stainless sculptured handles

- Durable stainless steel construction
- Sculptured handle coordinates with other GE Profile appliances
- Available on J2B912

### Enhanced appearance

- Gloss handle and vent trim on white and black models
- Available on J2B912



### Center oval burner

- Adds fifth burner to cooktop
- Interchangeable grate removes to insert provided griddle accessory
- Available on J2B912



### Non-stick griddle

- Replaces center grate
- Cooks multiple items like pancakes, sandwiches, quesadillas or sausages
- Flat, non-stick surfaces
- Provides uniform heat distribution from front to back of griddle
- Available on J2B912

Feature gallery: GE Profile™ free-standing 120-volt dual-fuel range—J2B912



**QuickSet VI glass touch controls\***

Features a smooth glass design that is easy-to-operate and easy-to-clean.



**Center oval burner**

Adds a fifth element to the center of the cooktop to accommodate large cookware and deliver ideal results.



**Non-stick griddle**

Offers a flat cooking surface, placed over the center oval burner, for cooking multiple foods at once.



**Deep recessed cooktop**

Helps contain spills for easy cleaning.



**Warming drawer**

Provides variable temperature control for keeping foods warm.



**PowerBoil™ burner**

Delivers 17,000 BTUs of forceful heat for rapid boiling.



GE Profile model J2B912





### Precise simmer burner

Delivers a low setting of 140°, ideal for delicate foods and sauces.



### Continuous grates

Allow for easy movement of pots and pans between burners.



### Sealed cooktop burners

Contain spills and make cleaning quick and easy.



### Big ClearView™ window

Allows monitoring the progress of food easy.



### Dishwasher-safe grates

Feature durable construction for effortless cleaning and maintenance.





The inside story: GE Profile™ free-standing 120-volt dual-fuel ranges—J2B912



**5.0 cu. ft. extra-large oven capacity**  
Gives consumers the room they need to cook large meals.



**Broiler pan**  
Helps confine drippings that collect during roasting or broiling to make cleaning easy.



**Fast Preheat**  
Includes a gas assist to increase heat output and reduce the wait it takes to reach the temperature setting.




**TrueTemp™ system**  
Provides even heat distribution and maximum oven control.



**Certified Sabbath mode**  
Allows consumers to keep cooked foods warm on the Jewish Sabbath and Jewish holidays.



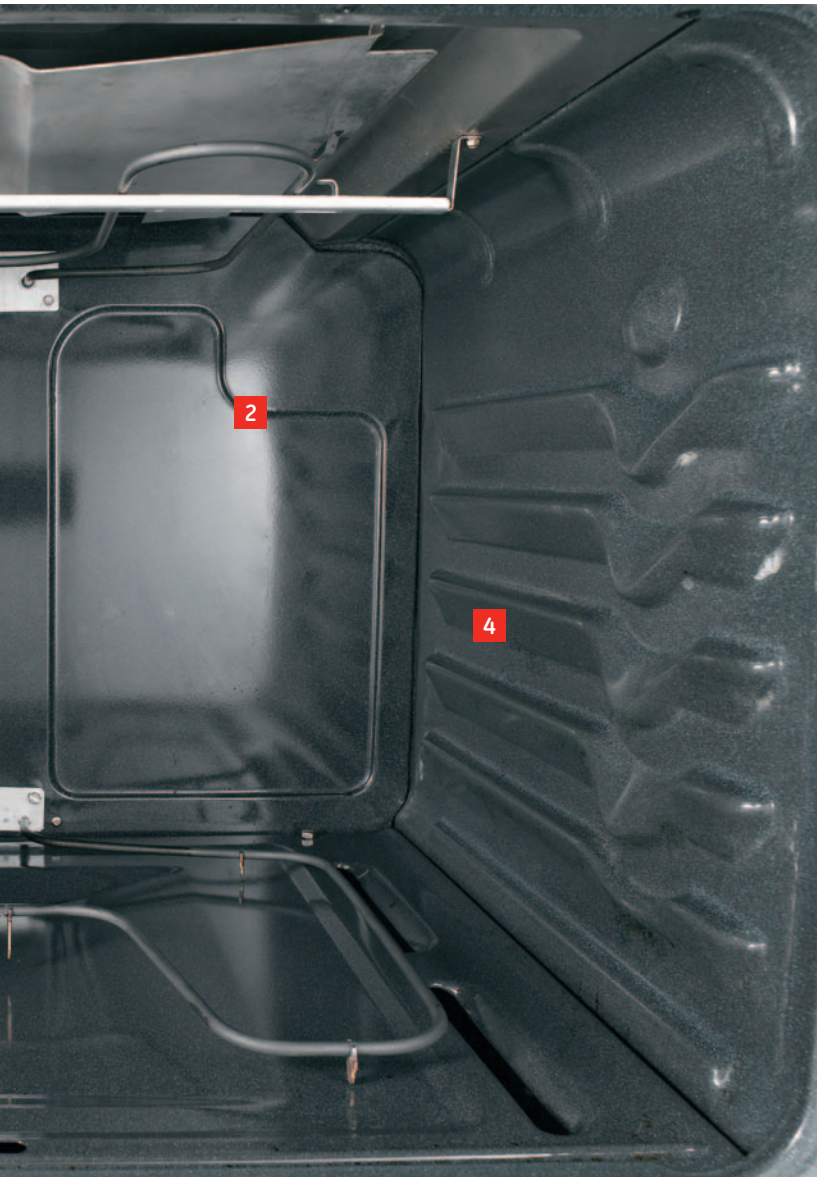

### Dual element bake

Feature upper and lower elements that deliver even heating and optimal results.



### Interior oven light

Makes viewing of the progress of cooking easy and convenient.



### Two oven racks

Feature a durable construction to help accommodate any size or type of cookware.



### Self-clean oven

Conveniently cleans the oven without the need for scrubbing.



### Six embossed rack positions

Allows consumers to take full advantage of the oven capacity and adjust racks for oversized cookware.



### Warming drawer

Provides variable temperature control for keeping foods warm.





Feature gallery: GE Profile™ free-standing 240-volt dual-fuel range—J2B918



**QuickSet VI glass touch controls\***  
Features a smooth glass design that is easy-to-operate and easy-to-clean.



**Deep recessed cooktop**  
Helps contain spills for easy cleaning.



**Continuous grates**  
Allow for easy movement of pots and pans between burners.



**Precise simmer burner**  
Delivers a low setting of 140°, ideal for delicate foods and sauces.



**Lower oven**  
Offers an additional 1.0 cu. ft. of capacity for convenient baking from 140°–450°.



**Big ClearView™ window**  
Allows monitoring the progress of food easy.



GE Profile model J2B918

*\*Traditional QuickSet VI controls on stainless models.  
Not all features available on all models.*





### PowerBoil™ burner

Delivers 17,000 BTUs of forceful heat for rapid boiling.



### Center oval burner

Adds a fifth element to the center of the cooktop to accommodate large cookware and deliver ideal results.



### Non-stick griddle

Offers a flat cooking surface, placed over the center oval burner, for cooking multiple foods at once.



### Sealed cooktop burners

Contain spills and make cleaning quick and easy.



### Dishwasher-safe grates

The porcelain-coated cast-iron grates are easy to clean.





The inside story: GE Profile™ free-standing 240-volt dual-fuel range—J2B918



5.0 cu. ft. super-large oven capacity

Gives consumers the room they need to cook large meals.



Electric convection oven

Combines upper and lower elements with a circulating fan for steady heat distribution and even results.



Auto Recipe™ conversion

Automatically converts standard recipe temperatures to proper convection settings.



Oven meat probe

Displays the internal temperature and signals when meats are cooked to perfection.



Lower oven

Adds 1.0 cu. ft. capacity to bake at a separate temperature.



J2B918 interior





### Self-clean oven

Conveniently cleans the oven without the need for scrubbing.



### Six embossed rack positions

Allows consumers to take full advantage of the oven capacity and adjust racks for oversized cookware.



### Certified Sabbath mode

Allows consumers to keep cooked foods warm on the Jewish Sabbath and Jewish holidays.



### Interior oven light

Makes viewing of the progress of cooking easy and convenient.



### Three oven racks

Feature a durable construction to help accommodate any size or type of cookware.





# Feature gallery: GE Profile™ slide-in 240-volt dual-fuel range—J2S968



**Gas on glass cooktop**  
Features a frameless surface that is easy to clean.



**Continuous grates**  
Allow for easy movement of pots and pans between burners.



**Integrated design**  
Aligns with cabinetry for a smooth, built-in look.



**Big ClearView™ window**  
An extra-large window and two halogen oven lights make monitoring the progress of food easy.



**Heavy-duty knobs**  
Add durability and brushed chrome for enhanced style and performance.



GE Profile model J2S968



### PowerBoil™ burner

Delivers 15,000 BTUs of forceful heat for rapid boiling.



### Precise Simmer burner

Delivers a low setting of 140°, ideal for delicate foods and sauces.



### Glass touch controls

Feature a smooth glass design that is easy-to-operate and easy-to-clean.



### Gloss handle and vent trim

Adds a touch of subtle elegance that blends naturally with any appliance color.




### Dishwasher-safe grates

The porcelain-coated cast-iron grates are easy to clean.





# The inside story: GE Profile™ slide-in 240-volt dual-fuel range—J2S968



## PreciseAir™ convection system

Uses an innovative fan that reverses direction for optimal air and heat circulation.



## Multiple mode convection

Offers three specialized modes for different cooking needs: single-rack convection baking, multi-rack convection baking and convection roasting.



## Extra-large oven capacity

Generous capacity gives consumers the room they need to cook large meals.



## Oven meat probe

Displays the internal temperature and signals when meats are cooked to perfection.



## Certified Sabbath mode

Allows consumers to keep cooked foods warm on the Jewish Sabbath and Jewish holidays.



## Heavy-duty self-clean oven racks

Double-coated porcelain racks provide extra support and no longer require hand cleaning.







### Proof mode

Creates the ideal temperature for yeast activation.



### Warm mode

Keeps cooked foods warm before serving.



### Optional closed-door broiling

Offers the cooking performance of open-door broiling without the heat loss.



### Self-clean oven with Hidden bake interior

Conveniently cleans the oven cavity without the need for scrubbing and the Hidden bake element makes cleanup even easier.



### Six rack positions

Allows consumers to take full advantage of the oven capacity and adjust racks for oversized cookware.



## Show and tell



### Precise Simmer burner demo\*

- Have a qualified technician convert the range to LP and adjust the flame size according to installation instructions.
- Place a few squares of Baker's Semisweet chocolate in a thick-bottomed pan. Ignite the Precise Simmer burner and turn the flame down to the lowers setting.
- Stir periodically. After approximately 7 minutes the chocolate will be melted. Test the results by dipping a cookie for your customers.
- Explain that the low 140° temperature is ideal for melting chocolate or butter and simmering delicate sauces—virtually eliminating the risk of scorching.



### Continuous grates demo

- Using a large stock pot or a heavy cast-iron skillet, demonstrate how easy it is to slide the pot or pan from one burner to another.
- Explain that the connected grate design eliminates the need to lift and carry heavy pots and pans between burners.





### Sales demo mode

- Plug the range into any standard 120 volt outlet.
- Remove all tape, plastic and paper from inside the oven (just in case the oven control is left on bake or broil which can activate the glowbar igniter).
- Press and hold both the BAKE and BROIL pads at the same time, hold until SF appears in the display.
- Then, at the same time, touch the CLOCK and KITCHEN TIMER pads.
- The control will then continuously scroll through each oven function.
- To end the sales display mode touch the START pad.

### With the range plugged in, the following can be demonstrated:

Oven Light & the Big ClearView™ Window

Digital time and temperature displays

Hi/Lo broil settings

Standard and Light self-clean settings

Automatic self-clean door latch

Convection bake control setting—fan operates low speed

Convection roast control setting—fan operates high speed

Reversing fan operation J2S968 Precise Air™ convection system

Control Lock

Reminder timer



### Free-standing and slide-in demonstration cord kit

For use with 30" free-standing electric and slide-in electric ranges with electronic controls. Provides power to the controls, convection fan and lights, but will not energize heating elements. Kit contains one cord and instructions.

**Pub. No. 3-A029**

## Show and tell



### Tubular free-standing display

Designed to display a free-standing range and an Advantium™ or Spacemaker® microwave oven.

72-1/2"H x 32-1/4"W x 25"D

**Pub. No. 4-D001**



### Free-standing or slide-in/drop-in display

Designed to display a free-standing, slide-in or drop-in range and an Advantium or Spacemaker microwave oven.

82"H x 44"W x 26-3/4"D

**Pub. No. 3-D131**



### Tubular slide-in or drop-in display

Designed to display Spacemaker® microwave or Advantium® oven and slide-in or drop-in range.\*

72-1/2"H x 44"W x 25"D

**Pub. No. 4-D371**



### Slide-in or drop-in display

Designed to display a slide-in or drop-in range.\*

44-3/4"H x 42"W x 27-1/4"D

**Pub. No. 3-D222**

\*Not designed for coil drop-in product



## Free-standing and slide-in dual-fuel ranges

Available new models



GE Profile™  
30" slide-in gas range  
J2S968

- 240-volt installation
- **PreciseAir™ convection system**
- Extra-large, self-clean oven
- **Gas on glass ceramic cooktop**
- PowerBoil™ 15,000 BTU burner
- Glass touch controls
- Precise Simmer burner
- Continuous dishwasher-safe grates
- Sealed cooktop burners
- TrueTemp™ system
- Big ClearView™ window
- **Heavy-duty knobs on stainless models**
- **Gloss handle and vent trim on color models**
- Available in Stainless steel, True white, True bisque and Black on black



GE Profile  
30" free-standing double-oven  
gas range  
J2B918

- **240-volt installation**
- **Electric convection oven**
- Extra-large, self-clean oven
- Center oval burner
- Non-stick griddle
- **Lower oven**
- Deep recessed cooktop
- QuickSet VI glass touch controls\*
- PowerBoil 17,000 BTU burner
- Precise Simmer burner
- Continuous dishwasher-safe grates
- Sealed cooktop burners
- Available in Stainless steel, White on white, Bisque on bisque and Black on black



GE Profile  
30" free-standing gas range  
J2B912


- 120-volt installation
- Electric oven with gas assist
- Self-clean oven
- Extra-large, self-clean oven
- Center oval burner
- Non-stick griddle
- Deep recessed cooktop
- QuickSet VI glass touch controls\*
- PowerBoil 17,000 BTU burner
- Precise Simmer burner
- Warming drawer
- Continuous dishwasher-safe grates
- Available in Stainless steel, White on white, Bisque on bisque and Black on black

\*Traditional QuickSet VI controls on stainless models.  
Not all features available on all models.


GE Profile 30" slide-in electric range with Trivection technology

GE Profile™	
JS998SK	
Features	
Oven	Trivection/Convection
Oven capacity	4.3 cu. ft.
Trivection technology	●
Speed baking mode	●
Speed broiling mode	●
PreciseAir convection system	●
Multi-rack convection bake	●
Single-rack convection bake	●
Convection roast	●
Auto Recipe conversion	●
Self-clean oven w/Delay Clean option	●
Light self-clean option	●
Automatic self-clean oven door lock	●
Oven racks	3 heavy-duty
TrueTemp system	●
Variable broil/Six-pass broil element	●
Dual bake element	●
Ceramic-glass cooktop	Patterned black
Overhanging cooktop	●
Dual 6 7/9" heating element	1 ribbon (2500W)
8" heating elements	1 ribbon (2000)
6" heating elements	2 ribbon (1500W)
Infinite heat controls	●
Chef's Guide controls	Glass touch
Programmable recipe recall	●
Proof mode	●
Warm mode	●
Defrost mode	●
Help mode	●
Optional closed door broiling	●
Temperature display	●
Delay bake option w/cook & hold	●
C° and F° programmable	●
Audible preheat signal	●
Auto oven shut-off w/override	●
Electronic clock and kitchen timer	●
Control lock capability	●
Hot surface indicator lights	4
Heating element "ON" indicator light	●
Certified Sabbath mode	●
Interior oven lights	2 halogen
Storage drawer	Stainless
Extra-large broiler pan with grid	●
Roasting rack	●
Trivection cookbook	●
Dishwasher-safe knobs	●
Appearance	
Color appearance*	SS
Frameless oven doors	Stainless steel
Big View window	●
Sculptured handles	Stainless look
Heavy-duty knobs	●
Weights & Dimensions	
Approx. shipping wt. (lbs.)	259
Overall oven interior dimensions (WxHxD in inches)	24 x 17-1/2 x 17-1/2
Power/Ratings	
KW rating @	240V 12.8
	208V 9.6
Amps @	240V 40
	208V 40
Convection wattage	2500
Broiler/bake wattage	2500/2500
*SS = Stainless steel.	

30" slide-in range dimensions (in inches)  
Model JS998

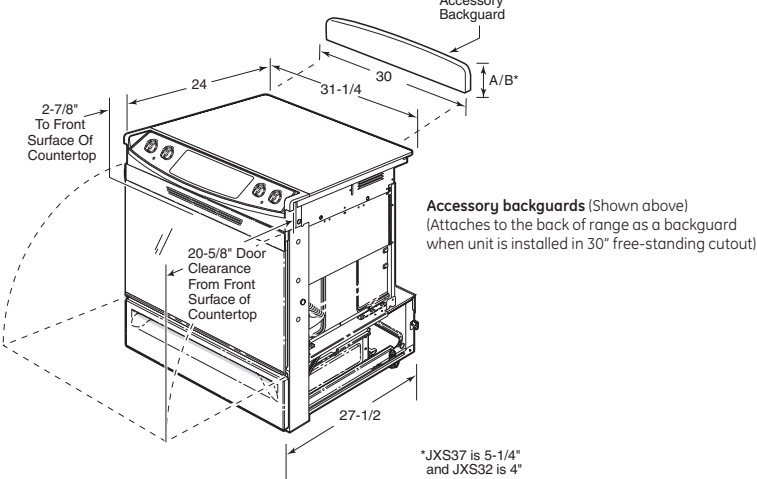

Model	A (5-1/4")	B (4")
JS998SK	JXS37BB	JXS32SS

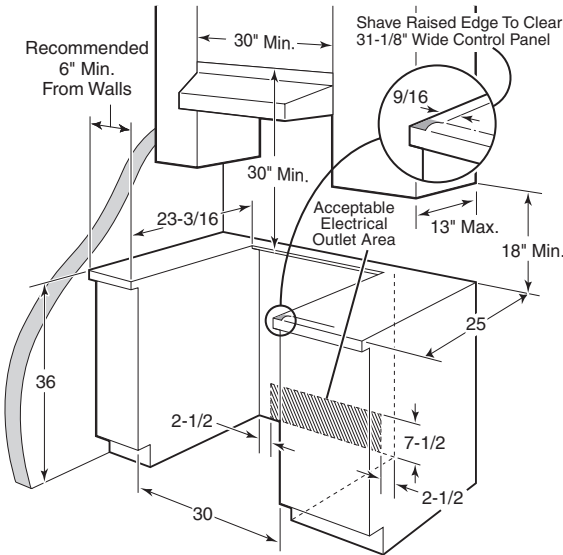

**Note:** Cabinets installed adjacent to slide-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

**Note:** To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

**Note:** Door handle protrudes 2-3/4" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Receptacle locations:** For all 30" Slide-in Ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.



Listed by  
Underwriters  
Laboratories



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.




## 30" slide-in electric ranges

	GE Profile™			GE®		
	JS968SK JS968TK JS968KK JS968BK	JS905SK JS905TK JS905BK	JS900SK JS900WK JS900CK JS900BK	JSP42SK JSP42WK JSP42CK JSP42BK	JSP39SK JSP39WK JSP39CK JSP39BK	JSS28WK JSS28CK JSS28BK
<b>Features</b>						
Self-clean oven with Delay Clean option	●	●	●	●	●	Standard clean
Light self-clean option	●	●	●	●	●	
Variable cleaning time	●	●	●	●	●	
Automatic self-clean oven door lock	●	●	●	●	●	
Oven racks	3 heavy-duty porc.-enameled	2 heavy-duty	2	2	2	2
Hidden bake oven interior	●					
TrueTemp™ system	●	●	●	●	●	●
Variable broil/Six-pass broil element	●	●	●	●		
	Patterned black True white True bisque Patterned black	Patterned black True white Patterned black	Patterned black Patterned white Patterned bisque Patterned black	Patterned black Patterned white Patterned bisque Patterned black		
Ceramic-glass cooktop						
Overhanging cooktop	●	●	●	●	●	●
6"/9"/12" tri-ri element	1 (3000W)					
6"/9" dual element		1 ribbon (2500W)	1 ribbon (2500W)	1 ribbon (2500W)		
8" heating elements			2 ribbon (2000W)	2 ribbon (2000W)	2 plug-in	2 plug-in
7" heating elements	2 ribbon (1800W)	2 ribbon (1800W)				
Bridge element	1 ribbon (800W)	1 ribbon (800W)				
Total wattage	4400W	4400W				
6" heating element	1 ribbon (1200W)	1 ribbon (1500W)	1 ribbon (1500W)	1 ribbon (1500W)	2 plug-in	2 plug-in
Warming zone	1 ribbon (120W)	1 ribbon (120W)				
Infinite heat controls	●	●	●	●	●	●
PreciseAir™ convection system	●					
Convection bake	Multi-/Single-rack					
Convection roast	●					
Auto Recipe™ conversion	●					
SmartSet controls	Glass touch	●	●	●	●	●
Proof mode	●					
Warm mode	●					
Oven meat probe	●					
Optional closed door broiling	●	●	●	●	●	●
Temperature display	●	●	●	●	●	●
Start pad	●	●	●	●	●	●
Delay bake option	●	●	●	●	●	
C° or F° programmable	●	●	●	●	●	
Audible preheat signal	●	●	●	●	●	●
Auto oven shut-off w/override	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	
Electronic clock/kitchen timer	●	●	●	●	●	●
Hot surface indicator lights	4	4	4	4		
Heating element "ON" indicator light	●	●	●	●	●	●
Certified Sabbath mode	●	●	●	●	●	
Interior oven light	Halogen	●	●	●	●	●
	Stainless White Bisque Black	Stainless White Black	Stainless White Bisque Black	Stainless White Bisque Black	Stainless White Bisque Black	White Bisque Black
Storage drawer						
Broiler pan with grid	●	●	●	●	●	●
Roasting rack	●					
Convection cookbook	●					
<b>Appearance</b>						
	SS WW CC BB	SS WW BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	WW CC BB
Color appearance*	Stainless White Bisque Black	Stainless White Black	Stainless White Bisque Black	Stainless White Bisque Black	Stainless White Bisque Black	White Bisque Black
Frameless glass oven door*	Big ClearView™	Big ClearView	Big ClearView	Big ClearView	Big ClearView	Big ClearView
Oven door with window	SS models only	SS models only				
Heavy-duty knobs	●	●	●			
Dishwasher-safe knobs	●	●	●			
	Sculptured stainless Sculptured white Sculptured bisque Sculptured black	Sculptured stainless Sculptured white Sculptured black	Sculptured stainless Sculptured white Sculptured bisque Sculptured black	CM*	CM*	CM*
Oven door handle	Sculptured stainless Sculptured white Sculptured bisque Sculptured black	Sculptured stainless Sculptured white Sculptured black	Sculptured stainless Sculptured white Sculptured bisque Sculptured black	Stainless Recessed white Recessed bisque Recessed black	Stainless Recessed white Recessed bisque Recessed black	Recessed white Recessed bisque Recessed black
Storage drawer handle						
<b>Weights &amp; Dimensions</b>						
Overall oven interior dimensions (WxHxD in inches)	24 x 16-1/4 x 18-1/8	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4
Approx. shipping wt. (lbs.)	248	237	237	181	172	155
<b>Power/Ratings</b>						
KW rating @	240V 208V	12.1 9.1	11.6 8.7	11.6 8.7	10.8 8.1	10.8 8.1
Amps @	240V 208V	40 40	40 40	40 40	40 40	40 40
Convection wattage	2500					
Broiler/Bake wattage	3600/2700	3600/3400	3600/3400	3600/3400	3300/3410	3300/3410


\*SS = Stainless steel, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door, CM = Color-Matched indicates color of drawer matches range cooktop (either white or bisque)

## Counter cutout dimensions (in inches)

If you are NOT using the Filler strip or Backguard:



If you are using the Filler strip or Backguard:



**Note:** Cabinets installed adjacent to slide-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

**Note:** To reduce possibility of scorching the side walls above the cooktop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

**Note:** Door handle protrudes 2-3/4" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Receptacle locations:** For all 30" slide-in ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.





All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories

30" slide-in range dimensions (in inches)  
All models

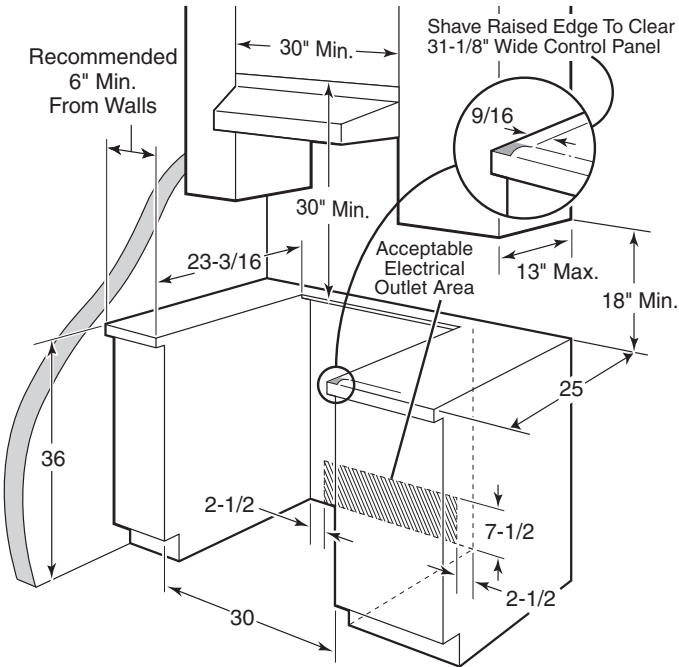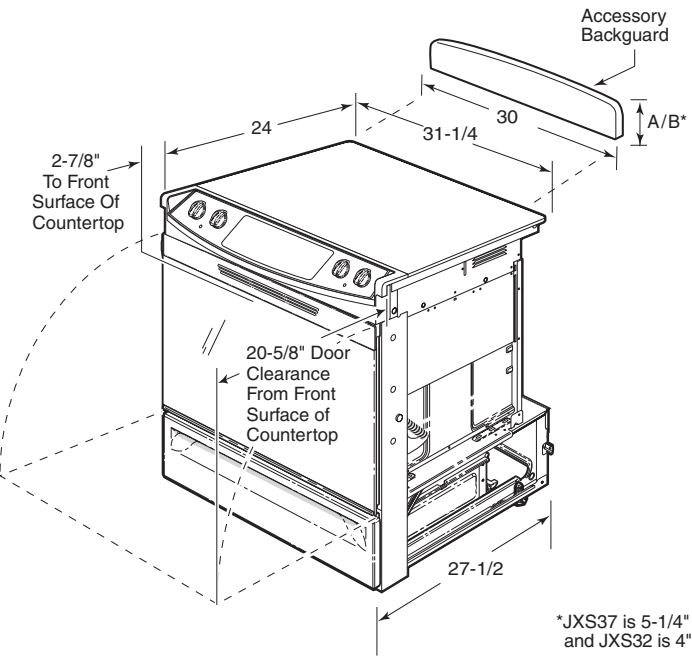

Optional kits for slide-in electric ranges (models JS968 and J2905)  
(Available at additional cost)

**Accessory backguards—  
GE Profile™ and GE®  
models**  
(Attaches to the back of  
range as a backguard  
when unit is installed in  
30" free-standing cutout)

Model	A 5-1/4"	B 4"
JS968SK	JXS37BB	JXS32SS
JS968TK	JXS37WW	JXS32WW
JS968KK	JXS37CC	JXS32CC
JS968BK	JXS37BB	JXS32BB
JS905SK	JXS37BB	JXS32SS
JS905TK	JXS37WW	JXS32WW
JS905BK	JXS37BB	JXS32BB
JS900SK	JXS37BB	JXS32SS
JS900WK	JXS37WW	JXS32WW
JS900CK	JXS37CC	JXS32CC
JS900BK	JXS37BB	JXS32BB
JSP42SK	JXS37BB	JXS32SS
JSP42WK	JXS37WW	JXS32WW
JSP42CK	JXS37CC	JXS32CC
JSP42BK	JXS37BB	JXS32BB
JSP39SK	—	JXS32SS
JSP39WK	—	JXS32WW
JSP39CK	—	JXS32CC
JSP39BK	—	JXS32BB
JSS28WK	—	JXS32WW
JSS28CK	—	JXS32CC
JSS28BK	—	JXS32BB

**Body sides**  
(Slide-in ranges are sold  
without sides installed. Can  
be installed on either left or  
right when unit has one  
exposed side [no cabinet  
adjacent]. Kit contains 1  
body side)  
JXS77WW—White  
JXS77CC—Bisque  
JXS77BB—Black/Stainless

**Optional lower trim kits**  
(If counter height is greater  
than 36-1/2", a lower trim  
kit is recommended to  
extend the useful height  
to 38" maximum)  
JXS56WW—White  
JXS56CC—Bisque  
JXS56BB—Black/Stainless

**Note:** Maintain at least 6" distance from nearest combustible surface.



## 30" drop-in electric ranges

	GE Profile™		GE®	
	JD968SK JD968TK JD968BK	JD900WK JD900WK JD900BK	JDP39WK JDP39CK JDP39BK	JDS28WK JDS28CK
<b>Features</b>				
Self-clean oven w/Delay Clean option	●	●	●	Standard-clean
Light self-clean option	●	●		
Variable cleaning time	●	●	●	
Automatic self-clean oven door lock	●	●		
Oven racks	3 heavy-duty porc.-enameled	2	2	2
CleanDesign oven/ hidden bake element	●			
TrueTemp™ system	●	●	●	●
Variable broil/Six-pass broil element	●	●		
Ceramic-glass cooktop	Patterned black True white Patterned black	Patterned white Patterned bisque Patterned black		
6 7/8" tri-ring element	●			
6 7/8" dual element		1 ribbon (2500W)		
8" heating elements		2 ribbon (2000W)	2 plug-in	2 plug-in
7" heating elements	2 ribbon (1800W)			
Bridge element	1 ribbon (800W)			
Total wattage	4400W			
6" heating element	1 ribbon (1200W)	1 ribbon (1500W)	2 plug-in	2 plug-in
Warming zone	1 ribbon (120W)			
Infinite heat controls	●	●	●	●
PreciseAir™ convection system	●			
Multi-rack convection bake	●			
Single rack convection bake	●			
Convection roast	●			
Auto Recipe™ conversion	●			
SmartSet controls	Glass touch	●	●	●
Proof mode	●			
Warm mode	●			
Oven meat probe	●			
Temperature display	●	●	●	●
Delay bake option	●	●	●	●
C° or F° programmable	●	●		
Audible preheat signal	●	●	●	●
Auto oven shut-off w/override	●	●	●	●
Control lock capability	●	●	●	●
Electronic clock/kitchen timer	●	●	●	●
Hot surface indicator lights	4	4		
Heating element "ON" indicator light	●	●	●	●
Certified Sabbath mode	●	●	●	
Interior oven light	Halogen	●	●	●
Broiler pan with grid	●	●	●	●
Roasting rack	●			
<b>Appearance</b>				
Color appearance*	SS WW BB	WW CC BB	WW CC BB	WW CC
Frameless glass oven door*	Stainless White Black	White Bisque Black	White Bisque Black	White Bisque
Oven door with window	Big ClearView™	Big ClearView	Big ClearView	Big ClearView
Heavy-duty knobs	SS models only			
Dishwasher-safe knobs	●	●		
Oven door handle	Sculptured stainless Sculptured white Sculptured black	Sculptured white Sculptured bisque Sculptured black	CM*	CM*
Convection cookbook	●			
<b>Weights &amp; Dimensions</b>				
Overall oven interior dimensions (WxHxD in inches)	24 x 16-1/4 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4
Approx. shipping wt. (lbs.)	175	170	144	128
<b>Power/Ratings</b>				
KW rating @	240V 208V	12.1 9.1	11.6 8.7	11.6 8.7
Amps @	240V 208V	40 40	40 40	40 40
Convection wattage	2500			
Broiler/bake wattage	3600/2700	3600/3400	3400/2585	3400/2585

\*SS = Stainless steel, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door, CM=Color-matched indicates color of drawer matches range cooktop (either white or bisque)

**Optional kits for drop-in electric ranges** (Available at additional cost)

**Maintop filler (JD968/JDP47)**

(Fills gap between cooktop and wall when unit is installed in 30" free-standing cutout)

JXS66WW—White

JXS66CC—Bisque

JXS66BB—Black/Stainless

**Note:** Cabinets installed adjacent to drop-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

**Note:** Door handle protrudes 2-3/4" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

**Drop-in ranges are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.**

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

**IMPORTANT:** 30" DROP-IN RANGES ARE DESIGNED TO HANG FROM THE COUNTERTOP. THEY DO NOT REST ON THE FLOOR. FOR INSTALLATION ALTERNATIVES, REFER TO INSTALLATION INSTRUCTIONS PACKED WITH PRODUCT.





Listed by  
Underwriters  
Laboratories

## All models

Model	A 5-1/4"	B 4"
JD9685K	JXS37BB	JXS32SS
JD9687K	JXS37WW	JXS32WW
JD968BK	JXS37BB	JXS32BB
JD900WK	JXS37WW	JXS32WW
JD900CK	JXS37CC	JXS32CC
JD900BK	JXS37BB	JXS32BB
JDP39WK	—	JXS32WB
JDP39CK	—	JXS32CC
JDP39BK	—	JXS32BB
JDS28WK	—	JXS32WW
JDS28BK	—	JXS32BB

**Accessory backguards** (Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)

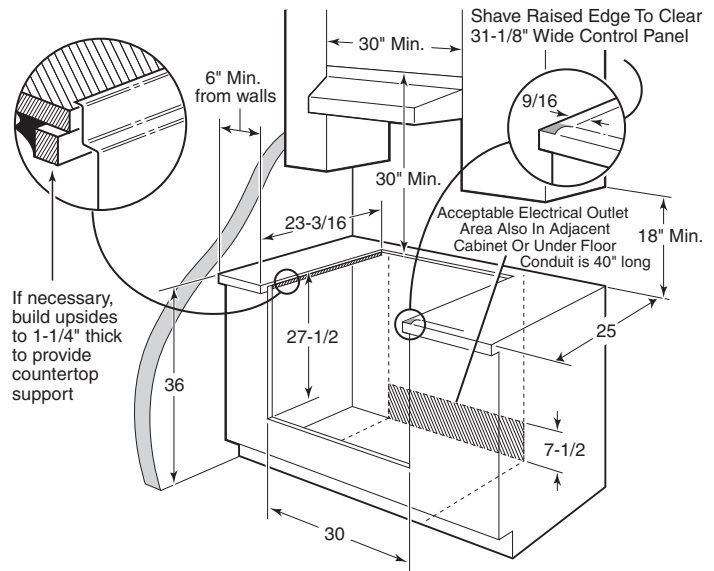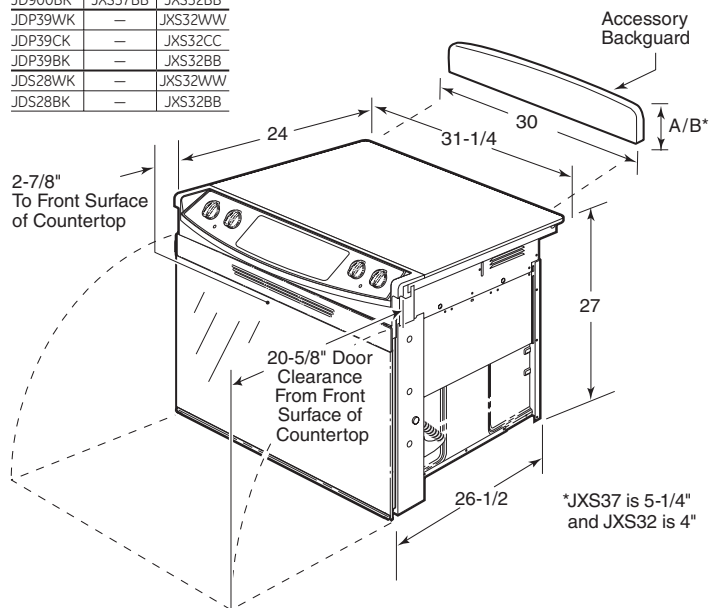

## Spacemaker™ 27" drop-in electric ranges

	GE Profile™	GE®	
	JMP31WC	JMP28BD	JMS08BD
<b>Features</b>			
Oven cleaning	Self-clean	Self-clean	Standard-clean
Variable cleaning time	●	●	
Automatic self-clean oven door lock	●	●	
Oven racks	2	2	2
Lift-up overhanging cooktop	White porc.-enam.	White porc.-enam.	White or bisque porcelain-enameled
8" heating elements	1	1	1
6" heating elements	3	3	3
Plug-in Calrad® heating elements	●	●	●
Infinite heat controls	●	●	●
Removable one-piece drip bowls	Chrome	Chrome	Chrome
Electronic clock and kitchen timer	●	●	
Delay Bake option	●	●	
Auto oven shut-off	●	●	
Electronic oven control	●	●	
Heating element "ON" indicator light	●	●	●
Interior oven light	●	●	●
Broiler pan with grid	●	●	●
<b>Appearance</b>			
Color appearance*	WW	CT	WH/CT
Frameless oven door	White glass	Black glass	Black glass
Oven door with window	Big ClearView™	Big ClearView	Big ClearView
Lift-off oven door	●	●	●
Designer-style handle	Sure Grip	●	●
<b>Weights &amp; Dimensions</b>			
Overall oven interior dimensions (WxHxD in inches)	19 x 15 x 18	19 x 15 x 18	19 x 15 x 18
Approx. shipping wt. (lbs.)	119	119	119
<b>Power/Ratings</b>			
KW rating @ 240V	9.8	9.8	10.1
208V	7.3	7.3	7.6
Amps @ 240V	40	40	40
208V	40	40	40

**Optional backguard**  
(Available at additional cost)  
JX27RBK = Black  
JX27RWH = White


**Note:** All 27" Drop-In Electric Ranges conform to U.L. requirements for minimum spacing between range and side wall below countertop.

**Note:** Door handle protrudes 2-3/4" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

27" drop-in range dimensions (in inches)

**Important:** This range is designed to hang from the countertop. It does not rest on the floor.

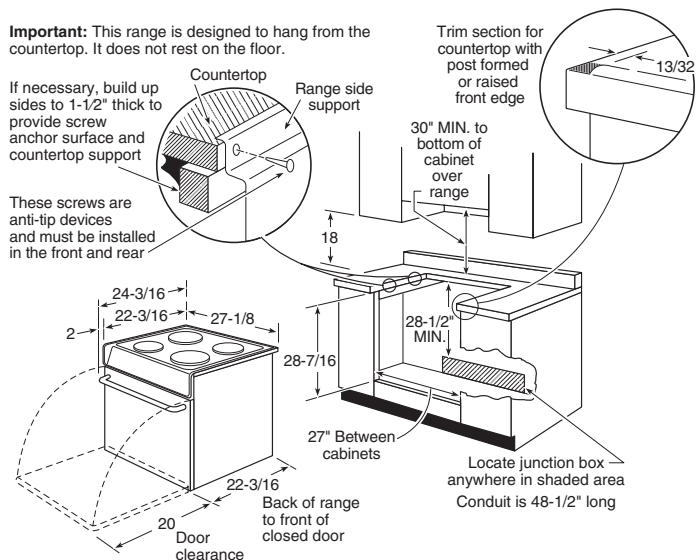

### Countertop cutout—top view


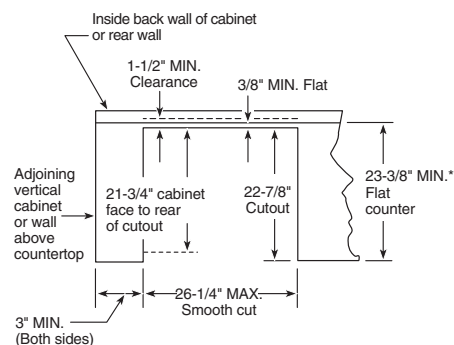




## 30" slide-in gas ranges

	GE Profile™			GE®	
	Dual-fuel	Gas		Gas	
	J2S968SEK J2S968TEK J2S968KEK J2S968BEK	JGS968SEK JGS968TEK JGS968KEK JGS968BEK	JGS905SEK JGS905TEK JGS905KEK JGS905BEK	JGSP28SEK JGSP28WEK JGSP28CEK JGSP28BEK	JGSS05BEH
<b>Features</b>					
Self-clean oven with Delay Clean option	●	●	●	●	Standard-clean
Light self-clean option	●	●	●	●	
Variable cleaning time	●	●	●	●	
Automatic self-clean oven door lock	●	●	●	●	
Oven racks	3 heavy-duty porc.-enameled	3 heavy-duty porc.-enameled	3 heavy-duty	2	
CleanDesign™ oven/hidden bake element	●	●	●	●	
TrueTemp™ system	●	●	●	●	
	Black glass True white glass True bisque glass Black glass	Black glass True white glass True bisque glass Black glass	Black glass True white glass True bisque glass Black glass	Black porc.-enamel White porc.-enamel Bisque porc.-enamel Black porc.-enamel	Black porc.-enamel
Cooktop	●	●	●	●	
Overhanging cooktop	●	●	●	●	
Cooktop burners	Sealed	Sealed	Sealed	Sealed	
PowerBoil™ burner	(1) 15,000 BTU/ 180° simmer	(1) 15,000 BTU/ 180° simmer	(1) 15,000 BTU/ 180° simmer		
Precise Simmer burner (nat.)	(1) 6,000 BTU/ 140° simmer	(1) 6,000 BTU/ 140° simmer	(1) 6,000 BTU/ 140° simmer	(1) 5,000 BTU	
All-purpose burners (nat.)	(1) 11,000 BTU/ 150° simmer; (1) 9,100 BTU/ 150° simmer	(1) 11,000 BTU/ 150° simmer; (1) 9,100 BTU/ 150° simmer	(2) 11,000 BTU/ 150° simmer; (1) 9,100 BTU/ 150° simmer	(1) 9,500 BTU (2) 12,000 BTU	(4) 9,000 BTU
Cooktop grates	Matte black hvy.-cast Grey hvy.-cast Taupe hvy.-cast Black hvy.-cast	Matte black hvy.-cast Grey hvy.-cast Taupe hvy.-cast Black hvy.-cast	Matte black Grey hvy.-cast Taupe hvy.-cast Black hvy.-cast	Black standard-cast Grey standard-cast Taupe standard-cast Black standard-cast	Black standard porcelain steel
Continuous grates	●	●	●	●	
Ignition system	Electronic	Electronic	Electronic	Electronic	Electronic
PreciseAir™ convection system	●	●	●	●	
Convection bake	Single-/multi-rack	●	●	●	
Convection roast	●	●	●	●	
Auto Recipe™ conversion	●	●	●	●	
Electronic controls	Glass touch	Glass touch	●	●	
Proof mode	●	●	●	●	
Warm mode	●	●	●	●	
Oven Meat probe	●	●	●	●	
Closed door broiling	●	●	●	●	●
Temperature display	●	●	●	●	
Delay Bake option	●	●	●	●	
C° or F° programmable	●	●	●	●	
Audible preheat signal	●	●	●	●	
Auto oven shut-off w/override	●	●	●	●	
Control lock capability	●	●	●	●	
Electronic clock/kitchen timer	●	●	●	●	
Certified Sabbath mode	●	●	●	●	
Interior oven light	Halogen	Halogen	●	●	●
	Stainless steel White Bisque Black	Stainless steel White Bisque Black	Stainless steel White Bisque Black	Stainless steel White Bisque Black	
Storage drawer	●	●	●	●	●
Slide-out broiler drawer	●	●	●	●	●
Broiler pan	●	●	●	●	●
Roasting rack	●	●	●	●	●
Convection cookbook	●	●	●	●	●
<b>Appearance</b>					
Color appearance*	SS/WW/CC/BB	SS/WW/CC/BB	SS/WW/CC/BB	SS/WW/CC/BB	BB
	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass	Black glass
Frameless oven door	●	●	●	●	●
Oven door with window	Big ClearView™	Big ClearView	Big ClearView	●	●
Sculptured oven door handle	●	●	●	●	●
Heavy-duty knobs	SS models only	SS models only	SS models only	●	●
Dishwasher-safe knobs	●	●	●	●	●
	Sculptured stainless Sculptured white Sculptured bisque Sculptured black	Sculptured stainless Sculptured white Sculptured bisque Sculptured black	Sculptured stainless Sculptured white Sculptured bisque Sculptured black	Stainless Recessed white Recessed bisque Recessed black	Recessed black
Storage drawer handle	●	●	●	●	●
<b>Weights &amp; Dimensions</b>					
Overall oven interior dimensions (WxHxD in inches)	24 x 16-1/4 x 18-1/4	24 x 16-1/4 x 18-1/4	24 x 16-1/4 x 18-1/4	24 x 16-1/4 x 18-1/4	24 x 17 x 19
Approx. shipping wt. (lbs.)	257	248	238	201	165
<b>Power/Ratings</b>					
	(1) 15.0/13.0 (1) 11.0/5.2 (1) 6.0/6.0 (1) 9.1/8.0	(1) 15.0/13.0 (1) 11.0/5.2 (1) 6.0/6.0 (1) 9.1/8.0	(1) 15.0/13.0 (1) 11.0/5.2 (1) 6.0/6.0 (1) 9.1/8.0	(2) 12.0/11.0 (1) 9.5/9.5 (1) 5.0/5.0	(4) 9.0/8.0
Top burners (000's BTU's) Nat/LP					
Range electrical rating	240v/208v, 60Hz/40A	120v, 60Hz, 5A	120v, 60Hz, 5A	120v, 60Hz, 5A	120v, 60Hz, 5A
Convection wattage	2,500				
Broiler/Bake wattage/BTU	3,600/2,700 watts	12,000/15,000 BTU	12,000/15,000 BTU	12,000/15,000 BTU	16,000/16,000 BTU
LP conversion kit (included)	●	●	●	●	●


\*SS = Stainless steel with black accents, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door  
Factory set for Natural Gas. A set of LP orifices is included with each range for LP conversion.

Counter cutout dimensions (in inches)  
Models J2S968, JGS968, JGSP48  
and JGSP28If you are NOT using the  
Filler strip or Backguard:If you are using the  
Filler strip or Backguard:

**Note:** Door handle protrudes 2-3/4" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Note:** Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least a 194°F temperature rating.

**Installation information:** Before installing, consult installation instructions packed with product for current dimensional data.

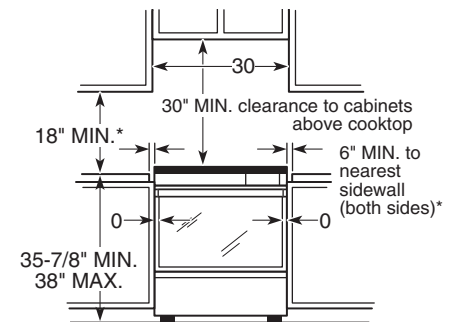

\*ANSI Requirement

\*\*JGSS05 requires 2" min. to nearest side wall.





All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by  
Underwriters  
Laboratories

### 30" slide-in gas ranges dimensions (in inches)

Models J2S968, JGS968 and JGS905

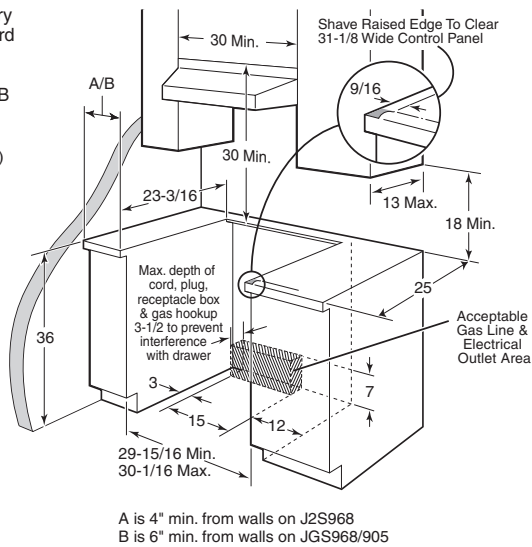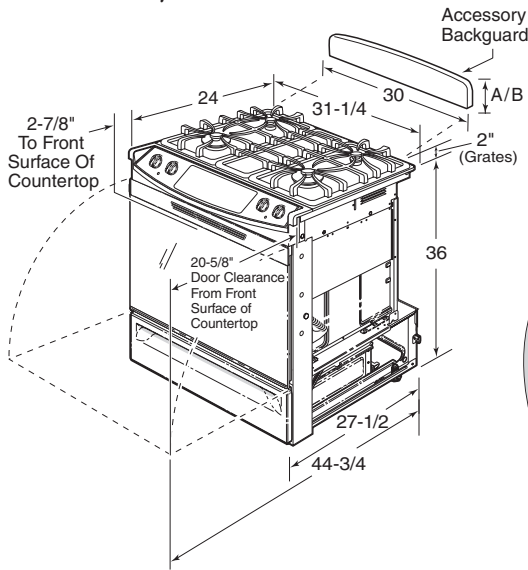

### Optional kits for slide-in gas ranges

(Models J2S968, JGS968, JGSP48 and JGSP28)

(Available at additional cost)

#### Accessory backguards

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)

Model	A 5-1/4"	B 4"
J2S968SEK	JXS37BB	JXS32SS
J2S968TEK	JXS37WW	JXS32WW
J2S968KEK	JXS37CC	JXS32CC
J2S968BEK	JXS37BB	JXS32BB
JGS968SEK	JXS37BB	JXS32SS
JGS968TEK	JXS37WW	JXS32WW
JGS968KEK	JXS37CC	JXS32CC
JGS968BEK	JXS37BB	JXS32BB
JGS905SEK	JXS37BB	JXS32SS
JGS905TEK	JXS37WW	JXS32WW
JGS905KEK	JXS37CC	JXS32CC
JGS905BEK	JXS37BB	JXS32BB
JGSP28SEK	JXS37BB	JXS32SS
JGSP28WEK	JXS37WW	JXS32WW
JGSP28CEK	JXS37CC	JXS32CC
JGSP28BEK	JXS37BB	JXS32BB

#### Body sides

(Slide-in ranges are sold without sides installed. Can be installed on either left or right when unit has one exposed side [no cabinet adjacent]. Kit contains 1 body side)

JXS77WW—White  
JXS77CC—Bisque  
JXS77BB—Black



#### Optional lower trim kits

(If counter height is greater than 36.5", a lower trim kit is recommended to extend the useful height to 38" maximum)

JXS56WW—White  
JXS56CC—Bisque  
JXS56BB—Black



### 30" slide-in gas ranges dimensions (in inches)

Model JGSP28

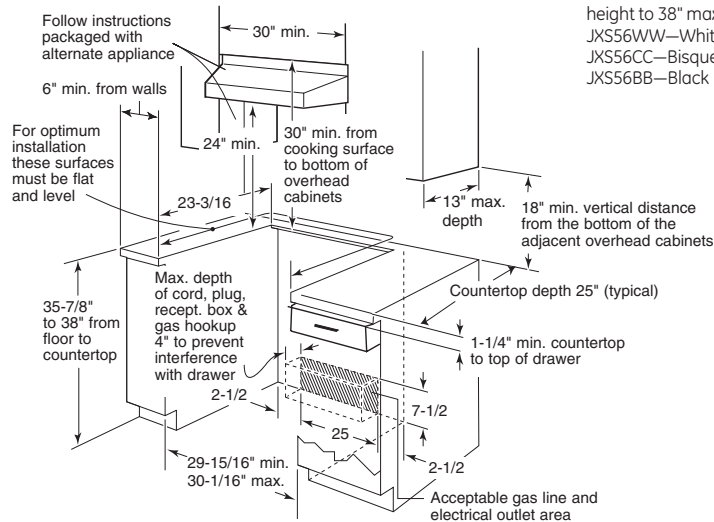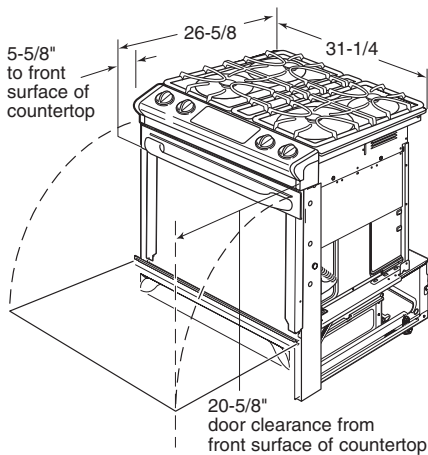

### 30" slide-in gas range dimensions (in inches)

Model JGSS05

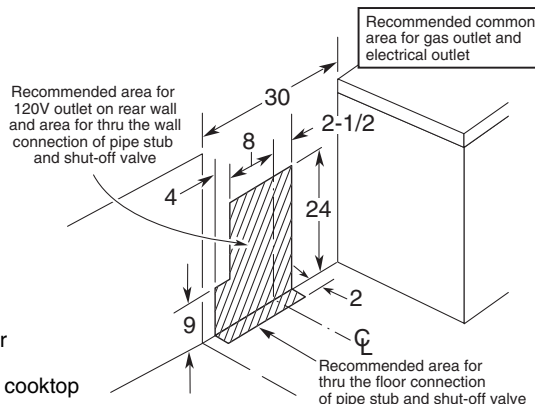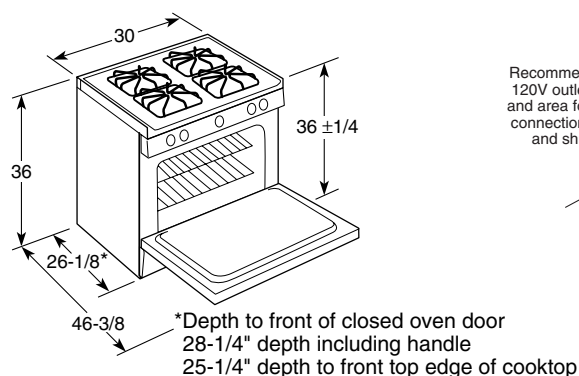



## 30" dual-fuel ranges


GE Profile™		
Dual-fuel		
	J2B918SEK J2B918WEK J2B918CEK J2B918BEK	J2B912SEK J2B912WEK J2B912BEK
Capacity		
Upper oven capacity	Super-large 5.0 cu. ft.	Super-large 5.0 cu. ft.
Lower oven capacity	1.0 cu. ft.	
Features		
Oven cleaning	Self-clean	Self-clean
Deep recessed porcelain cooktop	●	●
Cooktop burners	Sealed	Sealed
PowerBoil™ burner (Nat.)	(1) 17,000 BTU/ 160° Simmer	(1) 17,000 BTU/ 160° Simmer
Precise simmer burner (Nat.)	(1) 5,000 BTU/ 140° Simmer	(1) 5,000 BTU/ 140° Simmer
	(1) 11,000 BTU/ 150° Simmer; (1) 9,100 BTU/ 150° Simmer	(1) 11,000 BTU/ 150° Simmer; (1) 9,100 BTU/ 150° Simmer
All-purpose burners (Nat.)		
Center oval burner	(1) 6,000 BTU	(1) 6,000 BTU
Non-stick griddle	Included	Included
Valves (degree of turn)	270	270
TrueTemp™ system	●	●
Convection bake/roast	Electric	Electric
QuickSet oven controls	QuickSet VI glass touch†	QuickSet V
Auto self-clean	●	●
Electronic oven control	●	●
Hi/Low broil	●	●
Electronic clock and timer	●	●
Automatic oven timer	●	●
Audible preheat signal	●	●
Oven meat probe	●	●
Auto oven shut-off	●	●
Certified Sabbath mode	●	●
Auto Recipe™ conversion	●	●
Control lock capability	●	●
One-piece upswept cooktop	Porc.-enam. Matte black hvy.-cast Grey hvy.-cast Taupe hvy.-cast Black hvy.-cast	Porc.-enam. Matte black hvy.-cast Grey hvy.-cast Black hvy.-cast
Removable grates		
Continuous grates	Dishwasher-safe	Dishwasher-safe
Ignition system	Electronic	Electronic
Lower oven (140° to 450°)	●	●
Dual element bake	●	●
Removable drawer liner	●	●
Warming drawer (140° to 220°)	●	●
Oven racks	3	2
Six embossed rack positions	●	●
Broiler pan	●	●
Scratch-resistant backguard	Stainless steel Glass	Stainless steel Porc.-enam.
Interior oven light	●	●
In-oven broiling	●	●
Appearance		
Color appearance*	SS/WW/CC/BB	SS/WW/BB
	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Black glass
Frameless oven door		
Oven door with window	Big ClearView	Big ClearView
Oven door handle	Sculptured	Sculptured
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	24 x 19 x 19	24 x 19 x 19
Approx. shipping wt. (lbs.)	235	235
Power/Ratings		
	(1) 17.0/11.0 (1) 6.0/6.0 (1) 11.0/9.1 (1) 5.0/4.0 (1) 9.1/8.0	(1) 17.0/11.0 (1) 6.0/6.0 (1) 11.0/9.1 (1) 5.0/4.0 (1) 9.1/8.0
Top burners (000's BTU's) Nat/LP		
Oven/broiler burners (000's BTU's) Nat/LP		16.0/ 16.0 oven
Dual-fuel range electrical wattage	2585W oven 3410W broil	1575W oven 1575W broil
Dual-fuel range electrical rating**	208/240V, 60Hz, 40A	120V, 60Hz, 15A
LP conversion kit (includ.)	●	●

\*SS = Stainless steel with black accents, BC = Soft stainless with black accents,  
WW = White with white glass door, CC = Bisque with bisque glass door,  
BB = Black with black glass door.

\*\*15A requires a dedicated circuit.

† = Stainless steel models feature traditional QuickSet controls.

Factory set for Natural Gas. A set of LP orifices is included with each range for LP conversion.

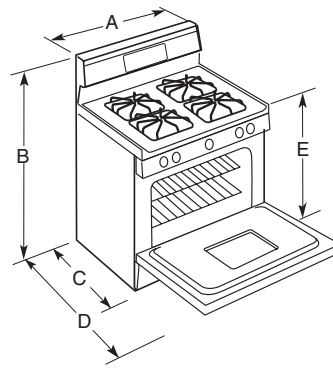

## Dimensions (in inches)


Model	A	B	C*	D	E
J2B918	30	47-3/4	26-1/4	46-3/8	36-1/4± 1/4
J2B912	30	47-3/4	26-1/4	46-3/8	36-1/4± 1/4

\*Dimension from wall to front of closed door handle is 29."

## Installation information (in inches)


## Model J2B918

NOTE: Make gas connections on the left side and electrical connections on the right side of the cutout opening.

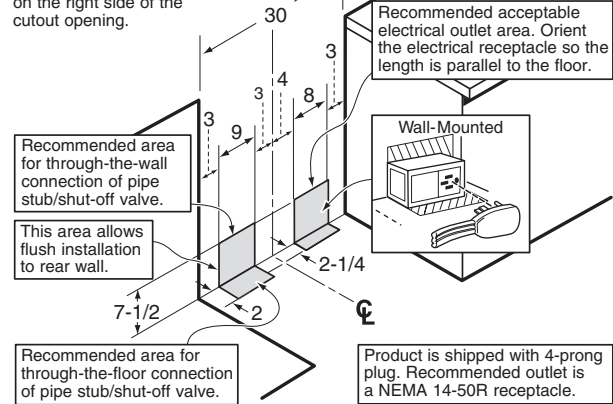

## Installation information (in inches)

## Model J2B912

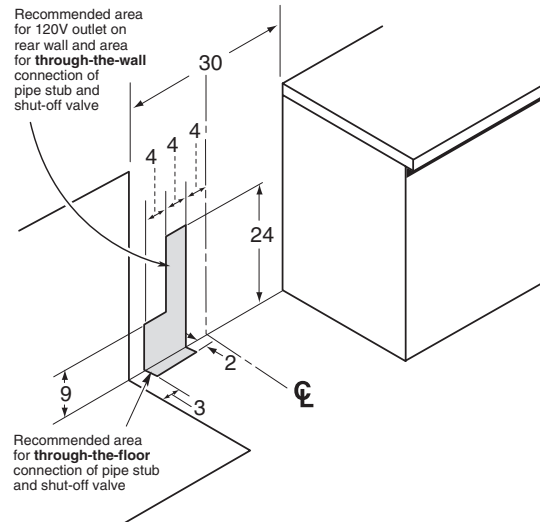



## A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.