




GE Appliances

GNSV30CCC/WW – GE SmartWater™ Dual Stage Water Filtration System

Installation Information (in inches)

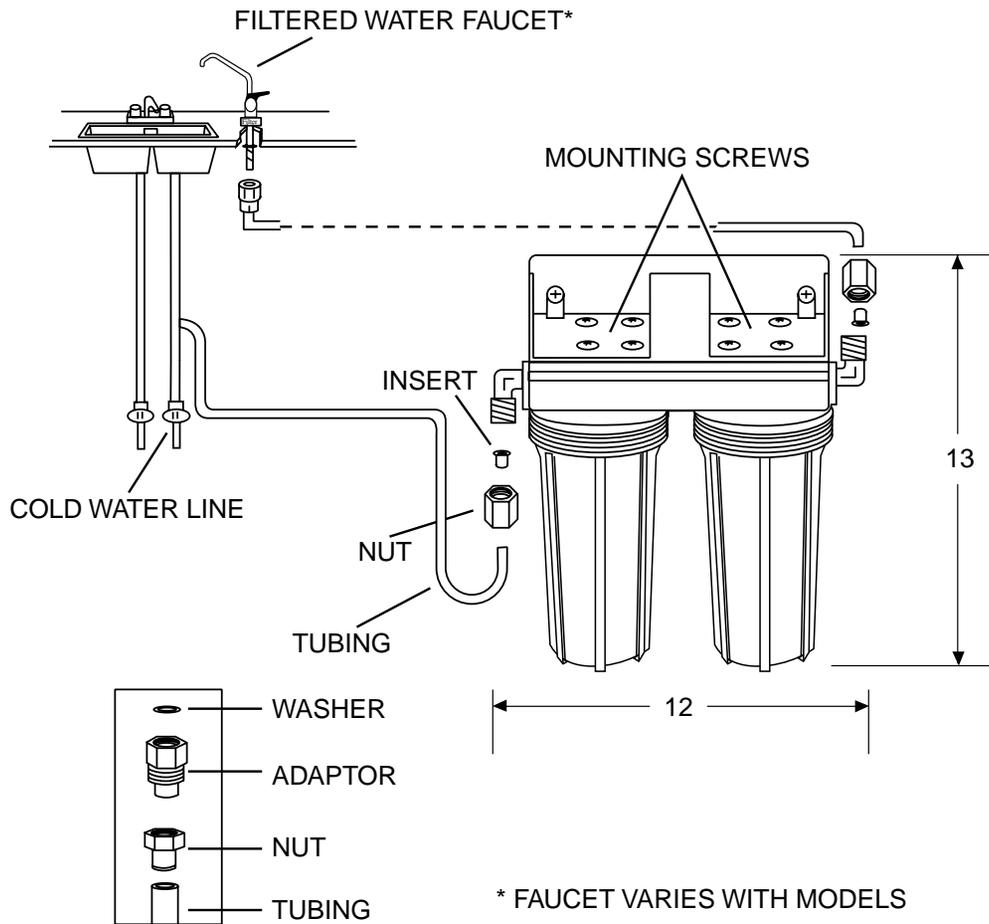

Note: Can be installed undercounter (as shown), in basement, or other convenient location. See installation instructions packed with product for complete details.

Replacement Filters

Call GE SmartWater™ Service toll-free 800.952.5039 to order replacement filters.

Water Test Kit

To order a water test kit, call 800.626.2000.

Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after system. System certified for cysts reduction may be used on disinfected water that may contain filterable cysts.



GNSV25CBL, GNSV30CCC, GNSV30CWW, GN1S15CBL and GNSL05CBL are Tested and Certified by NSF International against ANSI/NSF Standard 42 for Particulate Reduction Class I, Chlorine Reduction Class I and Taste and Odor Reduction.


GNSV25CBL, GNSV30CCC and GNSV30CWW are Tested and Certified by NSF International against ANSI/NSF Standard 53 for Lead, Cysts, Turbidity, Asbestos, Mercury and VOC Reduction.

For answers to your Monogram® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



GE Appliances

GNSV30CCC/WW – GE SmartWater™ Dual Stage Water Filtration System

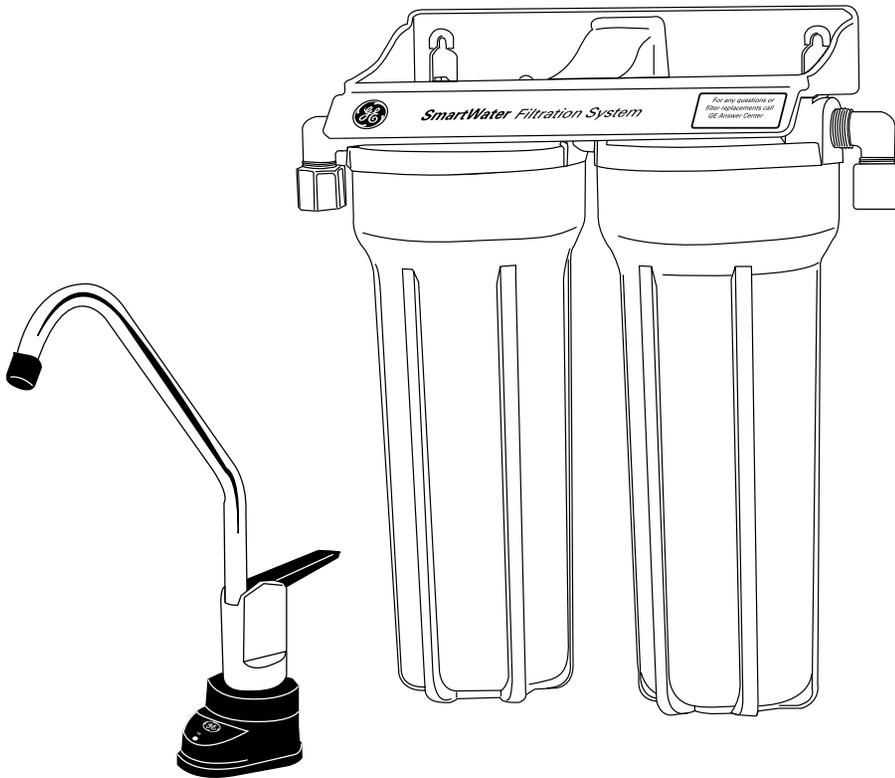

Features and Benefits

- Long-Reach SmartWater™ Faucet
- 40 Min. – 125 Max. Feed Water Pressure (psi)
- 40–100 Degrees Fahrenheit Feed Water Temperature
- 0.6 Filtered Water Flow (gpm)
- Filters Included with Electronic Filter Change Indicator
- Filter I (Sediment) – Filter Set FXSVC
 - Filter Cartridge – Activated Carbon Block Filter
- Filter II (VOC)
 - Filter Cartridge – Activated Carbon Block Filter
 - Particulate Removal – 0.5 Micron
 - Chlorine Reduction – 97% / 600 Gallons
 - Lead Reduction – 98% / 600 Gallons
 - Cyst Reduction – 99.99%
 - Turbidity Reduction–99%
 - VOC Reduction – 99% / 600 Gallons
 - Asbestos Reduction – 99%
 - Mercury Reduction – 90% / 600 Gallons
- Optional Basement Installation (hardware not included)
- Undercounter Installation (kit included)