




Profile™

## JP939BH/CH/SH/WH – GE Profile™ 30" Built-In CleanDesign Cooktop

### Cabinet Installation Dimensions (in inches)

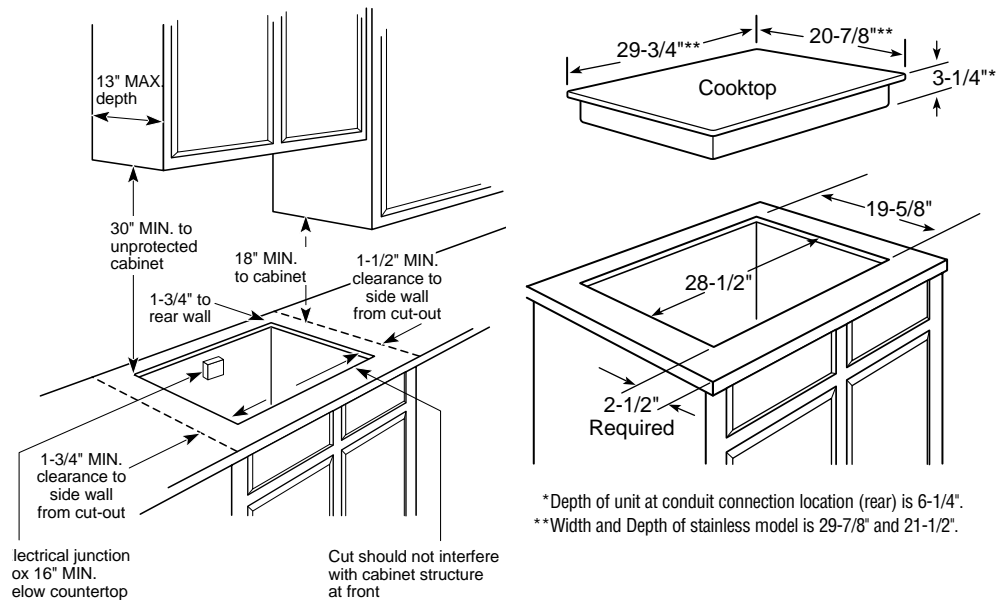

\*Depth of unit at conduit connection location (rear) is 6-1/4".

\*\*Width and Depth of stainless model is 29-7/8" and 21-1/2".

KW Rating	
240V	7.4
208V	5.6
Breaker Size	
240V	31 Amps <sup>†</sup>
208V	27 Amps <sup>†</sup>

<sup>†</sup>Note: Check local codes for required breaker size.

#### Built-In CleanDesign Cooktops

Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

30" Ribbon cooktops are approved for use over GE 30" Single Wall Ovens and warming drawers. All 30" Ribbon cooktops can be installed over 27" wall ovens. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

**Notes:** If installing with a GE Profile Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

**Note:** Consult cabinet and countertop manufacturer's specs for flush mount installation prior to install.

#### Flush Mount Installation Kit

Accommodates both 30" and 36" installations. Not for use with stainless steel models.

JXFLMTWW (True White)

JXFLMCC (True Bisque)

JXFLMBB (Black – use with black glass cooktops with a white, bisque or black pattern)

#### Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data.




Listed by  
Underwriters  
Laboratories

For answers to your Monogram®, GE Profile™ or GE appliance questions, visit our website at [GEAppliances.com](http://GEAppliances.com) or call GE Answer Center® service, 800.626.2000.



*Profile™*

## JP939BH/CH/SH/WH – GE Profile™ 30" Built-In CleanDesign Cooktop

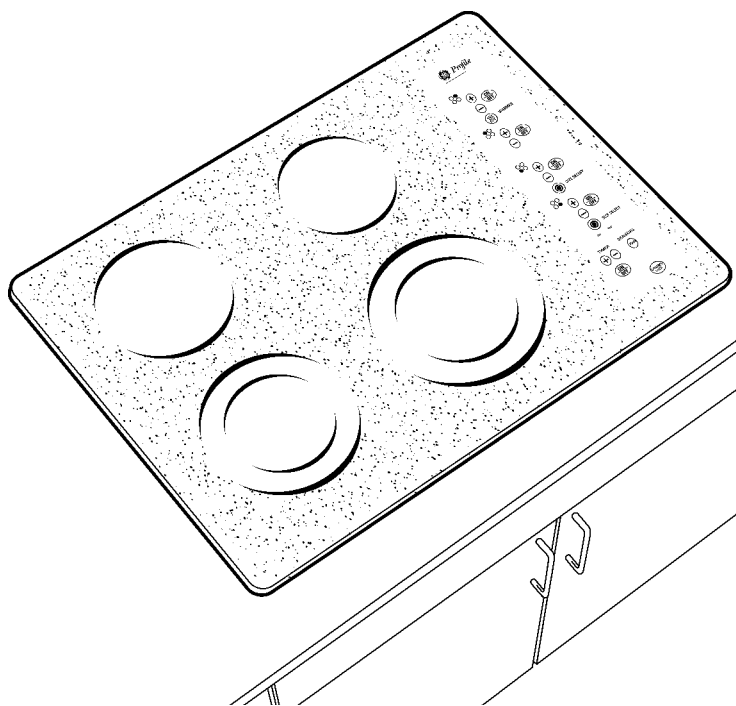

### Features and Benefits

- Electronic Touch Controls – Replaces traditional dial controls with digital buttons that are precise and easy-to-use.
- No Pulse Elements – Provides even cooking, immediate response, and fast heat up.
- Ceramic Glass Cooktop – A smooth cooktop surface makes cleaning quick and easy.
- Pan Presence Sensor – Detects when a burner element is left “on” and automatically shuts it off when not in use.
- Pan Size Sensor – Automatically adjusts the heating element to the size of the pan.
- Ribbon Heating Elements – Provides powerful heat beneath the smooth glass surface to ensure even heat and fast warm-up times.
- Dual Size Ribbon Elements – Offers a conventional choice of using a 6" or 9" on one and a 5" or 8" on the other heating element, depending on the size of the pan.
- Model JP939CHCC – Bisque on bisque
- Model JP939BHBB – Black on black
- Model JP939SHSS – Stainless steel
- Model JP939WHWW – White on white