



clothes care

New product introductions 2007
Retail Sales



imagination at work

Contents



3 Traditional clothes care

56 Specifications & installation



27 Frontload clothes care

60 Specifications & installation



traditional clothes care

New product introductions 2007
GE Profile™ and GE® washers and dryers



imagination at work

GE Profile™ washer quick pitch

Wash big. Dry fast. Get on with life.





A new wave in topload technology has arrived. GE Profile™ and GE® topload washers now feature the revolutionary **HydroWave™ wash system**, designed for superior cleaning performance and greater dependability.

The HydroWave wash system agitates with a **variable speed**, wave-like motion to effectively clean everything from the most heavily soiled clothes to the finest delicates. It's as gentle as frontload.

The HydroWave wash system is **surprisingly quiet**. No more “chug, chug, chugging”—just a smoother agitation that makes it possible to bring the washer out of the basement and into the kitchen or other living area.

GE Profile™ clothes care quick pitch

Wash big. Dry fast. Get on with life.



GE Profile models WPRE8100GWT and DPSE810EG/GGWT

GE Profile washers



only GE has it

Performance

New HydroWave™ wash system has variable speeds to match the wash action to the clothing type. Longer, slower travel through the water provides great cleaning performance and is gentler on your clothes.



Capacity

King-size 3.5 cu. ft. ribbed stainless steel wash basket washes more at once, which means fewer loads and less time spent doing laundry.



only GE has it

Quiet

The new HydroWave wash system was designed to be quieter. Lets you do the wash any time, whether it's night time or nap time.



Dependability

The HydroWave wash system's **variable speed motor** is engineered with far fewer parts than conventional topload washers, providing great durability and ease of maintenance.

GE Profile dryers



only GE has it


Performance

Delicate cycle with extra low heat setting helps protect fine garments from shrinkage and wear by maintaining an average fabric temperature of 125°F, the lowest delicate cycle temperature available.



Capacity

7.0 cu. ft. super capacity stainless steel dryer drum handles large-size items and family-size loads, without snagging or tearing fabrics.



Clothes Care

Dual electronic thermistors maintain constant, even heat for shorter dry times and better fabric care.

only GE has it



Dependability

Stainless steel drum resists rust, won't chip or peel.

GE® electronic clothes care quick pitch

Wash big. Dry fast. Get on with life.



GE models WJRE5500G and DRSR483EG/GGW

GE washers



only GE has it

Performance

New HydroWave™ wash system has a new wash action designed to match the clothing type. Longer, slower travel through the water provides great cleaning performance and is gentler on your clothes.



Capacity


King-size 3.5 cu. ft. ribbed stainless steel wash basket washes more at once, which means fewer loads and less time spent doing laundry.



only GE has it

Quiet

The new HydroWave wash system was designed to be quieter. Lets you do the wash any time, whether it's night time or nap time.



Dependability

The HydroWave wash system's **three-speed motor** is engineered with far fewer parts than conventional topload washers, providing great durability and ease of maintenance.

GE dryers



Performance

Auto Dry System monitors air temperature shutting off the dryer when the proper temperature is reached.



Capacity

7.0 cu. ft. super capacity handles king-size items and family-size loads, without snagging or tearing fabrics.



Clothes Care

Quick Fluff freshens or fluffs already dry clothing, fabrics, linens and pillows with no-heat tumbling.



Dependability

Stainless steel drum resists rust, won't chip or peel.

What's new: HydroWave™ wash system with exceptional quiet

Wash big. Dry fast. Get on with life.

New HydroWave™ wash action gives GE Profile™ and GE® topload washers the advantage of variable agitation speeds designed to match the clothing type and cleaning needs of every load.

The smooth, 360-degree stroke of the agitator moves clothes through the water more slowly, delivering thorough–yet completely gentle–cleaning performance.



GE HydroWave after 20 washes*



Leading competitor after 20 washes*



The HydroWave wash system is surprisingly quiet. Smoother agitation makes it possible to bring the washer out of the basement and into the kitchen or other living area.

*New clothes washed in normal load, after 20 washes.

Distinct GE Profile and GE appearances for every laundry room



GE Profile model WPRE8100GWT

Curves and color add style

The boldly curved control panel offers a sleek, modern look with real eye appeal. Control panels on GE Profile models are now available with a striking titanium-color finish.

Countdown timer enhances convenience

An easy-to-see LED readout displays the time remaining until the end of the wash cycle so clothes can be removed promptly and placed in the dryer.

Dryer updates make a perfect match



GE Profile model DPSE810EG/GGWT

The dryer gets better, too

Updated appearance and countdown timer

The laundry pair is complete with the matching dryer, also sporting enhanced features your customers will appreciate. The dryer is designed with the same curved control panel that gives the washer its sleek, up-to-date appearance. The DPSE810 dryer is also equipped with its own LED countdown timer, so clothes can be removed promptly with less wrinkling.



GE model WJRE5500GWW (matches DRSR483EG/GGWW)

User-friendly, ramped-up style

Easy-to-use rotary dial controls and convenient cycle status indicator lights highlight the newly redesigned GE control panel. Clean lines and a silver-tone backspash enhance its overall appearance.




GE model WBSR3140GWW (matches DBXR463EG/GG)

Feature gallery: GE Profile™ clothes care



GE Profile models WPRE8100GWT and DPSE810EG/GGWT

GE Profile washers



HydroWave™ Handwash

Cleans and cares for the finest fabrics by providing HydroWave Handwash—America's Gentlest Agitation!™




Countdown timer

Manage your time better with a washer that shows how many minutes until the cycle is finished.



3.5 cu. ft. king-size capacity stainless steel ribbed basket

Allows you to wash more at once, which means less time doing laundry.



Auto balance suspension system

Handles the heaviest loads, without banging or walking.

GE Profile dryers




Towels cycle

This special cycle helps eliminate the guesswork of drying large bulky items with precise moisture sensors, ultimately saving you time and energy.



Delicate cycle with extra-low heat setting

Helps protect fine garments from shrinkage and wear by maintaining an average fabric temperature of 125°F, the lowest delicate cycle temperature available.



DRYEL® cycle

Works to remove stains and odors, refresh clothing and helps minimize wrinkles.



Anti-bacterial cycle

Reduces certain types of bacteria by 99.9%.* The anti-bacterial process occurs during the drying cycle by extending heated cycle time.

Feature gallery: GE Profile™ control panels

Washer



GE Profile model WPRE8100GWT

Load size

Variable setting for load size to match laundry load.

Temperature

Allows choice between seven PerfectTemp temperatures.

Options

Provide selection of wash cycle options or option combinations of auto soak, extended spin and/or 2nd rinse.

Estimated time remaining display

Displays the approximate time remaining until the end of the cycle.

Wash cycles

Choose from the following wash cycles and turn the selector knob to your wash cycle of choice and press START to begin the cycle.

1 Prewash

For removing surface dirt from heavily soiled clothes.

2 Casuals

For wrinkle-free and permanent press items and knits.

3 Cottons

For heavy to lightly soiled cottons, household linens, work and play clothes.

4 Easy care

For wrinkle-free and permanent press items and knits.

5 Delicates

For lingerie and special-care fabrics with light to normal soil.

6 HydroWave™ hand wash

For items labeled hand washable with light soils. America's Gentlest Agitation!™

7 Speed wash

For lightly soiled items that are needed in a hurry. Extra-small loads, such as soccer uniforms, can be washed in as little as 25 minutes.

8 Drain & spin

For draining the tub and spinning water out of the clothes.

9 Quick rinse

For items that need a quick rinse. Great for bathing suits or for delicates that may need a quick rinse.

Start

Pressing START will begin the cycle. Pressing START again or raising the lid will PAUSE the cycle and the cycle indicator light will blink.

Dryer



GE Profile model DPSE810EG/GGWT

Options

Provide selection of end-of-cycle and/or extended tumble signals. Extended tumble provides approximately 20 minutes of no-heat tumbling after clothes are dry to minimize wrinkles.

Temperature

Regular or cottons/regular heat–For regular to heavy cottons. Medium or easy care/medium heat –For synthetics, blends, delicates and items labeled permanent press.

Dryness

Allows choice between four dryness levels.

Drying cycles

1 Cottons

For cottons and most linens. Easy care/permanent press–For wrinkle-free, permanent press, delicate items and knits.

2 Timed dry

Set the cycle selector at the desired drying time.

3 Damp dry

For leaving items partially damp.

4 Dewrinkle

For removing wrinkles from items that are clean and dry or that are very lightly damp.

5 Quick fluff

For freshening or fluffing already dry clothing, fabrics, linens, and pillows. Use with FLUFF NO HEAT. Provides 10 minutes of no-heat tumbling.

6 Towels

Helps eliminate the guesswork of drying large bulky items.

7 Knits

For knit fabrics ranging from casual sweatshirt fleece to elegant stretch velvets.

8 DRYEL®

Works to remove stains and odors, refreshes clothing and helps minimize wrinkles.

9 Anti-bacterial

Reduces certain types of bacteria by 99.9%*. The anti-bacterial process occurs during the drying cycle by extending heated cycle time. Choose this cycle to reduce contagious microorganisms, including but not limited to: *Staphylococcus*, *Pseudomonas aeruginosa* and *Klebsiella pneumoniae*.

10 Delicates

For fine washables, including nylon, spandex, rayon, lace, silks and stuffed animals.

Delicates/low heat

On some models. For delicates, synthetics and items labeled tumble dry low. Fluff/no heat–For fluffing items without heat. Use the TIMED DRY cycle.

Automatic cycles automatically determine fabric dryness. Select LESS DRY if you want your clothes slightly damp at the end of the drying cycle. Select MORE DRY if you want them to feel drier. Timed cycles run for a selected time.

Start

After closing the dryer door, select START. Opening the door while the dryer is ON will stop the dryer.

*The Anti-bacterial cycle is certified by NSF International to NSF Protocol P9 Sanitation Performance of Residential Clothes Dryers.

The inside story: GE Profile™ washers take better care of your clothes




GE Profile™ models WPRE8100GWT and DPSE810EGWT



1 The New HydroWave™ wash system

Has a variable speed motor that provides longer, slower agitation.

only GE has it



5 Power Rinse™ system with neutral drain


Uses a neutral drain system, which reduces the possibility of re-depositing soil and detergent on clean clothes.



Dependability

The HydroWave wash system's variable speed motor is engineered with far fewer parts than conventional topload washers, providing great durability and ease of maintenance.

only GE has it



Adaptive Logic™ system

Makes wash and dry cycle times more accurate, which means less guesswork.



2 Auto balance suspension system

Rod-and-spring design keeps the washer balanced even if the load is unbalanced.

only GE has it



ArmorGuard™ finish on galvanized steel cabinet

A seven-step paint process on galvanized steel using zinc phosphates prevents rusting.




3 Stainless steel wash basket

Professional grade stainless steel wash basket stands up to the toughest loads and is built for years of reliable use.




Sensor Dry Plus™

Dries clothes fast and gets clothes evenly dry, saving return trips to the dryer.



4 Galvanized steel floor

Keeps noise inside and helps keep working parts clean.



7 Stainless steel dryer basket

Won't chip or peel, and the smooth stainless surface won't snag fabrics or "catch" buttons, clips or zippers.

Dare to compare

New HydroWave™ wash action uses a 360-degree agitator stroke for thorough gentle cleaning that helps prevent fabric wear and color fading. How does the HydroWave system perform against the competition? Seeing is believing.

Performance

Wash performance after 20 washes*



GE Profile™



Competitor



GE Profile



Competitor



GE Profile



Competitor

**New clothes washed in normal load, after 20 washes.*

The 3.5 cu. ft. capacity of GE Profile and GE® topload washers outdoes the competition. Larger capacity means fewer loads, and less time doing laundry!

Capacity



GE Profile and GE capacity



Competitors' capacity

Traditional topload competitive comparison

	Capacity cu. ft. (DOE)	Stainless steel	Ribbed basket
GE Profile	3.5	Yes	Yes
GE King-size	3.5	Yes	Yes
GE Super Capacity	3.2	No	Yes
Whirlpool	3.2	No	No
Kenmore Elite	3.2	No	No
Maytag	3.3	Yes	No

Capacity measurements per U.S. Department of Energy standards.

*See written warranty for details.

Dare to compare

Quiet

Change in sound level	Change in Perceived Loudness
3	Just perceptible
5	Noticeable difference
10	Twice (or 1/2) as loud
15	Large change
20	Four times (or 1/4) as loud

GE quiets the competition

- The GE HydroWave™ wash system reduces laundry room sound levels.

Brand	dBA
GE Profile Harmony™ wash system	47.3
New GE Profile™ and GE® HydroWave wash system	50.1
Current GE Profile and GE wash system	58.3

Quiet cleaning makes quite a difference

- Sound turns to noise when it becomes loud enough to annoy or irritate.
- The GE HydroWave wash system gives you a quiet clean.


	Quiet-by-Design™	Deluxe quiet	Whirlpool	Maytag
AutoBalance™ suspension	X	X	No	No
Dynamic balance ring	X	X	No	No
GE QuietMotor™	X	X	No	No
Quiet water inlet and pump drain	X	X	Yes	Yes
Extra mastic		X	Yes	No
Front sound pack		X	No	Yes
Fully enclosed bottom	X	X	No	No

Dependability



Ribbed stainless steel basket

- Stands up to the toughest laundry challenges.
- Resists rust and won't chip or peel.

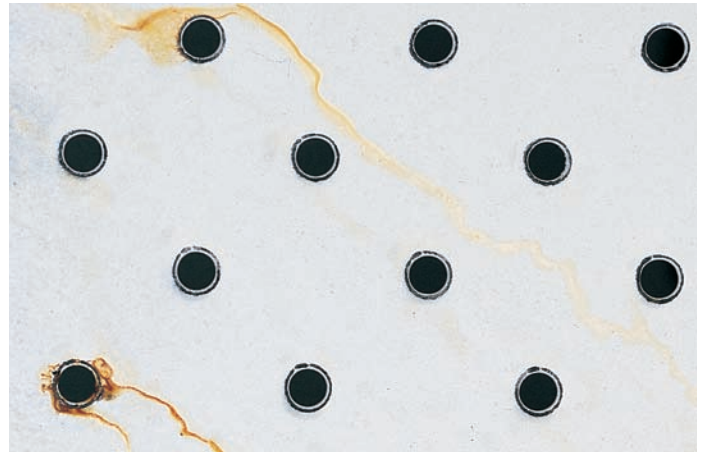

Competitors' porcelain basket

- Can rust which can result in snags and tears.



ExtrAction™ ribbed basket

- Removes up to 24% more moisture from clothes, versus a smooth basket, thereby, reducing dry times.
- Offers increased surface area to "squeeze" more water from clothes during the spin cycle, resulting in reduced dry times.



PermaTuf® II basket

- Designed to maintain a long-lasting, stain-free appearance with bright white interior. Molding provides a smooth surface and prevents snagging or damaging delicates.



ArmorGuard™ finish on galvanized steel cabinet

- Includes a seven step paint process on galvanized steel using zinc phosphates to prevent rusting.

Dare to compare

Special care and speed cycles.



Delicate Cycle with extra-low heat setting

Helps protect heat-sensitive fabrics by ensuring that the average fabric temperature is 125°F. Electronic sensors maintain proper temperature.

- Consumers can choose the right heat setting for the right fabric.



Speed Wash/Dry

Fastest speed wash/dry system in the industry. Washes a golf outfit, soccer uniform or school uniform in a hurry.

- Allows consumers to quickly wash and dry “emergency” loads.
- Works doubletime on game day to get kids out the door.
- Cleans and dries a school uniform during breakfast.

GE offers the lowest heat setting for the most delicate dry cycle among these brands.

Competitive comparison

Average fabric temperature	
GE Profile™	Extra-low 125°F
Whirlpool	Extra-low 132°F
Kenmore Elite	Extra-low 132°F
Maytag	Extra-low 130°F

Show and tell

Show your customer



GE HydroWave
360° P.O.P.

Pub. No. 14-D246



GE Profile HydroWave™
360° P.O.P.

Pub. No. 14-D256



GE interior washer
lid P.O.P.

Pub. No. 14-D276



GE Profile interior
washer lid P.O.P.

Pub. No. 14-D286



GE interior dryer
door P.O.P.

Pub. No. 14-D296



GE Profile interior dryer
door P.O.P.

Pub. No. 14-D306



Peek inside P.O.P.

Pub. No. 14-D326



LED static cling

Pub. No. 14-D316



Washer card

Pub. No. 14-D266



Show your customers the new wash system and educate on HydroWave™. Align the card against the latch and give a quick thrust to pop the panel off. Show the variable speed motor. Discuss the smooth, quiet agitation. Explain the auto balance suspension system. Point out that GE washers are 100% front serviceable. Tell how the galvanized steel floor keeps noise inside.

HydroWave™ wash system

Available new models



GE Profile™ washer WPRE8100G

- HydroWave™ wash system
- 3.5 cu. ft. king-size capacity
- Rotary electronic controls with Adaptive Logic™ system
- Stainless steel wash basket
- Variable speed motor and drive system
- Multiple wash/spin combinations



GE Profile washer WPRE6100G

- HydroWave wash system
- 3.5 cu. ft. king-size capacity
- Rotary electronic controls
- Stainless steel basket
- Rotary electronic controls
- Variable speed motor and drive system



GE® washer WJRE5500G

- HydroWave wash system
- 3.5 cu. ft. King-size capacity
- Rotary electronic controls with cycle status lights
- Stainless steel wash basket
- 5 wash/spin speed combinations
- 3 speed motor



GE Profile dryer DPSE810EG/GG

- 7.0 cu. ft. super capacity
- Rotary electronic controls with Adaptive Logic™ system
- Stainless steel dryer drum
- Sensor Dry Plus™
- Rotary electronic controls
- LED countdown timer



GE Profile dryer DPSR610EG/GG

- 7.0 cu. ft. super capacity
- Rotary electronic controls
- Stainless steel dryer drum
- Sensor Dry™
- 10 dry cycles
- 4 heat selections



GE dryer DRSR483EG/GG

- 7.0 cu. ft. super capacity
- Rotary electronic controls
- Stainless steel dryer drum
- 8 dry cycles
- Quick fluff (no heat)
- Variable EOC signal



GE washer WWSE5240G

- HydroWave wash system
- 3.2 cu. ft. super capacity plus
- Rotary electronic controls with cycle status lights
- Ribbed ExtrAction™ basket
- 5 wash/spin speed combinations
- 3 speed motor



GE washer WBSR3140G

- HydroWave wash system
- 3.2 cu. ft. super capacity plus
- Rotary electromechanical controls
- Ribbed ExtrAction basket
- 3 wash/spin speed combinations
- 4 wash/rinse temperatures



GE washer WDSR2080G

- 3.2 cu. ft. super capacity
- Rotary electromechanical controls
- 2-pulsed wash/spin speed combinations
- 8 wash cycles
- Bleach dispenser
- FlexCare™ agitator



GE dryer DWSR463EG/GG

- 7.0 cu. ft. super capacity
- Rotary electronic controls
- Auto Dry
- DuraDrum™ interior
- 4 heat selections
- Extended tumble



GE dryer DBXR463EG/GG

- 6.0 cu. ft. extra-large capacity
- Rotary electromechanical controls
- Auto Dry
- 6 dry cycles
- Quick fluff (no heat)
- Interior light



GE dryer DBLR333EG/GG

- 5.8 cu. ft. extra-large capacity
- Rotary electromechanical controls
- Auto Dry
- DuraDrum interior
- 3 heat selections
- 3 dry cycles
- Quiet-by-Design™

GE Profile™ and GE® washers and dryers
Wash big. Dry fast. Get on with life.

Washer



Performance

New HydroWave™ wash system has variable speeds to match the wash action to the clothing type. Longer, slower travel through the water provides great cleaning performance and is gentler on your clothes.



Quiet

The new HydroWave wash system was designed to be quieter. Lets you do the wash any time, whether it's night time or nap time.



Capacity


King-size 3.5 cu. ft. ribbed stainless steel wash basket washes more at once, which means fewer loads and less time spent doing laundry.

Dryer



Performance

Delicate cycle with extra-low heat setting helps protect fine garments from shrinkage and wear by maintaining an average fabric temperature of 125°F, the lowest delicate cycle temperature available.



Clothes Care

Dual electronic thermistors maintain constant, even heat for shorter dry times and better fabric care.



Capacity

7.0 cu. ft. super capacity stainless steel dryer drum handles large items and family-size loads, without snagging or tearing fabrics.

Not all features available on all models.



frontload clothes care

New product introductions 2007
GE® frontload washers and dryers



GE® frontload laundry pair

Everything you need.

Installation options



Side-by-side



Side-by-side with pedestals



Custom built-in/custom under-counter



Stacked

Why choose a GE frontload washer?

Use your ecomagination. ecomagination (ĕkōmăjenāshen) n. A goal, a methodology, a brand and a philosophy that expresses GE's commitment to imagine and build innovative solutions for the benefit of our customers and society at large.

Water savings

If every U.S. household currently using a non-ENERGY STAR® washer replaced it with a GE frontload washer:

- The water saved each year would fill more than one million Olympic-size swimming pools.
- Consumers would save a combined annual total of more than \$3 billion in water bills.
- Nearly 9 trillion gallons of water would be saved over 12 years, enough water to sustain every person on the planet for three days.



Energy savings

- The washer's total energy and water savings can pay for the initial cost of the washer over its life.*
- 1100 RPM spin speed extracts more water, meaning less drying time in the dryer.
- GE frontload washer exceeds 2007 ENERGY STAR® guidelines by 16%.*

*Based on an average cost of water, energy and sewer over 12 years using 10 loads/week compared to typical topload washer, WWSE5240.

As an ENERGY STAR® partner, GE has determined that the WCVH6600H, WCVH6260H, WBVH6240H, and WBVH5100H washers meet the ENERGY STAR® guidelines for energy efficiency.

ecomaginationSM
a GE commitment

GE® frontload clothes care quick pitch

Everything you need.



GE models WCVH6600HBB and DCVH660EH/GHBB

GE frontload washer



Clothes care

HydroHeater™

Increases the water temperature to sanitize and kill more than 99% of many common bacteria found in home laundry.*



Performance

Spin speed

Spins up to 1100 RPM to extract as much water and detergent as possible with no harm to fabrics.



Capacity

3.8 cu. ft. king-size capacity**


Makes room for more items, such as a king-size comforter or 23 full-size bath towels.



Savings

Uses as little as 10 gallons of water for a small load and 15 gallons for an average-size load, which saves up to 23 gallons per load, or 61% water.***

GE frontload dryer



Clothes care

Sensor Dry Plus™

Moisture and temperature settings provide more consistent clothes care.



Performance

Dewrinkle cycle

Tumbles clothes without heat to reduce creasing and wrinkling.

Capacity

7.0 cu. ft. king-size capacity

Large enough to handle anything the washer sends its way.

Savings

King-size drum handles even the largest loads, saving you time.



When the laundry piles up, the washer and dryer step up.

Alton Brown,
GE spokesperson
and host of Good Eats

*When selecting the washer water temperature "Sanitize" and soil level setting "Heavy" with home hot water heater set at 120°F.

**Washes equivalent amount of clothes as a 3.8 cu. ft. agitator machine, per IEC ratios.

***As compared to a typical washer, WWSE5240.

Not all features available on all models.

GE® frontload clothes care quick pitch

Everything you need.



GE models WBV5100HWW and DBVH510EH/GHWW


GE frontload washer



Clothes care

HydroMotion™ wash action

Reversing wash action offers great cleaning performance with gentle wash motion.



Performance

Spin speed

Spins up to 1000 RPM to extract as much water and detergent as possible with no harm to fabrics.



Capacity

3.6 cu. ft. king-size capacity*

Makes room for more items, such as a king-size comforter or 22 full-size bath towels.



Savings

Uses as little as 10 gallons of water for a small load and 15 gallons for an average-size load, which saves up to 23 gallons per load, or 61% water.**

GE frontload dryer



Clothes care

Sensor Dry Plus™

Moisture and temperature settings provide more consistent clothes care.



Performance

Dewrinkle cycle

Tumbles clothes without heat to reduce creasing and wrinkling.

Capacity

7.0 cu. ft. king-size capacity

Large enough to handle anything the washer sends its way.

Savings

King-size drum handles even the largest loads, saving you time.



When the laundry piles up, the washer and dryer step up.

*Alton Brown,
GE spokesperson
and host of Good Eats*

*Washes equivalent amount of clothes as a 3.6 cu. ft. agitator machine, per IEC ratios.

**As compared to a typical washer, WWSE5240.

Not all features available on all models.

Feature gallery

Everything you need.




GE® models WCVH6600HBB and DCVH660EH/GHBB

GE frontload washer



Flow-Thru™ dispensing system

Releases cleaning solution at just the right time for optimal wash performance.



QuietBalance™ suspension system

Two-stage Suspa®* suspension ensures reliable, quiet operation for flexible installation.



Optional pedestals

Increase accessibility and provide convenient storage for laundry supplies. Available in 10" or 13" height.



Speed Wash

Washes lightly soiled garments in 38 minutes.

GE frontload dryer



Cycle countdown display with LED indicators

Indicates remaining cycle time, allowing for easier coordination of laundry tasks.



Chrome-plated reversible 15" door with TrueGrip™ handle

Reversible dryer door allows for easy and flexible installation.



Multiple dry cycles

Cycles are matched to fabric type for enhanced drying performance and flexibility. Includes special cycles such as Speed Dry and Active Wear.



Cycle signals

Adjustable end-of-cycle signal alerts you when the load is dry, so clothes can be removed before wrinkles set in. Damp alert signal lets you remove the load of clothes while they are damp.

Feature gallery

Everything you need.




GE® models WBVH5100HWW and DBVH510EH/GHWW

GE frontload washer



Flow-Thru™ dispensing system

Releases cleaning solution at just the right time for optimal wash performance.



QuietBalance™ suspension system

Two-stage Suspa®* suspension ensures reliable, quiet operation for flexible installation.



Optional pedestals

Increase accessibility and provide convenient storage for laundry supplies. Available in 10" or 13" height.



Speed Wash

Washes lightly soiled garments in 38 minutes.

GE frontload dryer



Cycle countdown display with LED indicators

Indicates remaining cycle time, allowing for easier coordination of laundry tasks.



Reversible 15" door with TrueGrip™ handle

Reversible dryer door allows for easy and flexible installation.



Multiple dry cycles

Cycles are matched to fabric type for enhanced drying performance and flexibility. Includes special cycles such as Speed Dry and Active Wear.



Cycle signals

Adjustable end-of-cycle signal alerts you when the load is dry, so clothes can be removed before wrinkles set in. Damp alert signal lets you remove the load of clothes while they are damp.

Feature gallery—control panel

Washer



GE® frontload model WCVH6600HBB

Wash Cycles

Choosing the wash cycle automatically sets the soil level, spin speed and wash temperature. You can customize the cycle using the option buttons that appear on the right side of the control panel.

1 Whites

For heavy to lightly soiled white cottons.

Colors/Normal

For heavy to lightly soiled colorfast cottons.

Stain Wash

For heavily soiled and stained colorfast cottons, household linens, work and play clothes.

Easy Care

For wrinkle-free and permanent press items.

Active Wear

Special cycle for today's cotton/Spandex active wear blends.

Delicates

Provides gentle tumbling and soak during wash and rinse.

Hand Wash

For lingerie and special care items.

Speed Wash

For lightly soiled items that are needed in a hurry. Cycle time is approximately 38 minutes.

Drain & Spin

Drain and spin at any time.

2 Extra Rinse

For additional rinsing to remove excess dirt and detergent.

Pre Wash

For heavily soiled clothes or clothes with a care label that recommends Pre Wash.

Cycle Signal

To change the volume of the end-of-cycle signal, press button until desired volume is reached.

3 Soil Level

To change the pre-set **SOIL LEVEL**, choose between Extra Light, Light, Normal or Heavy soil.

4 Spin Speed

To change the pre-set **SPIN SPEED**, press the SPIN SPEED button until you have reached the desired setting.

5 Wash Temp

Adjust to select the proper water temperature for the wash cycle. The pre wash and rinse water is always cold to help reduce energy.

Sanitize Wash Temp

This temperature setting may be chosen in the WHITES and STAIN WASH cycles. SANITIZE kills more than 99% of many common bacteria found in home laundry.*

* When selecting the washer water temperature "Sanitize" and soil level setting "Heavy" with home hot water heater set at 120°F.

Dryer



GE frontload model DCVH660EH/GHBB

Dry Cycles

Choosing a dry cycle automatically sets the dry cycle, speed and temperature. You can customize the cycle using the option button that appears on the right side of the control panel.

1 Sensor Cycles Cottons

For cottons and most linens.

Mixed Load

For loads consisting of cottons and poly-blends.

Easy Care

For wrinkle-free and permanent press items.

Active Wear

For clothing worn for active sports exercise.

Delicates

For lingerie and special-care fabrics.

Speed Dry

For small loads that are needed in a hurry, such as sports or school uniforms.

Time Dry Cycles Warm Up

Use this feature to warm up clothes for up to 10 minutes.

Dewrinkle

For removing wrinkles from items that are dry or slightly damp.

Air Fluff

Use this feature to tumble items without heat.

2 Time Dry

Use to set your own dry time.

3 Extend Tumble

Minimizes wrinkles by adding approximately 60 minutes of no-heat tumbling.

Damp Alert

Causes the dryer to beep when clothes have dried to a damp level.

Cycle Signal

To change the volume of the end-of-cycle signal, press button until desired volume is reached.

4 Sensor Dry Level

The sensor continuously monitors the amount of moisture in the load and it stops at just the right time to prevent under- and over-drying.

5 Dry Temp

You can change the temperature of your dry cycle.

Anti-bacterial*

This option is used with **COTTONS** or **MIXED LOAD** cycles. This option reduces certain types of bacteria by 99.9%.

*Do not use this cycle on delicate fabrics.

The inside story

GE® frontload washer

1 SudsLogic™ technology

If too many suds are detected it automatically adapts to prevent over-sudsing.

2 Load-sensing adaptive fill

Washer automatically fills with just the right amount of water for the load.



3 QuietBalance™ suspension system

Ensures reliable, quiet operation for flexible installation.

4 Stainless steel wash basket

Professional grade stainless steel wash basket stands up to the toughest loads and is built for years of reliable use.

5 GentleClean™ lifters

Lightly tumble clothes for an exceptional clean, with minimal wear and tear.

GE model WCVH6600H

GE frontload dryer

1 Dual thermistors

Combined with sensor bars, these help maintain consistent heat and ensure the right level of dryness is reached.

2 Removable lint filter reminder light

Reminds you to clean the upfront filter.



GE model DCVH660EH/GH

3 Quiet-by-Design™

Motor and blower isolators, DuraDrum™ interior and sound-dampening materials ensure quiet operation.

4 DuraDrum™ interior

Handles king-size items and family-size loads with a durable scratch-resistant interior.

5 Deluxe dryer rack

Allows tumble-free drying of items like sweaters.

Dare to compare
GE® frontload washers

Washer capacity



GE WCVH6600H frontload washer

King-size 3.8 cu. ft. stainless steel wash basket*



Whirlpool Duet Sport WFW8500S washer

Large capacity 3.6 cu. ft. wash basket

Competitive comparison

	Capacity (cubic feet)**
GE® frontload washer (WCVH6600H)	3.8
Maytag (MFW9660)	3.8
Whirlpool (GHW9300)	3.8
GE frontload washer (WBVH6240H)	3.7
LG (WM2077)	3.72
GE frontload washer (WBVH5100H)	3.6
Whirlpool Duet Sport (WFW8500S)	3.6
Frigidaire Affinity (ATF7000ES)	3.5

*Washes equivalent amount of clothes as a 3.7 cu. ft. agitator machine, per IEC ratios.

**Per IEC ratios.

Wash times



GE WCVH6600H frontload washer



LG Tromm WM2077 washer

Competitive comparison

	Wash Times*	
	Normal	Speed
GE frontload washer (WCVH6600H)	59 min.	38 min.
GE frontload washer (WBVH6240H)	59 min.	38 min.
GE frontload washer (WBVH5100H)	59 min.	38 min.
Whirlpool Duet Sport (WFW8500S)	54 min.	28 min.
LG Tromm (WM2077)	59. min.	38 min.

Wash test performed by GE internal testing.
*Based on 8-lb. AHAM wash load.

Dare to compare
GE® frontload laundry pair

Washer heater



GE WCVH6600H frontload washer

HydroHeater™ internal water heater

The HydroHeater increases the water temperature to sanitize and kill more than 99% of many common bacteria found in home laundry.*

Competitive comparison

	Water heater
GE frontload washer (WCVH6600H)	Yes
Whirlpool (GHW9300)	Yes
LG (WM2077)	No
GE frontload washer (WBVH6240H)	Yes
GE frontload washer (WBVH5100H)	No
Whirlpool Duet Sport (WFW8500S)	Yes
Whirlpool Duet Sport (WFW8300S)	No
Frigidaire Affinity (ATF7000ES)	Yes
Frigidaire Affinity (ATF6000ES)	No

*When selecting the washer water temperature "Sanitize" and soil level setting "Heavy" with home hot water heater set at 120°F.



Frigidaire Affinity ATF7000ES washer

Only uses water directly from tap with no temperature boost.

Dryer vent length



GE DCVH660EH/GBB frontload dryer



Whirlpool Duet Sport WED8300SW dryer

GE has long equivalent ducting performance for more flexible installation.

Competitive comparison

	Vent length*
GE frontload dryer (DCVH660EH/GH)	90 ft.
GE frontload dryer (DBVH512EF/GF)	90 ft.
GE frontload dryer (DBVH510EH/GH)	90 ft.
Whirlpool (GEW9250)	64 ft.
LG (DLE2514)	65 ft.
Bosch (WTMC3300)	66 ft.
Kenmore (94082)	64 ft.
Frigidaire (GLEQ2152)	64 ft.

**On equivalent ducting.*

Dare to compare
GE® frontload dryers

Dryer capacity



GE DCVH660EH/GH frontload dryer

Large enough to handle 23 full-size bath towels.



Frigidaire AEQ7000ES dryer

Competitive comparison

	Capacity (cubic feet)
GE frontload dryer (DCVH660EH/GH)	7.0
GE frontload dryer (DBVH512EF/GF)	7.0
GE frontload dryer (DBVH510EH/GH)	7.0
Whirlpool (GEW9250)	7.0
LG (DLE2514)	7.0
Bosch (WTM3300)	6.7
Whirlpool Duet Sport (WE8500S)	6.7
Frigidaire Affinity (AEQ7000ES)	5.8

Dry times



GE DCVH660EH/GH frontload dryer

GE provides more options for all your clothes care needs.

Competitive comparison

	Dryer times*
GE frontload dryer (DCVH660EH/GH)	48 min.
GE frontload dryer (DBVH512EF/GF)	48 min.
GE frontload dryer (DBVH510EH/GH)	48 min.
LG Tromm (DLE2514)	54 min.
Maytag (MDE6700)	55 min.
Whirlpool Duet Sport (WED8500S)	55 min.
Frigidaire (AEQ6000)	68 min.

Dry test performed by GE internal testing.
*Based on an 8 lb. AHAM dryer load dried to 3% .

Drying system



GE DCVH660EH/GH frontload dryer

GE is the first to introduce thermistors on both incoming and outgoing air for better drying.

Competitive comparison

	Temperature monitoring system
GE frontload dryer (DCVH660EH/GH)	Dual thermistor
GE frontload dryer (DBVH512EF/GF)	Dual thermistor
GE frontload dryer (DBVH510EH/GH)	Dual thermistor
Whirlpool (GEW9250)	Single thermistor
LG (DLE2514)	Single thermistor
Bosch (WTMC3300)	Thermostat
Kenmore (94082)	Single thermistor

Dare to compare
GE® frontload laundry pair installation



Show and tell

Display the GE frontload washer and dryer to demonstrate their installation flexibility

1. Stacked display — The WCVH6600H, WCVH6260H, WBVH6240H and WSXH208F are included with the hardware and the instructions required to stack the dryer on top of the washer. Stack kits are available at additional cost for the WBVH5100H and WSSH300G. The WBVH5100H, requires part no. WE25X10018. The WSSH300G requires model no. STACKIT1WW or pub. no. 14-A026.
2. Pedestal display — Order quantity 2 of model 13" SBS137H or 10" SBS107H (same pedestal for both the washer and dryer), to fit the WCVH6600H/DCVH660EH/GH, WBVH6240H/DBVH512EF/GF, WCVH6260H/DCVH515EF/GF and WBVH5100H/DBVH510EH/GH. Order a quantity of 2 of model 15" FPDW15 for the WSSH300G and DSXH47EG/GG. All pedestals are included with the hardware and the instructions required to install them with either a washer or a dryer.
3. Custom built-in White display — To customize the shape of the counter or cabinetry to match the curve of the washer control panel, order the template and instructions pub. no. 14-A025.



Demonstrate the GE frontload washer and dryer to demonstrate their cycle features and options

1. Follow instructions to uncrate the washer and dryer units.
2. No kit is needed to demonstrate the controls on the sales floor.
3. If you are demonstrating an electric dryer but do not have 220V electrical available, you may convert the 220V dryer to 110V by using pub. no. 3-A029 (shown below).
4. To access the DEMO Mode for both the washer and dryer:
 - Plug unit in
 - Open door to unit
 - Within 30 seconds of powering on the unit press "start" 5 times quickly
 - To disable the demo mode, press "start" 5 times quickly with the door open



110V demo cord kit

Available to convert 220V dryer for demonstration.

Pub. no. 3-A029

GE® frontload laundry pairs

Available new models



GE frontload washer WCVH6600H

- 3.8 cu. ft. king-size capacity*
- ENERGY STAR® qualified
- HydroMotion™ wash action
- HydroHeater™ internal water heater
- Load-sensing adaptive fill
- 26 cycles
- HydroTemp™⁵ water temperature system
- 1100 RPM spin speed
- QuietBalance™ suspension system
- Cycle countdown display with LED indicators
- Available in WW, GG, BB

GE frontload dryer DCVH660EH/GH

- 7.0 cu. ft. king-size capacity
- Sensor Dry Plus™
- Dewrinkle cycle
- 5 custom heat settings
- TrueGrip™ handle
- Cycle countdown display with LED indicators
- Cycle indicator lights
- Rotary electronic controls
- Deluxe dryer rack
- Adjustable end-of-cycle signal
- Available in WW, GG, BB

*Washes equivalent amount of clothes as a 3.8 cu. ft. agitator machine, per IEC ratios.



GE frontload washer WBVH6240H

- 3.7 cu. ft. king-size capacity*
- ENERGY STAR qualified
- HydroMotion wash action
- HydroHeater internal water heater
- Load-sensing adaptive fill
- 24 cycles
- HydroTemp⁵ water temperature system
- 1000 RPM spin speed
- QuietBalance suspension system
- Cycle countdown display with LED indicators
- Available in WW

GE frontload dryer DBVH512EF/GF

- 7.0 cu. ft. king-size capacity
- Sensor Dry Plus
- Dewrinkle cycle
- 5 custom heat settings
- TrueGrip handle
- Cycle countdown display with LED indicators
- Cycle indicator lights
- Rotary electronic controls
- Deluxe dryer rack
- Adjustable end-of-cycle signal
- Available in WW

*Washes equivalent amount of clothes as a 3.7 cu. ft. agitator machine, per IEC ratios.

GE® frontload laundry pairs

Available new models



GE frontload washer WBVH5100H

- 3.6 cu. ft. king-size capacity*
- ENERGY STAR® qualified
- HydroMotion™ wash action
- PerfectTemp™
- Load-sensing adaptive fill
- 14 cycles
- 4 water temperature system
- 1000 RPM spin speed
- QuietBalance™ suspension system
- Cycle countdown display with LED indicators
- Available in WW

GE frontload dryer DBVH510EH/GH

- 7.0 cu. ft. king-size capacity
- Sensor Dry Plus™
- Dewrinkle cycle
- 4 custom heat settings
- TrueGrip™ handle
- Cycle countdown display with LED indicators
- Cycle indicator lights
- Rotary electronic controls
- Quiet-by-Design™
- Removable lint filter with reminder light
- Available in WW

*Washes equivalent amount of clothes as a 3.6 cu. ft. agitator machine, per IEC ratios.



GE frontload washer
WSSH300G

- 3.5 cu. ft. king-size capacity*
- ENERGY STAR® qualified
- Automatic water levels
- Timed dispensers
- 10 wash cycles
- End-of-cycle signal
- Variable motor speeds
- Delicate cycle
- Available in WW

GE frontload dryer
DSXH47EG/GG

- 5.8 cu. ft. super capacity
- Rotary controls
- Painted steel drum interior
- 7 dry cycles
- End-of-cycle signal
- 4 temperature options
- Interior drum light
- Reverse-a-Door
- Available in WW

*Washes equivalent amount of clothes as a 3.5 cu. ft. agitator machine, per IEC ratios.

GE® frontload laundry pair

Everything you need.

Washer



Performance

HydroMotion™ wash action

Reversing wash action offers great cleaning performance with gentle wash motion.



Clothes Care

HydroHeater™

Increases the water temperature to sanitize and kill more than 99% of many common bacteria found in home laundry.*



Savings

3.8 cu. ft. king-size capacity**

Makes room for more items, saving time, water and energy.

Dryer



Performance

Dewrinkle cycle

Tumbles clothes without heat to reduce creasing and wrinkling.



Clothes Care

Sensor Dry Plus™

Moisture and temperature settings provide more consistent clothes care.



Savings

7.0 cu. ft. king-size capacity

Large enough to handle anything the washer sends its way.

*When selecting the washer water temperature "Sanitize" and soil level setting "Heavy" with home hot water heater set at 120°F.

**Washes equivalent amount of clothes as a 3.8 cu. ft. agitator machine, per IEC ratios.

Warranty information

GE Profile™ washers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the washer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through fifth year From the date of the original purchase	Suspension Rod and Spring Assembly, and Main Electronic Control Board , if any of these parts should fail due to a defect in materials or workmanship. GE will also replace the Washer Lid or Cover , if they should rust under operating conditions. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.
Second through tenth year From the date of the original purchase	Shaft and Tube Assembly and Outer Wash Tub or Direct Drive (Harmony washer only) , if any of these parts should fail due to a defect in materials or workmanship. During this additional nine-year limited warranty , you will be responsible for any labor and related service costs.
Lifetime of product	Basket , if the basket should fail due to a defect in materials or workmanship. During this product lifetime limited warranty , you will be responsible for any labor and related service costs.

GE® washers and GE frontload washers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the washer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE Profile king-size, super capacity and extra-large capacity dryers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the dryer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second year From the date of the original purchase	Any part of the dryer which fails due to a defect in materials or workmanship. During this additional one-year limited warranty , you will be responsible for any labor and related service costs.
Third through fifth year From the date of the original purchase	Dryer Drum and Main Electronic Control Board , if either of these parts should fail due to a defect in materials or workmanship. During this additional three-year limited warranty , you will be responsible for any labor and related service costs.

GE super capacity, extra-large capacity, large capacity and GE frontload dryers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the dryer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

EXCLUSION OF IMPLIED WARRANTIES - Your sole and exclusive remedy is product repair as provided in this Limited Warranty. Any implied warranties, including the implied warranties of merchantability or fitness for a particular purpose, are limited to one year or the shortest period allowed by law.

*See written warranty for complete details.

This warranty is extended to the original purchaser and any succeeding owner for products purchased for home use within the USA. In Alaska, the One-Year Warranty excludes the cost of shipping, or service calls to your home. Some states do not allow the exclusion or limitation of incidental or consequential damages. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. To know what your legal rights are, consult your local or state consumer affairs office or your state's Attorney General.

What GE will not cover:

- Service trips to your home to teach you how to use the product.
- Improper installation.
- Replacement of house fuses or resetting of circuit breakers.
- Failure of the product if it is abused, misused or used for anything other than the intended purpose or used commercially.
- Damage to product caused by accident, fire, floods or acts of God.
- Incidental or consequential damage caused by possible defects with this appliance.


GE Profile™ washers

	GE Profile		
	WPGT9360E	WPRE8100G	WPRE6100G
Capacity			
Capacity cu. ft.	4.0* King-size	3.5 King-size	3.5 King-size
Energy			
ENERGY STAR®	●		
Controls			
Electronic	LCD touchscreen display	Rotary	Rotary
Status indicators	LCD display	LED	LED
Cycle countdown	LCD	LED	LED
Adaptive capabilities	Water levels	Cycle time	
HydroWash™	●		
HydroWave™		●	●
HydroHeater™	●		
Water temp system	RightTemp	PerfectTemp™	PerfectTemp
Wash/rinse temps	4	7	5
Water levels	Adaptive fill	Variable	Variable
Wash system			
Wash basket	Stainless steel	Stainless steel	Stainless steel
Wash mechanism	Infusor™	GentlePower™ agitator	GentlePower agitator
Wash/spin combinations	Multiple	Multiple	Multiple
Drive system			
Variable-speed motor	Direct drive	●	●
Maximum spin speed	1010 RPM	630 RPM	630 RPM
Dispensers			
Bleach	Flow-Thru™ timed	●	●
Fabric softener	Flow-Thru timed	●	●
Detergent	Flow-Thru timed		
Wash Boost	Flow-Thru timed		
Signals			
End-of-cycle	Variable		
Add bleach	Variable		
Wash cycles			
Number of cycles	Multiple	Multiple	Multiple
Custom cycles	6		
Cycle selections			
Whites/cottons	●	●	●
Colors	●	●	
Dark colors	●	●	
Easy care	●	●	●
Handwash	●	●	●
Specialty cycles	Multiple		
Program options			
Stain wash	Stain Inspector™		
Extra heavy soil	Super clean		●
Heavy soil	●	●	●
Medium soil	●	●	●
Light soil	●	●	●
Extra light soil	●		●
Special cycles			
Delay start	●		
Speed wash	Quick clean	●	
Prewash	●	●	
2nd rinse	●	●	●
Extended spin	●	●	●
Rinse and spin	●	●	●
Spin only	●	●	●
Additional features			
Quiet performance	Supreme	Deluxe	Deluxe
HydroView™ glass lid	●		
English/Spanish LCD option	●		
Color lid instructions		●	●
Appearance			
Backsplash color	Platinum or White	Titanium	Titanium
Colors available**	PL, WW	WT	WT
Weights & Dimensions			
Approx. shipping weight (lbs.)	155	175	175


*Washes equivalent amount of clothes as 4.0 cu. ft. agitator machine per IEC ratios.

**PL = Dark Platinum, WW = White on white, WT = White on titanium.

Washer dimensions (in inches) GE Profile Harmony™ washer

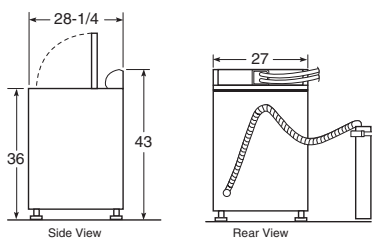

Washer dimensions (in inches)

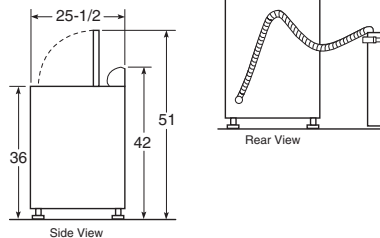

Washer specifications

Circuit requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

Electrical rating:

115V, 60Hz, 10A


Washer note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

GE® washers

	GE						
	WJRE5500G	WJRR4170G	WWSE5240G	WJSR4160G	WBSR3140G	WDSR2080G	WVSR1060G
Capacity							
Capacity cu. ft.	3.5 King-size	3.5 King-size	3.2 Super plus	3.2 Super plus	3.2 Super plus	3.2 Super	3.2 Super
Controls							
Electronic	Rotary		Rotary				
Electromechanical		•		•	•	•	•
Status indicators	LED		LED				
HydroWave™	•	•	•	•	•		
Water temp system	PerfectTemp™		PerfectTemp				
Wash/rinse temps	4	4	4	4	4	3	3 locked
Water levels	4	4	4	4	3	3	3
Wash system							
Wash basket	Stainless steel	Stainless steel	ExtrAction™	ExtrAction	ExtrAction	PermaTuf™ II	PermaTuf II
Wash mechanism	GentlePower™ agitator	GentlePower agitator	GentlePower agitator	GentlePower agitator	GentlePower agitator	FlexCare™ agitator	FlexCare agitator
Wash/spin combinations	5	4	5	4	3	2-pulsed	1
Drive system							
Transmission						Steel	Steel
Maximum spin speed	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM	630 RPM
Dispensers							
Bleach	•	•	•	•	•	•	
Fabric softener	•	•	•	•	•		
Wash cycles							
Number of cycles	18	17	24	16	14	8	6
Cottons Regular	•	•	•	•	•	Whites	Whites
Auto soak (30 min.)		•		•			
Auto soak (15 min.)		•		•			
Extra heavy soil	•		•				
Heavy soil	•	•	•	•	•	•	•
Medium soil	•	•	•	•	•	•	
Light soil	•	•	•	•	•	•	•
Extra light	•	•					
Easy Care	•	•	•	•	•		Colors
Auto soak (15 min.)				•			
Heavy soil	•	•	•	•	•		•
Medium soil	•	•	•	•	•		
Light soil	•	•	•	•	•		•
Extra light soil		•	•	•	•		
Casuals	•		•			•	
Heavy soil	•		•			•	
Medium soil	•		•			•	
Light soil	•		•			•	
Delicate	•	•	•	•	•		
Dark colors							•
Heavy soil							•
Medium soil			•				
Light soil		•	•	•	•		•
Handwash - Pulsed				•			
Medium soil							
Hang to Dry/Prewash			•				
Special Cycles							
Prewash	•	•		•	•		
2nd rinse	•	•	•	•	Power rinse		
Soak option	•		•				
Extended spin	•	•	•		•		
Rinse & spin (Quick rinse)	•	•	•	•	•	•	
Spin only	•	•	•	•		•	•
Additional Features							
Quiet performance	Quiet-by-Design™	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design
Color lid instructions	•	•	•	•	•	•	•
Appearance							
Backsplash color	Silver	White	Silver	White	White	White	White
Colors available*	WW	WW	WW	WW	WW	WW, CC	WW
Weights & Dimensions							
Approx. shipping wt. (lbs.)	160	160	155	160	160	160	160

*WW = White on white, CC = Bisque on bisque.

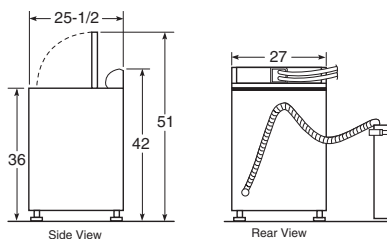Washer dimensions
(in inches)

Washer specifications

Circuit requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

Electrical rating:

115V, 60Hz, 10A


Washer note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

	GE Profile		
	Electric	DPSE810EG	DPSR610EG
Gas	DPGT750GC	DPSE810GG	DPSR610GG
Capacity			
Capacity cu. ft.	7.3 King-size	7.0 Super	7.0 Super
Controls			
Electronic	●	Rotary	Rotary
Status indicators	LCD	LED	
Cycle countdown	LCD	LED	
Adaptive Logic™	●	Cycle time	
Heat selections	5	5	4
Dry system			
Clothing moisture sensor	DuoDry™	Sensor Dry Plus™	Sensor Dry™
Temperature sensor	Thermistors	Thermistors	Thermostat
Dryer drum	Stainless steel	Stainless steel	Stainless steel
Drum baffles	Dark Platinum	White	White
Dual motors	●		
Signals			
End-of-cycle	Variable	●	●
Dry cycles			
Number of cycles	Multiple	20	10
Custom cycles	6		
Cycle selections			
Cottons	●	●	●
Mixed loads	●		
Easy care	●	●	●
Knits sweaters	●	●	
Delicates	●	●	●
Specialty cycles	Multiple		
Program options			
More dry	●	●	●
Dry	●	●	●
Less dry	●	●	●
Damp dry	●	●	●
Timed dry			
Time control	Electronic	80 min.	80 min.
Special cycles			
Antibacterial cycle		●	
Dryel® cycle	●	●	
Delay start	●		
Add time option	●		
Dewrinkle	●	●	●
Quick Fluff (no heat)	●	●	●
Optional wrinkle care		●	●
Additional Features			
Quiet performance	Supreme	Luxury	Deluxe
Quiet drum	●	●	
Deluxe dryer rack	●	●	●
Dryer interior light	●	●	●
Extended venting capability	Up to 150 ft.	●	
Clean lint filter reminder	●	●	
English/Spanish LCD option	●		
Appearance			
Backsplash color	Platinum or White	Titanium	Titanium
Colors available*	PL, WW	WT	WT
Weights & Dimensions			
Approx. shipping weight-elec. (lbs.)	155	125	125
Approx. shipping weight-gas (lbs.)	155	129	128

*PL = Dark Platinum, WW = White on white, WT = White on titanium.

Dryer dimensions (in inches)

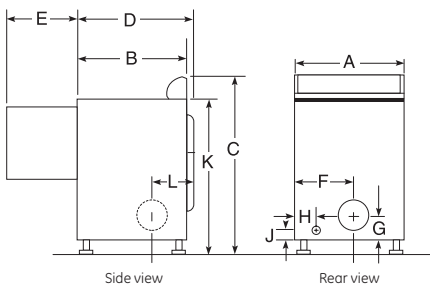

	7.3 cu. ft. capacity	7.0 cu. ft. capacity
A	27	27
B	26-1/2	25-1/2*
C	43	42
D	29	28-1/4
E	22-1/2	23-1/2
F	13	11-1/2
G	3-1/2	3-1/2
H	3	2
J	2-1/2	2-1/2
K	36	36
L	3-1/2	8-1/2

*24-1/2" from the edge of the side panel to the front. 25-1/2" from front to edge of end caps.



Listed by
Underwriters
Laboratories

Dryer specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom.

Gas: For 7.3, 7.0, 6.0 and 5.8 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit requirements:

Electric: An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

Electric dryer rating:

240V, 6000W, 28.5A, 60Hz—7.3 cu. ft. dryer

240V, 5600W, 24A, 60Hz—6.0 cu. ft. dryers

208V, 4400W, 22A, 60Hz—5.8 cu. ft. dryers

Gas: An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.

NEMA receptacle codes:

3-prong dryer cord/30A/4' long (cat #WX9X2) is for NEMA10-30R receptacle

4-prong dryer cord/30A/4' long (cat #WX9X18) is for NEMA14-30R receptacle

Gas dryer electric rating:

120V, 60Hz, 6A


Gas (BTU/HR): 25,000 for 7.3 cu. ft. dryers, 22,000 for 7.0, 6.0 and 5.8 cu. ft. dryers and. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit: 7.0, 6.0 and 5.8 cu. ft. model kit is WE25X0217 and 7.3 cu. ft. model kit is WE25X10014. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Dryer note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Note: GE Profile Harmony™ 7.3 cu. ft. dryer elbow kit, Pub. No. 14-A003, is available at additional cost. An extra length (10-ft.) communication cable, Pub. No. 14-A013, is available at additional cost.

Power cord locations


5.8, 6.0 and 7.0 cu. ft. dryers



	GE							
Electric	DRSR495EG	DRSR483EG	DLSR483EG	DWSR483EG DWXR483EG	DWSR463EG DWXR463EG	DBSR463EG DBXR463EG	DBLR333EG	DVLR223EG
Gas	DRSR495GG	DRSR483GG	DLSR483GG	DWSR483GG DWXR483GG	DWSR463GG DWXR463GG	DBSR463GG DBXR463GG	DBLR333GG	DVLR223GG
Capacity								
Capacity cu. ft.	7.0 Super	7.0 Super	7.0 Super	7.0 Super 6.0 Extra-large	7.0 Super 6.0 Extra-large	7.0 Super 6.0 Extra-large	5.8 Extra-large	5.8 Extra-large
Controls								
Electromechanical			●	●		●	●	●
Electronic	Rotary	Rotary			Rotary			
Heat selections	4	4	4	4	4	4	3	2
Dry system								
Clothing moisture sensor	Sensor Dry™							
Temperature sensor	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Dryer drum	Stainless steel	Stainless steel	DuraDrum™	DuraDrum	DuraDrum	DuraDrum	DuraDrum	DuraDrum
Drum baffles	White	White	White	White	White	White	White	White
Signals								
End-of-cycle	●	Variable	Variable	Variable	Variable	Fixed		
Dry cycles								
Number of cycles	9	8	8	8	6	6	3	2
Cottons	●	●	●	●	●	●	●	●
Easy care	●	●	●	●	●	●	●	
Damp dry	●	●	●	●	●	●		
Time control	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.	80 min.
Special cycles								
Dewrinkle	●	●	●	●		●		
Quick Fluff (no heat)	●	●	●	●	●	●		
Optional wrinkle care/ extended tumble	●	●	●	●	●			
Additional features								
Quiet performance	Variable	Quiet-by-Design™	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design
Deluxe dryer rack	●							
Dryer interior light	●	●	●	●	●	●		
Extended venting capability			Up to 150 ft.					
Appearance								
Backsplash color	Silver	Silver	White	White WW, CC WW	Silver	White	White	White
Colors available*	WW	WW, CC	WW	WW	WW	WW, CC	WW, CC	WW
Weights & dimensions								
Approx. shipping weight – electric (lbs.)	119	119	120	119 112	116 112	116 110	112	112
Approx. shipping weight – gas (lbs.)	124	124	125	124 115	121 115	121 115	115	115

*WW = White on white, CC = Bisque on bisque


Dryer dimensions (in inches)

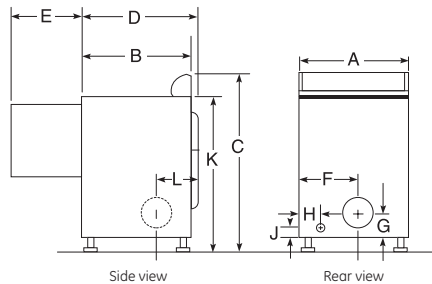

	5.8 & 6.0 cu. ft. capacity	7.0 cu. ft. capacity
A	27	27
B	25-1/2	25-1/2*
C	42	42
D	25-3/4	28-1/4
E	23-1/2	23-1/2
F	11-1/2	11-1/2
G	3-1/2	3-1/2
H	2	2
J	2-1/2	2-1/2
K	36	36
L	5-1/4	8-1/2

*24-1/2" from the edge of the side panel to the front. 25-1/2" from front to edge of end caps.

Power cord locations 5.8, 6.0 and 7.0 cu. ft. dryers



Frontload washers

	GE®		
	WCVH6600H	WBVH6240H	WBVH5100H
Capacity			
Capacity	King-size	King-size	King-size
Cubic feet	3.8*	3.7*	3.6*
Features			
ENERGY STAR®	●	●	●
ADA compliant	●	●	●
Wash/rinse temperatures	5 with sanitize	5 with sanitize	4
Water levels	Automatic	Automatic	Automatic
HydroMotion™ wash	●	●	●
HydroHeater™	●	●	●
SudsLogic™	●	●	●
Number of cycles	26	24	14
Specialty cycles	Active wear	Active wear	
Detergent dispenser (liquid/powder)	●	●	●
Bleach dispenser	●	●	●
Fabric softener dispenser	●	●	●
Auxiliary dispenser	●	●	
Control type	Electronic	Electronic	Electronic
End-of-cycle signal	Adjustable	Adjustable	Adjustable
Wash/spin speed combinations	6	6	5
RPM spin speed	1100	1000	1000
Water temperature system	HydroTemp™5	HydroTemp5	PerfectTemp™
Colors	●	●	●
Delicates	●	●	
Easy Care	●	●	●
Handwash	●	●	●
Whites	●	●	●
Optional soil levels—Extra Light	●	●	●
Optional soil levels—Heavy Soil	●	●	●
Optional soil levels—Light Soil	●	●	●
Optional soil levels—Normal Soil	●	●	●
2nd rinse	●	●	●
Adaptive capabilities	Load size	Load size	Load size
Cycle countdown	with LED indicators	with LED indicators	with LED indicators
Cycle status lights	●	●	●
Delay start	●	●	●
Drain and spin	●	●	●
Prewash	●	●	●
Speed wash	●	●	●
Stain wash	●	●	●
Door style	See-thru glass	See-thru glass	See-thru glass
Noise package	Quiet-by-Design™	Quiet-by-Design	Quiet-by-Design
Leveling legs	●	●	●
Stainless steel wash basket	●	●	●
Handle	TrueGrip™	TrueGrip	TrueGrip
Pedestal available at additional cost	●	●	●
Stacking kit available at additional cost	Included	Included	WE25X10018
Appearance			
Colors available**	WW, GG, BB	WW	WW
Weights & Dimensions			
Approx. shipping weight (lbs.)	225	225	225
Flexible installation	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side
Power/Ratings			
Circuit breaker or Time delay fuse	15 or 20 amps	15 or 20 amps	15 or 20 amps
Volts/Hertz	120V; 60Hz	120V; 60Hz	120V; 60Hz

*Washes equivalent amount of clothes as a similar cubic foot agitator machine, per IEC ratios.

**WW = White on white, GG = Granite grey, BB = Black on black.

Pedestal dimensions (in inches)

For 3.8, 3.7 and 3.6 cu. ft. frontload washers and 7.0 cu. ft. frontload dryers.


SBSD107HWW-white

SBSD137HWW-white

SBSD137HGG-granite

SBSD137HBB-black

These optional 10" and 13" pedestals raise the door opening and height of the washer or dryer. Feet on 10" pedestal allow it to adjust to 10-3/8" height. Feet on 13" pedestal allow it to adjust to 13-3/8" height.

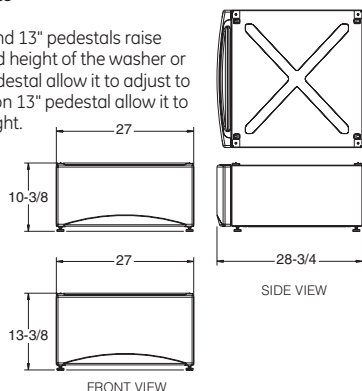


Frontload dryers


	GE		
	DCVH660EH/GH	DBVH512EF/GF	DBVH510EH/GH
Capacity			
Capacity	King-size	King-size	King-size
Cubic feet	7.0	7.0	7.0
Features			
ADA compliant	●	●	●
Moisture sensor	Sensor Dry Plus™	Sensor Dry Plus	Sensor Dry Plus
Control type	Rotary-electronic	Rotary-electronic	Rotary-electronic
Cycle countdown	with LED indicators	with LED indicators	with LED indicators
Cycle status lights	●	●	●
Dual thermostats	●	●	●
Heat selections	5	5	4
Number of cycles	Multiple	Multiple	Multiple
Cotton cycle	●	●	●
Custom cycles	●	●	●
Delicate cycle	●	●	●
Easy Care cycle	●	●	●
Mixed loads cycle	●	●	●
Optional dryness levels—Damp	●	●	●
Optional dryness levels—Dry	●	●	●
Optional dryness levels—Less dry	●	●	●
Optional dryness levels—More dry	●	●	●
Timed dry—actual minutes on timer	90	90	90
Add Time	●	●	●
Dewrinkle	●	●	●
Damp dry signal	●	●	●
Dryer interior light	●	●	●
Dryer rack	Deluxe	Deluxe	
End-of-cycle signal	Adjustable	Adjustable	Adjustable
100% front serviceable	●	●	●
Door style	See-thru glass	See-thru glass	See-thru glass
Drum interior	DuraDrum™	DuraDrum	DuraDrum
Leveling legs	●	●	●
Reverse-a-Door	●	●	●
Exhaust options (electric/gas)	4/3	4/3	4/3
Handle	TrueGrip	TrueGrip	TrueGrip
Pedestal available at additional cost	●	●	●
Appearance			
Colors available*	WW, GG, BB	WW	WW
Weights & Dimensions			
Approx. shipping weight (lbs.) E/G	125/130		
Flexible installation	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side

*WW = White on white, GG = Granite grey, BB = Black on black.


Washer dimensions in inches




Washer dimensions with door open (in inches)

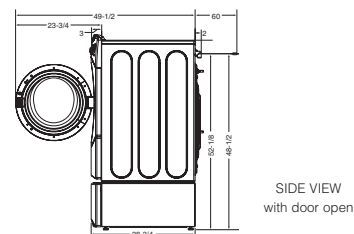

Dryer dimensions (in inches)



Stacked dimensions (in inches)

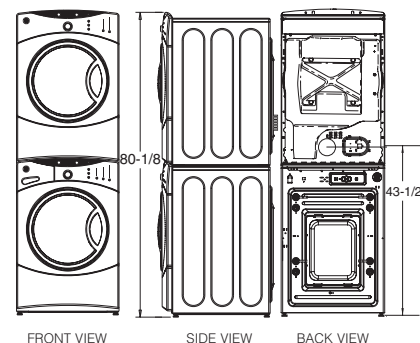



Frontload washer

	GE
	WSXH208F WSSH300G
Capacity	
Capacity	Extra-large/King-size
Cubic feet	3.1* /3.5*
Features	
ENERGY STAR®	●
ADA compliant	●
Wash/rinse temperatures	4
Water levels	Automatic
Standard rinse cycles	3/2
Motor speeds	Variable
Combinations**	HC, WW, WC, CC
Detergent dispenser (liquid/powder)	●
Bleach dispenser	●
Fabric softener dispenser	●
End-of-cycle signal	●
Final spin/speed selections	Automatic/4
Number of wash cycles	8/10
Cotton/Regular	●
Easy Care/Perm Press	●
Delicates	●
Max. spin speed	850/950
Noise package	Standard
Leveling legs	●
Stainless steel wash basket	●
Pedestal available at additional cost	12" FPDW1/ 15" FPDW15
Appearance	
Colors available	White on white
Weights & Dimensions	
Approx. shipping weight (lbs.)	217
Flexible installation	●

*Washes equivalent amount of clothes as a similar cubic foot agitator machine, per IEC ratios.

**HC = Hot-Cold, WW = Warm-Warm, WC = Warm-Cold, CC = Cold-Cold.

Washer dimensions (in inches)



	WSXH208F	WSSH300G
A	36	36
B	26-3/4	27
C	24-3/4	27-3/4
D	34-5/8	34-5/8
E	11-3/4	8-1/2
F	2-7/8	6-3/4
G	31-5/8	33-1/2
H	17	22-1/2
I	1-1/2	1-1/2
J	33-1/2	33-2/5

Washer specifications

Circuit requirements: An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

Electrical requirements:

120V, 60 Hertz, 12.0 Amps



See pub. no. 31-2819 for installation information.

Frontload dryer

	GE
	DSXH43EF/GF DSXH47EG/GG
Capacity	
Capacity	Extra-large/Super
Cubic feet	5.7/5.8
Features	
ADA compliant	●
Tumble drying	●
Time dry cycles	1/3*
Auto dry cycles	3/4
Temperature options	4
Cottons/Towels	●
Easy Care/Perm. Press	●
Knits/Delicates	●
Air Fluff/No Heat	●
Dryer rack	●/—
Quick clean lint screen	●
End-of-cycle signal	●
Dryer interior light	●
Reverse-a-Door	●
Spill Saver top	●
Poly tumbling vanes	●
Leveling legs	●
Exhaust options (Electric/Gas)	4/3
Heavy-duty suspension system	●
Pedestal available at additional cost	12" FPDW1/ 15" FPDW15
Appearance	
Colors available	White on white
Weights & Dimensions	
Approx. shipping wt. (Elec/Gas) (lbs.)	116/118
Flexible installation	●
Stacking kit included with dryer	●/—
STACKIT1WW or 14-A026 at additional cost	—/●
LP conversion kit	WE25X10021

*Includes Quick Dry, Dewrinkle

Dryer dimensions (in inches)



	DSXH43EF DSXH43GF	DSXH47EG DSXH47GG
A	36	36
B	26-7/8	27
C	25-3/4	28-1/2
D	34-5/8	34-5/8
E	47-1/2	48-1/2
F	4-3/8	4-3/8
G	4-3/4	4-3/4
H	13-9/16	13-9/16
I	3-3/4	5
J	1	2-1/4

Dryer specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom.

Gas: For 5.7 and 5.8 cu. ft. frontload dryers, when viewed from the front of the unit, exhaust 3-way via rear, right and bottom. Dryer is shipped exhausted to the rear.

Exhaust Elbow Kit:

Order Pub. No. 14-A018.

Electrical requirements:

240V, 3 Wire, 5600W, 24A, 60 Hz

208V, 3 Wire, 4400W, 22A, 60 Hz

Gas requirements:

120V, 60 Hz, 6A

See pub. no. 49-9963-2 for installation information.

Dryer exhausting information—
use metal duct only

		Best performance	
		Maximum length of 4" dia. rigid metal duct	
		Exhaust hood type	
		A 4" opening	B 2-1/2" opening
Frontload dryers	Number of 90° turns		
	0	60 ft.	48 ft.
	1	52 ft.	40 ft.
	2	44 ft.	32 ft.
	3	32 ft.	24 ft.
Frontload dryers	Number of 90° turns		
	0	30 ft.	18 ft.
	1	22 ft.	14 ft.
	2	14 ft.	10 ft.

Special installation requirements for
frontload models**Stacked installation**

• Brackets for stacking dryer are included as part of washer models, WCVH6600H, WCVH6260H, WBVH6240H. See installation instructions for details. If additional stacking kit is needed, order part no. WE25X10018.

• Brackets for stacking dryer are included as part of the dryer, DSXH43EF/GF. See dryer Use & Care for details.

• Bracket for stacking dryer, DSXH47EG/GG, order Pub. No. 14-A026 or STACKIT1WW at additional cost.

Custom built-in white installation template

• Order Pub. No. 14-A025 for models WCVH6600H, WCVH6260H, WBVH6240H, WBVH5100H, DCVH6600EH/GH, DCVH515EF/GF, DBVH512EF/GF, DBVH510EH/GH.

Undercounter installation

• Accessory mounting kits are required for undercounter installation of models WSXH208F, WSSH300G, DSXH43EF/GF, DSXH47EG/GG.

To order, call 1-800-848-7722.

Washer—Order Pub. No. 14-A037

Dryer—Order Pub. No. 14-A008

Alcove or closet installation

• If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.

• The dryer MUST be exhausted to the outdoors. See EXHAUST INFORMATION on page 62.

• Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:

0" either side
3" front and rear

• Minimum vertical space from floor to overhead cabinets, ceilings, etc., is 52".

• Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

• No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

Bathroom or bedroom installation

• The dryer MUST be exhausted to the outdoors. See EXHAUST INFORMATION on page 62.

• The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum clearances other than alcove or closet installations

• Minimum clearances to combustible surfaces:

0" both sides
3" rear

For more information on venting kits and accessories, please call 1-800-GE-CARES.

Special installation requirements

Alcove or closet installation

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer **MUST** be exhausted to the outdoors. See installation instructions.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
 - 0" either side
 - 3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc., is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

Dryer exhausting information

For complete information see installation instructions packed with dryer.

Important note: To convert a 7.3 cu. ft. dryer from rear exhaust to bottom or side venting, Pub. No. 14-A003 is required. 5.8, 6.0 and 7.0 cu. ft. dryers do not require additional parts to convert to bottom or side venting. **Note:** An extra length (10-ft.) communication cable is available at additional cost, Pub. No. 14-A013.

Ducting materials

For best performance, this dryer should be vented with 4" diameter all-rigid metal exhaust duct. If "all-rigid metal" duct cannot be used, then "flexible all-metal" venting can be used, but it will reduce the maximum recommended duct length.

The following kit or parts are available from your local service organization.

Kit WX8X75—7' aluminum duct and 4" hood, short tail.

(OR individual parts):

WX8X65 7' aluminum flex duct only

WX8X58 4' clamps (2)

WX8X67 4' exhaust hood

See installation instructions for complete information.

Exhaust length calculation:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.
 - The maximum lengths for flexible ducts are less than for rigid duct.
 - See table in installation instructions. A turn of 45° or less may be ignored.
 - Two 45° turns within the duct length should be treated as a 90° elbow.
 - A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down. Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

Bathroom or bedroom installation

- The dryer **MUST** be exhausted to the outdoors. See installation instructions.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum clearances other than alcove or closet installations

- Minimum clearances to combustible surfaces:
 - 0" both sides
 - 3" rear

Side or bottom exhaust

- For 7.3 cu. ft. models, order kit Pub. No. 14-A003
- For 7.0, 6.0 or 5.8 cu. ft. models, see installation instructions
- Unitized models do not require a kit for side venting

For more information on venting kits and accessories, please call 1-800-GE-CARES.

Dryer exhausting information—use metal duct only

Vertical and horizontal ducting

		Best performance			
		Maximum length of 4" dia. rigid metal duct		Maximum length of 4" dia. flexible metal duct	
		Exhaust hood type		Exhaust hood type	
 Domestic dryer models	Number of 90° turns	A	B	A	B
		4" opening	2-1/2" opening	4" opening	2-1/2" opening
7.3 cu. ft. capacity electric and gas dryers	0	150 ft.	127 ft.	75 ft.	52 ft.
	1	140 ft.	117 ft.	65 ft.	42 ft.
	2	130 ft.	107 ft.	55 ft.	32 ft.
	3	120 ft.	97 ft.	45 ft.	22 ft.
7.0, 6.0 and 5.8 cu. ft. capacity models all electric dryers	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
	3	35 ft.	25 ft.	20 ft.	15 ft.
7.0, 6.0 and 5.8 cu. ft. capacity models all gas dryers	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
	3	35 ft.	25 ft.	20 ft.	15 ft.
DLSR483E/G	0	150 ft.	125 ft.	55 ft.	45 ft.
	1	135 ft.	115 ft.	52 ft.	42 ft.
	2	125 ft.	105 ft.	49 ft.	39 ft.
	3	115 ft.	95 ft.	46 ft.	36 ft.
	4	105 ft.	85 ft.	43 ft.	33 ft.
	5	95 ft.	75 ft.	40 ft.	30 ft.



Listed by
Underwriters
Laboratories



A century of quality and innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

GE Consumer & Industrial
Appliances
General Electric Company
Louisville, KY 40225
ge.com

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2007 GE Company
PC46774 Pub. No. 14-X106