




GE Appliances


JSS16PD—GE 30" Slide-In Electric Range

Dimensions (in inches)

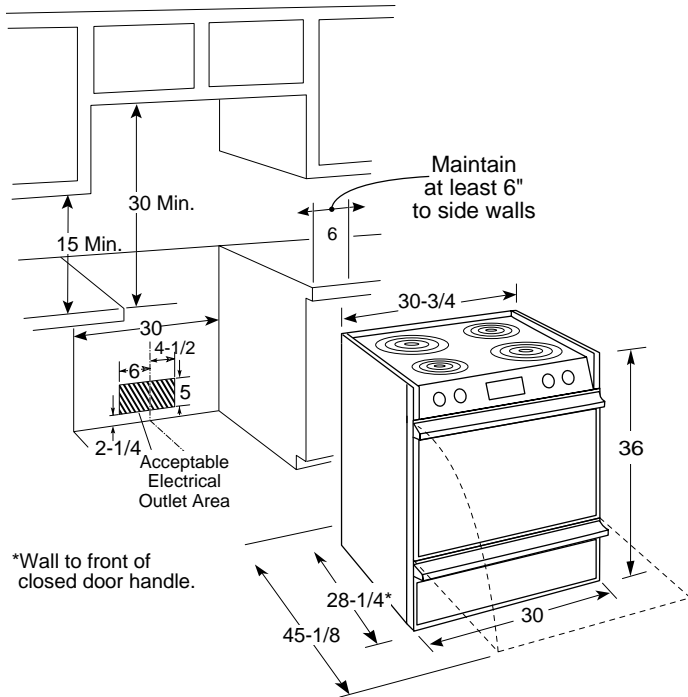


*Wall to front of closed door handle.

If you are NOT using the optional Filler or Backguard:



If you are using the optional Filler or Backguard:



For answers to your Monogram,[®] GE Profile[™] or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center[®] service, 800.626.2000.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by
Underwriters
Laboratories

KW Rating	
240V	10.8
208V	8.1

Optional Kits (Available at additional cost)

JXS28—Rear Filler Strip Kit
JXS31—White Accessory Backguard
JXS32—Brushed-Chrome Accessory Backguard
JXS34—Black Accessory Backguard
JXS35—Bisque Accessory Backguard
JXS40—Endcap kit to accommodate replacement where countertop may already be notched.
JXS52BB—Lower Trim Kit (Black)
JXS53WW—Lower Trim Kit (White)
JXS55CC—Lower Trim Kit (Bisque)

Note: All 30" Slide-In Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching of the side wall adjacent to the heating elements, it is recommended a minimum of 6" spacing from adjacent side walls be allowed for possible extended, high-heat, no-load operation of heating elements.

Note: Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194°.


Receptacle Location: For all 30" Slide-In Ranges, locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.



GE Appliances

JSS16PD—GE 30" Slide-In Electric Range

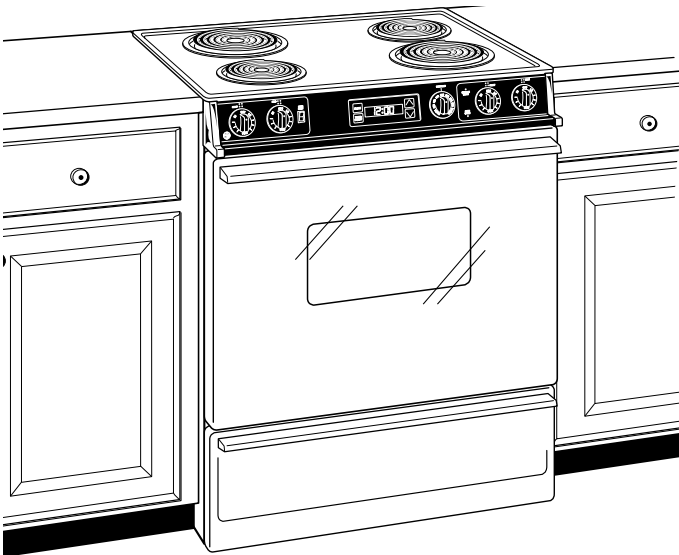

.JSS16PD.FPS

Features and Benefits

- Lift-Up Overhanging Porcelain-Enameled Cooktop
- Two 8" and Two 6" Plug-In Calrod® Heating Elements
- Removable Chrome One-Piece Drip Bowls
- Standard-Clean Oven
- Touch Pad Controls
- Electronic Clock and Kitchen Timer
- Broiler Pan with Grid
- 2 Oven Shelves
- Interior Oven Light
- Color-Matched Oven Door with Window
- Color-Matched Storage Drawer
- Visor Handle
- Optional Backguard Available at Additional Cost
- Model JSS16PDCT—Bisque
- Model JSS16PDWH—White
- Model JSS16PDAD—Almond