

DISHWASHERS

Featuring The GE Triton™ Dishwasher



The complete line of GE Dishwashers



We bring good things to life.

Only GE has 3 wash arms for cleaner dishes.



No pre-rinsing, soaking or scrubbing!

Only GE has three wash arms for improved coverage. Every spot on every dish receives a powerful spray. Eliminate recirculating food particles with 100% Triple Water Filtration and Dual Pumps. Food particles are pulverized by the Piranha™ Hard Food Disposer.

You want clean and quiet?



GE Triton™ Dishwashers deliver both!

Now, you don't have to choose between clean and quiet, because the GE Triton™ Dishwasher delivers both! Thanks to GE's advanced technology and TriClean™ Wash System, you get more than clean, you get a quiet kind of clean. By redirecting the spray jets, more water hits the dishes and less hits the tub and door, keeping more of the noise inside the dishwasher. Combining the ActiveVent, GE Profile™ QuietMotor, PermaTuf® Tub and a blanket of insulation, the QuietPower™ III sound package delivers the "Quietest Dishwasher in the U.S.A." So quiet, you will be talking about it, not over it.

"The cleanest wash you never heard."™

SaniWash. It more than cleans—it sanitizes.



GE Triton™ with SaniWash, an NSF*-certified sanitization cycle, reduces 99.999% of the bacteria found on dishes. It's ideal for sanitizing baby bottles and cutting boards, as well as glasses and dishes.

*National Sanitation Foundation

SpeedWash™ and SpeedDry™
Clean dishes 30 minutes faster!




When dinner's almost ready and the dishes are still dirty, use GE Triton Speed cycles. SpeedWash™ and SpeedDry™ cycles cut a full half-hour off GE's standard normal cycles. Thirty minutes can make a big difference when everyone's hungry and you're in a hurry.

GE Triton™ Dishwashers

These models include • TriClean™ Wash System (3 Wash Arms, 100% Triple Water Filtration with Dual Pumps, Piranha™ Anti-Jamming Hard Food Disposer) • CleanSensor • Electronic controls • SaniWash • SpeedWash™ and SpeedDry™ • China/Crystal cycle* • 8-Hour Delay Start • QuietPower™ III sound package • GE Profile™ QuietMotor • ActiveVent • Quiet Water Valve • Trimless appearance • Child lock • Super Capacity Plus silverware basket with 2 cell covers

Note: bold = feature upgrade from previous model

ONLY GE HAS IT!



TriClean™ Wash System has 3 Wash Arms that provide complete coverage eliminating pre-rinsing, soaking and scrubbing.

ONLY GE HAS IT!



100% Triple Water Filtration with Dual Pumps eliminates recirculating food particles.

ONLY GE HAS IT!



Piranha™ Anti-Jamming Hard Food Disposer grinds and pulverizes food particles.



SaniWash cycle reduces 99.999% of the bacteria found on dishes.

Not all features available on all models.



GE Profile Performance Series™

Triton™ Dishwasher with TriClean™ Wash System "Quietest in the U.S.A."

GSD5940DSS Stainless steel exterior

- Variable cycles/options • **Power Pre-Soak option**
- **Super upper rack with 2 rows of fold down tines**
- **SmartShelf with StemSafe** • **Super lower rack with 4 rows of fold-down tines**

GSD5950DCC Bisque (not shown)

GSD5930DWW White on white (not shown)

GSD5920DBB Black on black (not shown)

GSD5910DAA Almond on almond (not shown)



GE Profile Performance Series™

Triton™ Dishwasher with TriClean™ Wash System "Quietest in the U.S.A."

GSD5630DWW White on white

- Variable cycles/options

GSD5650DCC Bisque (not shown)

GSD5640FSS Stainless steel (not shown)

GSD5620DBB Black on black (not shown)

GSD5610DAA Almond on almond (not shown)



GE Triton™ Dishwashers

These models include: TriClean™ Wash System (3 Wash Arms, 100% Triple Water Filtration with Dual Pumps, Piranha™ Anti-Jamming Hard Food Disposer) • Electronic controls • Pots & Pans cycle • China/Crystal cycle* • Hi-Temp Rinse option • Hi-Temp Wash option • Delay Start • SmartShelf • Super Capacity silverware basket • GE Profile™ QuietMotor • Trimless appearance **Note: bold = feature upgrade from previous model**

ONLY GE HAS IT!



TriClean™ Wash System has 3 Wash Arms that provide complete coverage eliminating pre-rinsing, soaking and scrubbing.

ONLY GE HAS IT!



100% Triple Water Filtration with Dual Pumps eliminates recirculating food particles.

ONLY GE HAS IT!



Piranha™ Anti-Jamming Hard Food Disposer eliminates the need to pre-rinse dishes.

ONLY GE HAS IT!



GE Profile™ QuietMotor is quieter and more energy efficient.

*Developed in consultation with Lenox,® the leading manufacturer of fine china.

**As rated by consumers in the \$375-\$425 price range.

Not all features available on all models.



GE Profile™

Triton™ Dishwasher with TriClean™ Wash System "Quietest in the U.S.A."

GSD5360FSS Black/Stainless

• 5 cycles/34 options • **Light Wash** • **QuietPower™ III sound package** • **ActiveVent** • **Super lower rack with 2 rows of fold down tines** • **Super Capacity silverware basket with 2 cell covers**

GSD5350DCC Bisque (not shown)

GSD5330DWW White on white (not shown)

GSD5320DBB Black on black (not shown)

GSD5310DAA Almond on almond (not shown)



GE Profile™

Triton™ Dishwasher with TriClean™ Wash System "Quietest for the Money" **

GSD5130DWW White on white

• 4 cycles/26 options • Super racks • **QuietPower™ II sound package** • Super Capacity silverware basket with 1 cell cover

GSD5120DBB Black on black (not shown)

GSD5110DAA Almond on almond (not shown)




GE Nautilus™ Built-In Dishwashers

These models include: • QuietPower™ Motor • HotStart™ option • Normal Wash cycle • Heated Dry On/Off option • Rinse Only (on dial) • Rinse Aid Dispenser • Hi-Temp Wash option • Trimless appearance **Note: bold = feature upgrade from previous model**



PowerScrub™ Wash System has 2 wash arms mounted on top and lower levels, plus a spray tower in the middle.

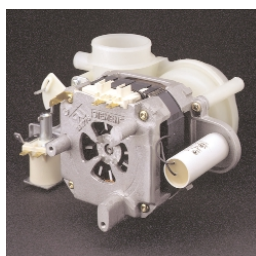

QuietPower™ Motor—quieter than GE's previous motor.



HotStart™ option preheats water allowing dishes to be washed at any time.



PermaTuf® Tub won't chip, peel, crack or rust under normal use.

*Developed in consultation with Lenox®, the leading manufacturer of fine china.

Not all features available on all models.

Introducing GE Nautilus™ “All you'll notice is the clean.”™



GSD3735FWW White on white (not shown)

GSD3725FBB Black on black (not shown)



GSD3425FBB Black on black (not shown)

GSD3415FAA Almond on almond (not shown)



GSD3135FWW White on white (not shown)

GSD3125FBB Black on black (not shown)



GSD2625FBB Black on black (not shown)

GSD2615FAA Almond on almond (not shown)



GE

Built-In Dishwasher

GSD3715FAA

Almond on almond

- **7 cycles/39 options** • TouchTap™ controls • PowerScrub™ Wash System • **QuietPower™ I sound package** • Piranha™ Anti-Jamming Hard Food Disposer • Pots & Pans cycle • 6-hour Delay Start option • **China/Crystal cycle*** • **Deluxe Split silverware basket** • **Deluxe Plus rack system** • **Rinse Aid Dispenser with indicator**

GE

Built-In Dishwasher

GSD3435FWW

White on white

- **6 cycles/31 options** • TouchTap™ controls • PowerScrub™ Wash System • QuietDesign™ sound package • Piranha™ Anti-Jamming Hard Food Disposer • Pots & Pans cycle • **6-hour Delay Start option** • Deluxe silverware basket • Deluxe rack system • **Light Wash cycle**

GE

Built-In Dishwasher

GSD3115FAA

Almond on almond

- **5 cycles/18 options** • **PowerScrub™ Wash System** • QuietDesign™ sound package • Piranha™ Anti-Jamming Hard Food Disposer • Pots & Pans cycle • Deluxe silverware basket • Deluxe rack system

GE

Built-In Dishwasher

GSD2635FWW

White on white

- **5 cycles/18 options** • QuietDesign™ sound package • **Plate Warmer cycle (on dial)** • **Short Wash cycle** • Deluxe silverware basket • Deluxe lower rack

GE

Built-In Dishwasher

GSD2325FBB


Black on black

- **3 cycles/12 options** • QuietDesign™ sound package • Deluxe silverware basket • Deluxe lower rack

Convertible Dishwashers


These models include: SureClean™ Wash System • Pots & Pans cycle • Normal Wash cycle • Short Wash cycle (on dial)
• Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial) • Heated Dry On/Off option • Hi-Temp Wash option
• 3 wash levels • Deluxe rack system • Trimless appearance **Note: bold = feature upgrade from previous model**

ONLY GE HAS IT!



SureClean™ Wash System cleans dishes completely.

ONLY GE HAS IT!




Piranha™ Anti-Jamming Hard Food Disposer eliminates the need to pre-rinse dishes.



Portable now



Built-in later



Hi-Temp Wash Option allows detergent to work better, dishes come clean.



GE
Convertible Dishwasher

GSC3430ZWW/GSC3400ZBL

• 6 cycles/19 options • Light Wash cycle • **Dual Filtration** • 6-hour Delay Start option (on dial) • **Piranha™ Anti-Jamming Hard Food Disposer** • **GE QuietMotor** • **Deluxe silverware basket with 1 cell cover** • **QuietPower™ I sound package** • **Rinse Aid Dispenser with indicator**



GE
Convertible Dishwasher

GSC3200ZBL/GSC3230ZWW

• 5 cycles/14 options • Deluxe silverware basket • Standard Quiet sound package • Deluxe upper rack


Spacemaker® Under-the-Sink Dishwashers



Installed under a single sink



Installed under a cooktop

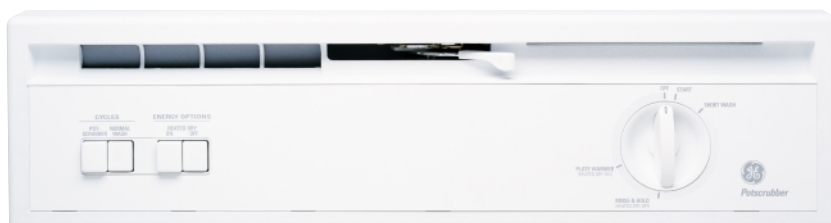

GE

Under-the-Sink Dishwasher

GSM2130DWW/GSM2110DAA

- 5 cycles/8 options • POTSCRUBBER Cycle • Normal Wash cycle • Short Wash cycle (on dial) • Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial)
- 2 wash levels • Spacemaker® upper rack • Deluxe lower rack • Deluxe silverware basket • PermaTuf® Tub

Note: Under-the-sink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Spacemaker® 18" Built-In Dishwasher



GE

Spacemaker 18" Built-In Dishwasher

GSS1800Z

- 4 cycles/6 options • 2 wash levels • Pots & Pans cycle • Normal Wash cycle (on dial) • Light Wash cycle (on dial) • Standard silverware basket • Heated Dry On/Off option • Reversible color panels: Black/Harvest, Almond/White

Not all features available on all models.

Disposall®—The Original Disposer

These models include • Dishwasher drain connector • Polyester drain housing • Stainless steel flange • Sink stopper • Manual reset protector • Dual swivel impellers • Precutter



GFC1000Y



GFC800Y



GFC700Y/GFC705Y



GFC300Y/GFC305Y



GFC290Y/GFC295Y



GFB1050V

GE

Continuous Feed Disposers

GFC1000Y

- Rugged 3/4-horsepower motor • 8000 RPM grinding action
- Super Deluxe sound insulation • Power Boost feature for heavy loads • Fast Mount installation • Removable splash guard

GFC800Y

- 1/2-horsepower motor • 8000 RPM grinding action
- Deluxe sound insulation • Fast Mount installation
- Removable splash guard

GFC700Y

- 1/2-horsepower motor • 8000 RPM grinding action • Standard sound insulation • Fast Mount installation • Removable splash guard

GFC705Y

Similar to GFC700Y but has attached line cord.

GFC300Y

- 1/2-horsepower motor • 8000 RPM grinding action
- Fast Mount installation • Removable splash guard

GFC305Y

Similar to GFC300Y but has attached line cord.

GFC290Y

- 1/3-horsepower motor • 8000 RPM grinding action
- Fast Mount installation • Removable splash guard

GFC295Y

Similar to GFC290Y but has attached line cord.

GE

Batch Feed Disposers

GFB1050V

- Rugged 3/4-horsepower motor • 2700 RPM grinding action
- Super Deluxe sound insulation • Twist Mount installation

Where local codes permit, any GE Dishwasher and any GE Disposer may be connected to a single 20-amp circuit.

White and Almond flanges are available: GPF71 (White) and GPF72 (Almond).

Compactors

These models include • 1/3-horsepower • Removable key lock



GE

Compactor

GCG1530ZWW White on white

- 1.4 cu. ft. capacity • Toe pedal opener
- Rear wheels allow easy movement and installation • Heavy-gauge steel construction

GCG1550DCC Bisque (not shown)

GCG1540FSS Stainless steel (not shown)

GCG1520ZBB Black on black

Not all features available on all models.

Dishwasher Accessories

Dishwasher Panel Kits and Accessories:
GE Profile™ models: GSD5300 and 5100 Series.
GE Profile Performance™ models: GSD5900 and 5600 Series.

 GPF400C/S/W/B/A—panel kit
 GPF600C/W/B/A—trimless door panel


GE Profile Performance™, and GE Profile™
(all above listed models):

 GPF700C/W/B/A—trimless access panel

Note: C = Bisque, S = Stainless Steel, W = White,
B = Black, A = Almond

Wood Panel Capability:

GPF475—GE Profile Performance™ and GE Profile™
3/4" trimless panel kit (door and access
 [GPF100—heavy-duty spring kit included])
GPF425A/B/W/C—GE Profile Performance™ and G
 Profile™
 1/4" panel trim kit (door and access)

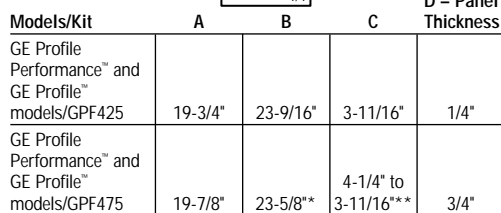

Listed by
Underwriters
Laboratories

Electrical Rating

Voltage AC.....	120
Hertz.....	60
Total connected load amperage.....	8.6
Calrod® heater watts	500

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

[illegible]

Note: If a flush look is needed, a 25" base cabinet needs to be used.

11

Dishwasher Accessories

	GE				
	GSD3735FWW GSD3725FBB GSD3715FAA	GSD3435FWW GSD3425FBB GSD3415FAA	GSD3135FWW GSD3125FBB GSD3115FAA	GSD2635FWW GSD2625FBB GSD2615FAA	GSD2325FBB
Features					
Wash System					
Wash System Type	PowerScrub™	PowerScrub™	PowerScrub™	Standard	Standard
Filtration System	Dual	Dual	Dual		
Food Disposer	Piranha™	Piranha™	Piranha™	●	●
Cycles	7	6	5	5	3
Pots & Pans	●	●	●		
Heavy Wash				●	Dial
Normal Wash	●	●	●	●	Dial
Light Wash	●	●			
China/Crystal	●				
Short Wash	Dial	Dial	Dial	Dial	
Plate Warmer	Dial	Dial	Dial	Dial	
Rinse Only	Dial	Dial	Dial	Dial	Dial
Options	39	31	18	18	12
Delay Start	1-6 Hour	1-6 Hour			
Heated Dry On/Off	●	●	●	Rocker	Rocker
Hi-Temp Wash	●	●	●	●	●
HotStart™	●	●	Dial	Dial	Dial
Racks, shelf & basket					
Upper Rack	Deluxe Plus	Deluxe	Deluxe	Standard	Standard
Lower Rack	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
Cup Shelf	●				
Silverware basket	Deluxe Split	Deluxe	Deluxe	Deluxe	Deluxe
Control type	TouchTap™	TouchTap™	Turn-To-Start	Turn-To-Start	Turn-To-Start
Cycle progress indicator(s)	"Cycle On"	"Cycle On"	Dial	Dial	Dial
Touchpads	8	7			
Pushbuttons			6	4	2
Rinse Aid dispenser	with Indicator	●	●	●	●
1, 2, 10-yr. warranty	●	●	●	●	
1, 10-yr. warranty					●
Economical/Quiet					
Quiet					
Sound Insulation Package	QuietPower™ I	QuietDesign™	QuietDesign™	QuietDesign™	QuietDesign™
PermaTuf™ Tub and door liner	●	●	●	●	●
QuietPower™ Motor	●	●	●	●	●
Appearance					
Colors available*	WW, BB, AA	WW, BB, AA	WW, BB, AA	WW, BB, AA	BB
Color Panels—Door & Access	Trimless	Trimless	Trimless	Trimless	Trimless
Weights & Dimensions					
Approx. shipping weight (lbs.)	100	100	100	100	100
Height w/legs retracted (in.)	34	34	34	34	34
Overall width (in.)	24	24	24	24	24
Overall depth (in.)	25-1/8	25-1/8	25-1/8	25-1/8	25-1/8
Accessories					
Requires kit for 1/4" panel capability with trim	GPF425W/B/A	GPF425W/B/A	GPF325W/B/A	GPF325W/B/A	GPF325B
Requires kit for trimless 3/4" panel capability	GPF475	GPF475	GPF375	GPF375	GPF375

Dishwasher Panel Kits and Accessories:

GE models: GSD3400, 3300, 2100, 2000 and 1920 Series.

GPF300W/B/A—panel kit

GPF500W/B/A—trimless door panel

Note: W = White, B = Black, A = Almond.

Side Panel for All GE Models:

End Cabinet Panel for All SE Models:
Contains one panel and adjustable toe-kick for end cabinet installation of built-in model.

Does not attach to dishwasher.

Specify color: GPS5AD—Almond GPS5WH—White

Optional Dishwasher Accessories:

Optional Dishwasher Accessories:
GPF53—Brackets for under non-wood countertop
installation

GPF95—Stainless sink for Spacemaker® dishwasher—single bowl 21-1/4" x 25" Drain hole on right;

GPF96—Stainless sink for Spacemaker® dishwasher—

single bowl 21-1/4" x 25" Drain hole on left;
elbow and strainer included

GPF97—Stainless sink for Spacemaker® dishwasher—double bowl 21-1/4" x 33" Elbow and strainer included

GPF100—Heavy spring kit for custom door panel weighing more than 4 lbs.

GPF200—Almond/Black/White side tub flange gasket kit

Wood Panel Capability:

GPF325A/B/W—GE 1/4" panel trim kit (door and access)

GPF375—GE 3/4" trimless panel trim kit (door and access)


Warranty Information*

Warranty information
1, 2, 10-year warranty package: Full one-year warranty on entire dishwasher. Limited second-year water distribution parts warranty. Full ten-year tub/door liner warranty.

1, 10-year warranty package: Full one-year warranty on entire dishwasher. Full ten-year tub/door liner warranty.

*See written warranty for details.

Built-In Dishwasher Dimensions (in inches)

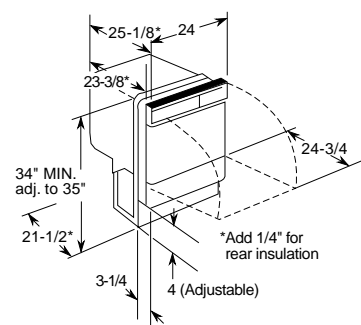


Electrical Rating

Voltage AC.....	120
Hertz.....	60
Total connected load amperage.....	8.6
Calrod® heater watts.....	500

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Installation Information (in inches)

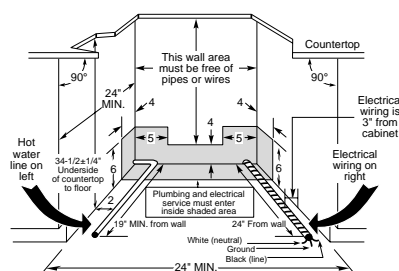


Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. All plumbing and electrical work must be in accordance with local codes.

Listed by
Underwriters
Laboratories

Wood Insert Cut-Out Dimensions

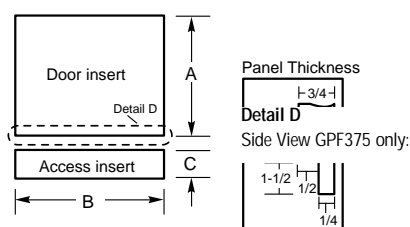

Models/Kit	A	B	C	D – Panel Thickness
GE Models GPF325 Kit	18-7/8"	23-9/16"	3-11/16"	1/4"
GPF375 Kit	18-15/16"	23-5/8"	4-1/4" to 3-3/4"	3/4"

*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)

**Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

Convertible/Portable Dishwashers

	GE	
	GSC3430ZWW GSC3400ZBL	GSC3230ZWW GSC3200ZBL
Features		
Wash System		
SureClean™ Wash System	●	●
Wash levels	3	3
Filtration System	Dual	
Piranha™ Hard Food Disposer	●	
Cycles	6	5
POTSCRUBBER	●	●
Normal Wash	●	●
Light Wash	●	
Short Wash	Dial	Dial
Plate Warmer	Dial	Dial
Rinse Only/Hold	Dial	Dial
Options	19	14
Delay Start	1-6-Hour	
Heated Dry On/Off	●	●
Hi-Temp Wash	●	●
Racks (upper/lower)	Deluxe	Deluxe
Silverware basket	Deluxe w/ 1 cell cover	Deluxe
Cycle progress indicator	1 "Cycle On"	Dial
Pushbuttons	7	6
Rinse Aid dispenser	with Indicator	●
1, 2, 10-yr. warranty*	●	●
Economical/Quiet		
Quiet		
Sound insulation package	QuietPower™ I	Standard
PermaTuf™ Tub and door liner	●	●
GE QuietMotor	●	
GE Motor		●
Sealed toekick	●	
Appearance		
Colors available**	WW, BL	WW, BL
Color panels—Door & Access	Trimless	Trimless
Decorative wood laminate top	Grey/Woodgrain	Grey/Woodgrain
Weights & Dimensions		
Approx. shipping wt. (lbs.)	147	147
Overall height w/legs extended (in.)	36-1/8*	36-1/8*
Overall width (in.)	24-3/4	24-3/4
Overall depth (in.)	27	27


*See written warranty for details.

**Colors available: WW = White on white BL = Black control panel and front panels w/almond side panels.

Dimensions (in inches)


GSC3230ZWW, GSC3200ZBL, GSC3430ZWW and GSC3400ZBL

Portable

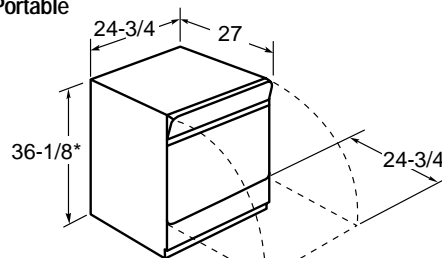

*Includes top and wheels

Built-In

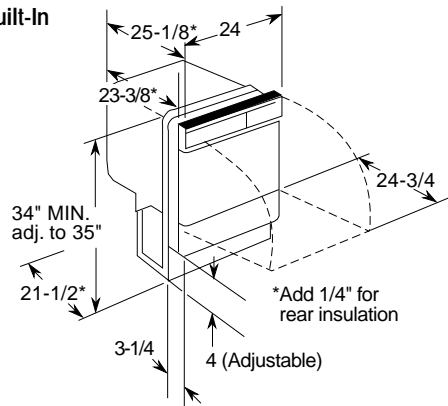

Important Note: GE kit number WD35M34 needed when adapting GE convertible dishwasher to a built-in installation. Contains built-in dishwasher water valve, hardware and complete instructions for changing a GE convertible dishwasher for under-the-counter installation.


Spacemaker® Built-In 18" Dishwasher

	GE
	GSS1800Z
Features	
Wash System	
Wash levels	2
Cycles	4
Pots & Pans	Dial
Normal Wash	Dial
Light Wash	Dial
Rinse Only/Hold	Dial
Options	6
Heated Dry On/Off	Rocker
Racks (upper/lower)	Standard
Silverware basket	Standard
Control type	Turn-To-Start
Cycle progress indicator	Dial
Rinse Aid dispenser	●
120°F @ inlet water capability	●
Leveling screws	●
1, 10-yr. warranty*	●
Economical/Quiet	
Tub Insulation	Standard
Appearance	
Colors available	Black/Almond/White
Color panels	2 Reversible:
Door & Access	Black/Harvest: Almond/White
Weights & Dimensions	
Approx. shipping weight (lbs.)	70
Height w/legs retracted (in.)	34-1/8
Overall width (in.)	17-13/16
Overall depth (in.)	23-3/4

*See written warranty for details.

Note: For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order Pub. No. 5-A007.

Dimensions (in inches)

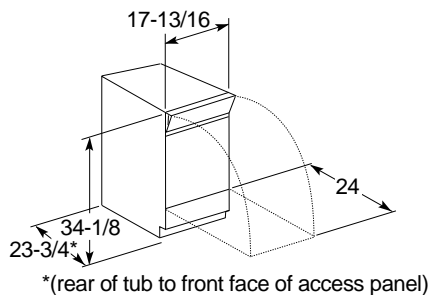

Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. All plumbing and electrical work must be in accordance with local codes.

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with the installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

Figure 1


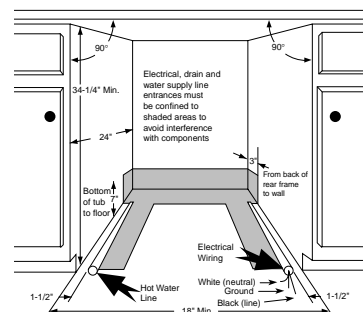


Figure 2



GE Spacemaker® Under-the-Sink Dishwasher


	GE
	GSM2130DWW GSM2110DAA
Features	
Wash System	
Wash levels	2
Cycles	5
POTSCRUBBER	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only/Hold	Dial
Options	8
Heated Dry On/Off	●
Racks, shelf & basket	
Upper Rack	Spacemaker®
Lower Rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-To-Start
Cycle progress Indicator	Dial
Pushbuttons	4
Rinse Aid dispenser	●
1. 2. 10-yr. warranty*	●
Economical/Quiet	
PermaTuf™ Tub and door liner	●
GE Motor	●
Appearance	
Colors available**	WW, AA
Door	Trimless
Color Panels	Access
Access	Trimless
Weights & Dimensions	
Approx. shipping weight (lbs.)	100
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	24

*See written warranty for details.

**Colors available: WW = White control panel with white front panels,
AA = Almond control panel with almond front panels.


Note: Under-the-sink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Rough-In for Installation with Disposer

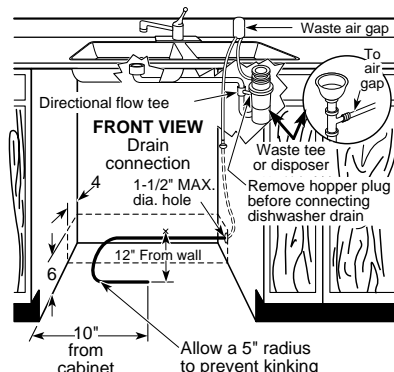


A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2" I.D. drain hose, 78" long. If using copper tubing, 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

Rear View Plumbing Arrangement

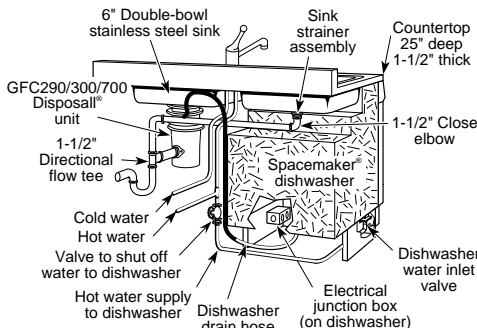


Cabinet Cut-Out for Sink




Cabinet cut-outs for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.

Wood Insert Cut-Out Dimensions (in inches)

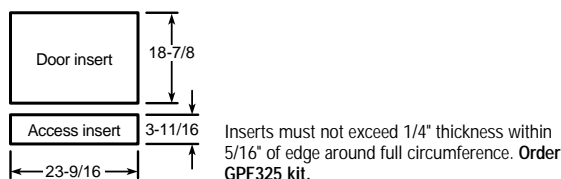

Cabinet Rough-In

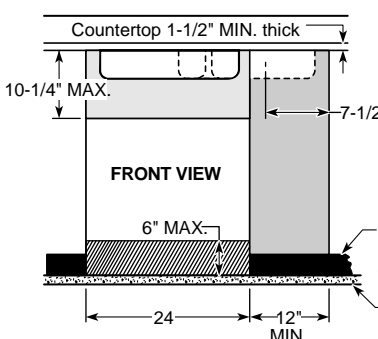

Stainless Steel Sinks Single and Double Compartment Models (Dimensions in Inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8


Model Number	Cutout In Countertop 1-1/2" Radius Corners		No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2

Note: Drain opening size is 3-1/2".

Above models are fully sound deadened.


*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.

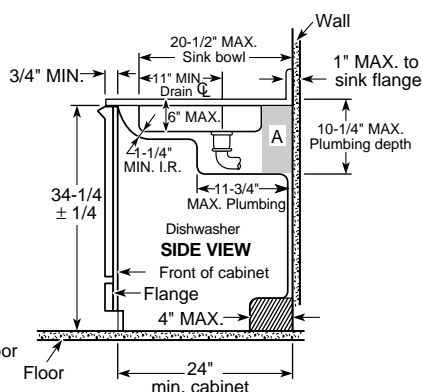

Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Plumbing/Electrical Rough-In

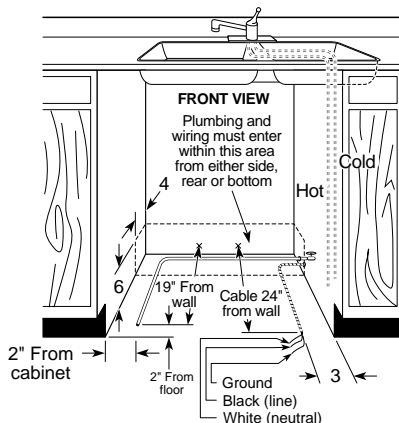

Plumbing: Hot Water Only: Use 3/8" O.D. copper tubing or 1/2" O.D. plastic tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 8.6. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.


Specifications: Inlet Water Temperature Recommended: Minimum 120°F. at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

Disposall®—The Original Disposer

	GE								
	Continuous Feed Models								Batch Feed Model
	GFC1000Y	GFC800Y	GFC705Y	GFC700Y	GFC305Y	GFC300Y	GFC295Y	GFC290Y	GFB1050V
Features									
Motor horsepower	3/4	1/2	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Stopper
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch
Power connection	Direct Wire	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Direct Wire
Power Boost	●								
Impellers									
Dual swivel	●	●	●	●	●	●	●	●	●
Jam resistant	●	●	●	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●	●	●	●
Stainless steel sink flange	●	●	●	●	●	●	●	●	●
Mounting type	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Twist Top
Precutler	●	●	●	●	●	●	●	●	●
Splash guard	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Non-Removable
Sink stopper	●	●	●	●	●	●	●	●	●
Dishwasher drain connector	●	●	●	●	●	●	●	●	●
Manual reset overload protector	●	●	●	●	●	●	●	●	●
Permanently lubricated bearing	●	●	●	●	●	●	●	●	●
Plastic drain elbow	●	●	●	●	●	●	●	●	●
Turntable	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Polyester drain housing	●	●	●	●	●	●	●	●	●
Grinding speed (RPM's)	8000	8000	8000	8000	8000	8000	8000	8000	2700
Hopper	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Nylon
Hopper liner and grinding ring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Full warranty*	5-Year	4-Year	2-Year	2-Year	1-Year	1-Year	1-Year	1-Year	5-Year
Economical/Quiet									
Sound insulation wrapper	Super Deluxe	Deluxe	Standard	Standard					Super Deluxe
Weights & Dimensions									
Approx. shipping weight (lbs.)	12.5	10.0	9.8	9.8	8.4	8.4	8.4	8.4	14.0
Net weight (lbs.)	11	8.8	8.6	8.6	7.6	7.6	7.6	7.6	12.5
(A)	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	14-5/8	16-9/16
(B)	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	6-1/4	5-1/2
(C)	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	3-1/4	6-1/2
(D)	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	8-1/4	9-5/16
(E)	8-1/8	8-1/8	8-1/8	8-1/8	6-3/8	6-3/8	6-3/8	6-3/8	8-5/8
Dishwasher inlet diameter (in.)	7/8	7/8	7/8	7/8	7/8	7/8	7/8	7/8	1
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
Accessories									
White sink flange & stopper	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71	GPF71
Almond sink flange & stopper	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72	GPF72
Bisque sink flange & stopper	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73	GPF73

*See written warranty for details.

Disposers



Disposer Accessories:
GPF75 Clamp nut kit


Compactors

	GE	
	GCG1550DCC, GCG1540FSS, GCG1530ZWW, GCG1520ZBB	
Features		
Cycle time	27 seconds max., 14 seconds min.	
Drive system	2-Point	
Motor horsepower	1/3	
Compression ratio (average)	75% reduction of volume	
Ram force (lb.) (max.)	2,300	
Front level legs and rear wheels	●	
Capacity	1.4 cu. ft.	
Side release bin	●	
Toe/foot pedal drawer opener	●	
Lock/start control w/removable key	●	
Automatic anti-jam	●	
Slide-out drawer	●	
Full 1-year warranty	●	
Appearance		
Color appearance*	CC, SS, WW, BB	
Reversible door panel included**	White/Black	
Heavy-gauge steel construction	●	
1/4" panel capability	●	
Weights & Dimensions		
Total shipping weight (lbs.)	152	
Total appliance weight (lbs.)	141	
Overall height (in.)	34-1/8 to 34-1/2	
Overall width (in.)	15	
Overall depth (in.)	24-1/4	
Cutout dimensions H x W x D (in.)	34-1/4 x 15-1/8 x 24-3/4	
Clearance for drop-down drawer side	6" or more on right side	
Drawer extension for removal	23" or more in front of appliance	
Custom panel size H x W (in.)	22-15/16 x 14-5/8	
Accessories		
Compactor bags (5 included)	WC60X5017	

*Colors available: SS = Stainless, WW = White on white, CC = Bisque, BB = Black on black.

** On black and white models only.

GCG1550DCC, GCG1540FSS,
GCG1530ZWW, GCG1520ZBB
Convertible Compactors



Compactor Accessories:
GPF80 White/Black Panel
for GCG1530
GPF81 Black/Almond Panel
for GCG1520

GE Triton.™ Clean and Quiet.



TriClean™ Wash System eliminates pre-rinsing, soaking and scrubbing!

Improved wash coverage provided by the exclusive three level wash. Eliminates recirculating food particles with 100% Triple Water Filtration and Dual Pumps. Pulverizes food particles with Piranha™ Hard Food Disposer.




QuietPower™ III— “The Quietest Dishwasher in the U.S.A.”

Redirected spray jets hit the dishes; not the tub and door. A blanket of insulation, with cushioning mastic, act to deaden sound. ActiveVent, an intelligent air vent system closes during wash cycle, opens during dry cycle to contain noise.



SaniWash for peace of mind.

With SaniWash cycle, your dishes, cutting boards and baby bottles are beyond clean—they're sanitized—reducing bacteria by 99.999%. This cycle is certified by the National Sanitation Foundation (NSF).



SpeedWash™ and SpeedDry™ save time.

Forget to run the dishwasher? Speed cycles cut a full half-hour off wash and dry time, based on GE standard normal cycles.

**Visit our web site at
www.getriton.com**

“The cleanest wash you never heard.”™

Industry Leading Service Support From—



America's
#1
Preferred
Appliance
Brand

GE is the appliance brand most often mentioned among the brands rated as offering the best products and services in America.*

*Source: Louis Harris Poll – 1999



GE Appliances

**The GE Answer Center®
Information Service 800.626.2000.
Questions? Call any time.**

Before or after you buy any GE product, ask us about the features, product comparisons, pricing and where to find it. Call us any time. We never close.

**GE Genuine Parts 800.626.2002.
Enhance, upgrade or fix it.
Check out our accessories!**

Accessories can make great GE products even better. Replacement parts for GE and most other brands, too. Fast delivery, convenient, direct.

**GE Appliance Service 800.432.2737
(800.GE.CARES)**

If you ever need product service, we'll come where and when you want—at your convenience. We're the largest manufacturer-owned service organization in the appliance industry. Same or next day service in most cases. Buy with confidence from GE.

Visit us at www.geappliances.com

General Electric Company
Louisville, Kentucky 40225
www.geappliances.com

Pub. No. 5-S070
PC21595