
GLDT690D/GLDT696D GE® Stainless Steel Interior Dishwasher with Hidden Controls

Dimensions and Installation Information (in inches)

Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	6.7
Calrod® heater watts max	650


For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.



• The rough cabinet opening must be at least 24" deep, 24" wide and approximately 32-1/2" to 34-3/4" high from floor to underside of the countertop.

For answers to your Monogram,® Cafe™ Series, Profile™ Series or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



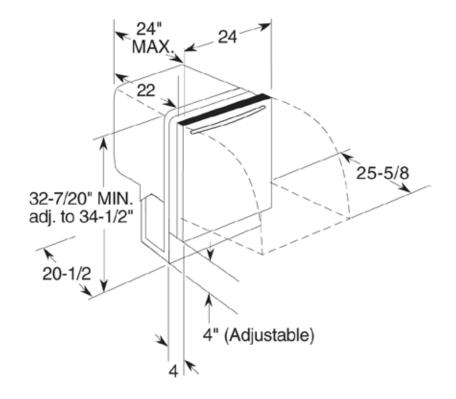



GLDT690D/GLDT696D GE® Stainless Steel Interior Dishwasher with Hidden Controls

Features and Benefits

- Bright annealed stainless steel interior Attractive interior provides long-lasting durability
- Low profile installation capable Great for raised sub-floors and 34" countertop heights
- Gray racks Long-lasting, durable racks resist rusting, chipping and peeling
- Two utility shelves in upper rack with Stem Safe Conveniently flip down to handle tall items and protect stemware
- 2-digit countdown display with 1-24 hour Delay Start Wash dishes at your convenience and monitor the progress
- Audible end-of-cycle signal Alert signals when cycle is complete
- 5 wash levels Eliminates the central wash tower to accommodate more items
- ADA-compliant Dishwasher design allows for simple operation and easy access
- ENERGY STAR[®] qualified Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings
- Model GLDT690DWW White on white
- Model GLDT690DBB Black on black
- Model GLDT696DSS Stainless steel (shown)

