

The #1 Preferred Brand of Room Air Conditioners



Introducing The NEW Quiet-Aire™ Electronic Line



We bring good things to life.

GE...THE #1 PREFERRED BRAND OF ROOM

Electronic Models

ALL **ELECTRONIC** MODELS INCLUDE:

- Multiple Cooling Speeds • Electronic Digital Thermostat w/Remote; 12 Hr. Timer
- Easy Access Filter • EZ Mount Window Kit



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGL24DA	23,800/23,300	8.5/8.5	230/208	1,500-1,650
AGL18DA	18,000/17,500	9.7/9.7	230/208	1,050-1,150
AGL14AA	13,800	10.0	115	750-850

- Circulaire™ Oscillating Air Flow
- Energy Saver Feature
- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGL12AA	12,000	9.8	115	575-650

- Energy Saver Feature
- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGL10AA	10,000	9.8	115	425-525

- Energy Saver Feature
- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGL08FA	8,000	10.0	115	250-350

- Slide-Out Chassis




MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
ASL06LB	6,000	9.8	115	170-210

- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGL05LA	5,200	9.7	115	100-150

Wall Case Dimensions

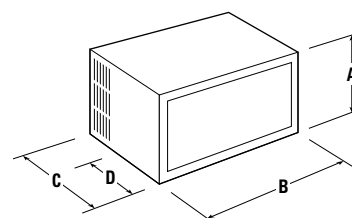

D = Distance from front of case to side louvers (excluding grille).

Fixed chassis units are not suitable for through-the-wall applications.

(Actual product may vary from photo shown.)

AIR CONDITIONERS

Mechanical Models

ALL **MECHANICAL** MODELS INCLUDE:

- Multiple Cooling Speeds • 8-Position Thermostat • Easy Access Filter • EZ Mount Window Kit



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGN24DA	23,800/23,300	8.5/8.5	230/208	1,500-1,650
AGN18DB	18,000/17,500	9.7/9.7	230/208	1,050-1,150

- Circulaire™ Oscillating Air Flow
- Energy Saver Feature
- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGN14AC	13,800	10.0	115	750-850

- Circulaire™ Oscillating Air Flow
- Energy Saver Feature
- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGN12AC	12,000	9.8	115	575-650
AGN10AC	10,000	9.8	115	425-525

- Energy Saver Feature
- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGN08FD	8,000	10.0	115	250-350

- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
ASN06LB	6,000	9.8	115	170-210

- Slide-Out Chassis



MODEL	BTU	EER	VOLTS	COOLS (Sq. Ft.)
AGN05LC	5,200	9.7	115	100-150

Wall Outlets



Parallel
115V / 15 Amp



Tandem
230/208V / 15 Amp



Perpendicular
230/208V / 20 Amp

All wiring including installation of receptacle must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum building wiring may pose special problems — consult a qualified electrician.

SPECIFICATIONS

Electronic (Preliminary)

	AGL24DA	AGL18DA	AGL14AA	AGL12AA	AGL10AA	AGL08FA	ASL06LB	AGL05LA
Features								
BTUH	23,800/23,300	18,000/17,500	13,800	12,000	10,000	8,000	6,000	5,200
Voltage	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	10.0	9.8	9.8	10.0	9.8	9.7
Amps	12.7/13.7	8.2/8.9	12.0	11.0	9.4	7.3	5.6	5.0
Watts	2,800/2,740	1,850/1,800	1,380	1,220	1,020	800	610	530
Plug Type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver Feature	●	●	●	●	●			
Dehumidification (pints/hr.)	7.5	5.5	4.6	3.3	3.0	2.3	1.6	1.4
Circulaire™	●	●	●					
Fan Speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3
CFM (High Shown)	560	440	420	280	265	210	190	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	One Touch Lift-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	16	16	14	14	14-3/4	13
Window Opening Width (in inches) min.	29	29	27	27	22	22	25-1/2	22
max.	41	41	39	39	36	36	37	36
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions								
Height (in inches) A	16-27/32	16-27/32	15	15	13-7/8	13-7/8	13-19/32	12-9/32
Width (in inches) B	26	26	23-5/8	23-5/8	18-9/16	18-9/16	20-1/2	18-9/16
Depth (in inches) C	28-31/32	24-15/16	20-9/32	20-9/32	19-5/32	19-5/32	17-17/32	13-27/32
Depth to louvers (in inches) D	10-5/16	10-5/16	8-5/8	8-5/8	8-1/2	8-1/2	7-5/32	5
Net Weight (lbs.)	146	120	100	95	75	64	64	44
Approx. Shipping Weight (lbs.)	160	133	106	101	81	70	71	48

*See written warranty for details.

Mechanical (Preliminary)

	AGN24DA	AGN18DB	AGN14AC	AGN12AC	AGN10AC	AGN08FD	ASN06LB	AGN05LC
Features								
BTUH	23,800/23,300	18,000/17,500	13,800	12,000	10,000	8,000	6,000	5,200
Voltage	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	10.0	9.8	9.8	10.0	9.8	9.7
Amps	12.7/13.7	8.2/8.9	12.0	11.0	9.4	7.3	5.6	5.0
Watts	2,800/2,740	1,840/1,780	1,380	1,220	1,020	800	610	540
Plug Type	Perpendicular	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver Feature	●	●	●	●	●			
Dehumidification (pints/hr.)	7.5	5.5	4.6	3.3	3.0	2.3	1.6	1.4
Circulaire™	●	●	●					
Fan Speeds (Cool/Fan Only)	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2
CFM (High Shown)	560	440	420	280	265	210	190	140
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	
Thermostat	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position
Filter Type	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	Rigid Frame/ Slide-Out	One Touch Lift-Out	Rigid Frame/ Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed
Window Mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window Opening Height (min. in inches)	18	18	16	16	14	14	14-3/4	13
Window Opening Width (in inches) min.	29	29	27	27	22	22	25-1/2	22
max.	41	41	39	39	36	36	37	36
Warranty* (Entire Unit)	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
Warranty* (Sealed Ref. System)	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Case Dimensions								
Height (in inches) A	16-27/32	16-27/32	15	15	13-7/8	13-7/8	13-19/32	12-9/32
Width (in inches) B	26	26	23-5/8	23-5/8	18-9/16	18-9/16	20-1/2	18-9/16
Depth (in inches) C	28-31/32	24-15/16	20-9/32	20-9/32	19-5/32	19-5/32	17-17/32	13-27/32
Depth to louvers (in inches) D	10-5/16	10-5/16	8-5/8	8-5/8	8-1/2	8-1/2	7-5/32	5
Net Weight (lbs.)	146	120	100	95	75	64	64	46
Approx. Shipping Weight (lbs.)	160	133	106	101	81	70	71	50

*See written warranty for details.

**GE Appliances**

General Electric Company
Louisville, Kentucky 40225
GEAppliances.com



Listed by
Underwriters
Laboratories



Water removal
rating is calculated
by the Association of
Home Appliance
Manufacturers'
standards.



Total capacity and
E.E.R. ratings are
calculated based
on the Association
of Home Appliance
Manufacturers'
standards.

Pub. No. 26-S021
OTT1911 11/01