



GSD3460GSS/3400GWW/CC/BB – GE Nautilus[™] Built-In Dishwasher

Built-In Dishwasher Dimensions (in inches)

Rough-In Installation Information (in inches)



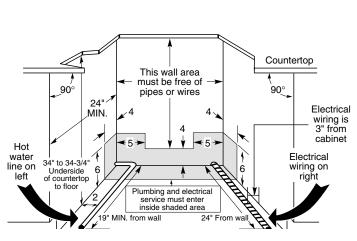


Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	6.2
Calrod [®] heater watts 5	500

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Wood Insert Cut-Out Dimensions (in inches)



				Panel
Models/Kits	А	В	С	Thickness
GE Models GPF425 Kit	19-3/4"	23-9/16"	3-11/16"	1/4"
GPF475 Kit	19-7/8"	23-5/8"*	4-1/4"**	3-11/16" to 3/4"

*Bottom of panel must be notched 1-1/2"x1/2" to clear across panel


**Adjustment required to match adjacent cabinet fronts due to leveling leg adjustment, 4" nominal.



For answers to your Monogram,[®] GE Profile[™] or GE[®] appliance questions, visit our website at GEAppliances.com or call GE Answer Center[®] service, 800.626.2000.



GSD3460GSS/3400GWW/CC/BB – GE Nautilus[™] Built-In Dishwasher

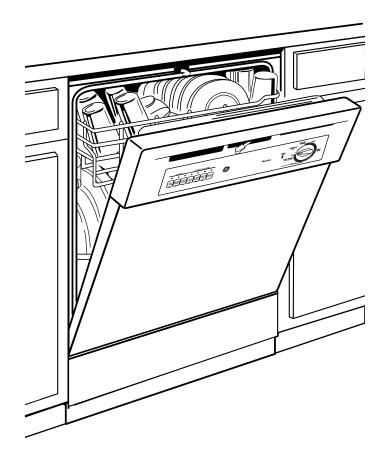

Features and Benefits

- PowerScrub[™] Wash System with Five Wash Levels
- Dual Filtration System
- Piranha[™] Hard Food Disposer
- TouchTap[™] Controls
- Deluxe Upper Rack
- Deluxe Lower Rack
- Deluxe Silverware Basket
- Six Cycle Selections: Pots & Pans, Normal Wash, Light Wash, Short Wash, Plate Warmer and Rinse Only
- 31 Options: Heated Dry, Hi-Temp Wash and HotStart[™]
- Rinse Aid Dispenser
- QuietPower[™] Motor
- QuietDesign[™] Sound Insulation Package
- Trimless Appearance
- GSD3460GSS Stainless steel
- GSD3400GWW White on white
- GSD3400GCC Bisque on bisque
- GSD3400GBB Black on black