


# Installation Instructions


## Gas Slide-in Range Island Installation Kit

 "If you have questions, call 800.GE.CARES or visit our website at: [GEAppliances.com](http://GEAppliances.com)"


### PARTS INCLUDED



Island Trim



(3) 1/4" drive #8 x 3/4"  
Sheet Metal Screws



T10 TORX® Bit

### TOOLS YOU WILL NEED



Nutdriver




Safety Glasses



Cut Resistant Gloves


In order to install the island trim kit, you must first remove the two (2) short trim pieces on both sides.

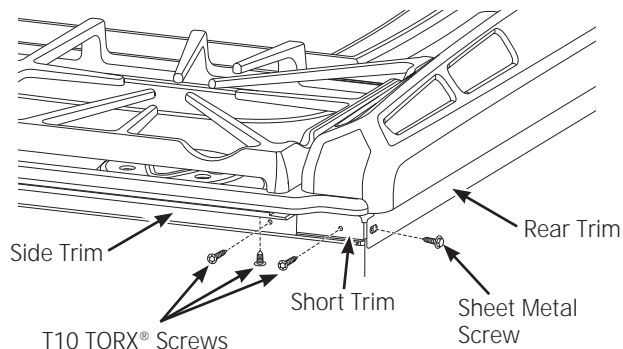


1. Remove (3) three T10 TORX® screws.
2. Remove (1) one 1/4" sheet metal screw retaining the rear trim and discard.  
**NOTE:** When the screws are removed from the rear trim it may flex away from the back of the range – this is normal.
3. Remove short trim.
4. Repeat steps 1 thru 3 on the opposite corner.

# Installation Instructions


5. Install island trim piece making sure that the side lap joint engages with the side trim on both sides.  
**NOTE:** Make sure that the notch on island trim fits into the slot of the rear trim.
6. Install the (2) two ¼" sheet metal screw provided in the kit thru the corner trim and rear trim.  
**NOTE:** This will draw the corner trim and rear trim together.

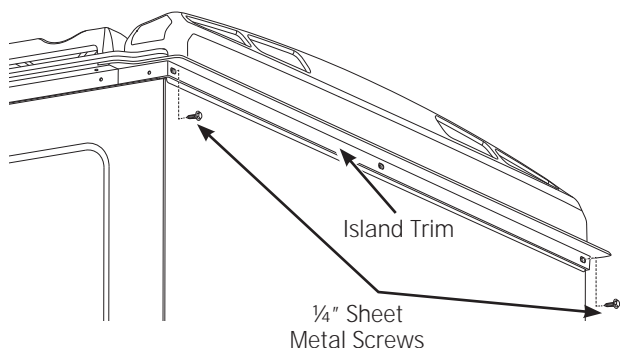


7. Install (2) two T10 TORX® screws into the side trim.

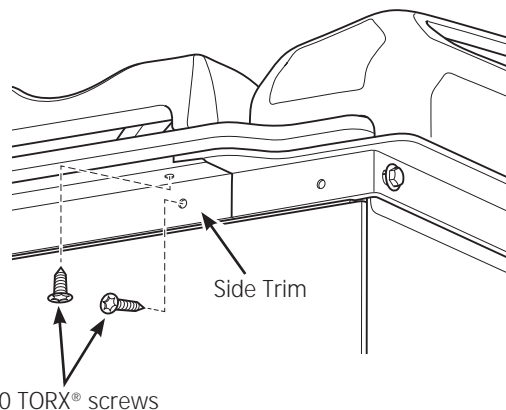

8. Install (1) one T10 TORX® screws into the island trim.

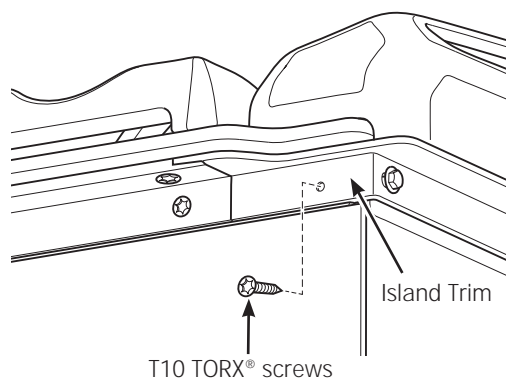

9. Repeat steps 7 & 8 on the opposite corner.  
**NOTE:** Island trim will protrude approximately 1/2" beyond the rear of the rear trim.
10. Install (1) one ¼" sheet metal screw provided in the kit thru the center hole of the island trim.

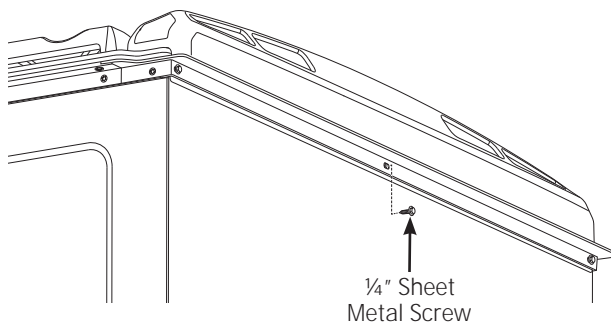

11. Install the range per the range installation instructions.