Café[™] Professional Series 30" Built-In Double Electric Convection Wall Oven

CAFÉ

CTD70DP2NS1





FEATURES & BENEFITS

Precision is the name of your cooking game - Confidently try new recipes and perfectly execute your favorites, using a smart system that automatically tracks progress, modifies temperatures and adjusts cook times

Brighten up life in the kitchen - Easily navigate wall oven settings using a stunning full color display that adds an unexpected touch of style to your kitchen

The perfect bake is now perfectly easy - Achieve unrivaled performance with the only system that delivers top-down true convection for consistent results on special occasion favorites like roasts, chicken, turkey and more

No preheat, no hassle - Save time with a variety of precision cooking modes that eliminate the need for preheating

Fried taste. Crisp texture. Less oil. - Make your favorite "fried" foods healthy, thanks to a mode that crisps without using oil for frying

Enjoy convenient temperature control from anywhere - Preheat while running errands or change oven temperatures while doing yard work with the Cafe Appliances Kitchen app

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

The oven rack that handles it all - Easily remove heavy dishes with a roller rack that is specially designed to glide smoothly and stay in the oven during the self-clean cycle, so you never have to handle cumbersome racks again

The perfect fit you've always dreamed of - When you're updating your kitchen, attention to detail is a priority. That's why Café wall ovens are guaranteed for an exact fit or Café Appliances will pay up to \$300 toward modifications.

APPEARANCE

III I LINGHTOD		
Color Appearance	Stainless Steel	
Oven Door Features	Big View Oven Window	
Handle	Café Pro Style Brushed Stainless Customizable	
Installation	Above Warming Drawer Side-by-Side	

FEATURES

This ordeo	
Configuration	Double Oven
	True European Convection with Direct Air (Upper)
Cooking System	True European Convection (Lower)
Oven Cleaning Type	Self-Clean with Steam Clean Option
Cleaning Time	Variable with Delay Clean Option
	Convection Bake
	Convection bake Multi-Rack
	Convection Broil Hi/Lo
	Convection Roast Thermal Bake
	Thermal Broil Hi/Lo
	Scan-to-Cook
	Keep Warm
	Proof
Oven Cooking Modes	Precision Cooking Modes
Self-Clean Oven Door Lock	Automatic
Control Type	7" Full Color LCD Screen
	10-Pass Bake Element
	10-Pass Dual Broil Element
Oven Features	Closed Door Broiling
	2 Never Scrub Roller Rack 2 Never Scrub Flat Rack
Oven Rack Features	6 Embossed Rack Positions per oven
	12-Hour Shut-Off Capability
	Audible Preheat Signal
	Auto Recipe Conversion
	C° or F° Programmable
	Sabbath Mode
	Control Lock Capability
	Cook Time
	Delay Time
	Electronic Clock & Kitchen Timer Remote Enabled
Oven Control Features	Temperature Probe
WiFi Connect	Built-In
	Amazon Alexa
	The Google Assistant
Connected Capabilities	IFTTT
	Fresco
	Innit
	Sonos Google Home
Cooking Technology	Convection
	2 Halogen Interior Oven Lights (Both Ovens)
	Black Gloss Finish

CAPACITY

Capacity (Cu. Ft.)	5.0 Upper / 5.0 Lower
Total Capacity (Cubic Feet)	10.0 cu ft

POWER / RATINGS

40
40
2850W
4300W
Dual Element
2400W
6.8
9

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	278 lb
Net Weight	260 lb
Overall Height	53 in
Overall Width	29-3/4 in
Overall Depth	26-3/4 in
Cabinet Width	30 in
Cutout Dimensions (w x h x d) (in.)	28-1/2 x 51-13/16 x 23-1/2
Oven Interior Dimensions (lower)	25 x 17-3/8 x 20-1/4
Oven Interior Dimensions (upper)	25 x 17-3/8 x 20-1/4

Café[™] Professional Series 30" Built-In Double Electric Convection Wall Oven

CTD70DP2NS1

CAFÉ

OPTIONAL ACCESSORIES

30" Never Scrub Roller Rack	UXWORXR30
Large Broiler Pan	WB48X10056
60" Replacement Electrical Conduit	WB18T10574
72" Replacement Electrical Conduit	WB18T10580

DIMENSIONS AND INSTALLATION INFORMATION


Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200° F (94°C).

If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with product for current dimensional data.

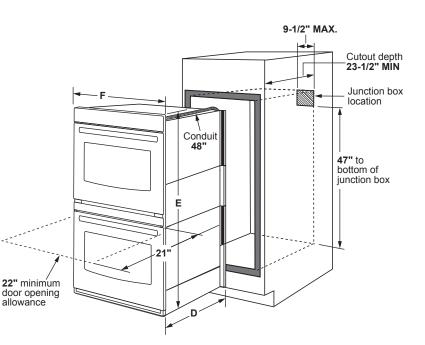


Limited 1-Year Entire Appliance

Limited 1-Year Entire Appliance

See Written Warranty For Full Details

Cutout width 28-1/2" MIN. 28-5/8" MAX. À B Cutout height 50-1/4" MIN. without pedestal 51-13/16" MIN. 51-15/16" MAX. with pedestal С Recommended 30" minimum cutout location from the floor



WARRANTY Parts Warranty

Labor Warranty

Warranty Notes

2 x 4 or equivalent runners level with bottom of cutout and flush with sides of cutout or solid bottom floor.

Cabinet	30"
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	3/4"
C - Overlap of oven at bottom of cutout	1-1/4"
Oven	
D - Install depth	23-1/2"
E - Overall height with trim	53"
F - Overall width	29-3/4"

12'

Café[™] Professional Series 30" Built-In Double Electric Convection Wall Oven

CTD70DP2NS1

DIMENSIONS AND INSTALLATION INFORMATION

30" double electric wall ovens are approved for installation above 27" and 30" warming drawers.


WHEN TO USE THE PEDESTAL RAILS: When replacing an older GE Appliances 30" double wall oven with a new GE Appliances model. Cutout height =51-13/16" to 51-15/16". This is our traditional cutout height.

WHEN NOT TO USE THE PEDESTAL RAILS: When replacing a 30" double wall oven from another manufacturer (i.e., Whirlpool) with a new GE Appliances model. Cutout height = 50-1/4". You will need to verify that the existing cutout matches the 50-1/4" dimension.

If the new GE Appliances 30" double wall oven is being installed into new construction (i.e., not a replacement), then the recommended installation is to use the pedestal rails.

ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

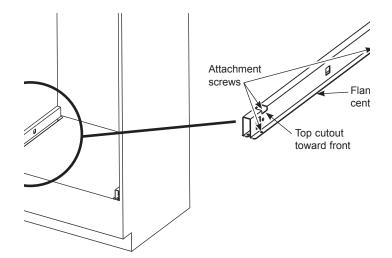

ADDITIONAL ACCESSORIES

















CXWD0H0PMBZ Brushed Bronze 2 handles

CXWD0H0PMSS Brushed Stainless 2 handles

CXWD0H0PMBT Brushed Black 2 handles

CXWD0H0PMCU Brushed Copper 2 handles

CXWD0H0PMCG Brushed Brass 2 handles

CXWD0H0PMFB Flat Black 2 handles

Dimension and installation information are shown in inches.

CAF