


ZBD8920PSS/ZBD8900PII

GE Monogram® Fully Integrated Built-In Dishwashers

Dimensions and Specifications (in inches)

- The dishwasher must be installed so that the drain hose is no more than 10 feet in length for proper drainage.
- Water and power supply should enter in the shaded area.
- Electrical and water connections are at the right front of the dishwasher. The hot water line should extend forward 30" to 40" from the rear wall. The electrical must extend forward at least 24" to reach the junction box.
- To prevent siphoning, an air gap must be used when the waste tee or disposer connection is less than 18" above the floor.

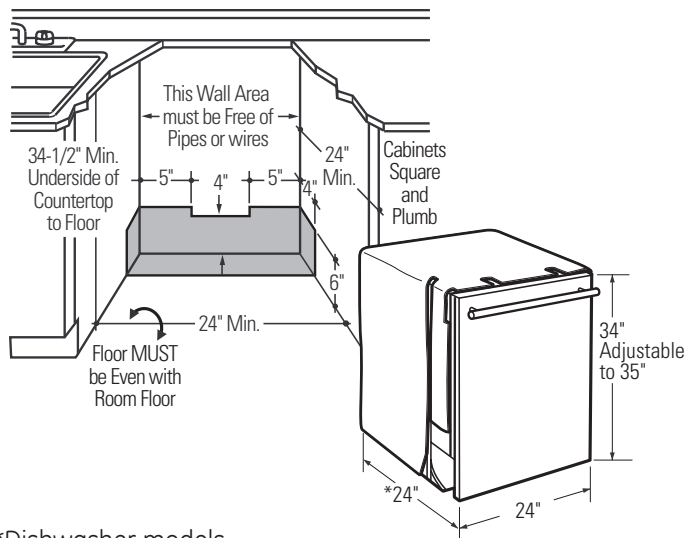

*Dishwasher models ZBD6900 and ZBD8900 require a 3/4" thick custom panel and will be 24-3/4" deep.

Electrical Requirements

The dishwasher must be supplied with 120V, 60Hz, and connected to an individual properly grounded branch circuit protected by a 15- or 20-amp circuit breaker or time-delay fuse.

Custom Panel for Model ZBD8900PII


These dishwashers require a field installed 3/4" thick custom panel and custom handle. An installation template is packed with these models and may be obtained in advance. **Order Pub. No. 31-30569-1.** Complete panel installation instructions are included on the template.

CUSTOM PANEL SIZE REQUIREMENTS

HEIGHT

Panel height must be between 30-1/16" and 30-1/4".

- If the panel height is more than 30-1/4" it will prevent the door from swinging open.
- If the panel height is less than 30-1/16" it will not cover the dishwasher door frame.

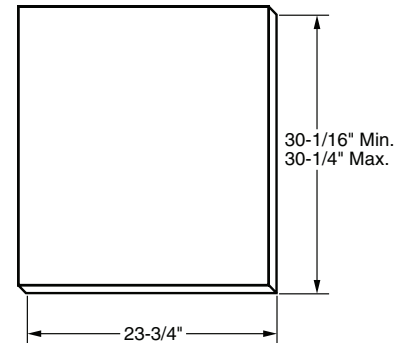


- The top of the custom panel must be flush with the top of the door. The 1/2" minimum gap between the top of the door and the bottom of the countertop must be maintained.

WIDTH

Panel width must be 23-3/4".

- If the panel width is less than 23-3/4" it will not cover the dishwasher frame.

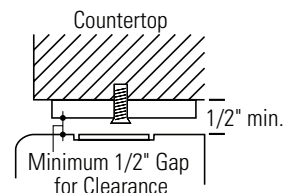

IMPORTANT: To ensure optimum door balance performance, the custom panel must not weigh more than 14 lbs.

Accessories for custom panel model ZBD8900

ZPR0700S door panel provides a professional-style handle on a stainless steel door panel.
ZTB700 stainless steel tubular handle for installation onto a custom panel.

Before installing refer to installation instructions for details. Pub. No. 31-30586

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



imagination at work



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.




Listed by Underwriters Laboratories

ZBD8900PII

GE Monogram® Fully Integrated Built-In Dishwashers

Custom Dishwasher Door Panel Template

GE PUB. NO. 31-30569-1

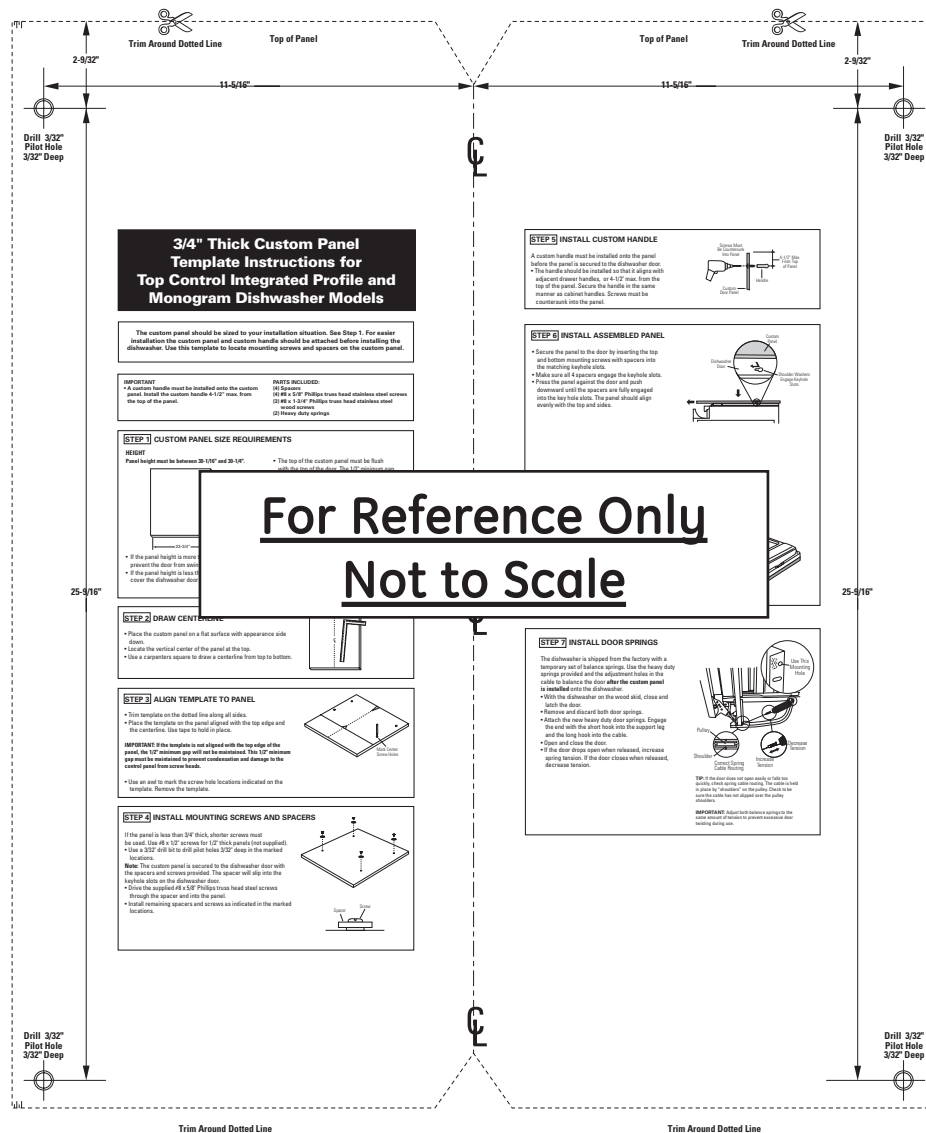

Order GE Pub. No. 31-30569-1

CALL 1-800-626-2000


For a full-size panel template with complete panel installation instructions.

ZBD8920PSS/ZBD8900PII


GE Monogram® Fully Integrated Built-In Dishwashers

Features and Benefits

- Hidden, integrated electronic controls maintain the overall clean appearance of the exterior.
- Bulk-dispense technology automatically dispenses the right amount of detergent based on soil level and water hardness, with every cycle, even during every pre-wash. The bulk dispense system is located on the inner door and holds up to 47 fluid ounces of liquid dishwashing detergent; enough detergent for up to 2 months of washing. Bulk-dispense technology provides detergent at optimum times of the wash cycles for better wash performance.
- High-intensity Xenon lights illuminate the entire interior, leaving no question as to whether or not dishes have been cleaned.
- Steam prewash option helps loosen tough soils before any cycle. Automatically runs with the selection of the Scour Wash cycle or can be selected as an option before any cycle.
- Quiet operation (48 dBA) is made possible by advanced sound-absorbing materials and a smooth-running motor.
- As an ENERGY STAR® partner, GE has determined that all Monogram full-size dishwashers meet the ENERGY STAR guidelines for energy efficiency and water conservation.
- Scour wash cycle uses bulk dispense to inject the precise amount of detergent multiple times throughout the main wash, along with steam, to scrub away hard-to-remove foods, like eggs, oatmeal and rice.
- Generously sized interior provides the space and loading flexibility necessary to accommodate 16 place settings.
- Model ZBD8920PSS – Stainless steel
- Model ZBD8900PII – Requires custom panel
- Accessory: ZPRO0700S – Professional-style stainless steel door panel kit
- Accessory: ZTB700 – Stainless steel tubular handle kit

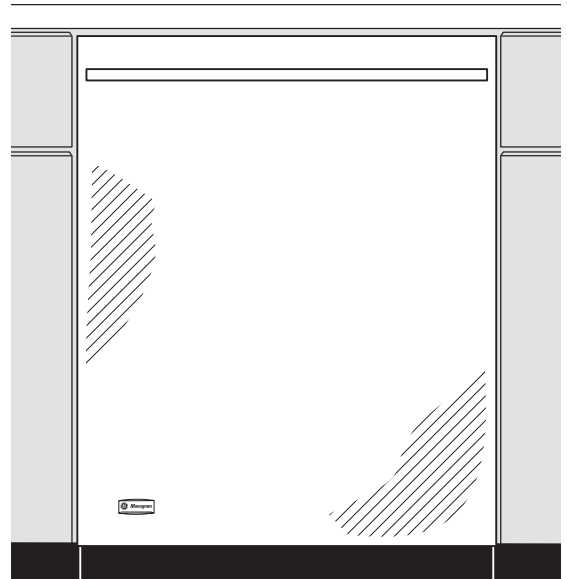

ZBD8920PSS

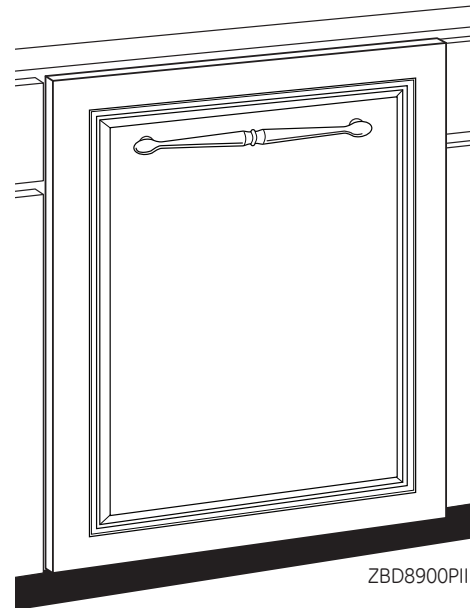

ZBD8900PII



imagination at work