

HOTPOINT®



Major appliances



Hotpoint® appliances are a good choice when value and affordability are important. Hotpoint appliances offer a wide choice of products combining flexibility, convenience and strong value with a recognized brand name. From more traditional styling to dependable features, Hotpoint appliances bring a practical approach to the kitchen.

HOTPOINT®

For the long run.

Refrigeration	4-5
Side-by-sides	6-7
Top-freezers	8-13
GE Bottom-freezer.....	11
GE Cycle and manual defrost.....	14
GE Spacemaker™ models.....	15
GE Upright freezers.....	16
GE Chest freezers.....	17
Specifications.....	18-21
Free-standing ranges	
Smooth top.....	22
Electric	23
30" ranges.....	24-27
Specialty application ranges.....	28
Specifications.....	29-30
Gas	31
30" ranges.....	32-37
Compact ranges.....	38
Specifications.....	39-41
GE Hoods	42
Specifications.....	43
Microwave ovens	
Counter Saver Plus™	44-45
GE Spacemaker over-the-range	46-47
GE Countertop	48-49
Specifications.....	50-53
Dishwashers	54-55
GE Spacemaker® undersink.....	56
GE Built-in 18".....	56
GE Convertible	56
Specifications.....	58-60
GE Disposers and GE Compactors	57
Specifications.....	61
Washers and dryers	
Super and Extra-large capacity washers.....	62
Extra-large capacity dryers	63
GE Spacemaker® washers and dryers.....	64-65
Specifications.....	66-69
GE Smartwater™ whole home water improvement	
GE Smartwater™ filtration systems.....	70-73
GE Smartwater™ softening systems	74
Specifications.....	75-77
GE Air conditioning	
GE Built-in “J” Series	78-79
GE Profile™ and GE Deluxe, Value and Heat/Cool Series	80-81
GE Quiet-Aire™ split system.....	82
GE Slide-Aire.....	82
GE Profile™ and GE Dehumidifiers	82
Specifications	83-86
Warranties	87
Consumer Services	Back cover

Side-by-side refrigerators

Side-by-side refrigerators


Hotpoint Side-by-side refrigerators are available with a variety of convenient extras, including gallon storage on the door, to fit a range of food storage needs.



One Touch! ice dispenser
Exterior ice and water service responds to a mere touch, delivering crushed ice, cubes or chilled water to your glass.



Spill-proof glass shelves
Help contain spills for ease of cleaning.



Slide-out freezer storage bin
Allows for easy loading and unloading of bulk purchases.



Adjustable door bins
Door bins hold gallon containers and six-packs in the fresh food compartment.



Vegetable/fruit crispers
Crispers offer adjustable humidity environments, providing optimum storage conditions to keep food fresher longer.



QuietSound Noise Reduction Package
Significantly reduces noise.



CSX26MRD

Top-freezer refrigerators

Hotpoint Top-freezer no-frost refrigerators have a wide range of capacities with a variety of new features, including gallon door storage, providing maximum food storage flexibility and convenience.




Fixed gallon door storage
Provides storage for gallon containers, six-packs and other large fresh food items; in the freezer, storage for large, bulky items.



Twin crispener system
Controls storage conditions with two different humidity levels to keep foods fresh.



Spill-proof glass shelves
Help contain spills for ease of cleaning.



Snack pan
Excellent for rewrapped meats, cheese, hors d'oeuvres, pudding and other snacks.



Full-width freezer shelf
Provides maximum convenience and flexibility in storing frozen food items.



Dairy compartment
Convenient counterbalanced dairy door covers butter and cheese to keep unwanted odors away.



Nice Cubes™ Icemaker
Provides rounded-shape ice, designed for better fit into a glass, reducing ice clogging as you drink a beverage.



CTX21DAB

All 14 and 16 cu. ft. models have galvanized steel doors.

Side-by-side refrigerators

One Touch! dispenser

Discover the convenience of the One Touch! dispenser delivering crushed ice, cubes or chilled water—directly through the door!



CSX26MRD

- 25.6 cubic foot capacity
- 9.59 cubic foot freezer
- One Touch! dispenser
- QuietSound Noise Reduction Package
- Adjustable gallon door storage
- Spill-proof shelves
- Adjustable temperature meat pan
- Adjustable humidity vegetable/fruit crisper



CSX26MRD

QuietSound Noise Reduction Package

Significantly reduces noise.



CSX22GRB

- 21.9 cubic foot capacity
- 6.90 cubic foot freezer
- One Touch! dispenser
- QuietSound Noise Reduction Package
- Fixed gallon door storage
- Adjustable temperature meat pan
- Adjustable humidity vegetable/fruit crisper

CSX20BAB

- 19.7 cubic foot capacity
- 6.79 cubic foot freezer
- Adjustable wire Everwhite cabinet shelves
- Classic white vegetable/fruit crispers
- Fixed gallon door storage
- Equipped for optional automatic icemaker

CSX22BCB

- Similar features and appearance as CSX20BAB except 21.9 cubic foot capacity and includes One Touch! dispenser with cubes only.



CSX22GRB



CSX22BCB



CSX20BAB

Not all features available on all models.
For additional features, specifications and color availability, refer to page 18.
For warranty information, refer to page 87.

Top-freezer refrigerators

Gallon door storage

Door shelves hold gallon containers and six-packs in the fresh food compartment; in the freezer, they store larger frozen food containers.



CTX21DAB

- 20.6 cubic foot capacity
- 6.30 cubic foot freezer
- Two split, one full-width spill-proof glass shelves
- Three door shelves, two with gallon storage
- Two clear tall vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker

CTX21DIB (not shown)

- Similar features and appearance as CTX21DAB except is equipped with factory-installed Nice Cubes™ icemaker.



CTX21DAB



Spill-proof glass shelves help contain spills for ease of cleaning.

CTX18DAB

- 18.2 cubic foot capacity
- 5.13 cubic foot freezer
- Fixed gallon door storage
- Two split, one full-width spill-proof glass shelves
- Two clear tall vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker

CTX18DIB (not shown)

- Similar features and appearance as CTX18DAB except is equipped with factory-installed Nice Cubes™ icemaker.

CTX18BAC

- 17.6 cubic foot capacity
- 4.01 cubic foot freezer
- Two classic white vegetable/fruit crispers
- White snack pan
- Two full-width wire Everwhite cabinet shelves
- Tall bottle storage
- Equipped for optional automatic icemaker

CTX16HAB

- 15.6 cubic foot capacity
- 3.86 cubic foot freezer
- Two split, one full-width adjustable glass shelves
- Two clear vegetable/fruit crispers
- Clear snack pan
- Equipped for optional automatic icemaker



CTX16HAB



CTX18DAB



CTX18BAC

Not all features available on all models. For additional features, specifications and color availability, refer to page 19. For warranty information, refer to page 87.

Top-freezer refrigerators

Nice Cubes™ icemaker

Models equipped with Nice Cubes™ icemaker let you provide continuous icemaking.



CTX21BAB

- 20.6 cubic foot capacity
- 6.30 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Three door shelves, two with tall bottle storage
- Two classic white tall vegetable/fruit crispers
- White snack pan
- Equipped for optional automatic icemaker

CTX18CIB

- 18.2 cubic foot capacity
- 5.13 cubic foot freezer
- One full-width classic white vegetable/fruit crisper
- Two full-width wire Everwhite cabinet shelves
- Equipped with factory-installed Nice Cubes™ icemaker

CTX18CAB (not shown)

- Similar features and appearance as CTX18CIB except is equipped for optional automatic icemaker.



Arrange wire Everwhite shelves for day-to-day needs; then adapt as storage needs change.



CTX21BAB



CTX18CIB

Not all features available on all models.
For additional features, specifications and color availability, refer to pages 18 and 19.
For warranty information, refer to page 87.

GE Refrigerator with bottom-freezer

A versatile, bottom-freezer refrigerator that puts the fresh food compartment right at eye level.

TCX181AD

- 17.6 cubic foot capacity
- Two adjustable humidity vegetable/fruit crispers
- Snack pan
- Gallon door storage
- Adjustable glass shelves
- Wire Everwhite sliding freezer basket
- Equipped for optional automatic icemaker



Gallon door storage provides easy access for oversized containers.



TCX181AD



Top-freezer refrigerators

Recessed handles

Color-matched recessed door handles reflect the latest in European design and appearance.



CTX16CYB

- 16.4 cubic foot capacity
- 3.86 cubic foot freezer
- Two adjustable wire Everwhite cabinet shelves
- Tall bottle door storage
- Two white vegetable/fruit crispers
- Recessed door handles
- Equipped for optional automatic icemaker

CTX14CYB (not shown)

- Similar features and appearance as CTX16CYB except 14.4 cubic foot capacity.

CTX16BYB

- 15.6 cubic foot capacity
- 3.86 cubic foot freezer
- Tall bottle door storage
- White snack pan
- Two classic white vegetable/fruit crispers
- Recessed door handles
- Equipped for optional automatic icemaker

CTX16CIB

- 16.4 cubic foot capacity
- 3.86 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Tall bottle door storage
- Two white vegetable/fruit crispers
- Equipped with factory installed Nice Cubes™ icemaker

CTX16CAB (not shown)

- Similar features and appearance as CTX16CIB except equipped for optional automatic icemaker.

CTX14CIB (not shown)

- Similar features and appearance as CTX16CIB except 14.4 cubic foot capacity.

CTX14CAB (not shown)

- Similar features and appearance as CTX16CAB except 14.4 cubic foot capacity.

GE Top-freezer refrigerators

When space is limited, these refrigerators solve a host of food storage problems.

TBX16SSB (not shown)

- 15.6 cubic foot capacity
- 3.86 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Tall bottle storage
- Only 64" high

TBX16RIC (not shown)

- Similar features and appearance as the TBX16SSB except equipped with factory-installed Nice Cubes™ icemaker
- Only 64" high

TBX12SAX

- 12.1 cubic foot capacity
- 3.00 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Tall bottle storage
- Two Ice 'N Easy trays
- Classic white interior

TBX10SNB

- 9.8 cubic foot capacity
- 2.33 cubic foot freezer
- Two full-width wire Everwhite cabinet shelves
- Tall bottle storage
- Two Ice 'N Easy trays
- Classic white interior
- Rounded doors



CTX16CYB

Top-freezer refrigerators



CTX16BYB



CTX16CIB



TBX12SAX



TBX10SNB

Not all features available on all models.
For additional features, specifications and color availability, refer to page 19.
For warranty information, refer to page 87.

Cycle defrost refrigerators

GE Cycle defrost refrigerators

Provide manual defrosting in the zero-degree freezer.

TDX11SNY

- 11.0 cubic foot capacity
- 2.4 cubic foot freezer
- Two modular door bins, two stationary shelves
- Three adjustable wire Everwhite cabinet shelves
- Full-width vegetable/fruit pan
- Two mini Ice 'N Easy trays
- Full-width freezer shelf

TDX9SNY (not shown)

- 9.0 cubic foot capacity
- 2.4 cubic foot freezer
- Four modular door bins, one stationary shelf
- Two adjustable wire Everwhite cabinet shelves
- Full-width vegetable/fruit pan
- Two mini Ice 'N Easy trays
- Full-width freezer shelf



TDX11SNY

Manual defrost refrigerator



TAX10SNX

GE Manual defrost refrigerator

Single-door model with short-term frozen food compartment.

TAX10SNX

- 9.6 cubic foot capacity
- .94 cubic foot compartment for short-term frozen food storage (not a zero-degree freezer)
- Two adjustable wire Everwhite cabinet shelves
- Full-width vegetable/fruit pan
- Tall bottle storage

For additional features, specifications and color availability, refer to page 20.
For warranty information, refer to page 87.

GE Spacemaker™ refrigerators

Sizes and capacities for every need – the family room, den, office, dorm or cabin; space-efficient models that bring surprising convenience to small places.

TAX6SNXWN/WH

- 6.0 cubic foot capacity
- Two adjustable cabinet shelves
- Reversible door
- Available in white or woodgrain
- Optional black panel or custom wood panel available with TK6 trim kit



TAX6SNXWH

TAX4SNCWH

- 4.3 cubic foot capacity
- Three wire cabinet shelves
- Two full-width and one half-width door shelves
- Can rack in door
- Rounded door
- Reversible door
- Available in white only



TAX4SNCWH

TAX4BNCBL

- 4.3 cubic foot capacity
- Two wire cabinet shelves
- White vegetable/fruit pan with cover
- Two full-width and one half-width door shelves
- Can rack in door
- Reversible door
- Available in black only



TAX4BNCBL

TAX2BNCBL

- 1.8 cubic foot capacity
- One slide-out cabinet shelf
- 1-1/2 door shelves with retaining rod
- Available in black only



TAX2BNCBL

TAX2SNCWH (not shown)

- Similar features and appearance as the TAX2BNCBL except is only available in white.

Spacious GE Upright freezers from no-frost to compacts

Select from these quality uprights for ease in viewing frozen foods! A range of capacities handles your exact requirements.

FUM17DA

- 17.1 cubic foot capacity
- Manual defrost
- Four cabinet shelves (1 adj.)
- Five door shelves

FUM21DA (not shown)

- 20.6 cubic foot capacity
- Manual defrost
- Four cabinet shelves (1 adj.)
- Six door shelves

FUM14DA (not shown)

- 14.1 cubic foot capacity
- Manual defrost
- Three cabinet shelves (1 adj.)

FUM12SA (not shown)

- 11.6 cubic foot capacity
- Manual defrost
- Three cabinet shelves
- Four door shelves

FUM14SA (not shown)

- 14.1 cubic foot capacity
- Manual defrost
- Three cabinet shelves
- Five door shelves

FUM17SA (not shown)

- 17.1 cubic foot capacity
- Manual defrost
- Three cabinet shelves
- Five door shelves

FUM21SA (not shown)

- 20.6 cubic foot capacity
- Manual defrost
- Four cabinet shelves
- Six door shelves

FUM9SA

- 8.7 cubic foot capacity
- Manual defrost
- Four cabinet shelves
- Five door shelves

FUM5SA (not shown)

- 5.0 cubic foot capacity
- Manual defrost
- Rounded doors
- Two cabinet shelves
- Three door shelves

FUF20DA Frost-Free (not shown)


- 20.3 cubic foot capacity
- Five cabinet shelves (3 adj.)
- Six door shelves

FUF17DA Frost-Free (not shown)

- 16.7 cubic foot capacity
- Four cabinet shelves (3 adj.)
- Five door shelves

FUF14DA Frost-Free (not shown)

- 13.7 cubic foot capacity
- Three cabinet shelves (2 adj.)



Safety lock provides security.



FUM17DA



FUM9SA

GE Chest freezers from compact to large-capacity models

For routine family needs, unexpected guests or changing schedules, there's a chest freezer to keep you prepared. Cook meals ahead and freeze; or take advantage of supermarket specials.

FCM20DA

- 19.7 cubic foot capacity
- Two lift-out and sliding bulk storage baskets
- Temperature monitor with audible alarm
- Interior light
- Built-in lock
- Power "ON" light

FCM25DA (not shown)

- 24.9 cubic foot capacity
- Three lift-out and sliding bulk storage baskets

FCM15DA (not shown)

- 14.8 cubic foot capacity
- Two lift-out and sliding bulk storage baskets

FCM15SA (not shown)

- 14.8 cubic foot capacity
- One lift-out and sliding bulk storage basket

FCM9SA

- 8.8 cubic foot capacity
- Adjustable temperature control

FCM9DA (not shown)

- 8.8 cubic foot capacity
- One lift-out and sliding bulk storage basket
- Temperature monitor with audible alarm
- Interior light
- Built-in lock

FCM7DA (not shown)

- 7.2 cubic foot capacity

FCM5SA (not shown)

- 5.0 cubic foot capacity
- Adjustable temperature control



Lift-out and sliding wire baskets for easy loading and unloading.



FCM20DA



FCM9SA

Refrigeration specifications

Side-by-side no-frost refrigerators

Side-by-sides provide storage flexibility combined with high performance and style. A wide variety of convenience features include full-length freezer and separate storage compartments. The Automatic Energy Saver System and efficient foam insulation on no-frost models help cut operating costs.


Side-by-side no-frost refrigerators

	CSX26MRD	CSX22GRB	CSX22BCB	CSX20BAB
Capacity				
Total (cu. ft.)	25.6	21.9	21.9	19.7
Fresh food (cu. ft.)	16.0	14.95	14.95	12.95
Freezer (cu. ft.)	9.59	6.90	6.90	6.79
Shelf area (sq. ft.)	24.1	22.8	22.4	20.6
Features				
Automatic icemaker	■	■	■	Opt. (IM3)
Exterior crushed ice, cubes and chilled water service	One Touch! Dispenser	One Touch! Dispenser	(Cubes only)	
Dispenser light	■			
Ice 'N Easy trays				2
Ice storage bin	■	■	■	■
Cabinet shelves (total) (adjustable)	3 Glass Spill-proof	3 Glass	3 Wire Everwhite	3 Wire Everwhite
Vegetable/fruit crisper(s) (upper)	Adj. Humid. (clear)	Adj. Humid. (clear)	Sealed (classic white)	Sealed (classic white)
Meat pan (lower)	Adj. Temp. (clear)	Adj. Temp. (clear)	Sealed (classic white)	Sealed (classic white)
Door shelves (total)	4 (2 Adj. w/gal. storage)	4 (2 w/ gal. storage)	4 (2 w/ gal. storage)	4 (2 w/ gal. storage)
Dairy compartment	Clear	Clear	White	White
Utility bin	■	■	■	■
Freezer compartment shelf(s) (Wire Everwhite)		3 Adj.	3 Adj.	4 (3 Adj.)
Freezer sliding baskets	3			
Freezer sliding storage bin	1	1	1	1
Freezer door shelves (total)	5	5	5	6
Economical/Quiet				
QuietSound Noise Reduction System	■	■	■	■
Energy Saver (condenser loop)	■	■	■	■
Insulation (cabinet)	Foam	Foam	Foam	Foam
Cabinet liner	Baked-Enamel-on-Steel	Baked-Enamel-on-Steel	Baked-Enamel-on-Steel	Baked-Enamel-on-Steel
Door liner	ABS	ABS	ABS	ABS
Appearance				
Color(s) available*	WW, AA	WW, AA	WH	WH, AD
Door handle(s)	CM	CM	Black	Black
Textured steel case & doors	■	■	■	■
Adjustable rollers	■	■	■	■
Door stops	■	■	■	■
Coil-free back	■	■	■	■
Weights & Dimensions				
Height to top of hinge (in.) A	69-3/4	67-5/8	67-5/8	67-5/8
Height to top of case (in.) B	68-3/4	66-5/8	66-5/8	66-5/8
Case depth without door (in.) C	28	28	28	28
Case depth (less handle) with door (in.) D	30-1/2	30-1/2	30-1/2	30-1/2
Case depth with door handle (in.) E	32-1/2	32-1/2	32-1/2	32-1/2
Depth with door open 90° (in.) F	49-3/4	49-3/8	49-3/8	47-3/8
Width (in.) G	35-3/4	33-1/2	33-1/2	31-1/2
Width with door open 90° less door handle (in.) H	36-1/8	34-3/8	34-3/8	32-1/4
Air clearances				
Each side (in.)	3/4†	3/4†	3/4†	3/4†
Top (in.)	1	1	1	1
Back (in.)	1	1	1	1
Approx. shipping weight (lbs.)	354	327	327	311

CM = Color Matched

*Color(s) available: WW = White on white, AA = Almond on almond, WH = White/Black handles, AD = Almond/Black handles.

†If installed against a wall, allow clearance of 11-1/4" on freezer side to remove ice bin.



Note: Before installing, consult installation instructions packed with product for current dimensional data.

Note: Before purchasing any appliance on which the Federal Trade Commission requires an energy label, read important energy cost and efficiency information available from your retailer.

GE Refrigerator with bottom-freezer


A versatile, bottom-freezer refrigerator that puts the fresh food compartment right at eye level.

Bottom-freezer refrigerator

	TCX181AD
Capacity	
Total (cu. ft.)	17.6
Fresh food (cu. ft.)	12.90
Freezer (cu. ft.)	4.7
Shelf area (sq. ft.)	23.0
Features	
Automatic icemaker	Opt. (IM3)
Ice 'N Easy trays	2
Ice tray shelf	■
Ice storage bin	■
Cabinet shelves (spill-proof) (adjustable)	4 Glass 4 Split
Snack pan	■
Vegetable/fruit crisper(s)	2 Adj. Humid.
Modular door bins	4 Adj.
Door shelf (full-width)	1 Fixed w/ Gallon Storage
Dairy compartments	1 Clear
Interior light	■
Wire Everwhite freezer storage basket	1 Full-Width
Freezer compartment shelf	1 Full-Width
Freezer door shelves	2 Full-Width
Freezer interior light	■
Economical/Quiet	
Cabinet/door insulation	Foam
Appearance	
Color(s) available*	WW, AA
Full-length door handle(s)	Color Matched
Textured steel doors and case	■
Door stops	■
Reversible doors	■
Adjustable front rollers	■
Adjustable rollers	■
Coil-free back	■
Weights & Dimensions	
Height to top of hinge (in.) A	66-1/4
Height to top of case (in.) B	65-3/4
Case depth without door (in.) C	26-1/4
Case depth less door handle (in.) D	28
Case depth with door handle (in.) E	29-1/8
Depth with door open 90° (in.) F	57-1/4
Width (in.) G	31
Side clearance for 90° door open	1-3/4
Air clearances	
Each side (in.)	0
Top (in.)	1
Back (in.)	0**
Approx. shipping wt. (lbs.)	247

*Color(s) available: WW = White on white, AA = Almond on almond

**Metal cover on back when touching wall, gives 1-1/4" clearance.



UL Listed by Underwriters Laboratories, Inc.




Top-freezer no-frost refrigerators

Enjoy the convenience of a large capacity freezer at eye level. The refrigerator compartment features distinctive storage bins and, on most models, adjustable shelves that adapt quickly to changing storage needs. Energy Saver Switch and efficient foam insulation help cut operating costs.

Top-freezer no-frost refrigerators

	CTX21DAB CTX21DIB	CTX21BAB	CTX18DAB CTX18DIB	CTX16HAB	CTX18BAC	CTX18CAB CTX18CIB	CTX16CAB CTX16CIB	CTX16CYB	CTX16BYB	CTX14CAB CTX14CIB	CTX14CYB	TBX16SSB	TBX16RIC	TBX12SAX	TBX10SNB
Capacity															
Total (cu. ft.)	20.6	20.6	18.2	15.6	17.6	18.2	16.4	16.4	15.6	14.4	14.4	15.6	15.6	12.1	9.8
Fresh food (cu. ft.)	14.25	14.25	13.04	11.69	13.62	13.04	12.58	12.58	11.69	10.58	10.58	11.69	11.69	9.10	7.50
Freezer (cu. ft.)	6.30	6.30	5.13	3.86	4.01	5.13	3.86	3.86	3.86	3.86	3.86	3.86	3.86	3.00	2.33
Shelf area (sq. ft.)	25.2	24.2	23.4	19.6	19.9	20.1	$\frac{17.5}{16.7}$	17.5	19.2	$\frac{17.2}{16.4}$	17.2	17.2	16.4	13.6	12.1
Features															
Automatic icemaker	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)	Opt. (IM3)
Ice 'N Easy trays	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Ice storage bin	Bucket		Bucket							Bucket			Utility- Opaque		
Ice tray shelf															
Cabinet shelves (total)	2 Split, 1 F/W Glass	2 F/W Wire	2 Split, 1 F/W Glass	2 Split, 1 F/W Glass	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire	2 F/W Wire
(adjustable)	3	2	3	3	2	2	2	2	2	2	2	2	2	2	2
(spill-proof)	3		3												
Door shelves w/tall bottle storage	3 (2 w/gal. storage)	3 (2 w/tall bottle)	2 w/gal. storage	2 w/gal. storage	2	2	2	2	2	2	2	2	2	2	2
Vegetable/fruit crisper(s)	2 (tall clear)	2 (tall classic white)	2 (tall clear)	2 Clear	2 (classic white)	1 F/W (classic white)	2 (classic white)	2 (classic white)	2 (classic white)	2 (classic white)	2 (classic white)	2 (classic white)	2 (classic white)	1 F/W (classic wh.) Divided	1 (classic white)
Snack pan	Clear	White	Clear	Clear	White			White							
Dairy compartment(s)	1 Clear	1 White	1 Clear	Clear	1 White	1 White	1 White	1 White	1 White	1 White	1 White	1 White	1 White		
Utility bin															
Freezer compartment shelf(s) (Wire Everwhite)	1 Adj. F/W (2 Pos.)	1 Adj. F/W (2 Pos.)	1 Adj. F/W (2 Pos.)	Step shelf	Step shelf	Trivet			Step shelf						1 F/W
Freezer door shelves	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Quiet/Economical															
Cabinet/door insulation	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam
Cabinet/door liner	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS
Energy Saver Switch															
Appearance															
Color(s) available*	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WH, AD
Door handle(s)	CM	CM	CM	CM	CM	CM	CM	Recessed	Recessed	CM	Recessed	CM	CM	Black	White recessed
Customer installed handles															
Textured steel case & doors															
Reversible doors															
Right or left door opening															
Coil-free back															
Adjustable rollers								4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	Level Legs
Door stops															
Weights & Dimensions															
Height to top of hinge (in.) A	66-7/8	66-7/8	64-3/4	64-3/4	67-3/8	64-3/4	67-3/8	67-3/8	64-3/4	61-3/4	61-3/4	64-3/4	64-3/4	60-5/8	59-1/8
Height to top of case (in.) B	66-1/4	66-1/4	64	64-1/4	66-7/8	64	66-7/8	66-7/8	64-1/4	61-1/4	61-1/4	64-1/4	64-1/4	60-1/4	58-5/8
Case depth without door (in.) C	27-5/8	27-5/8	27-3/4	25-3/8	26-1/4	27-3/4	26-1/4	26-1/4	25-3/8	25-3/8	25-3/8	25-3/8	25-3/8	27-7/16	25
Case depth with door less handle (in.) D	30	30	30	27-7/8	30	30	28-3/4	28-3/4	27-7/8	27-7/8	27-7/8	27-7/8	27-7/8	29-11/16	26-3/8
Case depth with door handle (in.) E	31-3/4	31-3/4	31-3/4	29-3/4	31-7/8	31-3/4	30-5/8	28-3/4	27-7/8	29-3/4	27-7/8	29-3/4	29-3/4	31-7/16	28
Depth with door open 90° (in.) F	60	60	58-1/8	54-3/8	55-7/8	58-1/8	55-1/4	55-1/4	54-3/8	54-3/8	54-3/8	54-3/8	54-3/8	51-9/16	48-3/4
Width (in.) G	31-1/4	31-1/4	29-3/8	28	28	29-3/8	28	28	28	28	28	28	28	23-3/8	23-5/8
Width with door open 90° less handle (in.) H	31-1/4	31-1/4	29-3/8	28-1/4	28-7/8	29-3/8	28-1/4	28-1/4	28-1/4	28-1/4	28-1/4	28-1/4	28-1/4	23-9/16	24-1/8
Air clearances															
Each side (in.)	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†
Top (in.)	1	1	1	1	1	1	1	1	1	1	1	1	1	2	1
Back (in.)	1	1	1	1	1	1	1	1	1	1	1	1	1	3/4	1
Approx. shipping weight (lbs.)	229	229	213	190	196	213	$\frac{190}{195}$	190	186	$\frac{170}{174}$	174	170	170	152	157

CM = Color Matched
 *Color(s) available: WW = White on white, AA = Almond on almond, WH = White/Black handles, AD = Almond/Black handles.
 †If installed against a wall, allow clearance of 11-1/4" on freezer side to remove ice bin.



See page 87 for warranty information.


Refrigeration specifications

GE Cycle and manual defrost refrigerators


Cycle defrost:
Two-door refrigerators combine dependability in food storage with economical operation. Freezer requires manual defrost.

Manual defrost:
Single-door refrigerators feature a compartment for short-term frozen food storage and a fresh food compartment with an adjustable shelf.

Cycle defrost



Manual defrost



	GE Cycle defrost two door		GE Manual defrost single door
	TDX11SNY	TDX9SNY	TAX10SNX
Capacity			
Total (cu. ft.)	11.0	9.0	9.6
Fresh food (cu. ft.)	8.60	6.60	8.64
Freezer (cu. ft.)	2.40	2.40	.94*
Shelf area (sq. ft.)	15.5	15.2	9.88
Features			
Ice 'N Easy trays	2 Mini	2 Mini	2
Freezer chiller tray with baffle			■
Cabinet shelves wire Everwhite	3 Adj.	2 Adj.	2 Adj.
Vegetable/fruit crisper	1 F/W	1 F/W	1 F/W
Door shelves	2 Modules, 2 Stationary	4 Modules, 1 Stationary	3 F/W
Tall bottle storage on door	■	■	■
Dairy compartment(s)	2	2	1
Egg storage bin			Pockets
Freezer compartment shelf(s)	1 F/W	1 F/W	
Economical/Quiet			
Cabinet/door insulation	Foam	Foam	Foam
Cabinet/door liner	Plastic	Plastic	Plastic
Appearance			
Color(s) available	White	White	White/Almond
Door handle(s)	White	White	Black
Reversible doors	■	■	■
Right or left door opening			■
Weights & Dimensions			
Height to top of hinge (in.) A	63-1/2	55	58
Height to top of case (in.) B	63	54-1/2	57-9/16
Case depth without door (in.) C	20-1/2	20-1/2	21-3/8
Case depth less door handle (in.) D	23-1/4	23-1/4	23-1/2
Case depth with door handle (in.) E	24-1/2	24-3/4	24-13/16
Depth with door open 90° (in.) F	46	46	44-13/16
Width (in.) G	23-1/4	23-1/2	23
Width with door open 90° (in.) H	23-3/4	23-3/4	23-1/2
Air clearances			
Each side (in.)	1/2	1/2	5/8
Top (in.)	2	2	2
Back (in.)	2	2	1
Approx. shipping weight (lbs.)	139	126	135


*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about **two weeks**. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.

GE Spacemaker™ compact refrigerators

	TAX6SNXWH	TAX6SNXWN	TAX4BNCBL	TAX4SNCWH	TAX2SNCWH	TAX2BNCBL
	Capacity					
Total (cu. ft.)	6.0	4.3	4.3	1.8	1.8	1.8
Fresh food (cu. ft.)	5.51	3.26	3.26	1.51	1.51	1.51
Freezer (cu. ft.)	.49*	.42*	.42*	.21*	.21*	.21*
Shelf area (sq. ft.)	8.8	6.0	6.0	2.9	2.9	2.9
Features						
Ice 'N Easy trays	2 Mini	1 Mini	2 Mini	1 Mini	1 Mini	1 Mini
Manual defrost	■	■	■	■	■	■
Cabinet shelves	2 (Adj.)	2 Full-width wire	3 Full-width wire	1 Plastic	1 Plastic	1 Plastic
Vegetable/fruit pan		White				
Door shelves	3 F/W	2 F/W, 1 H/W	2 F/W, 1 H/W	1-1/2	1-1/2	1-1/2
Utility bin				Tray		
Economical/Quiet						
Cabinet/door insulation	Foam	Foam	Foam	Foam	Foam	Foam
Cabinet/door liner	Polystyrene	Polystyrene	Polystyrene	Polystyrene	Polystyrene	Polystyrene
Appearance						
Color(s) available	White Woodgrain	Black	White	White	Black	Black
Door handles	White Visor Black Visor	Color-Matched Recessed	Color-Matched Recessed	Color-Matched Recessed	Color-Matched Recessed	Color-Matched Recessed
Rounded doors		■	■			■
Reversible door(s)	■	■	■			
Right or left door opening				Right Hand		
Weights & Dimensions						
Height (in.) A	34-1/4	32-7/8	32-7/8	19-7/8	19-7/8	19-7/8
Width (in.) B	23-5/8	20-1/16	20-1/16	18-7/8	18-7/8	18-7/8
Depth with handle (in.) C	25-7/8	21-7/8	21-7/8	19-1/4	19-1/4	19-1/4
Depth with door open 90° (in.) D	47-1/2	39-1/4	39-1/4	37	37	37
Air clearances						
Each side (in.)	0††	1/2	1/2	1/2	1/2	1/2
Top (in.)	1-1/2	2	2	2	2	2
Back (in.)	3/4	2	2	2	2	2
Approx. shipping weight (lbs.)	88	77	77	51	51	51
Accessories						
Custom trim kit	TK6 Optional†					

†TK6 trim kit comes with black panel.


††If installed against a wall, allow 1-1/4" on hinge side to allow for proper door opening.



Note: Right-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.
Left-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.

GE Upright freezers

Quality, convenient freezers equipped with door shelves and spacious interiors for ease in viewing frozen foods.




	GE Upright frost-free			GE Upright manual defrost								
	FUF20DA	FUF17DA	FUF14DA	FUM21DA	FUM21SA	FUM17DA	FUM17SA	FUM14DA	FUM14SA	FUM12SA	FUM9SA	FUM5SA
Capacity												
Total volume (cu. ft.)	20.3	16.7	13.7	20.6	20.6	17.1	17.1	14.1	14.1	11.6	8.7	5.0
Shelf area (sq. ft.)	23.9	18.4	14.3	25.3	21.9	19.1	16.2	17.9	15.0	13.0	10.1	6.0
Features												
Audible temperature alarm	■	■	■	■	■	■	■	■	■	■	■	■
Temperature control	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Limited food loss warranty	■	■	■	■	■	■	■	■	■	■	■	■
Door shelves (total)	6	5	5	6	6	5	5	5	5	4	5	3
Defrost water drain	■	■	■	■	■	■	■	■	■	■	■	■
Power "ON" light	■	■	■	■	■	■	■	■	■	■	■	■
Interior light	■	■	■	■	■	■	■	■	■	■	■	■
Lock	■	■	■	■	■	■	■	■	■	■	■	■
Cabinet shelves (total)	5 (3 Adj.)	4 (3 Adj.)	3 (2 Adj.)	4 (1 Adj.)	4	4 (1 Adj.)	3	3 (1 Adj.)	3	3	4	2
Refrigerated shelves	3	3	3	3	4	3	3	2	3	3	4	2
Bulk storage basket	Slide-Out	Slide-Out	Slide-Out	Slide-Out	■	Slide-Out	■	Slide-Out	■	■	■	■
Drop-front storage	■	■	■	■	■	■	■	■	■	■	■	■
Economical/Quiet												
Defrost	Frost-Free	Frost-Free	Frost-Free	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
Magnetic door gasket	■	■	■	■	■	■	■	■	■	■	■	■
Cabinet liner	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Baked enamel-on-steel	Polystyrene	Polystyrene
Wrap-around condenser	■	■	■	■	■	■	■	■	■	■	■	■
Appearance												
Color available	White	White	White	White	White	White	White	White	White	White	White	White
Door handle	■	■	■	■	Recessed	■	Recessed	■	Recessed	Recessed	■	Recessed
Textured steel case and door	■	■	■	■	■	■	■	■	■	■	■	■
Rounded door	■	■	■	■	■	■	■	■	■	■	■	■
Weights & Dimensions												
Height (in.) A	70	64-1/2	59	70	70	64-1/2	64-1/2	59	59	54-1/2	53-3/8	33-1/2
Width (in.) B	32	32	28	32	32	32	32	28	28	28	21-1/2	21-3/8
Depth (in.) C	28-1/2	26-1/2	28-1/2	28-1/2	28-1/2	26-1/2	26-1/2	28-1/2	28-1/2	26-1/2	26-3/8	26-1/8
Depth with door open 90° (in.) D	59-1/8	57-1/8	55-1/8	59-1/8	59-1/8	57-1/8	57-1/8	55-1/8	55-1/8	53-1/8	49-1/8	45-3/4
Air clearances												
Each side (in.)	3	3	3	3	3	3	3	3	3	3	1	1
Top (in.)	3	3	3	3	3	3	3	3	3	3	4	4
Back (in.)	3	3	3	3	3	3	3	3	3	3	4	4
Approx. shipping weight (lbs.)	231	213	173	231	231	211	211	173	173	168	120	80

NOTE: For proper installation of Upright Freezers (except FUM9SA and FUM5SA), allow clearance of 3" on each side; 3" or 4" on top; and 3" on back.

GE Chest freezers

Large-capacity or smaller chest models save money and deliver big performance features.



	GE Chest freezers								
	FCM25DA	FCM20DA	FCM15DA	FCM15SA	FCM9DA	FCM9SA	FCM7DA	FCM5SA	FCM5SA
Capacity									
Total volume (cu. ft.)	24.9	19.7	14.8	14.8	8.8	8.8	7.2	5.0	5.0
Features									
Manual defrost	■	■	■	■	■	■	■	■	■
Audible temperature alarm	■	■	■	■	■	■	■	■	■
Temperature control	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Wrap-around condenser	■	■	■	■	■	■	■	■	■
Wrap-around evaporator	■	■	■	■	■	■	■	■	■
Limited food loss warranty	■	■	■	■	■	■	■	■	■
Defrost water drain	■	■	■	■	■	■	■	■	■
Power "ON" light	■	■	■	■	■	■	■	■	■
Interior light	■	■	■	■	■	■	■	■	■
Lock	■	■	■	■	■	■	■	■	■
Removable sliding bulk storage basket(s)	3	2	2	1	1	■	1	■	■
Economical/Quiet									
Cabinet/lid insulation—Foam	■	■	■	■	■	■	■	■	■
Cabinet liner	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated	Steel Epoxy-Coated
Appearance									
Color available	White	White	White	White	White	White	White	White	White
Handle	■	■	■	Recessed	■	Recessed	■	Recessed	■
Textured steel case and lid	■	■	■	■	■	■	■	■	■
Weights & Dimensions									
Height (in.) A	35	35	35	35	34-1/4	34-1/4	34-1/4	34-1/4	34-1/4
Width (in.) B	73-1/4	61-1/4	48	48	41	41	35	27	27
Depth (in.) C	29-1/2	29-1/2	29-1/2	29-1/2	23-1/4	23-1/4	23-1/4	23-1/2	23-1/2
Height with lid open (in.) D	60-3/4	59-1/2	60-3/4	60-3/4	55-1/4	55-1/4	55-1/4	55-1/4	55-1/4
Air clearances									
Each side (in.)	3	3	3	3	3	3	3	3	3
Back (in.)	3	3	3	3	3	3	3	3	3
Approx. shipping weight (lbs.)	229	201	160	160	137	137	120	105	105

NOTE: For proper installation of Chest Freezers, allow clearance of 3" on each side and 3" on back.



Total volume and shelf area ratings are calculated by the Association of Home Appliance Manufacturers' standards.



Listed by Underwriters Laboratories, Inc.

See page 87 for warranty information.

Smooth top ranges

Smooth top ranges

The Hotpoint free-standing smooth top ranges provide quick cooking response. The fast, ribbon heating elements are positioned beneath the smooth cooktop and direct heat straight up to the pan. This sophisticated cooking method provides even heat for uniform cooking. The hot surface indicator lights provide safe, confident cooking. Electronic oven controls provide an easy, two-step self-cleaning oven operation.



5.0 cu. ft. capacity

Hotpoint's smooth top ranges now have America's largest oven capacity.* This oven is big enough to handle just about any cooking possibility.



Ribbon heating elements

Unlike conventional elements, the heat comes from brightly glowing ribbon elements positioned beneath the smooth fingerprint and scratch resistant patterned glass surface.



Frameless glass oven door

The full-width frameless door offers easy-clean, contemporary styling.



Two-step self-clean

Simply latch the oven door and turn to "Auto Self-Clean"—the oven does the rest.



Single control knob

Quickly and easily sets your oven to bake, broil, or even self-clean with the turn of a single control.

Removable full-width storage drawer

Conveniently stores cooking utensils close at hand. Drawer removes easily for cleaning underneath.



RB787BC



Electronic oven controls

Easy-to-use electronic oven controls provide:

- Simple touchpad oven operation
- Auto Self-Clean
- Self-clean cycling light
- Preheated oven light with audible preheat signal
- Auto oven shut-off
- Electronic clock and timer
- Automatic oven timer
- Oven "ON" light
- Delay Bake option.

*Among leading manufacturers' brands

All features may not be available on all models.

Electric ranges

Quality Hotpoint free-standing electric ranges are perfect solutions for today's busy schedules! Self-cleaning ovens save you time and effort. On ranges with one-piece, upswept cooktops, a simple wipe-up does the job. White on white models are designed to complement the elegance and efficiency of today's kitchens.



RB757WC



5.0 cu. ft. capacity

Hotpoint's standard clean ranges now have America's largest oven capacity.* This oven is big enough to handle just about any cooking possibility.



One-piece upswept cooktop

No cracks or crevices to trap dirt! The porcelain enamel-on-steel surface wipes clean easily.



Lift-up cooktop

Cooktop lifts up to allow easy clean-up of hard-to-reach spots underneath.



Plug-in surface elements

Unplug to permit clean-up or removal of drip bowls for easy cleaning in dishwasher. Plus easy access for cleaning of recessed areas designed to catch spillovers.



Two-step self-clean

Simply latch the oven door and turn to "Auto Self-Clean"—the oven does the rest.



Frameless glass oven door

The full-width frameless door offers easy-clean, contemporary styling.

Removable full-width storage drawer

Conveniently stores cooking utensils close at hand. Drawer removes easily for cleaning underneath.

Calrod® surface elements

An exclusive feature. The design of the removable Calrod® surface elements assures fast, clean cooking and better heat distribution.



Electronic oven controls

Easy-to-use electronic oven controls provide: ■ Simple touchpad oven operation ■ Auto Self-Clean ■ Self-clean cycling light ■ Preheated oven light with audible preheat signal ■ Auto oven shut-off ■ Electronic clock and timer ■ Automatic oven timer ■ Oven "ON" light ■ Delay Bake option.

*Among leading manufacturers' brands

All features may not be available on all models.

30" electric ranges

30" electric ranges with self-clean ovens

Put an end to messy oven cleaning! Choose from these quality ranges, all with the convenience of self-cleaning ovens. Simply set the controls and the oven cleans itself. All models feature 5.0 cu. ft. capacity; electronic clock and minute timer; two oven shelves; broiler pan with grid; lift-off oven door; interior oven light; infinite heat controls; removable, full-width storage drawer; and porcelain-enameled, upswept cooktop. Models RB797WC/AC/BC and RB787WC/BC have ribbon cooktops.

RB797WC

- White on white model
- Circuwave™
- Smooth, easy-to-clean fingerprint and scratch resistant patterned glass cooktop
- Two 8" and two 6" ribbon heating elements
- Hot surface indicator lights
- Frameless white glass oven door with window
- Designer-style handle

RB797AC

- Same features and appearance as RB797WC, available in Almond on almond.

RB797BC

- Same features and appearance as RB797WC, available in Black on black.

RB787WC

- White on white model
- Smooth, easy-to-clean fingerprint and scratch resistant patterned glass cooktop
- Two 8" and two 6" ribbon heating elements
- Hot surface indicator lights
- Auto oven shut-off
- Two-step self-clean
- Single oven control knob
- Frameless white glass oven door with window
- Designer-style handle

RB787BC

- Same features and appearance as RB787WC, except Black on black.

RB757WC

- White on white model
- Auto oven shut-off
- Two-step self-clean
- Two 8" and two 6" plug-in Calrod® heating elements with one-piece chrome drip bowls
- Lift-up cooktop
- Frameless white glass oven door with window
- Designer-style handle

RB757BC

- Same features and appearance as RB757WC, except has porcelain-enameled drip bowls and is available in White or Almond with black glass oven door.

RB753BC

- White or almond model
- Two 8" and two 6" plug-in Calrod® heating elements with one-piece chrome drip bowls
- Frameless black glass oven door
- Designer-style handle



RB797WC
Ribbon Range



RB787BC
Ribbon Range



RB787WC
Ribbon Range



RB757WC
Self-Cleaning Oven



RB757BC
Self-Cleaning Oven



Electronic oven controls

Easy-to-use electronic oven controls provide:

- Simple touchpad oven operation
- Auto Self-Clean
- Self-clean cycling light
- Preheated oven light with audible preheat signal
- Auto oven shut-off
- Electronic clock and timer
- Automatic oven timer
- Oven "ON" light
- Delay Bake option.



RB753BC
Self-Cleaning Oven

For detailed specifications, installation information and color availability, refer to page 29. For warranty information, refer to page 87.

30" electric ranges

30" electric ranges with standard clean ovens

Choose from these quality Hotpoint ranges featuring standard clean ovens. Calrod® models feature easy-to-clean, upswept, porcelain-enameled cooktop; 5.0 cu. ft. capacity; two oven shelves; plug-in Calrod® heating elements; one-piece removable chrome drip bowls; full-width removable storage drawer and broiler pan with grid. (Except for model RB585 which has a ribbon cooktop.)

RB585WC

- White on white model
- Smooth, easy-to-clean, fingerprint and scratch resistant patterned glass cooktop
- Two 8" and two 6" ribbon heating elements
- Hot surface indicator lights
- Electronic clock and minute timer
- Auto oven shut-off with override
- Audible pre-heat signal
- Frameless white glass oven door with window
- Designer-style handle

RB585BC

- Same features and appearance as RB585WC, except available in white or almond with black glass oven door.

RB536BC

- White or almond model
- Electronic clock and minute timer
- Lift-up cooktop
- Two 8" and two 6" plug-in heating elements
- Frameless black glass oven door with window
- Designer-style handle

RB530WC

- White on white model
- Electronic clock and minute timer
- Two 8" and two 6" plug-in heating elements
- Designer-style handle

RB526C

- White on white or Almond on almond model
- Two 8" and two 6" plug-in heating elements
- Color-matched oven door with window
- Designer-style handle
- Electronic clock and minute timer

RB525BC

- White or almond model
- One 8" and three 6" plug-in heating elements
- Frameless solid black glass oven door
- Chrome visor door handle

RB525C (not shown)

- Same features and appearance as RB525BC, except has color-matched painted oven door.



RB585WC

30" electric ranges



RB536BC



RB530WC



RB526C



RB525BC

For detailed specifications, installation information and color availability, refer to page 29. For warranty information, refer to page 87.



RA524W

Hotpoint 24" electric range

RA524W

- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights



RA520W

Hotpoint 20" electric range


RA520W

- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights

30" electric ranges

Models	RB797WC RB797AC RB797BC	RB787WC RB787BC	RB757WC RB757BC	RB753BC	RB585WC RB585BC	RB536BC	RB530WC	RB526C	RB525BC	RB525C
Features										
Self-clean oven	■	■	■	■	■	■	■	■	■	■
Oven capacity	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Cleaning time	Variable	Variable	Variable	Variable						
Standard clean oven					■	■	■	■	■	■
Circuwave™	■									
Oven shelves	2	2	2	2	2	2	2	2	2	2
Patterned cooktop	Ribbon	Ribbon			Ribbon					
Porcelain-enameled upswept cooktop			■	■		■	■	■	■	■
Lift-up cooktop			■	■		■	■	■	■	■
8-inch heating elements	2	2	2	2	2	2	2	2	1	1
6-inch heating elements	2	2	2	2	2	2	2	2	3	3
Plug-in Calrod® heating elements			■	■		■	■	■	■	■
Removable one-piece drip bowls			Chrome Porcelain	Chrome		Chrome	Chrome	Chrome	Chrome	Chrome
Electronic oven control	■	■	■	■	■	■	■	■	■	■
Electronic clock and minute timer	■	■	■	■	■	■	■	■	■	■
Electronic automatic oven timer	■	■	■	■	■	■	■	■	■	■
Auto oven shut-off	■	■	■	■	■	■	■	■	■	■
Audible preheat signal	■	■	■	■	■	■	■	■	■	■
Hot surface indicator lights	■	■	■	■	■	■	■	■	■	■
Heating element "ON" indicator lights			■	■		■	■	■	■	■
Oven cycling light	■	■	■	■	■	■	■	■	■	■
Interior oven light	■	■	■	■	■	■	■	■	■	■
Broiler pan with grid	■	■	■	■	■	■	■	■	■	■
Appearance										
Color appearance*	WW AA BB	WW BB	WW WH/AD	WH/AD	WW WH/AD	WH/AD	WW	WW AA	WH/AD	WH/AD
Oven window door	■	■	■	■	■	■	■	■	■	■
Door handle	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Designer-Style	Visor	Visor
Lift-off oven door	White Glass Almond Glass Black Glass	White Glass Black Glass	White Glass Black Glass	Black Glass	White Glass Black Glass	Black Glass	White	CM Glass	Black Glass	CM
Full-width storage drawer	■	■	■	■	■	■	■	■	■	■
Weights and Dimensions										
Overall oven interior dimensions (W x H x D in inches)	← 23 -3/4 x 19 x 18-1/2 →									
KW rating @ 240V	10.6	10.5	11.7	10.2	10.5	12.6	12.6	11.0	10.1	10.1
@ 208V	8.0	7.9	8.8	7.7	7.9	9.9	9.9	8.7	8.0	8.0
Approx. shipping weight (lbs.)	164	166	155	149	166	158	170	150	150	155

*BB=Black on black, WW=White on white, WH=White, AD=Almond, CM=Oven door is color-matched to cooktop and drawer front (either White or Almond).

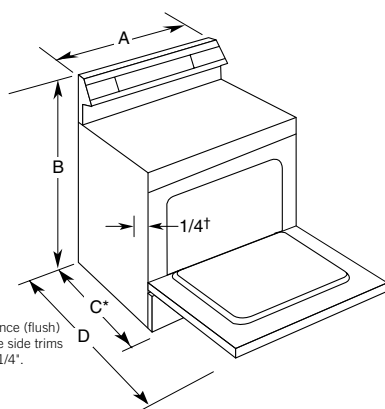

*Dimensions from wall to front of closed oven door handle: 28-1/2" on models RB797/787/757/753/585/536/530; 28-3/8" on RB526C and RB525BC; 28" on RB525C

†The range may be placed with a 0" clearance (flush) at the back wall and side walls if the range side trims extend beyond the cabinet fronts at least 1/4". Self-Clean models only.

30" electric range dimensions (in inches)

Models	A Width	B Height	C+ Depth	D
RB797WC	29-7/8	46-1/2	26-3/8	46-3/8
RB797AC	29-7/8	46-1/2	26-3/8	46-3/8
RB797BC	29-7/8	46-1/2	26-3/8	46-3/8
RB787WC	29-7/8	46-1/2	26-3/8	46-3/8
RB787BC	29-7/8	46-1/2	26-3/8	46-3/8
RB757WC	29-7/8	46-1/2	26-3/8	46-3/8
RB757BC	29-7/8	46-1/2	26-3/8	46-3/8
RB753BC	29-7/8	46-1/2	26-3/8	46-3/8
RB585WC	29-7/8	46-1/2	26-3/8	46-3/8
RB585BC	29-7/8	46-1/2	26-3/8	46-3/8
RB536BC	29-7/8	46-1/2	26-3/8	46-3/8
RB530WC	29-7/8	46-1/2	26-3/8	46-3/8
RB526C	29-7/8	46-1/2	26-3/8	46-3/8
RB525BC	29-7/8	46-1/2	26-3/8	46-3/8
RB525C	29-7/8	46-1/2	26-3/8	46-3/8


*Dimensions from wall to front of closed oven door.

FULL ONE-YEAR WARRANTY One year from date of original purchase, we will provide free of charge, parts and service labor in your home to repair or replace any part of the appliance that fails because of a manufacturing defect. Complete details from your dealer.



All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

30" free-standing range installation information (in inches)

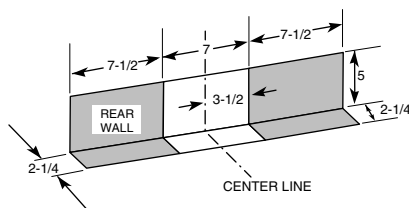

Note: 30" Electric Ranges conform to U.L. requirements for 0" spacing from walls below countertops. However some kitchen cabinet finishes can be damaged by heat from the range heating elements. It is recommended that a clearance of at least 1-1/2 inches be maintained to walls. Where varnished wood or plastic film finishes are used, a minimum clearance of 6 inches should be maintained.

Receptacle locations

Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.



Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Electric range specifications

Hotpoint 24" and 20" electric ranges	24" range	20" range
Models	RA524W	RA520W
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	■	■
Porcelain-enameled subtop	■	■
8-inch heating elements	1 Plug-in	1 Plug-in
6-inch heating elements	3 Plug-in	3 Plug-in
Removable drip bowls	Chrome	Chrome
Push-to-turn controls	■	■
Heating element "ON" indicator lights	2	2
Oven cycling light	■	■
Broiler pan with grid	■	■
Appearance		
Color appearance	WH/AD*	WH/AD*
Porcelain-enameled oven door	Solid CM*	Solid CM*
Four leveling legs	■	■
Weights and Dimensions		
Overall oven interior dimensions (W x H x D in inches)	19 x 14 x 19	16 x 15 x 19
KW rating @ 240V	8.2	8.2
@ 208V	6.2	6.2
Approx. ship. wt. (lbs.)	145	120



*WH=White, AD=Almond, CM=Color-Matched.

24" free-standing range dimensions and installation information (in inches)



Note: 24" Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching of the side wall adjacent to the heating elements, it is recommended a 2" spacing from adjacent side walls be allowed for possible extended high-heat, no-load heating element operation.

20" free-standing range dimensions and installation information (in inches)



Note: Compact 20" Electric Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching of side walls adjacent to heating elements, it is recommended a minimum of 2-1/2" spacing from adjacent side walls be allowed for possible extended, high-heat, no-load operation of heating elements.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Receptacle locations

Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawings for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.



All Hotpoint ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by
Underwriters
Laboratories

Gas ranges

Hotpoint Capacity Plus™ gas ranges feature:

- More usable oven capacity than any other leading manufacturer
- Available with self-cleaning, continuous cleaning or standard clean oven
- Select models feature sealed burners that provide simmer capability and maximum output
- Extra-large broiler pan and grid
- Six embossed rack positions
- Upswept porcelain-enameled cooktop



Sealed gas burners

Special burner design helps contain spills and boilover liquids from dripping beneath cooktop for easy clean-up.



Simmer 600 burner

Offers true simmer capability with a low (600 BTU) setting. Provides low, even heat distribution for delicate foods and sauces.



Performance Plus burner

Provides maximum output (12,000 BTU) for fast heat-up and boiling.



EasySet clock and oven timer

Easy-to-use electronic touchpad controls and delayed baking function with the convenience of knobs for controlling the oven, make cooking simple.



Capacity Plus™ gas ranges

Extra-large oven has more usable capacity than any other leading brand. Sixth embossed rack position increases cooking flexibility.



One-piece upswept cooktop

Has no cracks or crevices to trap dirt. The porcelain enamel-on-steel surface wipes clean easily.



Extra-large broiler pan/grid

Porcelain-enameled broiler pan and grid are extra large. Allows for extra broiling space.



Lift-up cooktop with easy-clean subtop

Standard burner models have a cooktop that lifts up for easy access to porcelain-enameled subtop. Twin rod supports allow cooktop to lift and lock into place. No pipes or wires to interfere with clean-up.

CAPACITY PLUS™ 30" **free-standing gas ranges**

Features more usable oven capacity than any other leading brand, a sixth embossed rack position, extra-large broiler pan, porcelain-enameled upswept cooktop, interior oven light and electronic pilotless ignition.

RGB745WEA

- White on white model
- Extra-large, self-cleaning oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy-steel grates
- In-oven broiling
- Frameless white glass oven door with window
- EasySet III clock and oven timer
- Removable chrome drip pans
- Storage drawer

RGB745BEA

- White or almond model
- Extra-large, self-cleaning oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy-steel grates
- In-oven broiling
- Frameless black glass oven door with window
- EasySet III clock and oven timer
- Removable black porcelain-enameled drip pans
- Storage drawer

RGB744WEA

- White on white model
- Extra-large self-cleaning oven
- In-oven broiling
- Frameless solid white glass oven door
- EasySet II clock and oven timer
- Twin cooktop burners
- Lift-up cooktop
- Removable chrome drip pans
- Storage drawer

RGB744BEA

- White or almond model
- Extra-large, self-cleaning oven
- In-oven broiling
- Frameless solid black glass oven door
- EasySet II clock and oven timer
- Automatic oven timer
- Twin cooktop burners
- Lift-up cooktop
- Removable black porcelain-enameled drip pans
- Storage drawer



RGB745WEA
CAPACITY PLUS™



RGB745BEA
CAPACITY PLUS™



RGB744WEA
CAPACITY PLUS™



RGB744BEA
CAPACITY PLUS™

For detailed specifications, installation information and color availability, refer to pages 40 and 41. For warranty information refer to page 87.

CAPACITY PLUS™ 30" free-standing gas ranges



Features more usable oven capacity than any other leading manufacturer, a sixth embossed rack position, extra-large broiler pan, porcelain-enameled, upswept cooktop, interior oven light, slide-out broiler drawer and electronic pilotless ignition.

RGB628BEA

- White or almond model
- Extra-large continuous cleaning oven
- Frameless black glass oven door with window
- Electronic clock and timer
- Twin cooktop burners
- Lift-up cooktop

RGB535BEA

- White or almond model
- Extra-large standard oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Heavy-steel grates
- Frameless black glass oven door with window
- Electronic clock and timer
- Removable black porcelain-enameled drip pans

RGB533WEA

- White on white model
- Extra-large standard oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Frameless white glass oven door with window
- Electronic clock and timer

RGB532BEA

- White or almond model
- Extra-large standard oven
- Sealed cooktop burners
- Simmer 600 burner
- Performance Plus burner
- Frameless black glass oven door with window
- Electronic clock and timer

RGB530BEA

- White or almond model
- Extra-large standard oven
- Sealed cooktop burners
- Frameless black glass oven door with window

RGB528BEA

- White or almond model
- Extra-large standard oven
- Frameless black glass oven door with window
- Electronic clock and timer
- Twin cooktop burners
- Lift-up cooktop

RGB528PEA

- White on white model
- Extra-large standard oven
- White porcelain-enameled oven door with window
- Electronic clock and timer
- Twin cooktop burners
- Lift-up cooktop



RGB628BEA
CAPACITY PLUS™

30" gas ranges



RGB535BEA
CAPACITY PLUS™



RGB533WEA
CAPACITY PLUS™



RGB532BEA
CAPACITY PLUS™



RGB530BEA
CAPACITY PLUS™



RGB528BEA
CAPACITY PLUS™



RGB528PEA
CAPACITY PLUS™

For detailed specifications, installation information and color availability, refer to pages 40 and 41. For warranty information refer to page 87.

CAPACITY PLUS™ 30" free-standing gas ranges

Models feature an extra-large standard oven, six embossed rack positions, twin cooktop burners and lift-up cooktop.

RGB526PEA

- White or almond model
- Extra-large standard oven
- Color-matched porcelain-enameled oven door with window
- Electronic clock and timer
- Slide-out broiler drawer
- Electronic pilotless ignition

RGB525PEA

- White on white model
- Extra-large standard oven
- Solid white porcelain-enameled oven door
- Slide-out broiler drawer
- Electronic pilotless ignition

RGB525PPA

- Same features as RGB525PEA, except with standing pilot ignition system.

RGB524PEA

- White or almond model
- Extra-large standard oven
- Solid color-matched porcelain-enameled oven door
- Slide-out broiler drawer
- Electronic pilotless ignition

RGB524PPA

- Same features as RGB524PEA, except with standing pilot ignition system.

RGB508PEA

- White or almond model
- Extra-large standard oven
- Solid color-matched porcelain-enameled oven door
- Drop-down broiler door
- Electronic pilotless ignition

RGB508PPA

- Same features as RGB508PEA, except with standing pilot ignition system.

RGB501PPA

- Extra-large standard oven
- Solid white porcelain-enameled oven door
- Removable square one-piece wire grates
- Drop-down door broiler
- Standing pilot ignition system
- One oven shelf

Available in White only with pilot ignition.



RGB526PEA
CAPACITY PLUS™



RGB525PEA/PPA
CAPACITY PLUS™



RGB524PEA/PPA
CAPACITY PLUS™



RGB508PEA/PPA
CAPACITY PLUS™



RGB501PPA

For detailed specifications, installation information and color availability, refer to pages 40 and 41. For warranty information refer to page 87.



RGA524EW/PW

24" compact gas ranges with standard oven

RGA524EW

- Standard oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls

RGA524PW

- Same features as RGA524EW, except with standing-pilot ignition system.



RGA520EW/PW

20" compact gas ranges with standard oven

RGA520EW

- Standard oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls

RGA520PW

- Same features as RGA520EW, except with standing-pilot ignition system.

For detailed specifications, installation information and color availability, refer to page 39. For warranty information refer to page 87.


24" and 20" gas ranges	24" range	20" range
Models	RGA524EW/PW	RGA520EW/PW
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	■	■
Porcelain-enameled subtop	■	■
Round grates	■	■
Ignition system	Electronic/Pilot	Electronic/Pilot
Push-to-turn controls	■	■
Broiler pan with grid	■	■
Separate broiler drawer (with tip down door)	■	■
Appearance		
Color appearance*	WH/AD	WH/AD
Porcelain-enameled oven door	Solid color-matched	Solid color-matched
Removable oven door	■	■
Four leveling legs	■	■
Weights and Dimensions		
Overall oven interior dimensions (WxHxD in inches)	19 x 14 x 19	14-7/8 x 16 x 19-1/2
Burner BTU's:		
Top (Nat/LP)	9,000/8,000	9,000/8,000
Oven (Nat/LP)	18,000/18,000	18,000/18,000
Gas range electrical rating**	120V, 60 Hz, 5A	120V, 60 Hz, 5A
Approx. ship. wt. (lbs.)	140	124

*WH=White, AD=Almond


Factory set for natural gas. Can be converted to LP by a qualified technician.

**Electrical rating not applicable to standing pilot model RGA524PW and RGA520PW.

24" gas range dimensions and installation information (in inches)

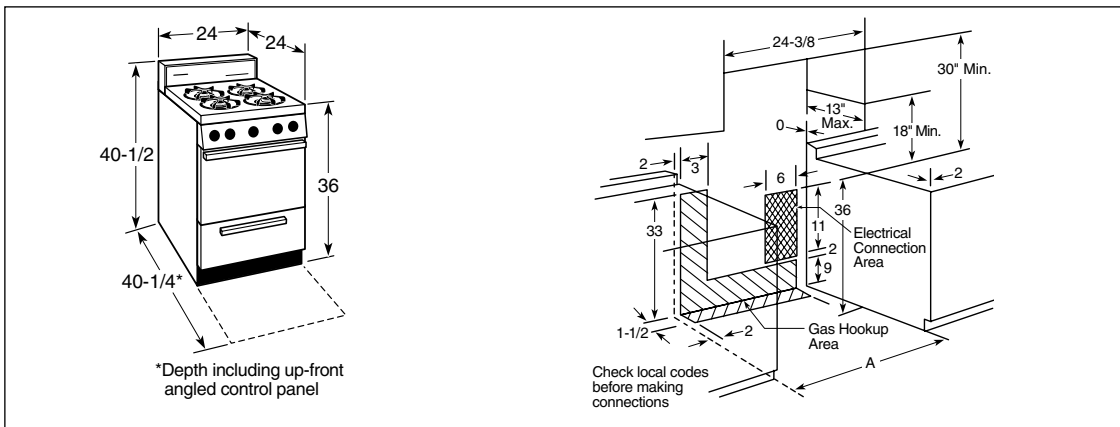

20" gas range dimensions and installation information (in inches)

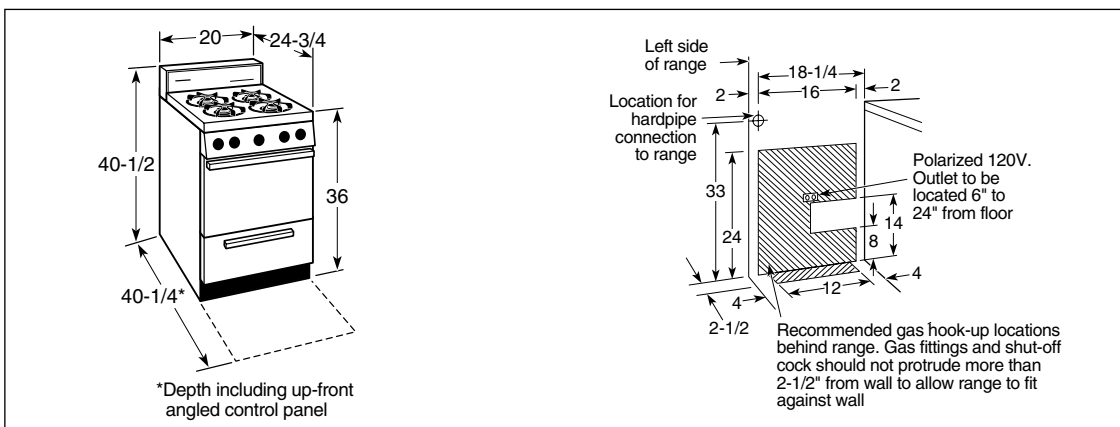

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Gas range specifications


30" CAPACITY PLUS™ gas ranges

Models	RGB745WEA	RGB745BEA	RGB744WEA	RGB744BEA	RGB628BEA	RGB535BEA	RGB533WEA	RGB532BEA	
Features									
Extra-large oven	Self-cleaning	Self-cleaning	Self-cleaning	Self-cleaning	Continuous Cleaning	Standard Clean	Standard Clean	Standard Clean	
Cooktop burners	Sealed	Sealed	Twin	Twin	Twin	Sealed	Sealed	Sealed	
Performance Plus burner (Nat.)	(1) 12,000/2,200 BTU	(1) 12,000/2,200 BTU				(1) 12,000/1,000 BTU	(1) 12,000/1,000 BTU	(1) 12,000/1,000 BTU	
Simmer 600 burner (Nat.)	(1) 5,000/600 BTU	(1) 5,000/600 BTU				(1) 5,000/600 BTU	(1) 5,000/600 BTU	(1) 5,000/600 BTU	
All purpose sealed burners (Nat.)	(2) 9,500/850 BTU	(2) 9,500/850 BTU				(2) 9,500/850 BTU	(2) 9,500/850 BTU	(2) 9,500/850 BTU	
Clock and minute timer	EasySet III	EasySet III	EasySet II	EasySet II	Electronic	Electronic	Electronic	Electronic	
Automatic oven timer	Electronic	Electronic	■	■					
Porcelain-enameled cooktop	Upswept	Upswept	Upswept	Upswept	Upswept	Upswept	Upswept	Upswept	
Lift-up cooktop			■	■	■				
Easy clean subtop			■	■	■				
Valves (degree of turn)	270°	270°	270°	270°	140°	270°	270°	270°	
Removable drip pans	Chrome	Black Porc.-Enam.	Chrome	Black Porc.-Enam.	Opt. Access.	Black Porc.-Enam.	Opt. Access.	Opt. Access.	
Removable square grates	Grey Heavy-steel	Black Heavy-steel	Grey	Black	Black	Black Heavy-steel	Grey	Black	
Ignition system	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	
Oven shelves	2	2	2	2	2	2	2	2	
Six embossed rack positions	■	■	■	■	■	■	■	■	
Interior oven light	■	■	■	■	■	■	■	■	
In-oven broiling	■	■	■	■					
Slide-out broiler drawer					■	■	■	■	
Removable storage drawer	■	■	■	■					
Appearance									
Color appearance*	WW	WH/AD	WW	WH/AD	WH/AD	WH/AD	WW	WH/AD	
Frameless oven door	White Glass	Black Glass	Solid White Glass	Solid Black Glass	Black Glass	Black Glass	White Glass	Black Glass	
Oven door with window	■	■			■	■	■	■	
Handle style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	Designer-style	
Removable oven door	■	■	■	■	■	■	■	■	
Weights and Dimensions									
Overall oven interior dimensions (WxHxD in inches)	← 24x17x19 →								
Approx. shipping weight (lbs.)	185	185	185	185	165	185	185	185	
Power/Ratings									
Gas range electrical rating**	← 120V, 60 Hz, 5A →								
Top burners† (000's BTU's) NAT/LP	(1)-12.0/9.5 (1)-5.0/3.5 (2)-9.5/7.0	(1)-12.0/9.5 (1)-5.0/3.5 (2)-9.5/7.0	← 9.0/8.0 →			(1)-12.0/9.5 (1)-5.0/3.5 (2)-9.5/7.0			
Oven/broiler burners† (000's BTU's) NAT/LP	← 16.0/16.0 - Oven 13.5/12.0 - Broil →				← 18.0/16.5 →				
Accessories									
LP conversion kit	■	■	■	■	■	■	■	■	

*WW=White on white WH/AD=White or Almond CM=Indicates color of oven door matches range cooktop (either White or Almond)

**Electrical rating not applicable to standing pilot models RGB525PPA/RGB524PPA/RGB508PPA/RGB501PPA

†Factory set for natural gas.

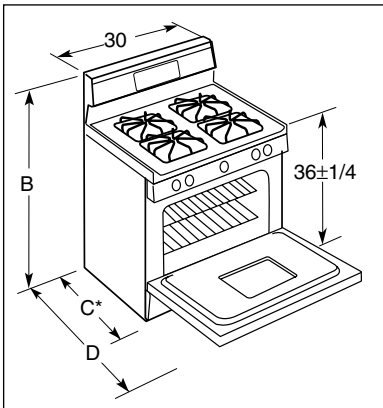

30" gas range dimensions (in inches)

Models	B Height	C* Depth	D Depth with door open
RGB745WEA	46-1/2	26-1/4	46-3/8
RGB745BEA	46-1/2	26-1/4	46-3/8
RGB744WEA	46-1/2	26-1/4	46-3/8
RGB744BEA	46-1/2	26-1/4	46-3/8
RGB628BEA	46-1/2	26-1/4	46-3/8
RGB535BEA	46-1/2	26-1/4	46-3/8
RGB533WEA	46-1/2	26-1/4	46-3/8
RGB532BEA	46-1/2	26-1/4	46-3/8
RGB530BEA	46-1/2	26-1/4	46-3/8
RGB528BEA	46-1/2	26-1/4	46-3/8
RGB528PEA	46-1/2	26-1/2	46-3/8
RGB526PEA	46-1/2	26-1/2	46-3/8
RGB525PEA/PPA	44	26-1/2	46-3/8
RGB524PEA/PPA	44	26-1/2	46-3/8
RGB508PEA/PPA	39-7/8	26-1/2	46-3/8
RGB501PPA	36	26-1/2	45-1/4

*Depth from wall to front of closed oven door.

Optional gas range accessory drip pans


(Available at additional cost)

To order these accessory drip pans, call toll-free 800-626-2002.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

Gas range specifications

	RGB530BEA	RGB528BEA	RGB528PEA	RGB526PEA	RGB525PEA RGB525PPA	RGB524PEA RGB524PPA	RGB508PEA RGB508PPA	RGB501PPA
	Standard Clean	Standard Clean	Standard Clean	Standard Clean	Standard Clean	Standard Clean	Standard Clean	Standard Clean
	Sealed	Twin	Twin	Twin	Twin	Twin	Twin	Twin
	(4) 9,500/ 850 BTU							
		Electronic	Electronic	Electronic				
	Upswept	Upswept	Upswept	Upswept	■	■	■	■
	■	■	■	■	■	■	■	■
	140°	140°	140°	140°	140°	140°	140°	140°
	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.	
	Black	Black	Grey	Black	Grey	Black	Black	Black Wire
	Electronic	Electronic	Electronic	Electronic	Elec./Pilot	Elec./Pilot	Elec./Pilot	Pilot
	2	2	2	2	2	2	2	1
	■	■	■	■	■	■	■	■
	■	■	■	■				
	■	■	■	■	■	■	Drop down door	Drop down door
	WH/AD	WH/AD	WW	WH/AD	WW	WH/AD	WH/AD	WH
	Black Glass	Black Glass	White Porc.-Enam.	CM Porc.-Enam.	Solid White Porc.-Enam.	Solid CM Porc.-Enam.	Solid CM Porc.-Enam.	Solid White Porc.-Enam.
	■	■	■	■				
	Designer-style	Designer-style	Visor	Visor	Visor	Visor	Visor	Visor
	■	■	■	■	■	■	■	■
	← 24x17x19 →							
	185	165	165	165	165	147	165	156
	← 120V, 60 Hz, 5A →							
	9.5/7.0							9.0/8.0
	← 18.0/16.5 →							
	■	■	■	■	■	■	■	■

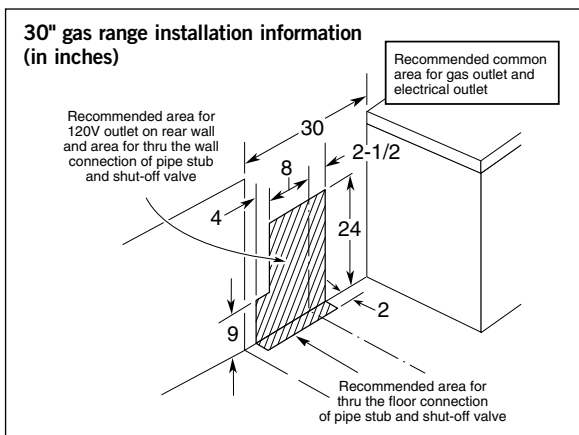

All ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories

GE High Performance and Performance Hoods are designed with an easy-to-clean continuous surface and two large filters that can be cleaned at the sink or dishwasher.

The High Performance hoods are recommended for use with grill/griddle cooktops. Powerful CFM performance draws smoke and odors up and out of the kitchen.

High performance



JV666C

- 36" vented hood
- Available in Stainless steel
- 2 halogen cooktop lights
- Night light setting
- 3 speed fan control with boost
- Vertical or rear exhaust (350/400 CFM)
- 3-1/4" x 10" rectangular duct
- 7" round duct

JV665C (not shown)

- Same features and appearance as JV666C except available in White on white or Black on black.



JV635C

- 30" vented hood
- Available in White on white or Black on black
- 2 halogen cooktop lights
- Night light setting
- 3 speed fan control with boost
- Vertical or rear exhaust (350/400 CFM)
- 3-1/4" x 10" rectangular duct
- 7" round duct

JV636C (not shown)

- Same features and appearance as JV635C except available in Stainless steel.

Performance



JV565C

- 36" width
- Available in White on white, Bisque or Black on black
- 2 speed fan control
- 200 CFM (max.)
- 2 halogen cooktop lights
- Convertible exhaust options (7" round, rectangular or non-vented)
- Rectangular damper included

JV566C (not shown)

- Same features and appearance as JV565C except available in Stainless steel.

JV535C (not shown)

- 30" width
- Same features and appearance as JV565C except available in 30" width.

JV536C (not shown)

- Same features and appearance as JV566C except available in 30" width.

JXDA23 Round damper accessory. Available at additional cost. (Models JV666/665/636/635/566/565/536/535)

Optional charcoal filter access.

Deluxe



JV347X

- 30" width
- Available in White on white, Black on black or Almond on almond
- Rotary control
- Three-speed fan
- Cooktop light with Night Light setting
- Light cover
- Convertible exhaust (Shipped in non-vented configuration, convertible to round or rectangular exhaust.)
- Rectangular damper included

JXDA22 round damper accessory, available at additional cost. (Models JV347/337/327 and JN327X)

Standard



JV327X

- 30" width
- Available in White or Almond
- 7" round duct
- Easy-to-use rocker switches
- Two-speed fan
- Cooktop light

JV337X (not shown)

- 3-1/4" x 10" rectangular duct
- Rectangular damper included

JN327X (not shown)

- Non-vented

Width	High Performance				Performance		Deluxe	Standard		
	30"		JV636C	JV635C	JV536C	JV535C	JV347X	JV327X	JV337X	JN327X
Hoods	36"	JV666C	JV665C			JV566C	JV565C			

Features

Two-speed fan control					■	■		■	■	■
Three-speed fan control	with boost	with boost	with boost	with boost			■			
Vertical exhaust (CFM)	350	350	350	350	190	190	180	160	160	
Rear exhaust (CFM)	400	400	400	400	200	200	160		150	
Damper included (rectangular)	■	■	■	■	■	■	■		■	
Optional damper accessory (round)	JXDA23	JXDA23	JXDA23	JXDA23	JXDA23	JXDA23	JXDA22	JXDA22		
Sones rating:										
Top exhaust	4.0/7.0*	4.0/7.0*	4.0/7.0*	4.0/7.0*	4.0	4.0	8.0	8.0	8.0	
Rear exhaust	4.0/7.0*	4.0/7.0*	4.0/7.7*	4.0/7.7*	4.0	4.0	8.0		8.0	
Removable grease filters	2	2	2	2	2	2	Disposable 1-Pc. Filter	1	1	Disposable 1-Pc. Filter
Filter size (sq. in.)	207	207	171	171	171/207	171/207	90	90	90	90
Cooktop light(s)**	2	2	2	2	2	2	1	1	1	1
Night light position on light switch	■	■	■	■	■	■	■			
3-1/4" x 10" rectangular duct	■	■	■	■	■	■	Option		■	
7" round duct	■	■	■	■	■	■	Option	■		
Non-vented					■	■	Option			■

Appearance

Color appearance†	SS	WW/BB	SS	WW/BB	SS	WW/CC/BB	WW/AA/BB	W or A	W or A	W or A
-------------------	----	-------	----	-------	----	----------	----------	--------	--------	--------

Weights & Dimensions

Approximate shipping weight (lbs.)	35	35	30	30	30	30	20	14	17	19
------------------------------------	----	----	----	----	----	----	----	----	----	----

Power/Ratings

Current rating amps @ 120V	2.5	2.5	2.5	2.5	1.4	1.4	2.5	2.5	2.5	2.5
----------------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----


*Top exhaust soles rating when in boost mode.

**Light bulbs not furnished.

†SS = Stainless steel, W = White, WW = White on white, CC = Bisque, A = Almond, AA = Almond on almond, BB = Black on black

Dimensions (in inches)


Model	A	B	C	D
JV666C/JV665C	7-1/4	35-7/8	20	12
JV636C/JV635C	7-1/4	29-7/8	20	12
JV536C/JV535C	7-1/4	29-7/8	20	12
JV566C/JV565C	7-1/4	35-7/8	20	12
JV347X	5-1/2	29-7/8	17-1/2	12
JV337X	5-1/2	29-7/8	17-1/2	12
JV327X	5-1/2	29-7/8	17-1/2	12
JN327X	5-1/2	29-7/8	17-1/2	12

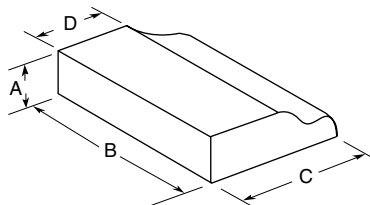

Hood dimensions (in inches)

1 Models: JV666C, JV665C, JV636C, JV635C, JV536C, JV535C, JV566C, and JV565C


Exhaust outlet connects to 3-1/4" x 10" duct (vertically or horizontally) and 7" round (vertically). Includes rectangular damper and 7" round damper adapter.



2 Models: JV347X* and JV337X

*JV347X—Refer to this drawing for rectangular exhaust option. Refer to drawing 3 for round exhaust option.


Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.

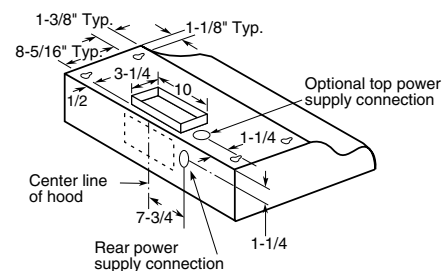


3 Models: JV347X* and JV327X

*JV347X—Refer to this drawing for round exhaust option. Refer to drawing 2 for rectangular exhaust option.

Exhaust outlet connects to 7" diameter duct. Vent top only. Round damper accessory, JXDA22, available at additional cost.

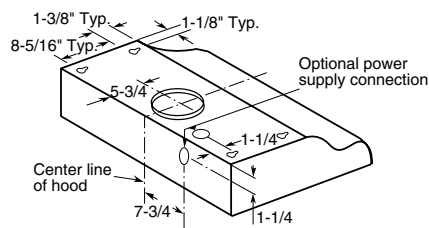

4 Model: JN327X

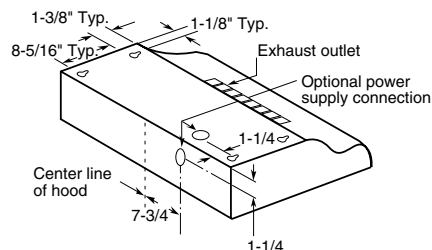

Note: Before installing, consult installation instructions [Pub. No. 49-8646 (JV665/JV635/JV535/JV565); Pub. No. 49-8809 (JV337/327/347/JN327)]; packed with product for current dimensional data.

Counter Saver Plus™ microwave ovens

Microwave convenience with no loss of usable space


Installs in the same space as a range hood. Counter Saver Plus™ microwave ovens are equipped with a built-in venting system, an enhanced two-speed, high-capacity exhaust fan plus Full-View cooktop lighting which illuminates the entire range cooking surface. The addition of a Counter Saver Plus™ microwave oven over your range creates a complete cooking center!



RVM1425BA (Black on black)
RVM1425WA (White on white, not shown)




RVM1335WC (White on white)
RVM1335BC (Black on black, not shown)

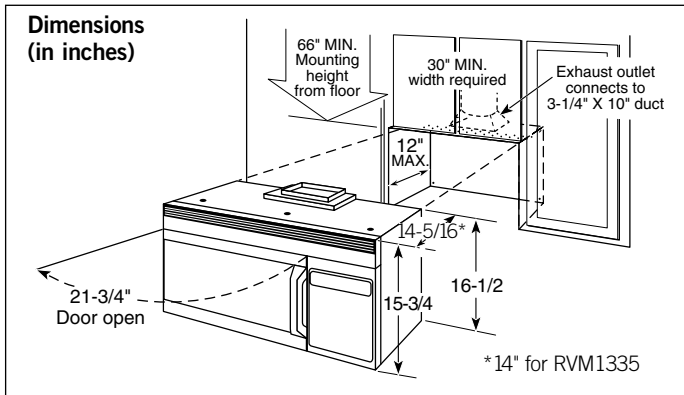

Important: When installing the Counter Saver Plus™ microwave oven over a range, allow minimum of 2" from bottom of Counter Saver Plus™ microwave oven to top of range backguard to allow for removal of light covers.

Optional accessories (Available at additional cost)

	Filler Panel Kit
RVM1335WC	JX40WH
RVM1335BC	JX41
RVM1425WA	JX40WH or JX46WH
RVM1425BA	JX41 or JX46BL



JX81A-Recirculating Charcoal Filter Kit
To be used when the Counter Saver Plus™ microwave oven cannot be vented to the outside.

When replacing a 36" or 42" range hood, this kit fills in the additional width to provide a custom, built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two, 3"-wide filler panels. Two kits are needed for a 42" opening.

Ventilation options

The Counter Saver Plus™ microwave oven is designed for adaptation to the following three types of ventilation:

- Outside Exhaust (Vertical)**
- Outside Exhaust (Horizontal)**
- Recirculating (Non-vented ductless—see Filter Kit Drawing)**

Note: Before installing, consult installation instructions for current dimensional data on these three types of ventilation.

Important: When installing the Counter Saver Plus™ microwave oven over a range, allow minimum of 2" from bottom of the Counter Saver Plus™ microwave oven to top of range backguard to allow for removal of light covers.


Counter Saver Plus™ microwave ovens

The design of the Counter Saver Plus™ microwave ovens complements any kitchen. Available in Black on black or White on white styling. Enjoy the convenience of microwave cooking with eye-level controls, directly above your range or cooktop in the space of a range hood.



1.4 cu. ft. oven cavity

The 1.4 cu. ft. oven cavity is Hotpoint's largest over-the-range microwave oven ever. It accommodates large casserole dishes for your cooking convenience.

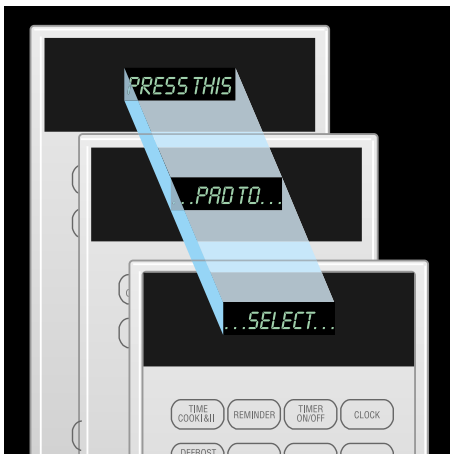

Interactive Display System

Easy-to-read horizontal scrolling display is designed to make cooking easier, and give you the flexibility of programming several functions at once.



Turntable

The turntable rotates the dish constantly for even and thorough cooking.

900 watts

Powerful 900 watts¹ of microwave output for fast cooking and reheating.

Auto/Time Defrost

Permits defrosting a variety of foods in minutes instead of hours. Automatically sets defrosting time and power level. Enter food weight and the oven does the rest.

Time Cook I & II

Allows you to set two time controlled cooking functions within one program.

Express Cook Pads

A shortcut to set cook times from 1 to 6 minutes. Automatically cooks at full power with the touch of one pad.

10 power levels

A choice of 10 power levels for maximum cooking flexibility, from warming and reheating, to the full speed of microwave cooking at high power.

Reheat

Offers the flexibility of automatically reheating a variety of popular foods from a cup of coffee to a plate of leftovers.

Popcorn

Designed for today's popular pre-packaged popcorn. Now for use with three sizes, 3.5, 3.0 and 1.75 oz., maximizes popping without scorching.

Instant On controls

Easy, one-step features. Simply press the desired function and the oven automatically begins to cook. No need to press START.

Full-View cooktop lighting

Provides better distribution of light over the entire cooking surface.

¹IEC-705 Test Procedure

	RVM1425WA/BA	RVM1335WC/BC
Features		
Watts (IEC-705 Test Procedure)	900	900
Oven cavity (cu. ft.)	1.4	1.3
Door color	White/Black	White/Black
Case color	White/Black	White/Black
Power levels	10	10
Electronic touch controls	■	■
Interactive display system	■	■
Electronic scrolling digital display w/Clock and AM/PM Pad	■	■
Variable Scroll Speed	■	■
Concurrent programming	■	■
Display On/Off	■	■
Turntable	■	■
Time Cook	I & II	I & II
Auto Defrost/Time Defrost	■	■
Popcorn Pad	■	■
Reheat Pad	■	■
Express Cook Pads (1-6 minutes)	■	■
Instant on controls	■	■
Cooking complete reminder	■	■
Delay Start	■	■
Timer On/Off	■	■
Reminder	■	■
Child lock-out	■	■
Full-View cooktop lighting	■	■
High-capacity exhaust fan	300 CFM	300 CFM
Easy Mount installation	■	■
Frequency (MHz)	2450	2450
Electrical input@120V	Watts 1480	1480
	Amps 15	15
Warranty*	1-Yr. In-Home	1-Yr. In-Home
Limited four-year magnetron warranty* (5 years total)	■	■
Dimensions	Cavity	19-5/16 x 9-5/16 x 13-3/16
	Exterior	19 x 9-1/8 x 12-1/2
		29-7/8 x 16-1/2 x 14-5/16
		29-7/8 x 16-1/2 x 14
Approx. shipping weight (lbs.)	70	73

*Full One-Year Warranty

In-home parts and labor included. Plus additional four-year limited warranty on magnetron tube (parts only). See written warranty for details.



Listed by Underwriters Laboratories

GE Spacemaker™ over-the-range microwave ovens

GE — The original Spacemaker™

In 1979, GE invented the Spacemaker™ over-the-range microwave. With 20 plus years of experience and the many innovative features on GE Spacemakers™, it is easy to see why so many people are making the Spacemaker™ their microwave of choice. When paired with a GE range, you now have a great cooking center with more flexibility and space saving design. A powerful, two-speed exhaust fan, with 300 CFM, and cooktop light are integrated into the base of the microwave oven eliminating the need for a range hood. The Easy Mount system makes GE over-the-range microwave ovens simple to install. When installed above a GE range, you've increased valuable counter-top space in the kitchen.



Auto Defrost/Time Defrost

Automatically sets defrosting time and power level.



Sensor Controls

Take the guesswork out of cooking.



Convenience Cooking Controls

Allow you to defrost, cook or reheat at the touch of a pad.



The Scrolling Display

Easy to read and a helpful cooking guide.



Add 30 Seconds

Extends cooking time without the hassle of reprogramming.



300 CFM venting system

This powerful 300 CFM venting system quickly removes smoke and steam from your cooktop.

Not all features available on all models.

GE Spacemaker™ microwave ovens with Sensor Cooking Controls provide

1.6 cu. ft. Oven Cavity, 1000 Watts*, Turntable On/Off, Help Pad, Time Cook I & II, Express Cook, Add 30 Seconds, Instant On Controls, Child Lock-Out, Night Light, Two-Speed, High-Capacity Exhaust Fan



JVM1650BB

- Sensor cooking controls for Beverage, Potatoes, Vegetables, Popcorn and Reheat
- Convenience Cooking Controls for Cook and Snack Pads
- CircuWave™ 1000 Cooking System
- Turntable On/Off
- Delay Start
- Reminder
- Auto/Time Defrost
- 10 power levels
- Beeper volume control
- Cooking Complete Reminder
- Removable Dual Rack
- Programmable night light
- Time On/Off

JVM1651BB

- (not shown)
- Non-vented model



JVM1650AB

- Almond on almond

JVM1651AB (not shown)

- Non-vented model

JVM1650WB (not shown)

- White on white

JVM1651WB (not shown)

- Non-vented model

JVM1650CB (not shown)

- Bisque

JVM1651CB (not shown)

- Non-vented model

GE Spacemaker™ microwave ovens with Convenience Cooking Controls provide

1.6 cu. ft. Oven Cavity, 1000 Watts*, SmartControl System with Interactive Display, Convenience Cooking Controls for Beverage, Time Cook I & II, Auto Defrost/Time Defrost, Express Cook, Timer On/Off, Child Lock-Out, Full-View Cooktop Lighting, Easy Mount Installation, Two-Speed, High-Capacity Exhaust Fan



JVM1640WB

- CircuWave™ 1000 Cooking System
- Turntable On/Off
- Help Pad
- Convenience Cooking controls for Popcorn, Reheat and Cook Pads
- Removable Dual Rack
- Beeper volume control



JVM1640BB (not shown)

- Black on black

JVM1640AB (not shown)

- Almond on almond



JVM1630BB

- Convenience Cooking Controls for Popcorn, Beverage and Reheat
- CircuWave™ 1000 Cooking System
- Turntable

JVM1631BB

- (not shown)
- Non-vented model



JVM1630WB (not shown)

- White on white

JVM1631WB (not shown)

- Non-vented model


*IEC-705 Test Procedure

For detailed specifications, installation information and color availability, refer to page 50. For warranty information, refer to page 87.

GE Countertop microwave ovens

GE Countertop microwave ovens with Convenience Cooking Controls provide

Convenience Cooking Controls for Beverage, Popcorn, Cook, Reheat and Snacks Pads, Time Cook I & II, Delay Start/Reminder, Time Defrost, Auto Defrost, Express Cook, Add 30 Seconds, 10 Power Levels, Instant On Controls, Kitchen Timer, Child Lock-Out, Cooking Complete Reminder, Sound On/Off

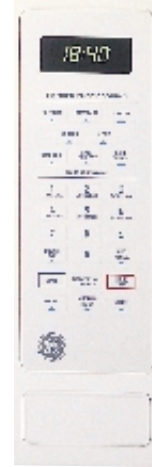

JE1840WB

- Extra-Large 1.8 cu. ft. oven cavity ■ 1100 Watts*
- Turntable ■ Built-In kit (available at additional cost)

JE1840GB (not shown)

- Black with Greystone case



JE1640GB

- Full-size 1.6 cu. ft. oven cavity ■ 1100 Watts*
- Built-in kit (available at additional cost)

JE1640WB (not shown)

- White on white

JE1640AB (not shown)

- Almond on almond



JE1340BC

- Family-size 1.3 cu. ft. oven cavity ■ 1100 Watts*

JE1340WC (not shown)

- White on white



JE1140BC

- Mid-size 1.1 cu. ft. oven cavity ■ 1100 Watts*

JE1140WC (not shown)

- White on white



JE740GY

- Compact .7 cu. ft. oven cavity ■ 700 Watts*
- Undercabinet hanging kit (available at additional cost)

JE740WY (not shown)

- White on white

*IEC-705 Test Procedure

For detailed specifications, installation information and color availability, refer to page 51. For warranty information, refer to page 87.

GE Spacemaker II™ microwave ovens provide

.9 cu. ft. Oven Cavity, 800 Watts*, Delay Start/Reminder, Time Defrost, Auto Defrost, Time Cook I & II, Express Cook, Instant On Controls, Sound On/Off, Built-in or undercabinet hanging kit (available at additional cost)



JEM25WY

- Convenience Cooking Controls for Popcorn, Beverage, Reheat, Snacks and Cook Pads



JEM25GY (not shown)

- Black with Greystone case

GE Countertop mid-size, compact and subcompact



JE835WW

- Mid-size .8 cu. ft. oven cavity ■ 800 watts*
- Convenience Controls for Beverage, Popcorn, Frozen Pizza, Dinner Plate, Baked Potato, Vegetables and Soup Pads
- Electronic Digital Display with Clock ■ Time Preference
- Turntable ■ Instant On Controls ■ Auto Start ■ Auto Defrost



JE710BA

- Compact .7 cu. ft. oven cavity ■ 600 watts* ■ Turntable
- Mechanical Dial ■ Undercabinet hanging kit (available at additional cost)

JE510BW (not shown)

- Black with Greystone case ■ Subcompact .5 cu. ft. oven cavity
- 600 watts* ■ Turntable ■ 15-minute timer ■ Undercabinet hanging kit (available at additional cost)


JE510WC (not shown)

- White on white



JE635WW

- Compact .6 cu. ft. oven cavity ■ 600 watts*
- Convenience Cooking Controls for Beverage, Popcorn, Frozen Pizza, Dinner Plate, Baked Potato and Vegetables Pads
- Turntable ■ Electronic Digital Display with Clock
- Instant On Controls ■ Auto Start ■ Auto Defrost



JE520BW

- Subcompact .5 cu. ft. oven cavity ■ 600 watts* ■ Turntable
- Electronic touch controls with electronic digital display and clock
- Time Cook ■ Time Defrost ■ 10 power levels ■ Undercabinet hanging kit (available at additional cost)

JE520WC (not shown)

- White on white

*IEC-705 Test Procedure

For detailed specifications, installation information and color availability, refer to pages 52-53. For warranty information, refer to page 87.

GE Microwave oven specifications

GE Spacemaker™ over-the-range microwave ovens

	JVM1651AB* JVM1650AB	JVM1651BB* JVM1650BB	JVM1651CB* JVM1650CB	JVM1651WB* JVM1650WB	JVM1640BB JVM1640WB/AB	JVM1631BB* JVM1630BB	JVM1631WB* JVM1630WB
Capacity							
Oven cavity (cu. ft.)	1.6	1.6	1.6	1.6	1.6	1.6	1.6
Features							
Watts (IEC-705 Test Procedure)	1000	1000	1000	1000	1000	1000	1000
Electronic touch controls	■	■	■	■	■	■	■
SmartControl System w/Interactive Display	■	■	■	■	■	■	■
Electronic scrolling digital display	■	■	■	■	■	■	■
Demo Mode	■	■	■	■	■	■	■
Clock and AM/PM Pad	■	■	■	■	■	■	■
Variable Scroll Speed	■	■	■	■	■	■	■
Help Pad	■	■	■	■	■	■	■
Concurrent programming	■	■	■	■	■	■	■
Display On/Off	■	■	■	■	■	■	■
Sensor Controls	■	■	■	■	■	■	■
Beverage	■	■	■	■	■	■	■
Popcorn	■	■	■	■	■	■	■
Potatoes	■	■	■	■	■	■	■
Reheat	■	■	■	■	■	■	■
Vegetables	■	■	■	■	■	■	■
Convenience Controls	■	■	■	■	■	■	■
Beverage Pad	■	■	■	■	■	■	■
Cook Pad	■	■	■	■	■	■	■
Popcorn Pad	■	■	■	■	■	■	■
Reheat Pad	■	■	■	■	■	■	■
Snacks Pad	■	■	■	■	■	■	■
Express Cook (1-6 min.)	■	■	■	■	■	■	■
Instant On Controls	■	■	■	■	■	■	■
Time Cook	I & II	I & II	I & II	I & II	I & II	I & II	I & II
Add 30 Seconds	■	■	■	■	■	■	■
Auto Defrost/Time Defrost	■	■	■	■	■	■	■
Power levels	10	10	10	10	10	10	10
Delay Start	■	■	■	■	■	■	■
Reminder	■	■	■	■	■	■	■
CircuWave™ 1000 Cooking System	■	■	■	■	■	■	■
Dual Rack	■	■	■	■	■	■	■
Turntable On/Off	■	■	■	■	■	■	■
Turntable On only	■	■	■	■	■	■	■
Full-View cooktop lighting	■	■	■	■	■	■	■
Night light	■	■	■	■	■	■	■
Programmable nite light	■	■	■	■	■	■	■
Timer On/Off	■	■	■	■	■	■	■
Beeper sound level control	■	■	■	■	■	■	■
Cooking Complete Reminder	■	■	■	■	■	■	■
Child lock out	■	■	■	■	■	■	■
Two-speed high-capacity exhaust fan	300 CFM	300 CFM	300 CFM	300 CFM	300 CFM	300 CFM	300 CFM
Easy Mount Installation	■	■	■	■	■	■	■
Appearance							
Color appearance**	AA	BB	BB	WW	BB/WW/AA	BB	WW
Case color	Almond	Black	Bisque	White	Black/White/Almond	Black	White
Designer-style handle	■	■	■	■	■	■	■
Big View window	■	■	■	■	■	■	■
Weights & Dimensions							
Approx. shipping weight (lbs.)	67	67	67	67	67	67	67
WxHxD	20-1/4 x 9-9/32 x 14-13/32						
Cavity	20-1/4 x 9-9/32 x 14-13/32						
Exterior †	29-7/8 x 16-15/32 (rear) x 15-1/16						
Power/Ratings							
2450 Frequency (MHz)	■	■	■	■	■	■	■
Electrical input	1480	1480	1480	1480	1480	1480	1480
@ 120V	Amperage	15	15	15	15	15	15
Warranty							
Full One-Year In-Home Warranty††	■	■	■	■	■	■	■
Limited Nine-Year Magnetron Warranty† (10 years total)	■	■	■	■	■	■	■

*Non-vented model.

**SS = Stainless steel, AA = Almond on almond, BB = Black on black, WW = White on white, CC = Bisque.


†Exterior dimensions: depth excludes handle.

††See warranty for details.

NOTE: Popcorn Pad designed for use with 3 packages sizes—3.5, 3.0 and 1.75 oz.

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

Dimensions (in inches)

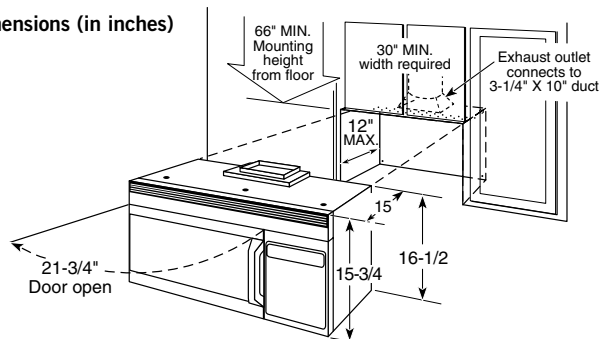

See page 87 for warranty information.

GE Microwave oven specifications

	Extra-large	Full-size	Family-size	Mid-size	Compact
GE Countertop microwave ovens	JE1840WB JE1840GB	JE1640AB JE1640WB JE1640GB	JE1340WC JE1340BC	JE1140WC JE1140BC	JE740WY JE740GY
Capacity					
Oven cavity (cu. ft.)	1.8	1.6	1.3	1.1	.7
Features					
Watts (IEC-705 Test Procedure)	1100	1100	1100	1100	700
Electronic Touch Controls	■	■	■	■	■
Electronic digital display w/clock	■	■	■	■	■
Beverage Pad	■	■	■	■	■
Cook Pad	■	■	■	■	■
Popcorn Pad	■	■	■	■	■
Reheat Pad	■	■	■	■	■
Snacks Pad	■	■	■	■	■
Express Cook	■	■	■	■	■
Instant On Controls	■	■	■	■	■
Time Cook	I & II	I & II	I & II	I & II	I & II
Add 30 Seconds	■	■	■	■	■
Auto Defrost	■	■	■	■	■
Time Defrost	■	■	■	■	■
Power levels	10	10	10	10	10
Turntable	■	■	■	■	■
Kitchen timer	99-M./99-S.	99-M./99-S.	99-M./99-S.	99-M./99-S.	99-M./99-S.
Delay Start/Reminder	■	■	■	■	■
Sound On/Off	■	■	■	■	■
Cooking Complete Reminder	■	■	■	■	■
Child lock out	■	■	■	■	■
Appearance					
Color appearance*	WW BB	AA WW BB	WW BB	WW BB	WW BB
Case color	White Greystone	Almond White Greystone	White Black	White Black	White Greystone
Door color	White Black	Almond White Black	White Black	White Black	White Black
Weights & Dimensions					
Approx. shipping wt. (lbs.)	48	50	42	40	33
Cavity	16-3/4 x 10-3/4 x 17-5/8	16-1/2 x 9-23/32 x 16-27/32	14-3/4 x 9-1/4 x 16	14-3/4 x 8-23/32 x 15-23/32	12-1/16 x 7-11/16 x 12-1/16
WxHxD (in inches)	Exterior † 23-7/8 x 13-1/2 x 19-1/4	23-21/32 x 13-5/16 x 18-5/16	21-7/8 x 12-5/8 x 17-1/4	20-1/2 x 11-7/8 x 16-15/16	19-1/4 x 10-13/16 x 13-9/16
Power/Ratings					
2450 Frequency (MHz)	■	■	■	■	■
Electric input	Watts 1550	1500	1530	1500	1150
@ 120V	Amperage 13.6	13.0	13.3	13.0	10.5
Accessories					
Optional built-in kit	JX1830WB/ JX1827WB	JX1530MAW/ JX1527MAW JX1530MWW/ JX1527MWW			
Optional hanging kit	JX1830BB/ JX1827BB	JX1530MBW/ JX1527MBW			Pub. No. 4-A019
Warranty					
Full One-Year Warranty**	In-Home	In-Home	Carry-In	Carry-In	Carry-In
Limited Nine-Year Magnetron Warranty** (10 years total)	■	■	■	■	■

*BB = Black on black, WW = White on white, AA = Almond on almond.

**See written warranty for details.


†Exterior dimensions: height includes feet.

GE Microwave oven specifications

GE Spacemaker II™ microwave ovens	JEM25WY	JEM25GY
Capacity		
Oven cavity (cu. ft.)	.9	.9
Features		
Watts (IEC-705 Test Procedure)	800	800
Electronic Touch Controls	■	■
Electronic digital display w/clock	■	■
Beverage	■	■
Cook	■	■
Popcorn	■	■
Reheat	■	■
Snacks	■	■
Express Cook	■	■
Instant On Controls	■	■
Time Cook I & II	■	■
Add 30 Seconds	■	■
Auto Defrost/Time Defrost	■	■
Power levels	10	10
Kitchen timer	99-M./99-S.	99-M./99-S.
Sound On/Off	■	■
Cooking Complete Reminder	■	■
Delay Start/Reminder	■	■
Child Lock Out	■	■
Appearance		
Door color	White	Black
Case color	White	Greystone
Weights & Dimensions		
Approx. shipping wt. (lbs.)	41	41
WxHxD	Cavity ← 16-1/2 x 7-7/16 x 11-1/4 →	
(in inches)	Exterior† ← 23-25/32 x 11-3/16 x 12-9/32 →	
Power/Ratings		
Frequency (MHz)	2450	2450
Electrical input	Watts 1300	
@ 120V	Amperage 11.5	
Accessories		
Hanging kit (Pub. No. 4-A019)*	Optional	Optional
Optional built-in kit	JX827WN	JX827BN/ JX827SS
Warranty		
Full One-Year Warranty**	Carry-In	Carry-In
Nine-Year Magnetron Warranty** (10 years total)	Limited	Limited

*Pub. No. 4-A019 is available at additional cost.
 **See written warranty for details.
 †Exterior dimensions: height includes feet.

Cut-Out Dimensions (in inches)

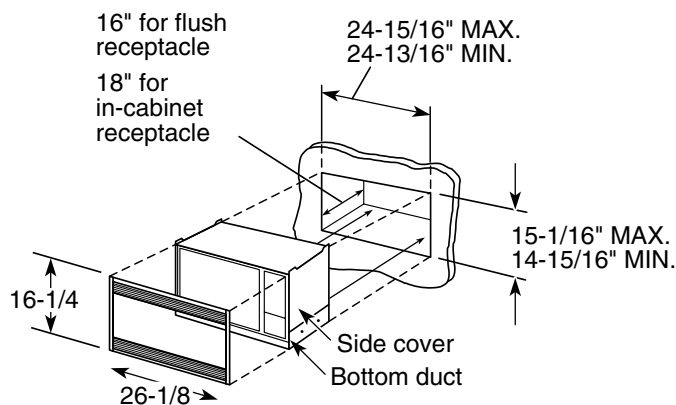


Accessory Trim Kits for .9 Microwave Ovens (Available at additional cost)

For a custom built-in appearance, this kit allows built-in installation of the Spacemaker II™ microwave oven into a wall or cabinet alone, and is U.L.-approved for installation over a GE single electric wall oven. This kit should not be installed over a gas wall oven.

JX827BN—JEM25GY, JX827WN—JEM25WY
 JX827SS—JEM25GY

Undercabinet Mounting Kit Pub. No. 4-A019 For Spacemaker II™, Compact and Subcompact Microwave Oven Models (Available at additional cost)

Not to be used over a thermal oven.



Undercabinet Installation

Install Spacemaker II™, Compact and Subcompact microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements.* These microwave ovens can be installed on practically any wood or metal cabinets.

*Installation may vary depending on cabinets.

Note: 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

GE Microwave oven specifications

GE Countertop: compact/subcompact microwave ovens

	JE710BA	JE835WW JE635WW	JE520WC JE520BW	JE510WC JE510BW
Capacity				
Oven cavity (cu. ft.)	.7	$\frac{.8}{.6}$.5	.5
Features				
Watts (IEC-705 Test Procedure)	600	$\frac{800}{600}$	600	600
Electronic Touch Controls		■		
Electronic digital display w/clock (LED)		■	■	
Mechanical Dial	■			■
Beverage Pad		■		
Popcorn Pad		■		
Frozen Pizza Pad		■		
Dinner Plate Pad		■		
Baked Potato Pad		■		
Vegetables Pad		■		
Soup Pad		—		
Instant On Controls		■		
Time Cook	15 Min.		■	15 Min.
Auto Defrost		■		
Time Defrost			■	
Power levels	1	10	10	1
Turntable	■	■	■	■
Quick Set		■		
Auto Start		■		
Child Lock Out		■		
Appearance				
Door color	Black	White	$\frac{\text{White}}{\text{Black}}$	$\frac{\text{White}}{\text{Black}}$
Case color	Black	White	$\frac{\text{White}}{\text{Black}}$	$\frac{\text{White}}{\text{Black}}$
Weights & Dimensions				
Approx. shipping wt. (lbs.)	28	33	29	29
Cavity	11-7/8 x 7-5/8 x 12-1/2	$\frac{12-5/8 \times 8-1/2}{\times 13-3/16}$ 11-3/8 x 7-7/8 x 11-5/8	← 11-3/32 x 6-11/16 x 11-7/32 →	
WxHxD (in inches) Exterior †	19 x 11 x 12-7/8	$\frac{19-1/2 \times 11-3/8}{\times 15-1/8}$ $\frac{18-5/16 \times 10-13/16}{13-7/8}$	← 18-5/32 x 9-19/32 x 12-11/16 →	
Power/Ratings				
Frequency (MHz)	2450	2450	2450	2450
Electrical input	Watts	910	1200/920	950
@ 120V	Amperage	8.5	10.5/8.0	8.5
Accessory				
Hanging kit (Pub. No. 4-A019)*	Optional		Optional	Optional
Warranty				
Full One-Year warranty**	Carry-In	Carry-In	Carry-In	Carry-In
Four-year Magnetron warranty** (Five years total)	■	■	■	■


*Pub. No. 4-A019 is available at additional cost.

**See written warranty for details.

†Exterior dimensions: height includes feet.

Undercabinet Mounting Kit Pub. No. 4-A019 For Spacemaker II™, Compact and Subcompact Microwave Oven Models (Available at additional cost)

Not to be used over a thermal oven.



Undercabinet Installation


Install Spacemaker II™, Compact and Subcompact microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements.* These microwave ovens can be installed on practically any wood or metal cabinets.

*Installation may vary depending on cabinets.

Note: 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

Hotpoint dishwashers offer quiet, performance, capacity and quality for today's customers

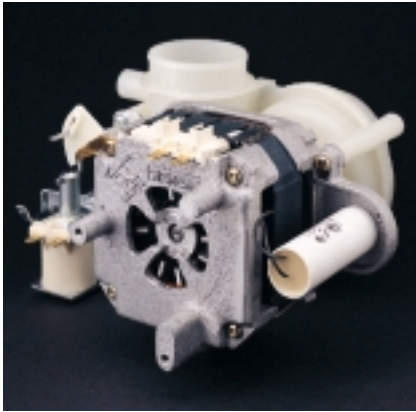


New QuietPower™ motor

A quieter, cooler, more energy efficient motor than previous motor.



Toe kick & access panel insulation

Fiberglass insulation in toe kick and access panel minimizes operating noise.

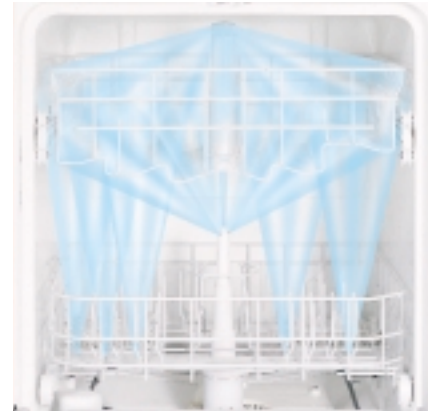


New Power Wash II System

Three-level wash action with powerful jet action for effective food soil removal and great wash performance.



Pots & Pans cycle

Removes dried-on and baked-on (but not burned-on) food from pots, pans and dishes.

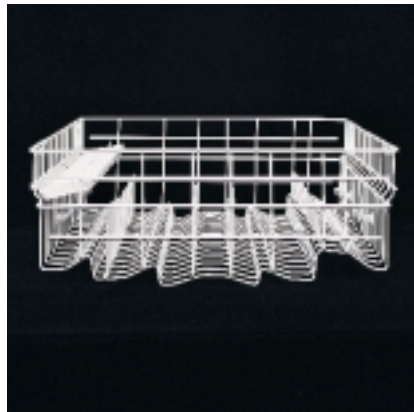

Deluxe Plus upper rack

Extra-deep upper rack. Extra fold-up cup shelves allow for double-stacking of dishes.



Deluxe lower rack

The rack has curved tines to accommodate stoneware and large plates or broiler pans.



Crystal Clear™ rinse aid dispenser

Container automatically releases a small amount of rinse agent, which speeds drying and lessens water spotting and streaking.



Durable tub and door liner

Guaranteed against leakage from cracking, peeling, chipping or rusting for ten years.

Not all features available on all models.

High quality features for performance and convenience



HDA3400FBB

HDA3400FBB

- 6 cycles/27 options
- Pots & Pans cycle
- Water Saver cycle (on dial)
- Plate Warmer cycle (on dial)
- 5-Hour Delay Start
- Light Wash (on dial)
- Hi-Temp Wash
- Hot Prewash option
- Deluxe Plus upper rack
- Deluxe insulation package
- Deluxe silverware basket
- QuietPower™ Motor

HDA3400FWW – White on white
HDA3400FAA – Almond on almond



HDA3200FBB

HDA3200FBB

- 5 cycles/22 options
- Pots & Pans cycle
- Water Saver cycle (on dial)
- Plate Warmer cycle (on dial)
- Hi-Temp Wash
- Hot Prewash option (on dial)
- Deluxe Plus upper rack
- Deluxe silverware basket
- QuietPower™ Motor

HDA3200FWW – White on white
HDA3200FAA – Almond on almond



HDA2000FBB/HDA2000FAD/HDA2000FWH (Available for Contract Sales only)

HDA2000FBB/HDA2000FAD HDA2000FWH

- 4 cycles/9 options
 - Water Saver cycle (on dial)
 - Rinse Only cycle (on dial)
 - Heavy Wash cycle (on dial)
 - Heated Dry On/Off (on rocker)
 - Hot Prewash option (on dial)
 - Standard upper rack
 - Deluxe silverware basket
- Available for contract sales only.**

HDA2100FWW – White on white



HDA1000ZWH

HDA1000ZWH

- 1 cycle/2 options
- Normal Wash cycle (on dial)
- Heated Dry On/Off (on rocker)
- Standard upper rack
- Deluxe silverware basket

For detailed specifications, installation information and color availability, refer to page 58. For warranty information, refer to page 87.

GE Spacemaker® undersink dishwashers

Works under a single sink or cooktop



Under a single sink bowl



Under a cooktop



GSM2130FWW/GSM2110FAA

- 5 cycles/12 options ■ Pots & Pans cycle ■ Normal Wash cycle
- Short Wash cycle (on dial) ■ Rinse Only/Hold cycle (on dial)
- Plate Warmer cycle (on dial) ■ HotStart™ option ■ PermaTuf® interior
- Spacemaker® upper rack ■ Deluxe lower rack ■ Deluxe silverware basket
- 2 wash levels ■ QuietPower™ motor

Note: Undersink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

GE Built-in 18" dishwasher

New 18" space-saving model



GSS1800Z

- 4 cycles/6 options ■ Pots and Pans cycle (on dial)
- Light Wash cycle (on dial) ■ Rinse Only/Hold cycle (on dial)
- Heated Dry On/Off option (rocker) ■ 3-color panel pack
- Available with black control panel only

GE Convertible dishwashers

- New PowerScrub™ Wash System ■ Pots & Pans cycle ■ Normal Wash cycle
- Short Wash cycle (on dial) ■ Plate Warmer cycle (on dial) ■ Rinse Only cycle (on dial)
- HotStart™ option ■ Heated Dry On/Off option ■ Hi-Temp Wash option
- 3 wash levels ■ Rinse Aid dispenser ■ Standard insulation package



Portable now



Built-in later



GSC3430FWW

- 7 cycles/39 options ■ New PowerScrub™ Wash System ■ TouchTap™ Control pads
- China/Crystal cycle* ■ 6-hour delay start option ■ HotStart™ option
- Deluxe upper rack ■ Deluxe lower rack ■ Split silverware basket ■ Rinse Aid dispenser w/indicator
- White on white with white cabinet ■ QuietPower™ motor

Also available in Black on black with almond cabinet as Model GSC3400FBL.

*Developed in consultation with Lenox®, the leading manufacturer of fine china.



GSC3200FBL

- 5 cycles/22 options ■ New PowerScrub™ Wash System ■ HotStart™ option
- Deluxe upper rack ■ Deluxe lower rack ■ Deluxe silverware basket ■ Black on black with almond cabinet
- QuietPower™ motor

Also available in White on white with white cabinet as Model GSC3230FWW.

For detailed specifications, installation information and color availability, refer to pages 59-60. For warranty information, refer to page 87.

Continuous feed models

- Stainless steel flange ■ Manual reset protector
- Polyester drain housing ■ Dishwasher drain connector
- Dual swivel stainless impellers ■ Precutter ■ Sink stopper



GFC1000Y



GFC800Y



GFC700Y/GFC705Y



GFC300Y/GFC305Y



GFC290Y/GFC295Y



GFB1050V

GFC1000Y

- Rugged 3/4-horsepower motor ■ 8000 RPM grinding action ■ Super Deluxe sound insulation ■ Power Boost feature for heavy loads ■ Fast Mount installation
- Removable splash guard

GFC800Y

- 1/2-horsepower motor ■ 8000 RPM grinding action
- Deluxe sound insulation ■ Fast Mount installation
- Removable splash guard

GFC700Y

- 1/2-horsepower motor ■ 8000 RPM grinding action
- Standard sound insulation ■ Fast Mount installation
- Removable splash guard

GFC705Y

- Similar to GFC700Y but has attached line cord.

GFC300Y

- 1/2-horsepower motor ■ 8000 RPM grinding action
- Fast Mount installation ■ Removable splash guard

GFC305Y

- Similar to GFC300Y but has attached line cord.

GFC290Y

- 1/3-horsepower motor ■ 8000 RPM grinding action
- Fast Mount installation ■ Removable splash guard

GFC295Y

- Similar to GFC290Y but has attached line cord.

Batch feed model

GFB1050V

- Rugged 3/4-horsepower motor ■ 2700 RPM grinding action
- Super Deluxe sound insulation ■ Twist Mount installation

Where local codes permit, any GE Dishwasher and any GE Disposer may be connected to a single 20-amp circuit.

White and Almond flanges are available: GPF71 (White) and GPF72 (Almond).

GE Built-in compactors



GCG1540FSS Stainless steel

- 1.4 cu. ft. capacity ■ 1/3-horsepower
- Removable key lock ■ Toe pedal opener
- Rear wheels allow easy movement and installation ■ Heave-gauge steel construction

GCG1550FCC Bisque (not shown)

GCG1520FBB Black on black (not shown)


GCG1530FWW White on white (not shown)

Dishwasher specifications


Built-in dishwashers	HDA3400FWW/ HDA3400FBB/ HDA3400FAA	HDA3200FWW/ HDA3200FBB/ HDA3200FAA	Contract Only HDA2100FWW/ HDA2000FBB/ HDA2000FHH/ HDA2000FAD	HDA1000ZWH
	Features			
Power Wash II System	■	■		
Self-cleaning filter	■	■		
Wash levels	3	3	2	2
Cycles/Options	6/27	5/22	4/9	1/2
Pots & Pans cycle	■	■		
Heavy Wash cycle			Dial	
Normal Wash cycle	■	■	Dial	Dial
Water Saver cycle	Dial	Dial	Dial	
Plate Warmer cycle	Dial	Dial		
Rinse Only cycle		Dial	Dial	Dial
Delay Start	■			
Heated Dry	■	Rocker	Rocker	Rocker
Hi-Temp Wash	■	■		
Hot Prewash option	■	Dial	Dial	
Pushbuttons	6	4		
Rinse Aid dispenser	■	■	■	■
Rack System	Upper Deluxe Plus	Deluxe Plus	Standard	Standard
	Lower Deluxe	Deluxe	Deluxe	Deluxe
Silverware Basket	Deluxe	Deluxe	Deluxe	Deluxe
Economical/Quiet				
Sound insulation package	Deluxe	Standard Plus	Standard	
QuietPower™ motor	■	■		
Appearance				
Colors available*	WW, BB, AA	WW, BB, AA	WW, BB, WH, AD	WH
Color panels	Door Trimless	Trimless	Trimless	Trimless
	Access Trimless	Trimless	Textured	Textured
Weights & Dimensions				
Approx. shipping wt. (lbs.)	81	81	81	81
Height w/legs Retracted (in.)	34	34	34	34
Overall width (in.)	24	24	24	24
Overall depth (in.)	25-1/8	25-1/8	25-1/8	25-1/8
Accessories				
Requires kit for 1/4" panel capability (w/trim)	GPF325W/B/A	GPF325W/B/A	GPF325W/B/A	GPF325W
Requires kit for 3/4" panel capability (trimless)	GPF375	GPF375	GPF375	GPF375

*WW = White on white, BB = Black on black, AA = Almond on almond, WH = White/Black, AD = Almond/Black
 **Certificate enclosed in Use and Care Book for ordering information.
 ***See written warranty for details.
 †For the 1/4" panel capability with trim order GPF325A/W/B. For the 3/4" trimless panel capability order GPF375.


Dishwasher rough-in information (in inches)

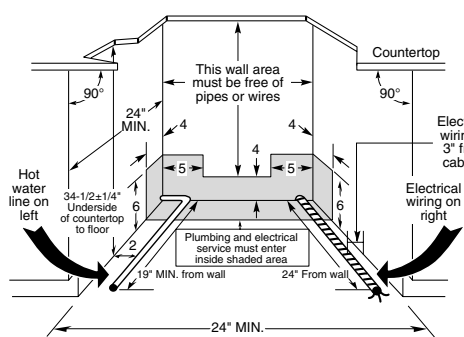

Dishwasher dimensions (in inches)

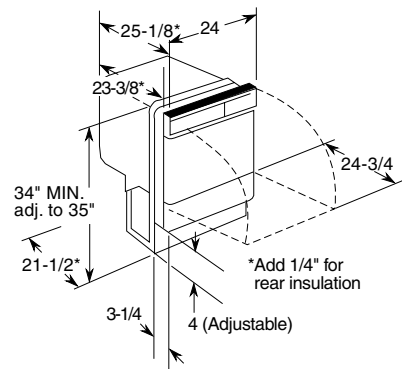

Wood insert cut-out dimensions

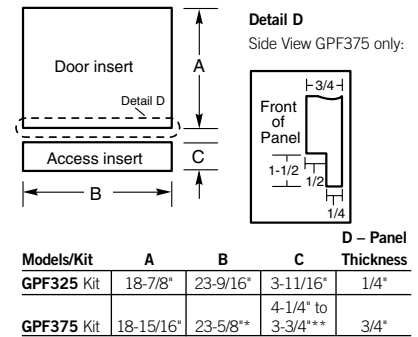

*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)
 **Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

Specifications and electrical rating

120 Volts AC, 60 Hertz, 8.6 Amps total connected load 500 Watt Calrod® heater. For use on adequately wired 120 volt, 15 amp circuit having two-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes. Dishwasher includes drain hose and leveling legs.

Note: Before installing, consult installation instructions packed with product for current dimensional data.



Listed by Underwriters Laboratories

GE Spacemaker® undersink dishwasher

GSM2130FWW
GSM2110FAA

Features

Wash levels	2
Cycles/Options	5/12
Pots & Pans cycle	■
Normal Wash cycle	■
Short Wash cycle	Dial
Plate Warmer cycle	Dial
Rinse Only/Hold cycle	Dial
Heated Dry On/Off option	■
HotStart™ option	■
Rack system	Upper Spacemaker® Lower Deluxe
Silverware basket	Deluxe
Control type	Turn-To-Start
Cycle Progress Indicators	Dial
Pushbuttons	4
Rinse aid dispenser	■

Economical/Quiet

PermaTuf® tub and door liner	■
QuietPower™ Motor	■

Appearance

Colors Available**	WW, AA
Door	Trimless
Color Panels	Access Trimless

Miscellaneous


Approx. shipping weight (lbs.)	72
1, 2, 10-yr. warranty*	■

*See written warranty for details.

**WW = White on white
AA = Almond on almond

Note: Undersink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Cabinet cutout for sink

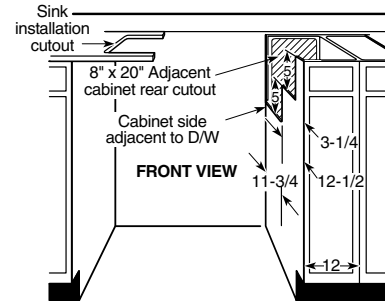


Cabinet cutouts for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.

Stainless steel sinks single and double compartment models (dimensions in inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2" Radius Corners		No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2


Note: Drain opening size is 3-1/2". Above models are fully sound deadened. *Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment. **All have four holes, but one hole has a removable plug.



Undersink dishwasher wood insert dimensions (in inches)

Inserts must not exceed 1/4" thickness within 5/16" of edge around full circumference. Order GPF325 Kit.

Plumbing/electrical rough-in




Plumbing: Hot Water Only. Use 3/8" O.D. copper tubing or 1/2" O.D. plastic tubing min. inlet line. Water valve has 3/8" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 8.6. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.


Specifications: Inlet Water Temperature Recommended: Minimum 120°F. at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

Cabinet rough-in

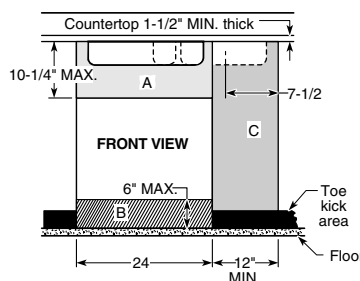


Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2" max. specified distance from the wall, or if the base cabinet is less than the 24" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Rough-in for installation with disposer



A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher is furnished with a 1/2" I.D. drain hose, 78" long. If using copper tubing, a 2" length of 1/2" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8" I.D. dishwasher drain connector.

Rear view plumbing arrangement



GE Convertible/portable specifications


Convertible/portable dishwashers	GSC3430FWW/ GSC3400FBL	GSC3230FWW/ GSC3200FBL
Features		
PowerScrub™ Wash System	■	■
Filtration System	Dual	Dual
Piranha™ hard food disposer	■	■
Cycles/Options	7/39	5/22
Pots & Pans cycle	■	■
Normal Wash cycle	■	■
Short Wash cycle	Dial	Dial
Light Wash cycle	■	■
Rinse Only cycle	Dial	Dial
Plate Warmer cycle	Dial	Dial
China/Crystal option	■	■
Hi-Temp Wash	■	■
6-Hour Delay Start	Dial	■
Heated Dry	■	■
HotStart™ option	■	■
Wash levels	3	3
Cycle progress indicators	Dial	Dial
Rack system	Upper Lower	Deluxe Deluxe
Silverware Basket	Split	Deluxe
TouchTap™ Control pads	8	■
Pushbuttons	■	6
Rinse Aid dispenser	with Indicator	■
Economical/Quiet		
Sound insulation package	QuietPower™ I	QuietDesign™
PermaTuf™ Tub and door liner	■	■
QuietPower™ motor	■	■
Sealed toe-kick	■	■
Appearance		
Colors available*	WW, BL	WW, BL
Color panels—Door & Access	Trimless	Trimless
Miscellaneous		
Approx. shipping weight (lbs.)	147	147
1, 2, 10 Warranty*	■	■

*See written warranty for details.
† WW=White on white, BL=Black control panels and front panels with almond side panels

18" Compact dishwasher	GSS1800Z
Features	
Cycles/Options	4/6
Pots & Pans cycle	Dial
Normal Wash cycle	Dial
Light Wash cycle	Dial
Rinse Only/Hold cycle	Dial
Heated Dry On/Off option	Rocker
Rack system	Upper Lower
Silverware Basket	Standard
Control type	Turn-To-Start
Wash levels	2
Cycle progress indicators	Dial
120° F. @ inlet water capability	■
Rinse Aid dispenser	■
Economical/Quiet	
Sound insulation package	Standard
Appearance	
Colors available	Black, Almond, White
Color panels	2 Reversible: Black/Harvest; Almond/White
Miscellaneous	
Approx. shipping weight (lbs.)	77
1, 10 Yr. Warranty*	■


*See written warranty for details.
Note: Does not accept GPF kits. For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order pub. no. 5-A007.

Dimensions (in inches) GSC3430FWW, GSC3400FBL, GSC3230FWW and GSC3200FBL

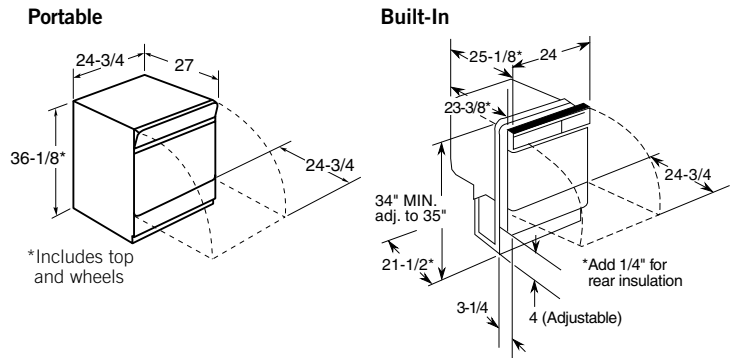

Important Note: GE Kit number WD35M34 needed when adapting GE Convertible Dishwasher to a built-in installation. Contains built-in dishwasher water valve, hardware and complete instructions for changing a GE Convertible Dishwasher to an under-the-counter installation.

Dimensions (in inches)

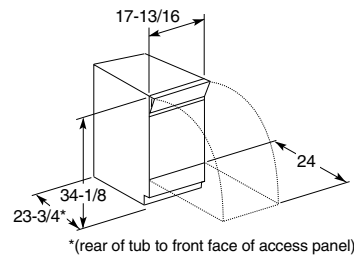

Dishwasher Rough-in information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Figure 1


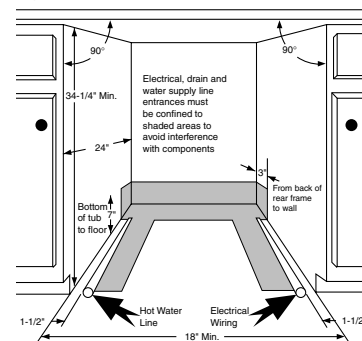


Figure 2



Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A *minimum* clearance of 2" is recommended.


Rough-in the water, electrical, and drain lines before proceeding with the installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

GE Disposer and built-in compactor specifications

GE Disposall® food waste disposers	Continuous Feed Models								Batch Feed Model
	GFC1000Y	GFC800Y	GFC705Y	GFC700Y	GFC305Y	GFC300Y	GFC295Y	GFC290Y	GFB1050V
Features									
Motor horsepower	3/4	1/2	1/2	1/2	1/2	1/2	1/3	1/3	3/4
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Stopper
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch
Power connection	Direct Wire	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Direct Wire
Power Boost	■								
Dual swivel impellers	■	■	■	■	■	■	■	■	■
Jam resistant	■	■	■	■	■	■	■	■	■
Stainless steel	■	■	■	■	■	■	■	■	■
Stainless steel sink flange	■	■	■	■	■	■	■	■	■
Mounting type	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Fast Mount	Twist Top
Precutler	■	■	■	■	■	■	■	■	■
Splash guard	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Removable	Non-Removable
Sink stopper	■	■	■	■	■	■	■	■	■
Dishwasher drain connector	■	■	■	■	■	■	■	■	■
Manual reset overload protector	■	■	■	■	■	■	■	■	■
Permanently lubricated bearing	■	■	■	■	■	■	■	■	■
Plastic drain elbow	■	■	■	■	■	■	■	■	■
Turntable	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Polyester drain housing	■	■	■	■	■	■	■	■	■
Grinding speed (RPM's)	8000	8000	8000	8000	8000	8000	8000	8000	2700
Hopper liner/grinding ring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Galvanized	Galvanized	Galvanized	Galvanized	Stainless Steel
Hopper	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Nylon
Economical/Quiet									
Sound insulation wrapper	Super Deluxe	Deluxe	Standard	Standard	-	-	-	-	Super Deluxe
Weights & Dimensions									
Approx. shipping weight (lbs.)	12.5	10.0	9.8	9.8	8.4	8.4	8.4	8.4	14.0
Net weight (lbs.)	11	8.8	8.6	8.6	7.6	7.6	7.6	7.6	12.5
(A)	← 14-5/8 →								16-9/16
(B)	← 6-1/4 →								5-1/2
(C)	← 3-1/4 →								6-1/2
(D)	← 8-1/4 →								9-5/16
(E)	← 8-1/8 →		← 6-3/8 →				← 8-5/8 →		1
Dishwasher inlet diameter (in.)	← 7/8 →								1
Drain outlet diameter (in.)	← 1-1/2 →								
Accessories									
GPF71 White sink flange & stopper	■	■	■	■	■	■	■	■	■
GPF72 Almond sink flange & stopper	■	■	■	■	■	■	■	■	■


Disposers



Disposer Accessories:
GPF75 Clamp nut kit

GE Built-In Compactors	GCG1550FCC/ GCG1540FSS/ GCG1530FWW/ GCG1520FBB
Features	
Cycle time	27 seconds max., 14 seconds min.
Drive System	2-Point
Motor horsepower	1/3
Compression ratio (average)	75% reduction of volume
Ram force (lb.) (max.)	2,300
Front level legs and rear wheels	■
Capacity	1.4 cu. ft.
Side release bin	■
Toe/foot pedal drawer opener	■
Lock/start control w/removable key	■
Automatic anti-jam	■
Slide-out drawer	■
Full 1-year warranty	■
Appearance	
Color appearance	Bisque/Stainless Steel/White/Black
Heavy gauge steel construction	■
1/4" panel capability	■
Weights & Dimensions	
Total shipping weight (lbs.)	152
Total appliance weight (lbs.)	141
Overall height (in.)	34-1/8 to 34-1/2
Overall width (in.)	15
Overall depth (in.)	24-1/4
Cutout dimensions H x W x D (in.)	34-1/4 x 15-1/8 x 24-3/4
Clearance for drop-down drawer side	6" or more on right side
Drawer extension for removal	23" or more in front of appliance
Custom panel size H x W (in.)	22-15/16 x 14-5/8
Accessories	
Compactor bags (5 included)	WC60X5017
New 1/4" Panel Trim Kits (color matched)	GPF82C—Bisque, GPF82S—Stainless Steel, GPF82W—White, GPF82B—Black

Dimensions (in inches)



See page 87 for warranty information.

Super and Extra-large capacity washers

VBSR2080W

- Super capacity washer
- 3 water levels
- 8 cycles
- 2 wash/spin speed combinations
- Bleach dispenser
- Self-cleaning filter
- Fabric softener dispenser
- Front lid opening

VBXR1070W

- Extra-large capacity washer
- 3 water levels
- 6 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- Self-cleaning filter
- Front lid opening

VWSR1040V

- Super capacity washer
- 2 water levels
- 4 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- Front lid opening



VBSR2080W



VBXR1070W



VWSR1040V



Super capacity

The 3.2 cu. ft. super capacity washer provides added space for extra-large loads.



FlexCare™ agitator

Delivers excellent wash performance, and the innovative "Flexible Fins," care for delicate wash loads.



Balance Pro™ suspension system

An innovative rod and spring floating suspension system designed to handle off-balanced loads on any type of floor.



Tuf Tub™ basket

The basket resists peeling, chipping, rusting or flaking for long term durability.



VBSR2080W

All features may not be available on all models. For detailed specifications, installation information and color availability, refer to pages 66 and 69. For warranty information, refer to page 87.

Extra-large capacity dryers

NBXR453EV (Electric)

NBXR453GV (Gas)

- Extra-large capacity dryer
- Automatic dry control
- 5 cycles
- 4 heat selections
- Up-front lint filter
- Reversible door

NVL333EY (Electric)

NVL333GY (Gas)

- Extra-large capacity dryer
- Automatic dry control
- 3 cycles
- 3 heat selections
- Up-front lint filter



NBXR453EV (Electric), NBXR453GV (Gas)



NVL333EY (Electric), NVL333GY (Gas)



Automatic dry control

Monitors moisture level with an automatic thermostat and ends the cycle when clothes are properly dried. **Optional press guard** provides extra care to help prevent wrinkles.



Up-front lint filter

Convenient, up-front removable lint filter is easy to reach, easy to clean.



Double-coated drum interior

Provides long-lasting dependability and durability.



Off-set appearance


A contemporary design that makes cleaning easy.



NBXR453E/GV

All features may not be available on all models. For detailed specifications, installation information and color availability, refer to pages 66 and 69. For warranty information, refer to page 87.

GE portable/stationary models



Stainless steel tub
Extra-Large 2.7 cu. ft. stainless steel tub with lint filter.



- WSLP1100A**
120V Portable/topload washer
- 24" extra-large capacity
 - 1 wash/spin speeds
 - 10 cycles
 - 4 wash/rinse temperatures
 - 4 water levels
 - Load sensing
 - ColorLogic™ 2000
 - Lint filter
 - Easy roll rollers
 - Available in White on white and Almond on almond



Fabric softener dispenser
Easily accessible detergent/fabric softener dispenser.

- WLSL1100A**
120V Stationary/topload washer
- 24" extra-large capacity
 - 1 wash/spin speeds
 - 10 cycles
 - 4 wash/rinse temperatures
 - 4 water levels
 - Load sensing
 - Lint filter
 - Available in White on white and Almond on almond

- WSKP2060W**
120V Portable washer
- 2 wash/spin speeds
 - 6 cycles
 - 3 wash/rinse temperatures
 - 4 water levels
 - Unicouple connector quickly attaches to a faucet adapter
 - Available in White with granite-look top

120V Stationary Washer
WSKS2060W (not shown)



- DSKS433EA**
240V Stationary Dryer
- 3 drying cycles
 - 4 Heat selections
 - Available in White on white and Almond on almond




DSLR24AW shown with WSLP1100A Washer and DSKS433EA Dryer

- DSLR24AW Stack rack with light**
(Available at additional cost)
- For use with Portable or Stationary Washers and Dryers
 - Available in White on white and Almond on almond



- DSKP233EA**
120V Portable/Stationary dryer
- 3 drying cycles
 - 2 Heat selections
 - 15-amp dryer cord attached
 - Available in White on white control panel

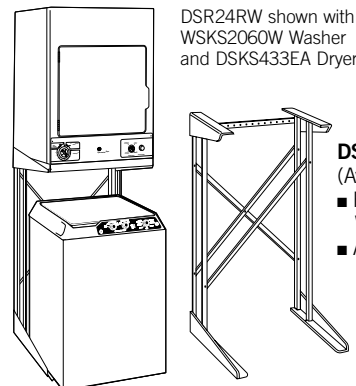

DSR24RW shown with WSKS2060W Washer and DSKS433EA Dryer

- DSR24RW Stack Rack**
(Available at additional Cost)
- For use with Portable or Stationary Washers and Dryers
 - Available in White only

GE Unitized washer/dryer models

WSM2700W Electric

WSM2780W Gas

- Full size 27" wide
- Extra-Large Capacity
Washer features 3 cycles (Regular, Permanent Press and Delicate), 3 wash temperature options, 3 water level selections
- Dryer features Automatic Dry Control, 4 cycles: Automatic Dry (Medium Heat), Timed Dry (High Heat), Delicate (Low Heat), Air Fluff (No-Heat)
- Available in White on white and Almond on almond

WSM2420T Electric

WSM2480T Gas

- 24" wide
- Washer features 3 cycles: Regular, Permanent Press and Delicates, 3 wash/rinse temperatures, 3 water levels
- Dryer features Automatic Dry Control, 4 cycles: Automatic Regular, Automatic Permanent Press, Timed Dry, and Air Fluff
- Available in White on white
- Electric model also available in Almond on almond




All features may not be available on all models. For detailed specifications, installation information and color availability, refer to pages 67 and 68. For warranty information, refer to page 87.

Washer and dryer specifications

Washers

Models	VBSR2080W	VVSR1040V	VBXR1070W
Features			
Capacity/Cubic feet	Super/3.2	Super/3.2	Extra-Large/2.7
Wash/spin speed combination(s)	2 (timer)	1	1
Wash/rinse temperatures	3	3 (timer)	3
Water levels	3	2	3
Fabric softener dispenser	■		
Bleach dispenser	■		
FlexCare™ agitator	■	■	■
Front lid opening	■	■	■
New lid instructions	■	■	■
Tuf Tub™ basket	■	■	■
Self-cleaning filter	■	■	■
Number of wash cycles	8	4	7
Perm press	■	Warm cycle only	■
Knits	■		■
Delicates	■		■
Heavy soil	■	Hot cycle only	■
Normal soil	■	Warm cycle only	■
Light soil	■	Cold cycle only	■
Auto soak (15 min.)	■		■
Supercycle™	■		
Front serviceable	■		■
Colors available*	WW/AA	WW	WW/AA
Approx. shipping weight (lbs.)	160	160	152

*Colors available: White on White or Almond on Almond

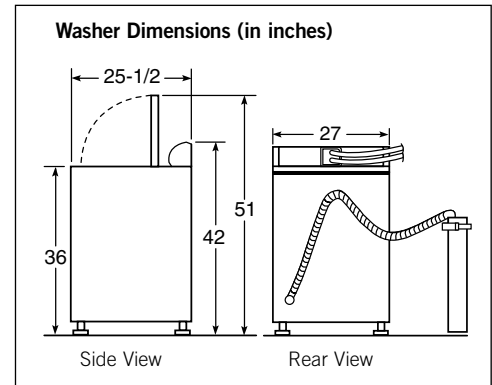

Washer specifications

Electrical rating: 115V, 60 Hz, 10 Amps

Circuit requirements: An individual properly-grounded branch circuit, with a three-prong grounding-type receptacle protected by a 15 or 20 amp circuit breaker or time-delay fuse, is required.

Washer Note: Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Dryers


Models	Electric Gas	NBXR453EV NBXR453GV	NVL333EY NVL333GY
Features			
Capacity/Cubic feet		Extra-large/6.0	Extra-large/5.7
Automatic dry control		■	■
Double-coated drum		■	
Porcelain drum interior			■
Removable upfront lint filter		■	■
Heat selections		4	3 (timer)
Number of dry cycles		5	3
Auto cotton			
Cottons cycle		■	■
Auto perm press			
Perm press cycle		■	■
Timed dry			
Actual minutes on timer		80	70
Damp dry		■	
De-wrinkle		■	
Timed (no-heat)			■
Front serviceable		■	■
Reversible door		■	
Colors available*		WW/AA	WW/AA
Approx. shipping weight (lbs.)	Elec. Gas	110 115	118 136

*Colors available: White on white or Almond on almond

Note: Before installing, consult installation instructions packed with product for current dimensional data. Hotpoint electric dryers are available with long ducting capability.



Listed by
Underwriters
Laboratories

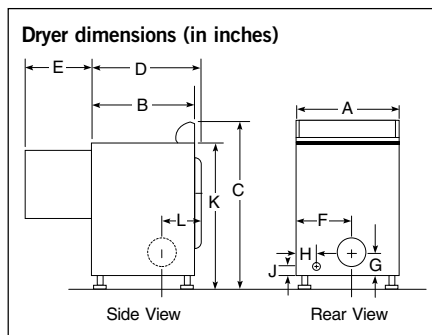

Dryer specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom.

Gas: 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

See installation instructions for venting specifications.

Dryer dimensions (in inches)

	Extra-Large 5.7 Capacity	Extra-Large 6.0 Capacity	Super Capacity
A	27	27	27
B	25-1/2*	25-1/2*	25-1/2*
C	42	42	42
D	25-3/4	25-3/4	28-1/4
E	23-1/2	23-1/2	23-1/2
F	11-3/4	11-1/2	11-1/2
G	5-1/2	3-1/2	3-1/2
H	2	2	2
J	2-1/2	2-1/2	2-1/2
K	36	36	36
L	4-3/4	5-1/4	8-1/2

*24-1/2" from the edge of the side panel to the front. 25-1/2" from front to edge of end caps.

Circuit requirements:

Electric: An individual properly-grounded branch circuit protected by a 30 amp circuit breaker or time-delay fuse, is required.

Gas: An individual, properly-grounded branch circuit with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or time-delay fuse, is required.

Gas (BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit, 5.7 cu. ft. model kit is WE25X10003, 6.0 and 7.0 cu. ft. model kit is WE25X0217. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Electric dryer rating: 208/240V, 5600W, 60 Hz, 24 Amp

Gas dryer electric rating: 120V, 60 Hz, 6 Amp

GE Spacemaker® Portable/Stationary Models


Individual Spacemaker® Washers	Stationary WSKS2060W	Portable WSKP2060W	Stationary WLSL1100A	Portable WSLP1100A
Capacity				
Capacity	Compact	Compact	Extra-Large	Extra-Large
Features				
Wash/spin speed combinations	2	2	1	1
Wash/rinse temperatures	3	3	4	4
Water levels	4	4	4	4
Number of cycles	6	6	10	10
Regular				
Heavy Soil	■	■	■	■
Medium Soil	■	■	■	■
Perm. Press				
Medium Soil	■	■	■	■
Light Soil	■	■	■	■
Delicates				
Spin only	■	■	■	■
One touch load sensing	■	■	■	■
Automatic cool down	■	■	■	■
Bleach dispenser	■	■	■	■
Fabric softener dispenser	■	■	■	■
Automatic detergent dispenser	■	■	■	■
Lint filter	■	■	2 Removable	2 Removable
Quiet pump	■	■	■	■
Easy-roll rollers	■	■	■	■
Basket material	PermaTuf II	PermaTuf II	Stainless Steel	Stainless Steel
Appearance				
Colors available	White with granite-look top	White with granite-look top	WW, AA	WW, AA
Weights & Dimensions				
Circuit requirements	120V, 60 Hertz, 15 or 20 Amps			
Dimensions (HxWxD in inches)*	34-1/4 x 22-1/4 x 24	34 x 22-1/4 x 24	37-1/2** x 23-5/8 x 26	38 x 23-5/8 x 26
Approx. shipping wt. (lbs.)	109	109	114	116

*Depth measured from front of control knob.
**With leveling legs extended.


Individual Spacemaker® Dryers	Stationary DSKS433EA	Portable/Stationary* DSKP233EA
Capacity		
Capacity	Compact	Compact
Features		
Dry control	Automatic	Automatic
Heat selections	4	2 (timer)
Number of dry cycles	3	3
Auto. Reg.—Perm. Press		■
Auto. Perm. Press & Delicate	■	
Auto. Reg. (min)	■	
Timed Regular (min.)	140	105
Air Fluff (min.)	(Heat selection)	10
Separate start switch	■	■
Control location	Mid-Band	Top
End-of-cycle signal		■
Lint filter	Up-Front	Back of Drum
Appearance		
Colors available	WW, AA	WW
Weight and Dimensions		
Exhaust options**	4-Way	Rear
Circuit requirements	240/208V†, 60 Hertz, 30 Amp	120V, 60 Hertz, 30 Amp
Power cord	No Cord	6 feet
Dimensions (HxWxD in inches)	33-1/4 x 23-7/8 x 24-1/2	32 x 23-7/8 x 23-5/8
Approx. shipping wt. (lbs.)	108	100

*Dryer comes equipped with casters and stationary leveling legs.
DSKP233EA approved for DSR24RW only.
**DSKS433EA shipped exhausted through the top. DSKP233EA exhausted to rear only.
†240/208 volt outlet: Rear-mounted outlet on DSKS433EA approved for use with Washer/Dryer Stack Rack DSR24RW or DSLR24AW.
Circuit Requirements: An individual, properly-grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

Rear vent installation

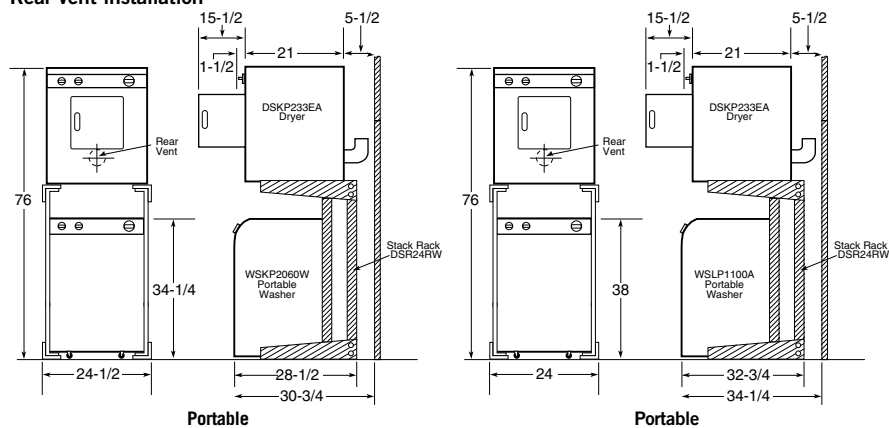

Top vent installation:

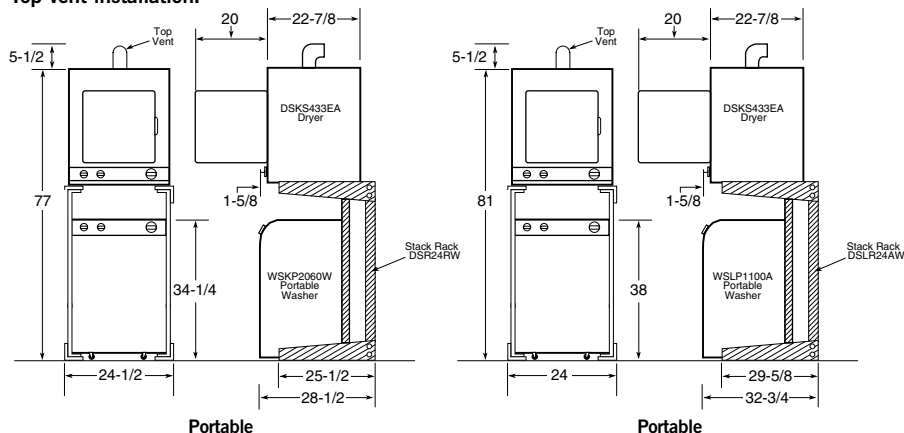

See page 87 for warranty information.

GE Washer and dryer specifications

GE Unitized Spacemaker® washers and dryers

Washer Features	Electric		Gas	
	Washer	Dryer	Washer	Dryer
Capacity				
Capacity	X-Large	X-Large	Compact	Compact
Features				
Wash/spin speed combinations	1		2	
Wash/rinse temperatures	3		3	
Water levels	3		3	
Number of wash cycles	3		3	
Regular	■		■	
Perm. Press	■		■	
Delicates	■		■	
Unbalanced load control	■		■	
Lint filter	■		■	

Dryer Features

Features				
Automatic dry control		■		■
Number of dry cycles		4		4
Auto Regular		■		■
Auto Perm Press		■		■
Delicates		■		■
Timed		■		■
Air Fluff		■		■
Control location		Mid-Band		Mid-Band
Exhaust options		Rear		Rear/Sides

Appearance

Colors available†	WW/AA	WW**
-------------------	-------	------

Weights and Dimensions

Dimensions (HxWxD in inches)	75-1/2 x 27 x 30-13/16*	71-3/4 x 23-7/8 x 27-1/4*
Approx. shipping wt. (lbs.)	300	238

*Depth dimension assumes water hook-up is recessed in the wall.

**Electrical model is also available in Almond on almond.

†Colors available: White on white or Almond on almond

Note: The third prong on the WSM2780T plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.

Electrical requirements

WSM2700W: Electric dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

WSM2420T: Electric dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

NOTE: THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.

WSM2480T: Gas dryer—This appliance should be connected to an individual, properly-grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60 Hz electrical service and should be protected by 15 or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot long flexible U.L. listed 20-amp power cord to match a 15-amp receptacle.

Gas rated input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.

WSM2780W: Gas dryer—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60 Hz electrical service and should be protected by 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot long flexible U.L. listed 20-amp power cord to match a 20-amp receptacle.

WSM2780W Gas Rated input 20,000 BTU/HR. Factory equipped for natural gas.

LP gas supply requires a conversion kit.

Kits: WSM2780W-WE25X206

WSM2480T-WE25X0219

Have a qualified gas technician install a conversion kit before use.


Exhaust information

See "Dryer Exhausting Information" on page 69.


For complete information see installation instructions packed with the product.

See page 87 for warranty information.

Models WSM2700W and WSM2780W Dimensions (in inches)

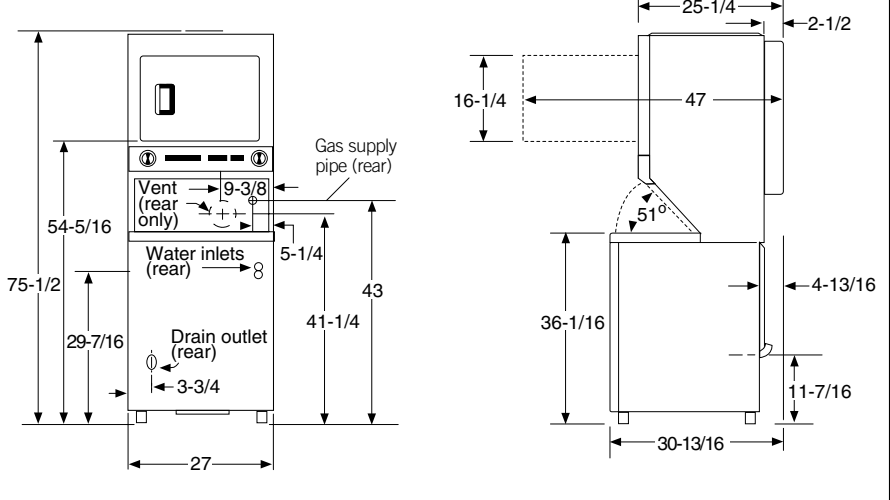

Models WSM2420T and WSM2480T Dimensions (in inches)

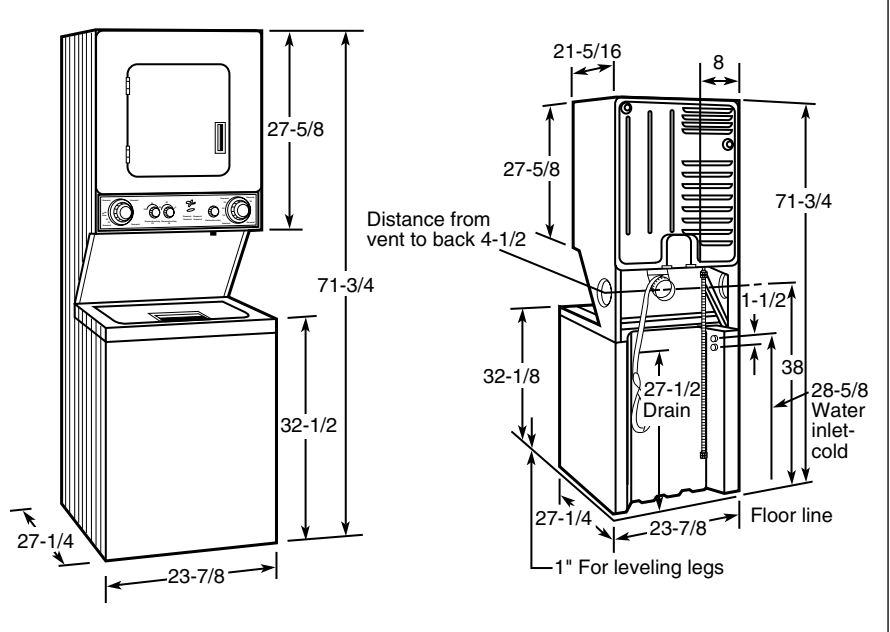

Dryer exhausting information

For complete information see installation instructions packed with dryer.

Important note:

GE Kit Number 14-A018 needed when converting rear exhaust to bottom or side.
(On Extra-large (5.7) capacity models only.)

Ducting materials

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If "all rigid metal" duct cannot be used, then "flexible all metal" venting can be used, but it will reduce the maximum recommended duct length. The following kit or parts are available from your local service organization.
Kit WX8X75—7" aluminum duct and 4" hood, short tail.
(OR individual parts):
WX8X65 7" aluminum flex duct only
WX8X58 4" clamps (2)
WX8X67 4" exhaust hood
See installation instructions for complete information.

Exhaust length calculation:

- Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
- The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown

in the table. The maximum lengths for flexible ducts are less than for rigid duct.


See table in installation instructions. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down. Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

Dryer exhausting information—Use metal duct only Vertical and horizontal ducting



Domestic Dryer Models	Number of 90° Turns	Maximum Length of 4" Dia. Rigid Metal Duct Exhaust Hood Type		Maximum Length of 4" Dia. Flexible Metal Duct Exhaust Hood Type	
		Cat. No. WX8X59 (Preferred) A 4" Opening	B 2-1/2" Opening	Cat. No. WX8X59 (Preferred) A 4" Opening	B 2-1/2" Opening
Super & Extra-Large 6.0 Capacity Models All Electric Dryers	0 1 2 3 4	90 ft. 60 ft. 45 ft. 35 ft. 25 ft.	60 ft. 45 ft. 35 ft. 25 ft. 15 ft.	55 ft. 40 ft. 30 ft. 20 ft. 15 ft.	45 ft. 30 ft. 20 ft. 15 ft. 10 ft.
Super & Extra-Large 6.0 Capacity Models All Gas Dryers	0 1 2 3	45 ft. 35 ft. 25 ft. 15 ft.	30 ft. 20 ft. 10 ft. —	30 ft. 20 ft. 10 ft. —	15 ft. 10 ft. — —
Extra-Large 5.7 Capacity Electric and Gas Dryers	0 1 2 3 4	60 ft. 52 ft. 44 ft. 32 ft. 28 ft.	48 ft. 40 ft. 32 ft. 24 ft. 16 ft.	30 ft. 22 ft. 14 ft. — —	18 ft. 14 ft. 10 ft. — —
Spacemaker® Models DSKS433EA WSM2780W	0 1 2 3	46 ft. 38 ft. 31 ft. 24 ft.	37 ft. 30 ft. 22 ft. 15 ft.	30 ft. 25 ft. 20 ft. 16 ft.	24 ft. 20 ft. 14 ft. 10 ft.
Spacemaker® Model DSKP233EA	0 1 3	43 ft. 33 ft. 23 ft.	36 ft. 26 ft. 16 ft.	30 ft. 24 ft. 16 ft.	24 ft. 18 ft. 10 ft.
Spacemaker® Model WSM2700W	0 1 2 3	56 ft. 46 ft. 34 ft. 32 ft.	42 ft. 36 ft. 28 ft. 18 ft.	30 ft. 22 ft. 16 ft. 10 ft.	22 ft. 14 ft. 10 ft. 5 ft.
Spacemaker® Models WSM2420T WSM2480T	0 1 2	43 ft. 33 ft. 23 ft.	36 ft. 26 ft. 16 ft.	30 ft. 24 ft. 16 ft.	24 ft. 18 ft. 10 ft.

Special installation requirements

Alcove or closet Installation:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer **MUST** be exhausted to the outdoors. See EXHAUST INFORMATION above.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
0" either side
3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- The closet should be vented to the outdoors to prevent gas pocketing in case of a gas leak in the supply line.
- No other fuel-burning appliance shall be installed in the same closet with the dryer.

Bathroom or bedroom installation:

- The dryer **MUST** be exhausted to the outdoors. See EXHAUST INFORMATION above.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum clearances other than alcove or closet installations

- Minimum clearances to combustible surfaces:
0" both sides
3" rear

For more information on venting kits and accessories, please call 1-800-GE-CARES.



Listed by
Underwriters
Laboratories

Water that's good for you.



Drinking water filtration

If you're one of the 75% of Americans concerned about the quality of your water,* GE SmartWater offers several ways to improve the quality of your water for drinking and cooking. Whether you choose our Premium Filtration—Reverse Osmosis, Carbon Filtration System, or a Refrigerator Icemaker filter, GE SmartWater has the system to meet your specific needs. These products can reduce such contaminants as lead, cysts, certain chemicals and undesirable taste and odors in your water, while providing several options for easy installation. So enjoy quality, healthy water in your home today with a GE SmartWater drinking water filtration system.

*WQA Consumer survey, 1997.

Enjoy all the benefits of filtered drinking water



Healthy water

Provides added assurance of healthy drinking water.



Better tasting water

Healthy water for drinking and making beverages such as coffee, tea and juice.



Great for cooking


Cooking with filtered water provides great tasting foods.



NSF certified

All GE SmartWater™ drinking water filtration products are certified by NSF, the most highly recognized independent testing institution for water treatment products.

GE SmartWater™ filtration systems vs. bottled Water: a cost comparison

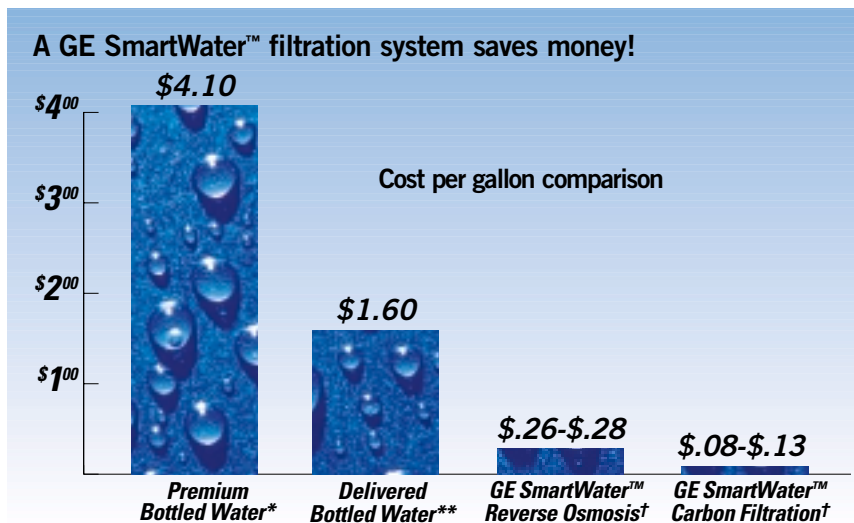

Eliminates the expense and inconvenience of purchasing bottled water at a store or scheduling home delivery of bottled water.

* National average price of "Premium" bottled water.
 ** Average cost per gallon for delivered bottled water.
 † GE SmartWater™ estimate is calculated by dividing the number of gallons by consumer cost of product, installation and replacement filters.

Premium drinking water filtration—reverse osmosis: GE system

GE's best filtration process Works to reduce up to 99%* of the following elements:

Reduces	
Lead	Mercury
Cysts	Copper
Taste & Odor	Sodium
Chlorine	Magnesium
Sediment	Sulfate
Rust	Ammonia
Nitrate/Nitrite	Tannins
And More!	

Large capacity provides up to 10 gallons** of high-quality filtered water per day.

SmartWater™ faucet—Separate black on chrome short-reach faucet is used only when filtered water is needed, extending filter life.

Simple installation—Can be installed easily undercounter, in basement or other convenient location.

NSF certified—NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects, tests and certifies our product performance.

*Elements reduced are not necessarily present in your water. See product specification sheet, packed with product, for specific elements reduced by model, or call the GE Answer Center® toll-free, 800.626.2000.

**As tested and validated by the Water Quality Association using Standard S-300. Note: Depends on water pressure, temperature and total dissolved solids.



XGRV10ABL
Reverse osmosis filtration system (includes tank) with short-reach chrome on black faucet

Under sink dual stage carbon drinking water filtration: GE systems



Reduces

Chemicals/VOC
Lead
Cysts
Asbestos
Taste & Odor
Chlorine
Sediment
Rust



Reduces

Chemicals/VOC
Lead
Cysts
Asbestos
Taste & Odor
Chlorine
Sediment
Rust

GNSV25C

- Long-reach black on chrome faucet with electronic monitor. Amber filter light indicates when to replace filters to ensure highest quality water.
- Chemicals/VOC, lead and cysts reduction filters included (FXSVC dual pack)
- System rated for 540 gallons of water

GXSV10C

- Short-reach faucet with electronic monitor. Amber filter light indicates when to replace filters to ensure highest quality water.
- Quick connect installation fittings.
- Chemicals/VOC, lead and cysts reduction filters included (FXSVC dual pack)
- System rated for 540 gallons of water

GNSV30C

Customize to match your kitchen with a choice of faucet colors.



GNSV30CWW



GNSV30CCC

For additional features, specifications and color availability, refer to page 76. For warranty information, refer to page 87.

Under sink dual stage carbon drinking water filtration: GE systems (cont.)



GNSL05C

- Long-reach faucet with electronic monitor.
- Lead and cysts reduction filters included (FXSLC dual pack)
- System rated for 1250 gallons of water

Reduces

Lead
Cysts
Taste & Odor
Chlorine
Sediment
Rust



GXSL03C

- Short-reach faucet without electronic monitor.
- Quick connect installation fittings.
- Lead and cysts reduction filters included (FXSLC dual pack)
- System rated for 1250 gallons of water

Reduces

Lead
Cysts
Taste & Odor
Chlorine
Sediment
Rust

Under sink single stage carbon drinking water filtration: GE systems



GX1S15C/GN1S15C

- Short-reach faucet without electronic monitor
- Quick connect installation fittings
- Lead and cyst reduction filter included (FXUSC)
- System rated for 1250 gallons of water

Reduces

Lead
Cysts
Taste & Odor
Chlorine
Sediment
Rust



GX1S01C

- Flexible installation options—install directly on kitchen faucet or use accessory faucet (sold separately). For filtered water only on demand (UNFCTBL, UNFCTWW).
- System rated for 3000 gallons of water when used with FXUTC filter (sold separately)

Reduces

Taste & Odor
Chlorine
Sediment
Rust

When used with FXUTC Filter

For additional features, specifications and color availability, refer to page 76. For warranty information, refer to page 87.

GE Refrigerator and icemaker drinking water filtration: GE systems

Note: bold = feature upgrade from previous model



Quick connect auto shut-off fittings

Allow for easy installation and replacement of filter.



GE SmartWater filters

Work on any brand side-by-side and top-freezer refrigerators with or without dispensers.



GXITQ

■ Quick connect auto shut off fittings ■ Filter reduces Chlorine, Bad Taste & Odor and Sediment ■ System rated for 2000 gallons of water

GXILQ (not shown)

■ Quick connect auto shut off fittings ■ Filter reduces lead, cyst, chlorine, bad taste & odor and sediment ■ System rated for 750 gallons of water

GXITQR (not shown)

■ Replacement filter only for GXITQ

GE Household filtration system



Household filtration

Household filtration systems work to filter all the water that enters your home. This process works to improve your water by reducing sand, sediment and rust—a perfect complement for your water softener and drinking water filtration system.



GXWH08C/GNWH08C

- Built-in valve-on and bypass positions
- Easy turn bypass valve design and pressure relief valve—makes changing filter easy
- Reduces sediment and rust for up to 16,000 gallons or 3 months (filter included)
- Installation kit included for easy installation
- Clear sump
- Easy to install 3/4" inlet/outlet for installation on main cold water line



GXWH01C

- Opaque sump
- Installation kit sold separately
- Filter sold separately
- Pressure relief valve—makes changing filter easy



GXWH30C

- Heavy-Duty filtration system
- Attaches to 1" and 3/4" water lines
- Pressure relief valve—makes changing filter easy
- Installation kit Included for easy installation
- Filters sold separately (FXHTC or FXHSC)

For additional features, specifications and color availability, refer to page 77. For warranty information, refer to page 87.

GE Softening system



GXS27B

- Large capacity means less maintenance— 27,000 grain capacity helps assure an ample supply of soft water and provides for lifestyle changes.
- 200 lb. salt storage reduces the need for frequent salt replacement.
- 6 Hour program and time memory permanent memory maintains hardness and regeneration time settings even if power is off or unit is unplugged for extended periods. No batteries needed, unit recharges itself when power is restored.
- 24-Volt electronic system simplifies installation and maintenance.

For Families of 2 or Less



GNSF18Z

- Compact size means installation flexibility—The compact housing provides installation flexibility; installs in many areas other softeners may not.
- 18,000 grain capacity assures an ample supply of soft water.
- 140 lb. salt storage combined with the compact size means easier salt loading.
- 6 Hour program and time memory— Permanent memory maintains hardness and regeneration time settings even if power is off or unit is unplugged for extended periods. No batteries needed, unit recharges itself when power is restored.
- 24-Volt Electronic System simplifies installation and maintenance.

For Condos and Small Spaces



Easier to clean

Reduces hard water build-up, making tubs, showers and sinks easier to clean.

Softening systems

There is no doubt that water hardness is one of the most common of all water problems. A U.S. Geological Study shows that hard water is found in 85% of the United States. GE SmartWater softening systems reduce the hardness in your water, providing your family with quality water throughout your home.



Whiter towels

Towels are 45% whiter while using 1/3 less detergent. Clothes are softer, cleaner, brighter and last longer.



Cleaner dishes

Gives you cleaner dishes by reducing soap and hard water spotting.



Feels smoother

Soft water feels noticeably smoother to your skin.



Reduces energy costs

Helps reduce build-up in pipes and water-using appliances, providing cost savings.


GE SmartWater™ reverse osmosis filtration systems

GXRV10ABL	
Capacity	
Storage Tank Capacity (gals.)	1.3
Features	
SmartWater™ Faucet	Short-Reach
Faucet Color	Chrome with black
Output Per Day (gals.)—Production Rate (gpd) as tested by WQA Standard S-300	10
Process Water Used (per gal.)	4
Working Pressure (psi)	40 min. - 125 max.
Max. TDS Removal (ppm)	2000
Percent TDS Removal** (ppm)	75-92
Percent Cysts Reduction	99.95 effective
Max. Hardness	10 grains
Feed Water pH limits	4-10
Operation and Storage Water Temperature	40-100° F
Auto Shut-Off	■
Filters & Membrane	
RO Membrane	FX12M Thin Film Polyamid (TFP)
Pre-Filter (Sediment)	FX12PA-Carbon Block
Post-Filter (Taste/Odor)	FX12PA-Carbon Block
Under counter Installation (kit included)	■
Optional Basement Installation (hardware not included)	■
Appearance	
Style	Bracket
Unit Color	White
Filter Housing	Opaque
Weights & Dimensions	
Approximate Shipping Weight (lbs.)	20
17 x 16 x 5-3/4 (unit)	
Overall W x H x D (in.)	9 x 15 x 9 (tank)
Accessories (available at additional cost)	
Supplemental Tank	RVTNK1
Icemaker Connection Kit	RVKIT

*Output according to ANSI/NSF Standard 58 as tested by Spectrum Labs, Inc. is 14 gals. per day. Feed water over 10 grains of hardness may affect performance of the filtration system.

**Feed water = 50 psig, 77°F, pH = 7.5 ± 5 and 750 ppm TDS as sodium chloride. Product water produced, amount of waste and percent rejection will vary with changes in pressure, temperature and total dissolved solids. Feed water over 10 grains of hardness may affect performance of the filtration system.

Model GXRV10ABL Installation Information (in inches)

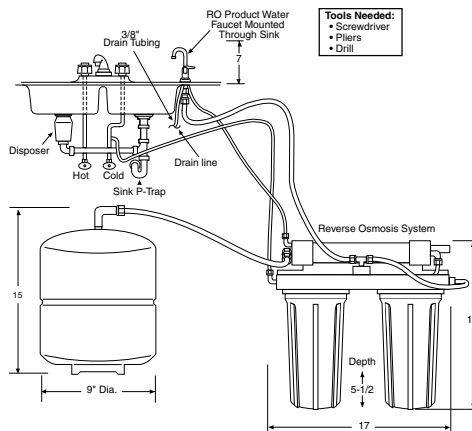

Installation and Parts Information

Note: R.O. System can be installed up to 30 feet from point-of-use/faucet.

Note: Can be installed under counter (as shown), in basement, or other convenient location. Before installing, see installation instructions packed with product for complete details.

Replacement Membranes, Pre- and Post-Filters

Call GE SmartWater Services, toll-free 800.952.5039 for convenient ordering.

Water Test Kit

To order a water test kit, call 800.626.2000.



GE Reverse Osmosis Model GXRV10ABL Series are tested and certified to ANSI/NSF Standard 58 for TDS and cyst reduction.

NSF Approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects our manufacturing facilities, structurally tests our product, tests our product to make sure nothing harmful is added to the water and certifies our product performance as specified on the performance data sheet (inside the product box).

SPECTRUM LABS INC.

The GE Reverse Osmosis models GXRV10ABL Series have been quality tested by an independent laboratory, Spectrum Labs, Inc.

Caution: Do not use with water that is micro-biologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. This reverse osmosis unit contains a replaceable membrane cartridge treatment component critical for effective removal of Total Dissolved Solids. The water should be tested periodically to verify that the system is performing satisfactorily.


GE SmartWater™ filtration systems specifications

GE SmartWater™ water filtration systems	GNSV30C GNSV25C	GXSV10C	GNSL05C	GXSL03C	GN1S15C GX1S15C	GX1S01C
Features						
SmartWater™ Faucet	Long-Reach	Short-Reach Electronic Monitor	Long-Reach Monitor	Short-Reach	Short-Reach	Sold Separately
Faucet Color	White on white	Chrome w/black	Chrome w/black	Chrome w/black	Chrome w/black	N/A
Feed Water Pressure (psi)	440 min.-125 max.	40 min.-125 max.	40 min.-125 max.	40 min.-125 max.	40 min.-125 max.	40 min.-125 max.
Feed Water Temperature	40-100°F	40-100°F	40-100°F	40-100°F	40-100°F	40-100°F
Filtered Water Flow (gpm)	0.5	0.5	0.6	0.6	0.6	
Filter I (Sediment)	Filter Set-FXSVC	Filter Set-FXSVC	Filter Set-FXSLC	Filter Set-FXSLC	FXULC	Sold Separately
Filter Cartridge	Block Act. Carbon	Block Act. Carbon	Polyspun Depth Filter	Polyspun Depth Filter	Spiral Wound Act. Carbon	
Filter Set-FXSVC						
Filter II (Carbon block)	(VOC)	FXULB (VOC)	Filter Set-FXSLC (Lead,Cysts)	FXUTB (Lead,Cysts)	N/A	N/A
Filter Cartridge	Block Act. Carbon	Block Act. Carbon	Spiral Wound Act. Car.	Spiral Wound Act. Car.	N/A	
Particulate Removal	Absolute 1 micron	Absolute 1 micron	Nominal .5 micron	Nominal .5 micron	Nominal .5 micron	
Chlorine Reduction (percent / gals.)	98/540	98/540	98/1250	98/1250	98/1250	
Filter Life	6 months	6 months	6 months	6 months	6 months	6 months
Lead Reduction (percent / gals.)	99/540	99/540	99/1250	99/1250	99/1250	
Cysts Reduction (percent)	99.99	99.99	99.99	99.99	99.99	
Turbidity Reduction (percent)	99	99	99	99	99	
VOC Reduction (percent / gals.)	99/540	99/540				
Lindane Reduction (percent / gals.) (A Pesticide)	■	■	91/1250	91/1250	91/1250	
Asbestos Reduction (percent)	99	99	99	99	99	
Filter Change Indicator	Electronic	Electronic	Sticker	Sticker	Sticker	Sticker
Installation Kit	■	■	■	■	■	SSKIT (sold separately)
Fittings	■	■	■	■	■	SSKIT (sold separately)
Optional Basement Installation (hardware not included)	■	■	■	■	■	■
Appearance						
Style	Bracket	Bracket	Bracket	Bracket	Bracket	Bracket
Unit Color	White	White	White	White	White	White
Filter Housing	White	White	White	White	White	White
Weights & Dimensions						
Approximate Shipping Weight (lbs.)	7	7	7	7	3.8	1.5
Overall W x H x D (in.)	12 x 13 x 4-5/8	12 x 13 x 4-5/8	12 x 13 x 4-5/8	12 x 13 x 4-5/8	5-1/2 x 13 x 4-3/4	4-3/4 x 13 x 4-3/4
Power/Ratings						
Faucet Monitor Power Requirement	2 AA batteries (included)	2 AA batteries (included)	N/A	N/A	N/A	N/A
Accessories (available at additional cost)						
Icemaker Connection Kit	UCKIT	UCKIT	UCKIT	UCKIT	UCKIT	UCKIT
Faucet		UCFCTWW WOW		UNFCTWW WOW	UNFCTWW WOW	UNFCTWW/UNFCTBL WOW/BOC


*Models GXSV10C, GXSL03C, GXUT03B, GX1S15C, GX1S01C have retail packaging
WOW=White on white, BOC=Black on chrome

Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cysts reduction may be used on disinfected water that may contain filterable cysts.


Models GNSV30C/GNSV25C/GNSL05C Installation Information (in inches)

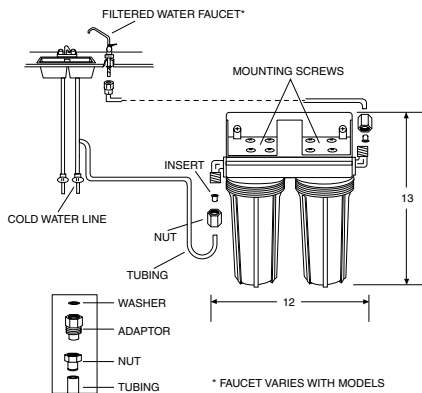

Models GXSV10C/GXSL03C Installation Information (in inches)

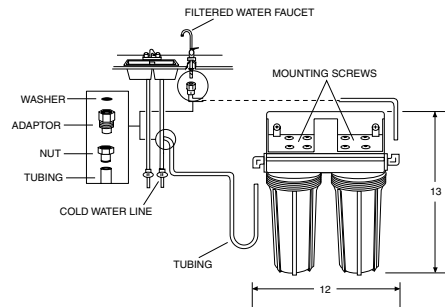

Models GX1S15C/GN1S15C/GX1S01C Installation Information (in inches)

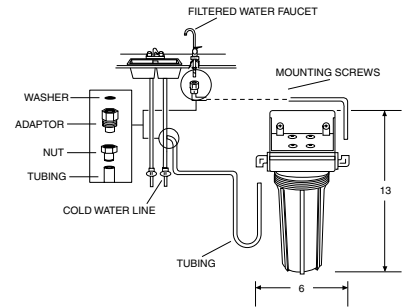

Installation and Parts Information

Note: Can be installed under counter (as shown), in basement, or other convenient location. Before installing, see installation instructions packed with product for complete details.

Replacement Filters

Call GE SmartWater Services toll-free 800.952.5039 to order replacement filters.

Water Test Kit

To order a water test kit, call 800.626.2000.

GNSV30C, GNSV25C, GN1S15C, GNSL05C, GX1S15C, GXSV10C, GXSL03C are Tested and Certified by NSF International against ANSI/NSF Standard 42 for Particulate Reduction Class I, Chlorine Reduction Class I and Taste and Odor Reduction.

GNSL05C, GXSL03C and GX1S15C are Tested and GN1S15C Certified by NSF International against ANSI/NSF Standard 53 for Lead, Cysts, Turbidity, Asbestos and Lindane Reduction.

GNSV30C, GNSV25C and GXSV10C are Tested and Certified by NSF International against ANSI/NSF Standard 53 for Lead, Cysts, Turbidity, Asbestos and VOC Reduction.



The GE SmartWater™ Filtration System (GNLUL30B) have been quality tested by an independent laboratory, Spectrum Labs, Inc.



NSF Approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects our manufacturing facilities, structurally tests our product, tests our product to make sure nothing harmful is added to the water and certifies our product performance as specified on the performance data sheet (inside the product box).

See page 87 for warranty information.

GE SmartWater™ refrigerator/ icemaker water filtration systems

	GXILQ	GXITQ
Features		
Feed Water Pressure (psi)	25 min.-125 max.	25 min.-125 max.
Feed Water Temperature	40-100°F	40-100°F
Filtered Water Flow (gpm)	0.5	0.5
Filter Life	6 months	6 months
Filter Cartridge	Act. Carbon	Act. Carbon
Particulate Removal	Nominal 1 micron	Nominal 5 micron
Chlorine Reduction (gals.)	750	93% per 2000
Filter Life	6 months	6 months
Lead Reduction (percent/gals.)	99/750	
Cysts Reduction (percent/gals.)	99.95/750	
Filter Change Indicator	Sticker	Sticker
Fittings	Quick Connect	Quick Connect
Plumbing connections	1/4"	1/4"
Auto Shut-Off Valve	■	■
Appearance		
Style	Bracket	
Unit Color	White	White
Filter Housing	White	White
Weights & Dimensions		
Approximate Shipping Weight (lbs.)	2	2
Overall W x H x D (in.)	16 x 2-1/2 x 2-1/2	14 x 2 x 2
Accessories (■ = included)		
Installation Kit	■	■
Replacement Filter		GXITQR

Important: All units must be installed according to local codes.


Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cysts reduction may be used on disinfected water that may contain filterable cysts.

Replacement Filters

Call GE SmartWater Services toll-free 800.952.5039 to order replacement filters.

GE SmartWater™ household water filtration system

	GXWH30C	GNWH08C GXWH08C	GXWH01C
Features			
Feed Water Pressure (psi)	40 min.-100 max.	40 min.-125 max.	40 min.-125 max.
Feed Water Temperature	40-100°F	40-100°F	40-100°F
Filtered Water Flow (gpm)	4-20	4-12	4-12
Filter Life	3 months	3 months	3 months
Filter Change Indicator	Sticker	Sticker	Sticker
Suitable for 1" Plumbing Connections	■		
Bypass Valve		2-Position	
Appearance			
Unit Color	White	White	White
Filter Housing	White	Clear	White
Weights & Dimensions			
Approximate Shipping Weight (lbs.)	8	4	2
Overall W x H x D (in.)	15 x 15 x 15	5-1/2 x 14-1/2 x 5	5-1/2 x 14-1/2 x 5
Accessories (■ = included at additional cost)			
Installation Kit	■	■	WHKIT
Wrench	HDWRNCH	■	WHWRNCH
Replacement Filter			
Polyspun		■	FXJSC
String Wound		FXWSC	FXWSC
Plated		FXWPC	FXWPC
Carbon Paper	FXHSC	FXWTS	FXWTC
Heavy Duty Carbon	FXHTC		

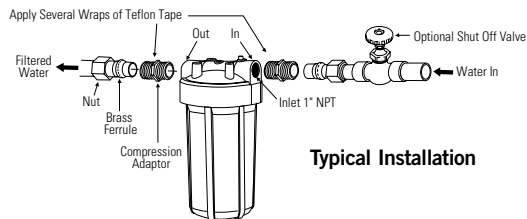

GE SmartWater™ softening systems

	GXSF27B	GNSF18Z
Capacity		
Capacity (grains)	Large-27,000*	Compact-18,000*
Features		
Efficiency (grains per lb.-salt)	5200**	5000**
Max. Hardness Removal (gpg)	95	25
Max. Clear Water Iron Reduction (ppm)	5	3
Resin Filter Type	Std. mesh	Std. mesh
Resin Weight (lbs.)	36.9	38
Resin Quantity (cu. ft.)	.71	.73
Resin Tank Size (in inches)	8 x 40	10 x 21
Salt Capacity (lbs.)	200	140
Water Used for Regeneration (gals.)	40-50	25-30
Regeneration Time (min.)	Approx. 118	Approx. 120
Service Flow Rate (at 15 psi drop)	8	7
Electronic Controls	■	■
Permanent Settings Memory	■	■
Plumbing Connection	1"-NPT	1"-NPT
Appearance		
Spacesaver Design		
Style	Round	Round
Unit Color	Grey	Grey
Electronic-Demand Driven	■	■
Weights & Dimensions		
Approximate Shipping Wt. (lbs.)	94	66
Overall W x H x D (in.)	18-1/4 x 48-3/4 x 18-1/4	18-5/8 x 29-1/2 x 18-5/8
Power/Ratings		
Electronic Rating	24V, 60Hz	24V, 60Hz

*GXSF27B-Test protocol @ 11.4 lbs. of salt. GNSF18Z-Test protocol @ 6.3 lbs. of salt.

**GXSF27B-Test protocol @ 2.0 lbs. of salt. GNSF18Z-Test protocol @ 1.6 lbs. of salt.


Important: All units must be installed according to local codes.

Note: Before installing, see installation instructions packed with product for complete details, or call GE QuickSpecs 800-432-3729.

Installation Information (in inches)


Model GXSF27B

Salt Capacity – 200 lbs.

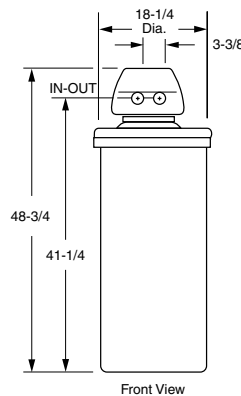

Model GNSF18Z

Salt Capacity – 140 lbs.



GE Built-In “J” series air conditioning

GE Slope-Top chassis only models

- Variable setting thermostat ■ Fan Cycle switch ■ Four-way air direction
- Up-front, washable air filter ■ “Fan Only” setting for air circulation



E.E.R.
(Energy Efficiency Ratio)
Shown on the tag of each new unit, compares the air conditioner’s cooling output with the electricity it requires for power. The higher the E.E.R. number, the more efficient the unit, and the less costly to operate.

Fan Cycle switch
Helps reduce power consumption and operating costs.



Cool Only Units
Offer a variety of capacities to cool many applications.

Heat/Cool Units
Provide a variety of capacities for summer cooling, plus supplemental heat for cold weather—units combine air conditioning with electric resistance heat.

Heat Pump Units
Heat pump units offer efficient summer cooling with reverse cycle heating and back-up resistance heat for cold weather.

Units include attractive room-side grille of high-impact polystyrene.

These units are chassis-only models and require a separately purchased solid-sided wall case (RAB46, RAB47 or RAB48) and exterior grille (RAG13 or RAG14) for installation.



Cool Only Units

Models	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	Wall Case
AJCS06LC	6000	115	9.5	—	RAB46/47/48
AJCS08AC	8000	115	9.2	—	RAB46/47/48
AJCS10AC	9900	115	9.2	—	RAB46/47/48
AJCS09DC	8900/8700	230/208	9.5/9.5	—	RAB46/47/48
AJCS10DC	9900/9700	230/208	9.2/9.2	—	RAB46/47/48
AJCS12DC	11,600/11,400	230/208	9.0/9.0	—	RAB46/47/48



Heat/Cool Units

Models	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	Wall Case
AJES09DC	8900/8700	230/208	9.5/9.5	11,600/9,480	RAB46/47/48
AJES10DC	9900/9700	230/208	9.2/9.2	11,600/9,480	RAB46/47/48
AJES12DC	11,600/11,400	230/208	9.0/9.0	11,600/9,480	RAB46/47/48



Heat Pump Units

Models	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	BTUH Reverse Cycle Heating†	Wall Case
AJHS08DC*	8000/7800	230/208	9.2/9.2	11,600/9500	7700/7500	RAB46/47/48
AJHS10DC*	9800/9600	230/208	9.2/9.2	11,600/9500	9700/9500	RAB46/47/48

*Model includes two-stage heating thermostat.

†At 47°F.

Note: If any “J” Series unit is a replacement unit, the existing rear grille should be replaced for better performance with either stamped aluminum (RAG13) grille or architectural louvered extruded aluminum (RAG14).

GE Hi-Mount chassis only models

- Variable setting thermostat ■ Fan Cycle switch ■ Four-way air direction
- Up-front, washable air filter ■ Multiple fan speeds



For high-mount installations where control accessibility is difficult, GE offers five “J” Series models with controls located in the lower corner of the room-side cabinet. There are two 115V and two 230V cooling only models, and one 230V model with electric heat.

Units include attractive room-side grille of high-impact polystyrene. Each unit requires a solid-sided wall case (RAB46, RAB47 or RAB48) and exterior grille (RAG13 or RAG14) for installation.

Cool Only Units



Models	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	Wall Case
AJCH08AC	8000	115	9.2	–	RAB46/47/48
AJCH10AC	9900	115	9.2	–	RAB46/47/48
AJCH10DC	9900/9700	230/208	9.2/9.2	–	RAB46/47/48
AJCH12DC	11,600/11,400	230/208	9.0/9.0	–	RAB46/47/48

Heat/Cool Unit



Model	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	Wall Case
AJEH12DC	11,600/11,400	230/208	9.0/9.0	11,600/9480	RAB46/47/48

GE Window/Wall mount models

- Multiple cooling/heating speeds ■ Vent/Exhaust ■ Multi-position thermostat ■ Fan Cycle switch ■ Easy access filter
- Slide-out chassis ■ EZ Mount window kit (for Cooling Only models)



For convenience and efficiency, GE offers a unique line of units that provide cooling only, cooling with electric heat, and cooling with heat pumps, for use in window or through-the-wall application.

All units include solid-sided sleeve with a slide-out chassis.

Heat/Cool Units

Model	BTU	EER	Volts	Cools (sq. ft.)	Heater Wattage
AJES10DS	9,900/9,700	9.2/9.2	230/208	425-525	3.4/2.8 (kw)
AJES08AS	8,000	9.2	115	250-350	1.2 (kw)
AJES06LS	6,000	9.5	115	170-210	1.2 (kw)

Heat Pump Unit

Model	BTU	EER	Volts	Cools (sq. ft.)	Heater Wattage
AJHS08AS	8,000	9.2	115	250-350	1.2 (kw)

Cooling Only Units

Model	BTU	EER	Volts	Cools (sq. ft.)
AJCS10AZ	9,900	9.2	115	425-525
AJCS08AZ	8,000	9.2	115	250-350
AJCS06LZ	6,000	9.5	115	170-210



Cooling Only



Heat/Cool, Heat Pump

For additional features, specifications and color availability, refer to page 84. For warranty information, refer to page 87.

GE Profile™ and Deluxe series

- Energy Saver feature ■ Multiple cooling speeds ■ Vent/Exhaust ■ Adjustable thermostat
- EZ Mount window kit ■ Four-way adjustable air discharge ■ One Touch Lift-Out filter ■ Slide-out chassis



Electronic thermostat with remote control


Allows you to set and adjust exact temperatures for total comfort.



Energy Saver feature

Once the room is cool enough, the thermostat will shut down the compressor and fan, saving energy and reducing your energy bill.

GE Profile™ Series

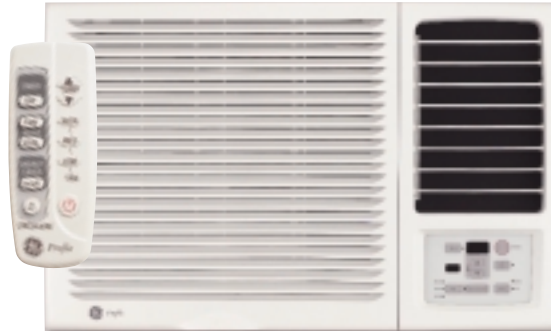

Models	BTU	EER	Volts	Cools (sq. ft.)
ASM24DA	23,700/23,100	8.8/8.8	230/208	1480-1620
ASM22DA	22,000/21,500	8.8/8.8	230/208	1330-1450
ASM18DA	18,000/17,500	10.0/10.0	230/208	1050-1150
ASM16DA	15,600/15,200	9.7/9.7	230/208	890-990
ASM14AA	14,000	10.0	115	750-850
ASM12DA	12,500/12,200	10.0/10.0	230/208	625-700
ASM12AA	12,500	10.0	115	625-700
ASM10AA	10,000	10.0	115	425-525

GE Deluxe Series



Models	BTU	EER	Volts	Cools (sq. ft.)
ASM08FA	8,000	10.0	115	250-350
ASM06LB*	6,000	10.0	115	170-210

*Energy Star Compliant



As an ENERGY STAR® Partner, GE has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

GE Value series

- Multiple cooling speeds
- 3-Position thermostat
- Rigid slide-out filter
- EZ Mount window kit
- Vent exhaust



Easy Mount Installation


Designed for ease of placement, this unit can be installed by most people and requires no prior experience or special tools.




Model	BTU	EER	Volts	Cools (sq. ft.)
AGV18DC	17,800/17,300	9.7/9.7	230/208	1050-1150



Model	BTU	EER	Volts	Cools (sq. ft.)
AGV07LA	7,000	9.7	115	210-280

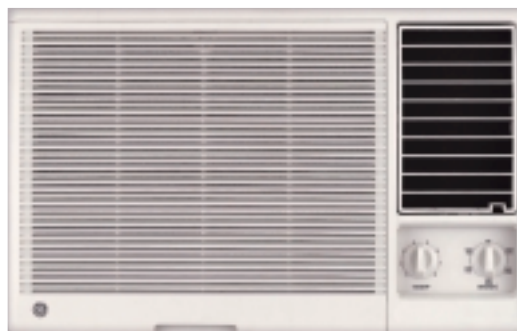

Models	BTU	EER	Volts	Cools (sq. ft.)
AGV12DB	12,000/11,500	9.8/9.8	230/208	575-650
AGV12AB	12,000	9.8	115	575-650
AGV10AB	10,000	9.8	115	425-525

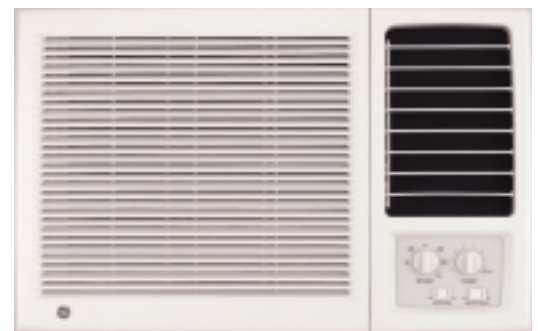

Model	BTU	EER	Volts	Cools (sq. ft.)
ASV24DA	23,700/23,100	8.5/8.5	230/208	1480-1620

For additional features, specifications and color availability, refer to page 83.


For warranty information, refer to page 87.

GE Value series (continued)



Quick Clean Filters

Keep unit running efficiently and save money. Simply slide out the filter, wash and replace.




Energy Efficiency Ratio (E.E.R.)

Higher E.E.R. numbers indicate greater efficiency and lower operating costs. An E.E.R. of 10.0 compared to an E.E.R. of 9.0 can provide an annual energy savings of more than 10% while still providing the same amount of cooling BTU's.



Model	BTU	EER	Volts	Cools (sq. ft.)
ASV14AA	14,000	10.0	115	750-850

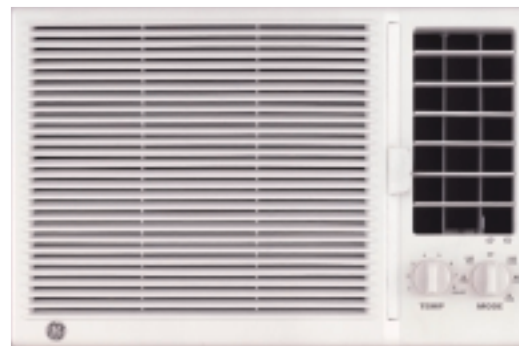

Model	BTU	EER	Volts	Cools (sq. ft.)
ASV05LA*	5,000	9.7	115	100-150

*Energy Star Compliant



Models	BTU	EER	Volts	Cools (sq. ft.)
ASV08FA	8,000	9.8	115	250-350
ASV06LB*	6,000	9.8	115	170-210

*Energy Star Compliant



Model	BTU	EER	Volts	Cools (sq. ft.)
ASC05LA	5,000	8.5	115	100-150


■ Carry-Cool® Model



As an ENERGY STAR® Partner, GE has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

GE Heat/Cool series

- Multiple cooling/heating speeds ■ Vent/Exhaust ■ 10-Position thermostat ■ Four-way adjustable air discharge
- Easy access filter ■ Slide-out chassis ■ Rigid panel window kit




Cooling and Electric Heat

Along with comfortable cooling capabilities, our new series also provides supplemental heat during winter months and can even be used as the primary heat source in temperate zones.



Models	BTU	EER	Volts	Cools (sq. ft.)	Heater Wattage
AVE22DA	22,000/21,300	8.2/8.2	230/208	1,330-1,450	5.0/4.0 (kw)
AVE18DA	18,000/17,500	9.5/9.5	230/208	1,050-1,150	3.0/2.6 (kw)
AVE15DA	15,000/14,500	9.0/9.0	230/208	850-950	3.0/2.6 (kw)

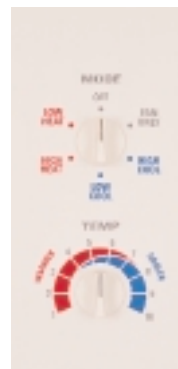

Concealed Controls

Hidden from view to provide a clean, contemporary appearance.

For additional features, specifications and color availability, refer to pages 83 and 85.

For warranty information, refer to page 87.


GE air conditioning

GE Quiet-Aire™-Split System

The GE Quiet-Aire™-Split System air conditioner provides virtually silent cooling comfort. With a design that includes outside air compressor placement, disturbing sounds are kept out of doors and out of earshot. This design also eliminates annoyances like rattling windows. So rest easily and peacefully. Available in heat pump and cooling only models in 9,000, 12,000 and 18,000 BTU sizes.



Indoor unit

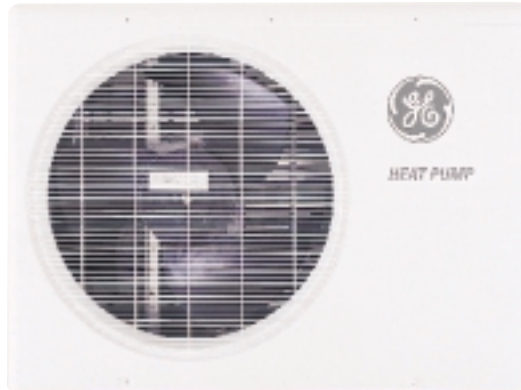

Outdoor unit

For more information, see Pub. No. 20-S008, or call the GE Answer Center® at 800.626.2000.

GE Slide-Aire

- 10-Position thermostat
- Vertical Slider Kit Panel
- Multiple cooling and fan speeds
- Two-way adjustable air discharge



Slide-Aire models

Accommodate the special installation needs of sliding and casement windows (those with side hinges that open in or out).



Contemporary styling

Sleek new contemporary styling blends quietly with most decor.



Model	BTU	EER	Volts	Cools (sq. ft.)
AVX10AC	10,000	9.0	115	425-525
AVX07FB	7,000	8.5	115	210-280

GE Profile™ and GE dehumidifiers



Model	Pints Per Day
AHG20LA	19

- Electronic Micro Computer Control
- Overflow protection
- Water Full indicator
- Automatic defrost
- 6-Pint bucket capacity
- External drain connector



Model	Pints Per Day
AHG50LA	50
AHG40LA	40
AHG25LA	25

- Compact and contemporary design
- Automatic Humidistat control
- Automatic Shut-Off system with Bucket Full indicator
- Easy roll casters
- External drain connector
- Automatic defrost control
- Removable condensate container
- Washable air filter

For additional features, specifications and color availability, refer to pages 83 and 86. For warranty information, refer to page 87.


Models	GE Profile™ 230 Volt					GE Profile™ 115 Volt			GE Deluxe 115 Volt	
	ASM24DA	ASM22DA	ASM18DA	ASM16DA	ASM12DA	ASM14AA	ASM12AA	ASM10AA	ASM08FA	ASM06LB
Features										
BTUH	23,700/23,100	22,000/21,500	18,000/17,500	15,600/15,200	12,500/12,200	14,000	12,500	10,000	8,000	6,000
Voltage	230/208	230/208	230/208	230/208	230/208	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.8/8.8	8.8/8.8	10.0/10.0	9.7/9.7	10.0/10.0	10.0	10.0	10.0	10.0	10.0
Amps	12.5/13.4	11.6/12.6	8.5/9.1	7.4/7.9	5.8/6.4	12.0	11.7	9.2	7.4	5.6
Watts	2,695/2,625	2,500/2,440	1,800/1,750	1,610/1,570	1,250/1,220	1,400	1,250	1,000	800	600
Plug type	Perpendicular	Perpendicular	Tandem	Tandem	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver feature (speeds)	■	■	■	■	■	■	■	■	■	■
Electronic Control	■	■	■	■	■	■	■	■	■	■
24-hour timer	■	■	■	■	■	■	■	■	■	■
Dehumidification (pints/hr.)	7.2	7.0	5.5	3.6	3.4	3.5	3.4	3.0	2.5	1.6
Circulaire™	■	■	■	■	■	■	■	■	■	■
Fan Speeds (Cool/Fan Only)	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/3	3/2	3/2
CFM (High Shown) (Indoor)	510	510	510	490	350	430	350	240	240	190
Vent/exhaust	■	■	■	■	■	■	■	■	■	■
Thermostat	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	10-Position	10-Position
Filter type	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out	One Touch Lift-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out
Window mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Window opening height (min. in inches)	17-3/8	17-3/8	17-3/8	17-3/8	17-3/8	17-3/8	17-3/8	16-1/8	14-3/4	14-3/4
Window opening width (min. in inches)	30	30	30	30	30	30	30	27-5/8	25-1/2	25-1/2
Window opening width (max. in inches)	41	41	41	41	41	41	41	41	37	37
Warranty*	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.
Case Dimensions										
Height (in inches) A	16-3/4	16-3/4	16-3/4	16-3/4	16-3/4	16-3/4	16-3/4	15-1/2	13-19/32	13-19/32
Width (in inches) B	26	26	26	26	26	26	26	23-5/8	20-1/2	20-1/2
Depth (in inches) C	27-3/16	27-3/16	27-3/16	25-13/16	25-13/16	25-13/16	25-13/16	25-13/16	21-17/32	17-17/32
Depth to louvers (in inches) D	9-1/4	9-1/4	9-1/4	9-1/4	9-1/4	9-1/4	9-1/4	8-21/32	7-5/32	7-5/32
Net weight (lbs.)	146	137	128	118	110	118	110	90	64	61
Approx. shipping weight (lbs.)	165	156	147	137	129	137	129	102	71	68

*See written warranty for details.

Models	GE Value 230 Volt			GE Value 115 Volt							GE Slide-Aire		
	ASV24DA	AGV18DC	AGV12DB	ASV14AA	AGV12AB	AGV10AB	ASV08FA	AGV07LA	ASV06LB	ASV05LA	ASC05LA	AVX10AC	AVX07FB
Features													
BTUH	23,700/23,100	17,800/17,300	12,000/11,500	14,000	12,000	10,000	8,000	7,000	6,000	5,000	5,000	10,000	7,000
Voltage	230/208	230/208	230/208	115	115	115	115	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.5/8.5	9.7/9.7	9.8/9.8	10.0	9.8	9.8	9.8	9.7	9.8	9.7	8.5	9.0	8.5
Amps	12.5/13.4	8.2/8.9	5.5/5.8	12.0	11.0	9.2	7.4	6.6	5.6	4.8	5.5	11.0	7.5
Watts	2,790/2,715	1,835/1,780	1,220/1,170	1,400	1,220	1,020	815	720	610	515	590	1,110	820
Plug type	Perpendicular	Tandem	Tandem	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Energy Saver feature (speeds)	■	■	■	■	■	■	■	■	■	■	■	■	■
Dehumidification (pints/hr.)	6.5	5.5	3.5	3.5	3.3	3.0	2.5	1.8	1.6	1.5	1.5	3.1	2.5
Circulaire™	■	■	■	■	■	■	■	■	■	■	■	■	■
Fan speeds (Cool/Fan Only)	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2	3/2
CFM (High Shown) (Indoor)	510	440	280	430	280	265	240	204	190	140	140	260	210
Vent/exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	Exhaust	No	Exhaust	Exhaust
Thermostat	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	8-Position	10-Position	10-Position
Filter type	One Touch Lift-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	One Touch Lift-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	One Touch Lift-Out	Rigid Frame/Slide-Out	One Touch Lift-Out	Rigid Frame/Slide-Out	Rigid Frame/Slide-Out	Foam	Foam
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Fixed	Plastic Portable	Fixed	Fixed
Window mounting	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	V-Std. Mount	V-Std. Mount
Window opening height (min. in inches)	17-3/8	18	16	17-3/8	16	16	14-3/4	14	14-3/4	12-7/8	13-3/16	21 - 40-1/2	21 - 40-1/2
Window opening width (min. in inches)	30	29	27	30	27	27	25-1/2	22	25-1/2	22	23	15-1/2	15-1/2
Window opening width (max. in inches)	41	41	39	41	39	39	37	36	37	36	35	—	—
Warranty*	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.	Full 1-Yr. Full 5-Yr.
Case Dimensions (in inches)													
Height—A	16-3/4	16-27/32	15	16-3/4	15	15	13-19/32	13-7/8	13-19/32	12-3/8	13-1/8	20-1/2	20-1/2
Width—B	26	26	23-5/8	26	23-5/8	23-5/8	20-1/2	18-9/16	20-1/2	17-13/16	18-3/4	14-1/2	14-1/2
Depth—C	27-3/16	24-15/16	20-9/32	25-13/16	20-9/32	20-9/32	17-17/32	19-5/32	17-17/32	12-7/16	7-3/32	22-9/16	22-9/16
Depth to louvers—D	9-1/4	10-5/16	8-5/8	9-1/4	8-5/8	8-5/8	7-5/32	8-1/2	7-5/32	4-31/32	1	6	6
Net weight (lbs.)	146	120	95	118	95	90	64	64	61	45	47	102	84
Approx. ship. weight (lbs.)	165	133	101	137	101	96	71	70	68	50	52	106	88

*See written warranty for details.

GE Profile™, Deluxe and Value Models Wall Case Dimensions

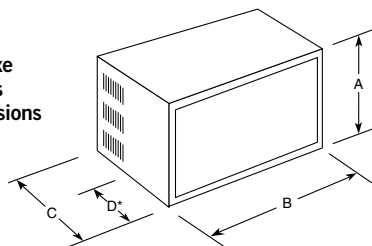

*Distance from front of case to side louvers (excluding grille).



Parallel
115V.
15 Amp.



Perpendicular
230/208V.
20 Amp.



Tandem
230/208V.
15 Amp.



Large Tandem
230/208V.
30 Amp.

Wall Outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems—consult a qualified electrician.

Note: When installing units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Carry-Cool units are not designed for through-the-wall applications.

Note: Some models may not be available in your area due to local legislation. Contact your local dealer.

See page 87 for warranty information.

GE Built-In “J” series and heat pumps

Models	Chassis/Cool						Chassis/Cool High-Mount			
	AJCS06LC	AJCS08AC	AJCS10AC	AJCS09DC	AJCS10DC	AJCS12DC	AJCH08AC	AJCH10AC	AJCH10DC	AJCH12DC
Capacity										
BTUH-AHAM	6000	8000	9900	8900/8700	9900/9700	11,600/11,400	8000	9900	9900/9700	11,600/11,400
E.E.R.	9.5	9.2	9.2	9.5/9.5	9.2/9.2	9.0/9.0	9.2	9.2	9.2/9.2	9.0/9.0
Dehumidification (pints/hr.)	1.4	2.0	2.7	2.5	2.6	3.2	2.0	2.7	2.6	3.2
Features										
Fan speeds (Cool/Fan Only)	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Airflow (cfm) roomside hi/low	210/180	250/210	250/210	250/210	250/210	265/230	250/210	250/210	250/210	265/230
Air exchange exhaust	■	■	■	■	■	■	■	■	■	■
Variable setting thermostat	■	■	■	■	■	■	■	■	■	■
Filter type	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out
Rotary compressor	■	■	■	■	■	■	■	■	■	■
Economical/Quiet										
Fan cycle switch	■	■	■	■	■	■	■	■	■	■
Appearance										
Slide-out chassis	■	■	■	■	■	■	■	■	■	■
Installation	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall
Wall case required	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48
Weights & Dimensions										
Height (in inches) A	← 15-5/8 →						→			
Width (in inches) B	← 26 →									
Depth (in inches) C	← 16-7/8 →						→			
Approx. net weight (lbs.)	66	73	82	75	82	84	75	82	84	84
Approx. shipping weight (lbs.)	75	82	90	84	90	93	84	90	93	93
Power/Ratings										
Voltage	115	115	115	230/208	230/208	230/208	115	115	230/208	230/208
Amps-AHAM	5.7	7.9	9.7	4.2/4.6	4.9/5.3	5.8/6.3	7.9	9.7	4.9/5.3	5.8/6.3
Watts input	630	870	1075	935/915	1075/1055	1290/1265	870	1075	1075/1055	1290/1265
Line cord plug	Parallel	Parallel	Parallel	Tandem	Tandem	Tandem	Parallel	Parallel	Tandem	Tandem
Recommended circuit protection (time delay)	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps

Models	Chassis/Heat/Cool			Chassis/Heat/Cool High-Mount	Chassis/Heat Pumps	
	AJES09DC	AJES10DC	AJES12DC	AJEH12DC	AJHS08DC	AJHS10DC
Capacity						
BTUH-AHAM	8900/8700	9900/9700	11,600/11,400	11,600/11,400	8000/7800	9800/9600
E.E.R.	9.5/9.5	9.2/9.2	9.0/9.0	9.0/9.0	9.2/9.2	9.2/9.2
Dehumidification (pints/hr.)	2.5	2.6	3.2	3.2	2.0	2.6
Features						
Fan speeds (Heating/Cooling)	2/2	2/2	2/2	2/2	2/2	2/2
Fan Only speeds	2	2	2	2	2	2
Airflow (cfm) roomside hi/low	250/210	250/210	265/230	265/230	250/210	250/210
Air exchange exhaust	■	■	■	■	■	■
Variable setting thermostat	■	■	■	■	■	■
Filter type	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out
Rotary compressor	■	■	■	■	■	■
Economical/Quiet						
Fan cycle switch	■	■	■	■	■	■
Appearance						
Slide-out chassis	■	■	■	■	■	■
Wall case required	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48
Installation	Wall	Wall	Wall	Wall	Wall	Wall
Window installation kit	Optional	Optional	Optional	Optional	Optional	Optional
Weights & Dimensions						
Height (in inches) A	← 15-5/8 →			→		
Width (in inches) B	← 26 →					
Depth (in inches) C	← 16-7/8 →			→		
Approx. net weight (lbs.)	77	84	84	86	75	84
Approx. shipping weight (lbs.)	86	93	93	95	84	93
Power/Ratings						
Voltage	230/208	230/208	230/208	230/208	230/208	230/208
Amps-AHAM	4.2/4.6	4.9/5.3	5.8/6.3	5.8/6.3	4.0/4.3	4.9/5.3
Watts input	935/915	1075/1055	1290/1265	1290/1265	870/850	1065/1045
Line cord plug	Perpendicular	Perpendicular	Perpendicular	Perpendicular	Perpendicular	Perpendicular
Recommended circuit protection (time delay)	20 Amps	20 Amps	20 Amps	20 Amps	20 Amps	20 Amps
Reverse Cycle Heating						
BTUH-AHAM					7700/7500	9700/9500
C.O.P. @ 47°F.					3.0	3.0
Amps-AHAM					3.4/3.7	4.3/4.7
Watts input					750/730	950/930
Electric Resistance Heating						
BTUH-AHAM	11,600/9480	11,600/9480	11,600/9480	11,600/9480	11,600/9500	11,600/9500
Amps (Max. connected load)	16.0	16.0	16.0	16.0	16.0	16.0
Watts output	3400/2780	3400/2780	3400/2780	3400/2780	3400/2780	3400/2780

All cooling with electric heat models and heat pumps are corrosion treated. Specifications and design subject to change without notice.

GE Heat/Cool and Window/Built-In "J" series and heat pumps

Models	Heat/Cool Units			Heat/Cool Units			Heat Pump	Cooling Only Units		
	AVE22DA**	AVE18DA**	AVE15DA**	AJES10DS**	AJES08AS**	AJES06LS**	AJHS08AS**	AJCS10AZ	AJCS08AZ	AJCS06LZ
Features										
Cooling BTUH-AHAM	22,000/21,300	18,000/17,500	15,000/14,500	9,900/9,700	8,000	6,000	8,000	9,900	8,000	6,000
Heating BTUH-AHAM	16,000/13,400	10,200/8,700	10,200/8,700	11,600/9,400	4100	4100	4100			
Voltage	230/208	230/208	230/208	230/208	115	115	115	115	115	115
E.E.R. (BTUH/Watt)	8.2/8.2	9.5/9.5	9.0/9.0	9.2/9.2	9.2	9.5	9.2	9.2	9.2	9.5
Rated cooling amps - AHAM	13.0/14.2	7.9/8.5	7.5/8.1	4.9/5.3	7.9	5.7	7.9	9.7	7.9	5.7
Cooling watts	2,680/2,600	1,890/1,840	1,670/1,610	1,075/1,055	870	630	870	1,075	870	630
Rated heating amps - AHAM	22.8/20.9	15.0/13.5	15.0/13.5	15.5/14.0	12.0	12.0	12.0			
Circuit size, amps	30	20	20	20	15	15	15	15	15	15
Plug type (see below)	Tandem	Perpendicular	Perpendicular	Perpendicular	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Line cord plug recommended circuit protection (time delay)				20 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps
Line cord length	55" left	55" left	55" left							
Dehumidification (pints/hr.)	8.2	5.5	4.3	2.6	2.0	1.4	2.0	2.7	2.0	1.4
CFM (high shown)	500	450	420	250	250	210	230	250	250	210
Air exchange exhaust	■	■	■	■	■	■	■	■	■	■
Variable air discharge	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way	4-Way
Control Door	■	■	■							
Fan speeds: Cooling/Heating	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2	2	2
Fan Only position	1	1	1	2	2	2	2	2	2	2
Fan cycle switch				■	■	■	■	■	■	■
Thermostat	10-Position	10-Position	10-Position	Variable Setting	Variable Setting	Variable Setting	Variable Setting	Variable Setting	Variable Setting	Variable Setting
Filter type	Rigid/Slide-Out	Rigid/Slide-Out	Rigid/Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out
Chassis	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out
Compressor type	Recip.	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
Window mounting	Rigid Panel	Rigid Panel	Rigid Panel	Standard	Standard	Standard	Standard	EZ Mount	EZ Mount	EZ Mount
Window opening height (min. in inches)	18-5/8	18-5/8	18-5/8	17	17	17	17	17	17	17
Window opening width (min. in inches)	26-3/4	26-3/4	26-3/4	31	31	31	31	31	31	31
Window opening width (max. in inches)	40	40	40	42	42	42	42	41	41	41
Case Dimensions										
Height (in inches) A	17-1/4	17-1/4	17-1/4	15-5/8	15-5/8	15-5/8	15-5/8	15-5/8	15-5/8	15-5/8
Width (in inches) B	26-1/2	26-1/2	26-1/2	26	26	26	26	26	26	26
Depth (in inches) C	27-5/8	23-5/8	23-5/8	16-7/8	16-7/8	16-7/8	16-7/8	16-7/8	16-7/8	16-7/8
Depth to louvers (in inches) D	10-3/4	9-1/8	9-1/8	None	None	None	None	None	None	None
Net weight (lbs.)	172	123	120	108	96	89	98	105	93	86
Approx. shipping weight (lbs.)	185	130	127	117	105	98	107	114	102	95
Warranty*	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.
Heating Capacity - Reverse Cycle										
BTUH - AHAM - H.P.							7,700			
Rated Heating Amps - AHAM							6.8			
COP @ 47°							3.0			
Heating Capacity - Electric										
BTUH - AHAM - I ² R	16,000/13,400	10,200/8,700	10,200/8,700	11,600/9,480	4,100	4,100	4,100			
Rating Heating Amps - AHAM	22.8/20.9	15.0/13.5	15.0/13.5	15.5/14.0	12.0	12.0	12.0			
Total Heating Load Watts	5,200/4,280	3,320/2,690	3,320/2,690	3,400/2,780	1,200	1,200	1,200			

*See written warranty for details.

**These units are not intended to be the primary source of heat.

Built-In room air conditioners wall opening for RAB46/47/48 cases

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studing surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.

Note: Units should be caulked on all four sides of case to the building exterior to assure building integrity.







Two Wall Cases for Tenant Option Installation
When the air conditioner is offered as a tenant option, these wall cases provide protection against outside elements.

RAB47—includes wall case, exterior grille, weather panel and steel closure panels.

RAB48—includes wall case, exterior grille, steel closure panel and two layers of insulation.

Standard Wall Case RAB46

Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis.



Wall Outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems—consult a qualified electrician.

Note: Some models may not be available in your area due to local legislation. Contact your local dealer.

Note: When installing slide-out chassis units in through-the-wall applications, keep louvers free. Do not restrict air flow areas. Fixed chassis units are not suitable for through-the-wall applications.



Listed by Underwriters Laboratories

Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.



See page 87 for warranty information.

GE Quiet-Aire™ — Split System air conditioners/heat pumps

	Cooling Only			Heat Pumps		
	Indoor	Outdoor		Indoor	Outdoor	
	AS1CD09AA0	AS1CD12AA0	AS1CD18DA0	AS1RD09AA0	AS1RD12AA0	AS1RD18DA0
	AS0CD09AA0	AS0CD12AA0	AS0CD18DA0	AS0RD09AA0	AS0RD12AA0	AS0RD18DA0
Cooling capacity (BTU/hr)	9,000	12,000	18,000/17,800	9,000	12,000	18,000/17,800
Heating capacity (BTU/hr)	N/A	N/A	N/A	9,000	12,000	19,000/18,700
Auto operation	■	■	■	■	■	■
Cooling fan speeds/fan only	3/3	3/3	3/3	3/3/3	3/3/3	3/3/3
LCD wireless remote	■	■	■	■	■	■
"Sleep Mode"	■	■	■	■	■	■
24 Hr. Timer (Delay Start/Pre-Set Stop)	■	■	■	■	■	■
Air flow, up & down—auto	■	■	■	■	■	■
Air flow, left/right—manual	■	■	■	■	■	■
EER, cooling	9.6	9.3	9.5/9.5	10.0	9.3	9.5/9.5
SEER, cooling	10.0	10.0	10.0/10.0	10.0	10.0	10.0/10.0
COP, heating	N/A	N/A	N/A	3.1	2.75	2.9/2.9
Watts, cooling	940	1290	1900/1870	900	1290	1900/1870
Watts, heating	N/A	N/A	N/A	860	1290	1900/1870
Voltage/Phase/Hz	115/60/1	115/60/1	230-208/60/1	115/60/1	115/60/1	230-208/60/1
Amperes, cooling	8.5	11.7	8.5/9.0	8.0	11.7	8.5/9.0
Amperes, heating	N/A	N/A	N/A	7.7	11.7	8.5/9.0
Temperature range—cool (°F)	64-86	64-86	64-86	64-86	64-86	64-86
Temperature range—heat (°F)	N/A	N/A	N/A	60-86	60-86	60-86
Temperature increments (°F)	2	2	2	2	2	2
Dehumidification (pints/hr.)	2.6	3.5	5.3	2.6	3.5	5.3
CFM (Indoor/Outdoor)	280/882	330/882	460/1835	280/882	330/882	460/1835
Washable air filter	■	■	■	■	■	■
Tube kit	Optional	Optional	Optional	Optional	Optional	Optional
Weights & Dimensions						
Indoor (H x W x D inches)	11.4 x 35.4 x 7.2	11.4 x 35.4 x 7.2	11.4 x 42.6 x 7.2	11.4 x 35.4 x 7.2	11.4 x 35.4 x 7.2	11.4 x 42.6 x 7.2
Weight (lbs.) shipping/net	28.7/19.8	28.7/19.8	33.0/24.2	28.7/19.8	28.7/19.8	33.0/24.2
Color	Dove White	Dove White	Dove White	Dove White	Dove White	Dove White
Carton (H x W x D inches)	14.6 x 38.2 x 9.9	14.6 x 38.2 x 9.9	14.6 x 45.6 x 9.9	14.6 x 38.2 x 9.9	14.6 x 38.2 x 9.9	14.6 x 45.6 x 9.9
Outdoor (H x W x D inches)	21.9 x 31.6 x 10.3	21.9 x 31.6 x 10.3	25.8 x 34.3 x 12.6	21.9 x 31.6 x 10.3	21.9 x 31.6 x 10.3	25.8 x 34.3 x 12.6
Weight (lbs.) shipping/net	83.8/77.2	83.8/77.2	130/121	83.8/77.2	83.8/77.2	130/121
Color	Pigeon Grey	Pigeon Grey	Pigeon Grey	Pigeon Grey	Pigeon Grey	Pigeon Grey
Carton (H x W x D inches)	23.9 x 37.8 x 15.1	23.9 x 37.8 x 15.1	28.1 x 40.3 x 17.4	23.9 x 37.8 x 15.1	23.9 x 37.8 x 15.1	28.1 x 40.3 x 17.4

Optional Tube Kits

	9,000 BTU/Hr. Models	
	TUS1542	TUS2542
Insulated Tubing	15'	25'
Wiring	30'	30'
Wall Hole Sleeve	Standard	Standard
Suction Line	0.5"	0.5"
Liquid Line	0.25"	0.25"

	12,000 BTU/Hr. Models	
	TUS1542	TUS2542
Insulated Tubing	15'	25'
Wiring	30'	30'
Wall Hole Sleeve	Standard	Standard
Suction Line	0.5"	0.5"
Liquid Line	0.25"	0.25"

	18,000 BTU/Hr. Models	
	TUS1553	TUS2553
Insulated Tubing	15'	25'
Wiring	30'	30'
Wall Hole Sleeve	Standard	Standard
Suction Line	0.625"	0.625"
Liquid Line	0.375"	0.375"

GE dehumidifiers

Models	GE Profile™			
	AHG20LA	AHG50LA	AHG40LA	AHG25LA
Features				
Dehumidification (pints/day)	19	50	40	25
Dry Airflow (CFM)	63	113	131	134
Color	Gray	Cameo White	Cameo White	Cameo White
Electronic Control	■			
Auto Shut Off	■	■	■	■
Automatic Defrost	■	■	■	■
Water Full indicator	■	■	■	■
Fan speeds	1	2	2	2
Removable bucket with handle	■	■	■	■
Bucket capacity (pints)	6	24	24	24
External drain connector	■	■	■	■
Casters - 4 movable	■	■	■	■
Voltage	115	115	115	115
Watts	450	580	550	450
Amps	5.3	5.3	5.1	5.3
Circuit size (Amps)	15	15	15	15
Plug type	Parallel	Parallel	Parallel	Parallel
Case Dimensions				
Height (in inches)	22-5/8	20-7/8	20-7/8	20-7/8
Width (in inches)	12-1/4	12-5/8	12-5/8	12-5/8
Depth (in inches)	10-5/8	17-1/8	17-1/8	17-1/8
Shipping weight (lbs.)	42	48	48	54
Net weight (lbs.)	38	43	43	50
Warranty*	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.	Full 1-Yr.
	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.	Full 5-Yr.

*See written warranty for details.

The condensed list below is a convenient overview of the written warranties offered on various Hotpoint and GE appliances described in this catalog. For complete warranty details on a specific appliance model, contact your nearest Hotpoint/GE appliance dealer, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

Appliance	Length	Type	Warranty Covers	Parts Or Labor	Where Serviced*
Refrigerators (All models except TAX2BNCBL, TAX2SNCWH, TAX4BNCBL, TAX4SNCWH, TAX6SNXWH/WN)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrigeration System, Compressor	Both	In-Home
	Lifetime	Limited	See-thru Vegetable/fruit crispers	Parts	Carry-In**
Refrigerators (Models TAX2BNCBL, TAX2SNCWH, TAX4BNCBL, TAX6SNXWH/WN)	1-Year	Limited	Entire Appliance	Both	Carry-In**
	Additional 4-Year (5 years total)	Limited	Compressor	Part	Carry-In**
Freezers (Upright and Chest)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrig. Sys.	Both	In-Home
	1-Year/5-Year††	Full	Food Spoilage†	N/A	N/A
GE SmartWater™ Filtration Systems (Models GNSV25C, GNSL05C)	1-Year	Full	Entire Appliance (excludes filters)	Both	In-Home
GE SmartWater™ Filtration Systems (Models GXRV10ABL, GXSV10C, GXSL03C, GX1S15C, GN1S15C, GX1S01C, GXITQ, GXILQ, GXWH08C, GNWH08C, GXWH01C, GXWH30C)	1-Year	Limited	Entire Appliance (excludes filters)	Both	Carry-In**
GE SmartWater™ Softening Systems (Models GXSF27B, GNSF18Z)	1-Year	Full	Entire Appliance	Both	In-Home
	3-Year	Limited	Electronic Monitor	Parts	In-Home
	10-Year	Limited	Replacement Brine tank or cabinet	Parts	In-Home
Washers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Transmission	Parts	In-Home***
	Additional 19-Year (20 years total)	Limited	Tuf Tub™ basket	Parts	In-Home***
GE Spacemaker® Washers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Transmission	Parts	In-Home***
Dryers (Extra-Large Capacity)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Extra-Large Capacity Drum	Parts	In-Home***
Dryers (Large Capacity) and GE Spacemaker® Dryers	1-Year	Full	Entire Appliance	Both	In-Home
Ranges	1-Year	Full	Entire Appliance	Both	In-Home
Hoods	1-Year	Full	Entire Appliance	Both	In-Home
Over-The-Range Microwave Oven Models JVM1651AB/BB/WB, JVM1650AB/BB/WB, JVM1640BB,WB,AB, JVM1631BB/WB, JVM1630BB/WB	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	In-Home
Over-The-Range Microwave Oven Models RVM1425BA/WA, RVM1325BW/WW	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Magnetron Tube	Part	In-Home***
Microwave Oven Models JE1840WB/GB, JE1640AB/WB/GB	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	In-Home***
Microwave Oven Models JE1340WC/BC, JE1140WC/BC, JE740WY/GY, JEM25WY/GY	1-Year	Limited	Entire Appliance	Both	Carry-In**
	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	Carry-In**
Microwave Oven Models JE510BW, JE520BW, JE835WW, JE635WW, JE710BA	1-Year	Limited	Entire Appliance	Both	Carry-In**
	Additional 4-Year (5 years total)	Limited	Magnetron Tube	Part	Carry-In**
Dishwashers (Models HDA3400FWW, HDA3400FBB, HDA3400FAA, HDA3200FWW, HDA3200FBB, HDA3200FAA, HDA2100FWW, HDA2000FBB, HDA2000FWH, HDA2000FAD)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Full	Polypropylene Tub and Door Liner	Both	In-Home
Dishwasher Model HDA1000ZWH	1-Year	Full	Entire Appliance	Both	In-Home
Dishwasher (Models GSC3400F, GSC3430F, GSC3200F, GSC3230F, GSM2130FWW, GSM2110FAA, GSS1800Z)	1 Year	Full	Entire Appliance	Both	In-Home
	Additional 1-Year (2 years total)	Limited	Water Distrib. Sys.	Parts	In-Home***
	Additional 9-Year (10 years total)	Full	PermaTuf® Tub and Door Liner	Both	In-Home
Disposer Models GFC1050V, GFC1000Y	5-Years	Full	Entire Appliance	Both	In-Home
Disposer Model GFC800Y	4-Years	Full	Entire Appliance	Both	In-Home
Disposer Models GFC705Y, GFC700Y	2-Year	Full	Entire Appliance	Both	In-Home
Disposer Models GFC305Y, GFC300Y, GFC295Y, GFC290Y	1-Year	Full	Entire Appliance	Both	In-Home
Compactors	1-Year	Full	Entire Appliance	Both	In-Home
Room Air Conditioners (Window, Window Built-In)	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrig. Sys.	Both	In-Home
Dehumidifiers	1-Year	Limited	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Sealed Refrigeration System	Both	In-Home

*See warranty for details.

**In-Home service available at additional cost.

***Does not include service trip and labor charges.

†Cumulative limits: \$100—14.9 cu. ft. and smaller; \$150—15.0 cu. ft. and larger.

††One year on spoilage from any part failure. Five years on spoilage from sealed refrigerant system failure.

Visit us at www.hotpoint.com



We're surfer-friendly!

Completely comprehensive, this site provides you with virtually everything you need to know about Hotpoint® appliances, parts, accessories and service. And, it's also surfer-friendly, so your searches won't be endless—they'll be effortless!

Industry leading support—



The GE Answer Center® Information Service **800.626.2000.** (geappliances.com)

Questions? Call any time.

Before or after you buy any GE or Hotpoint product, ask us about the features, product comparisons, pricing and where to find it. Call us any time. We never close.

GE Genuine Parts **800.626.2002.**

Enhance, upgrade or fix it. Check out our accessories! Accessories can make great GE or Hotpoint products even better. Replacement parts for GE, Hotpoint and most other brands, too. Fast delivery, convenient, direct.

GE Appliance Service **800.432.2737 (800.GE.CARES)**

Same day or next day service.

If you ever need product service, we'll come where and when you want—at your convenience. We're the largest manufacturer-owned service organization in the appliance industry. Same or next day service in most cases.