



# built-in comfort

GE® built-in air conditioners and heat pumps




# Comforting solutions

Selecting a **GE® air conditioner** is not only good for the occupant and guests, it's a decision that will leave you resting comfortably as well. You can't go wrong with any of our units, from our newest **Vertical Zoneline®** that allows any room to have a more **homelike appearance** to our traditional Zoneline packaged terminal air conditioners and built-in models. All GE air conditioners are engineered to give many years of **dependable** service with a full complement of standard features and a variety of exclusive GE features. They're designed for **hassle-free** installation and **easy maintenance**.



## Feature gallery

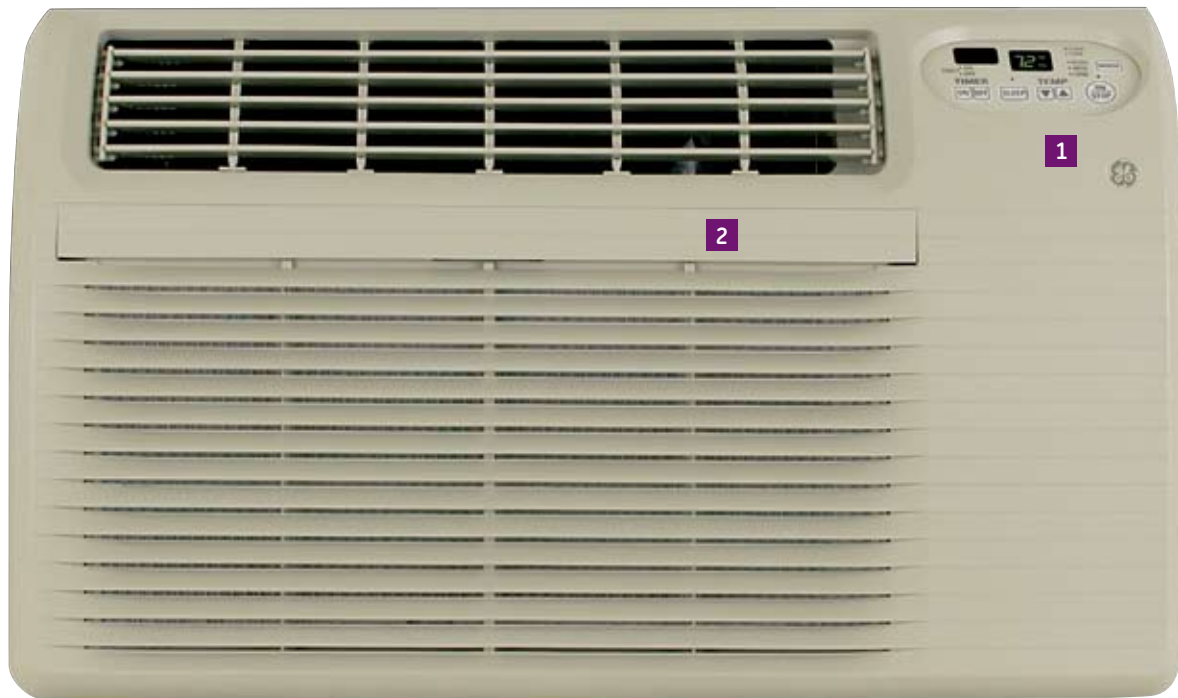

### Timer

Electronic models feature a timer control so you can program the air conditioner to turn "on" or "off" when you're not around.



### Appearance

Clean lines, smooth curves and contemporary design help the air conditioner blend into the room.



### Upfront filters

Upfront easy to clean filters make maintenance a breeze.



### High-mount

Controls located at bottom of unit for easy access when mounted high in wall offering installation flexibility.



### ENERGY STAR® qualified (cool only)

Cool-only models certified to exceed ENERGY STAR guidelines for energy efficiency.



### Remote control

Cooling comfort at your fingertips from anywhere in the room.



### Power interruption restart

Remembers and restarts the unit to the setting prior to loss of power.



## Built-in room air conditioners

#1 preferred brand of room air conditioners.



### GE® standard-mount electronic cool only units

- ENERGY STAR® qualified
- Electronic control with remote
- Electronic digital thermostat
- Four-way air direction
- Up-front, washable air filter
- 3 cool/3 fan speeds
- Power interruption restart



#### AJCQ12DCC

- 11,600/11,400 BTU,  
9.5/9.5 EER, 230/208 Volts

#### AJCQ10DCC

- 9,900/9,700 BTU,  
9.5/9.5 EER, 230/208 Volts

#### AJCQ10ACC

- 9,900 BTU, 9.5 EER, 115 Volts

#### AJCQ08ACC

- 8,000 BTU, 9.5 EER, 115 Volts

#### AJCQ06LCC

- 6,000 BTU, 10.0 EER, 115 Volts



### GE standard-mount cool only units

- ENERGY STAR-qualified
- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 fan speeds
- Wall case optional



#### AJCS12DCC

- 11,600/11,400 BTU,  
9.5/9.5 EER, 230/208 Volts

#### AJCS10DCC

- 10,150/9,800 BTU,  
9.5/9.5 EER, 230/208 Volts

#### AJCS09DCC

- 8,900/8,700 BTU, 9.5/9.5 EER,  
230/208 Volts

#### AJCS10ACC

- 10,150 BTU, 9.5 EER, 115 Volts

#### AJCS08ACC

- 8,000 BTU, 9.5 EER, 115 Volts

#### AJCS06LCC

- 6,000 BTU, 10.0 EER, 115 Volts



### GE high-mount cool only units

- ENERGY STAR-qualified
- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 fan speeds
- Wall case optional



#### AJCH12DCC

- 11,600/11,400 BTU,  
9.5/9.5 EER, 230/208 Volts

#### AJCH10DCC

- 10,150/9,800 BTU,  
9.5/9.5 EER, 230/208 Volts

#### AJCH10ACC

- 10,150 BTU, 9.5 EER, 115 Volts

#### AJCH08ACC

- 8,000 BTU, 9.5 EER, 115 Volts



### GE heat pumps

- ENERGY STAR qualified
- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds



#### AJHS10DCC

- 10,000/9,800 BTU cool, 9,700/9,500 BTU pump, 11,600/9,500 BTU electric, 9.5/9.5 EER, 230/208 Volts

#### AJHS08DCC

- 8,550/8,300 BTU cool, 7,700/7,500 BTU pump, 11,600/9,500 BTU electric, 9.5/9.5 EER, 230/208 Volts

#### AJHS08ASC\*

- 8,400 BTU cool, 7,700 BTU pump, 4,100 BTU electric, 9.5 EER, 115 Volts



### GE standard-mount heat/cool units

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

#### AJES12DCC

- 11,600/11,400 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

#### AJES10DCC

- 10,150/9,800 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

#### AJES09DCC

- 8,900/8,700 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

#### AJES10DSC\*

- 10,150/9,800 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

#### AJES08ASC\*

- 8,000 BTU cool, 4,100 BTU heat, 9.5 EER, 115 Volts

#### AJES06LSC\*

- 6,000 BTU cool, 4,100 BTU heat, 10.0 EER rating, 115 Volts



### GE high-mount heat/cool unit

- Mechanical controls
- Variable position thermostat
- Four-way air direction
- Up-front, washable air filter
- 2 cool/2 heat/2 fan only speeds

#### AJEH12DCC

- 11,600/11,400 BTU cool, 11,600/9,500 BTU heat, 9.5/9.5 EER, 230/208 Volts

# GE® built-in room air conditioners

	GE														
	Electronic units					Mechanical units						High-mount units			
	AJCQ06LCC	AJCQ08ACC	AJCQ10ACC	AJCQ10DCC	AJCQ12DCC	AJCS06LCC	AJCS08ACC	AJCS10ACC	AJCS09DCC	AJCS10DCC	AJCS12DCC	AJCH08ACC	AJCH10ACC	AJCH10DCC	AJCH12DCC
ENERGY STAR®	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Voltage	115	115	115	230/208	230/208	115	115	115	230/208	230/208	230/208	115	115	230/208	230/208
Cooling capacity															
BTUH-AHAM	6000	8000	9900	9900/9700	11600/11400	6000	8000	10150	8900/8700	10150/9800	11600/11400	8000	10,150	10150/9800	11600/11400
Amps-AHAM	5.7	7.9	9.7	4.9/5.3	5.8/6.3	5.7	7.9	9.7	4.2/4.6	4.9/5.3	5.8/6.3	7.9	9.7	4.9/5.3	5.8/6.3
Watts input	600	840	1040	1040/1020	1220/1200	600	840	1070	935/915	1070/1035	1220/1200	840	1070	1070/1035	1220/1200
EER	10.0	9.5	9.5	9.5/9.5	9.5/9.5	10.0	9.5	9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5	9.5	9.5/9.5	9.5/9.5
Dehumidification (pts./hr.)	1.4	2.1	2.9	2.9	3.4	1.3	2.0	2.9	2.3	2.9	3.4	2.0	2.9	2.9	3.4
Features															
Line cord plug	Parallel	Parallel	Parallel	Tandem	Tandem	Parallel	Parallel	Parallel	Tandem	Tandem	Tandem	Parallel	Parallel	Tandem	Tandem
Recommended circuit protection (time delay)	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps	15 amps
Fan speeds	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2
Fan only setting	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2
Air flow (CFM) room side hi/low	212/184	240/212	282/254	282/254	304/279	222/197	286/254	282/254	311/296	292/268	298/280	286/251	282/254	292/268	298/280
Air exchange exhaust	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Fan cycle switch	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Rotary compressor	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Slide-out chassis	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Installation	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall	Thru wall
Wall case required	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48
Window installation kit	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Wts. & Dimens.															
Overall dimen. WxHxD (in inches)	26 x 15-5/8 x 16-7/8														
Approx. net weight (lbs.)	63	68	77	77	79	56	59	70	64	65	68	60	72	66	70
Approx. shipping weight (lbs.)	72	77	86	86	88	65	68	80	73	74	77	69	81	76	79

	GE									
	Heat/Cool units						High-mount	Heat pumps		
	AJES06LSC*	AJES08ASC*	AJES10DSC	AJES09DCC	AJES10DCC	AJES12DCC	AJEH12DCC	AJHS08ASC	AJHS08DCC	AJHS10DCC
ENERGY STAR								●	●	●
Voltage	115	115	230/208	230/208	230/208	230/208	230/208	115	230/208	230/208
Cooling capacity										
BTUH-AHAM	6000	8000	10150/9800	8900/8700	10150/9800	11600/11400	11600/11400	8000	8550/8300	10,000/9800
Amps-AHAM	5.7	7.9	4.9/5.3	4.2/4.6	4.9/5.3	5.8/6.3	5.8/6.3	7.9	4.0/4.3	4.9/5.3
Watts input	600	840	1070/1035	935/915	1070/1035	1220/1200	1220/1200	840	840/820	1030/1010
EER	10.0	9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5/9.5	9.5	9.5/9.5	9.5/9.5
Dehumidification (pts./hr.)	1.3	2.0	2.9	2.3	2.9	3.4	3.4	2.1	2.1	2.9
Reverse cycle heating										
BTU-AHAM								7700	7700/7500	9700/9500
C.O.P.								3.0	3.0/3.0	3.0/3.0
Amps-AHAM								7.0	3.5/3.7	4.3/4.7
Watts input								755	760/730	950/930
Electric resistance heating										
BTUH	4100	4100	11600/9500	11600/9500	11600/9500	11600/9500	11600/9500	4100	11600/9500	11600/9500
Amps	12.0	12.0	16.0/14.5	16.0/14.5	16.0/14.5	16.0/14.5	16.0/14.5	12.0	16.0/14.5	16.0/14.5
Watts input	1380	1380	3670/3010	3670/3010	3670/3010	3680/3020	3680/3020	1380	3660/3000	3680/3020
Features										
Line cord plug	Parallel	Parallel	Perpendicular	Perpendicular	Perpendicular	Perpendicular	Perpendicular	Parallel	Perpendicular	Perpendicular
Recommended circuit protection (time delay)	15 amps	15 amps	20 amps	20 amps	20 amps	20 amps	20 amps	15 amps	20 amps	20 amps
Fan cycle switch	●	●	●	●	●	●	●	●	●	●
Fan speeds, heating/cooling	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Fan only setting	2	2	2	2	2	2	2	2	2	2
Air flow (CFM) roomside hi/low	222/197	286/251	292/268 279/252	311/296 266/241	292/268 279/252	298/280 293/260	298/280 293/260	237/212	237/212 212/187	304/279 279/254
Air exchange exhaust	●	●	●	●	●	●	●	●	●	●
Rotary compressor	●	●	●	●	●	●	●	●	●	●
Slide-out chassis	●	●	●	●	●	●	●	●	●	●
Installation	Window/wall	Window/wall	Window/wall	Thru wall	Thru wall	Thru wall	Thru wall	Window/wall	Thru wall	Thru wall
Wall case required	Included	Included	Included	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	Included	RAB46/47/48	RAB46/47/48
Window installation kit	Std. mount	Std. mount	Std. mount	Optional	Optional	Optional	Optional	Std. mount	Optional	Optional
Weights & Dimensions										
Overall dimensions WxHxD (in inches)	← 26 x 15-5/8 x 16-7/8 →									
Approximate net weight (lbs.)	78	81	94	68	75	75	75	91	73	82
Approximate shipping wt. (lbs.)	92	96	108	77	85	84	84	106	82	91

All 230/208V cooling units with electric heat models and heat pumps are corrosion treated. Specifications and design subject to change without notice.

\*These units are not intended to be the primary source of heat.

## Air conditioner tips

**Air flow**—Keep air filters clean. Do not block air flow areas.

**Roomside view**—J-models feature concealed power cord storage, this eliminates excessive cord exposure when receptacle is located close to unit.

## Accessories

Other accessories are available, they include: Fedders and Whirlpool sleeve adapters. Drain kits and Chassis adapters for old Hotpoint cases.

## Warranty

One-Year Full Warranty on entire unit. In-home service. Parts and labor included. Five-Year Full Warranty on sealed refrigerating system. In-home service. Parts and labor included. See written warranty for details.






Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.

## GE built-in room air conditioners & heat pump applications

### Wall opening for RAB46/47/48

A finished opening of 26-1/8" x 15-3/4", clear of intrusions, is required. Keep clearance of 4" from side walls. Brick veneer or frame walls should have wood studding surrounding case to provide firm anchoring with screws. Case can be fastened directly to brick or block walls with screws sunk in lead expansion shields.

**Note:** Units should be caulked on all four sides of case to the building exterior to assure building integrity.



### Standard wall case RAB46

Solid-sided wall case fabricated of galvanized steel with baked enamel finish. Welded areas are coated with a sealing compound to help resist rust and corrosion. Polymer gasket surrounds opening to assure tight weather seal. Aluminum grille (RAG13) is included. Panels on interior and between case and grille provide weather protection prior to installation of chassis.

### Two wall cases for tenant option installation

When the air conditioner is offered as a tenant option, these wall cases provide protection against outside elements.

**RAB47**—includes wall case, exterior grille and steel closure panels.

**RAB48**—includes wall case, exterior grille, steel closure panel and two layers of insulation.


### Coastal corrosion protection

We apply protective treatments to all of our Heat/Cool and Heat Pump models.

- Specially treated Condenser Coils are coated to shield against corrosion.
- Fan Motors are totally closed to reduce winding failure due to salt corrosion.
- Quality finish on compressors to resist corrosion.

### Architectural RAG14E grille

Our optional architectural louvered exterior grille, for use with "J" series models, offers both aesthetic appeal and durability.

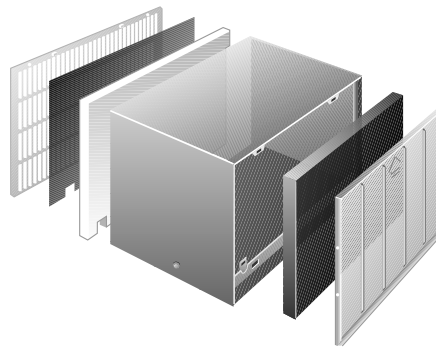

Standard heavy gauge aluminum exterior grilles (RAG13). Shipped with wall case.

Solid-sided wall case made with heavy gauge galvanized steel with baked enamel finish. RAB46 or RAB47 or RAB48 wall cases have no side louvers and are used with "J" series models.


Rotary Compressor—compact, efficient.

Roomsie Grille handsome, strong, high impact polymer grille has directional airflow adjustment. Shipped with chassis.

### High-mount units

GE answers the challenge of high-mount installations. For easier accessibility, we've locate the controls in the lower corner of the room-side cabinet. We offer 115 volt and 230 volt cooling-only models and one 230 volt model with electric heat. These units provide features similar to the standard models.

#### Maximum Cord Set Extension




Two Fan Motors (Not Visible)  
Separate fan motors for indoor and outdoor section to assure quiet operation.

Slide-out Chassis on all units for easier installation.

Hidden exhaust and energy saver controls.

Up-front washable air filter.

Adjustable discharge louvers.

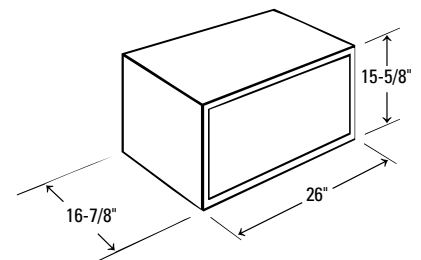



Answers that click!

GE puts everything you need at your fingertips.



GE appliances web site — 16 million visitors a year!  
Visit us at [ge.com](http://ge.com)

Everything you need to know about GE products is here. Access up-to-date information, find out “what’s new,” obtain dimensions, get installation tips and more. Extremely user-friendly, this one-stop site lets you research by brand, category or model number and even buy online through a local GE dealer.

GE Answer Center® saves you time.  
800.626.2000

This service provides answers on product features, installation, service and more.



### A century of quality and innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

**GE Consumer & Industrial**  
Appliances  
General Electric Company  
Louisville, KY 40225  
[ge.com](http://ge.com)

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or [ge.com](http://ge.com)

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2007 GE Company  
Pub. no. 20-S007 PC47589