



heavy-duty racks • precise air™ convection system • 2003 product specifications • trivection™ technology • auto recipe™ conversion

GE Profile™ and GE® Built-In Cooking Products

The maximum in cooking performance and versatility.

imagination at work



Advanced technology comes to the kitchen.

With more convenience, performance and style, GE built-in products are changing the way the modern family cooks. And Trivection™ technology is leading the charge. It has the ability to produce optimal food quality, up to five times faster than a traditional oven!*

The amazing Precise Air™ convection system bakes more evenly than any other convection wall oven.*

And when it comes to style, we feature more choices to complement any taste or preference. With self-clean models, extra-large capacities and multi-dimensional features, GE offers innovative built-in products designed for today's lifestyles.

*Pending final substantiation.

Trivection™ technology

Wall ovens and slide-in ranges with Trivection™ technology combine thermal, convection and microwave heat sources to produce delicious results up to five times faster than a traditional thermal oven.*



Cooktops

Our gas and electric cooktops offer features and options that are indispensable in the kitchen. From high output burners to warming zones to one-touch controls, GE puts advanced performance at your fingertips.



Built-in wall ovens

Built-in wall ovens make a dramatic design statement. Installed in a wall, under a counter or in a cabinet, these ovens integrate beautifully into any kitchen.



Warming drawers

GE's essential warming drawer helps you keep just-cooked foods warm while you're waiting for guests or preparing other dishes.





GE Profile™ Built-In Ovens Featuring Trivection™ technology

It's all about great food. Speed seals the deal.

GE Profile wall ovens and slide-in ranges with exclusive Trivection™ technology achieves the delicate balance of heat and time by combining thermal, Precise Air™ convection and microwave heating methods. The result is mouth-watering foods up to five times faster than a traditional oven.*



Using pre-determined settings, customized by food type, Trivection technology automatically delivers the ideal combination of heating energy to produce optimal texture, crispness, moistness and browning.



From angel food cake to casseroles to salmon, Trivection technology ensures delicious and succulent results.

Trivection technology combines the best qualities of three heat sources.



Thermal Heating

Traditional bake and broil elements provide dry heat from above and below the food, while helping maintain consistent oven temperature.

Precise Air™ Convection

An innovative fan reverses direction for optimal air and heat circulation, providing even cooking, faster roasting speeds and multi-rack baking capability. Ideal for accelerated browning.

Microwave Energy

Electromagnetic waves excite molecules in food and help accelerate the cooking process, ensuring faster cooking speeds.

*Pending final substantiation.

Not all features available on all models.

A dash of thermal. A pinch of convection. A hint of microwave.



Lasagna

A lasagna is usually a large and dense with a high moisture content that benefits from high levels of all three energies. The thermal and convection energies will provide ideal browning, while the microwave will help to quickly bring the middle of the lasagna up to proper baking temperature.

A traditional oven cooks a lasagna in one hour using only thermal energy. A Trivection technology oven cooks a lasagna in 15 minutes using thermal, convection and microwave energies continuously throughout the cooking cycle.*



Turkey (22-pound)

Poultry, which has a large amount of surface area, has a tendency to dry out during cooking. To combat this, the thermal and convection energies will help brown the outside to seal in the juices, while the microwave energy will speed up the cooking process to prevent moisture loss.

A traditional oven cooks a 22 lb. turkey in four hours using only thermal energy. A Trivection technology oven cooks the same turkey in two hours using thermal and convection energies continuously and microwave energy for 80% of the cooking cycle.*

Chef's Guide™ Controls make cooking a snap.



With easy step-by-step instructions, the Chef's Guide controls help take you through the cooking experience. Program the oven in three simple steps:

Step 1: Select the cooking method and type of food

Step 2: Enter the traditional recipe temperature

Step 3: Enter the traditional cooking time

Once the oven is programmed, it automatically adjusts the ideal heating combination and the cooking time to the food type selected—delivering exceptional results.

Built-In Double and Single Ovens: 30" Electric with Trivection™ technology

These models include • Trivection technology • Precise Air™ convection system • Single-rack and multi-rack convection bake • Convection roast • TrueTemp™ system • Self-clean oven with light self-clean option • Chef's Guide™ glass touch controls • Auto Recipe™ conversion • Proof mode • Warm mode • Defrost mode • Three heavy-duty racks • Two halogen interior oven lights • Big View window • Certified Sabbath mode • Trivection cookbook

Note: bold = feature upgrade from previous model



Trivection technology delivers the ideal combination of three different heating technologies.



TrueTemp technology provides even heat distribution and maximum control.



Precise Air convection uses an innovative fan that reverses direction for optimal air and heat circulation.



Chef's Guide controls make oven programming quick and easy.

Not all features available on all models.

Trivection/Convection Upper, Convection Lower



GE Profile™ 30" Built-In Double Oven with Trivection Technology

JT980SH Stainless steel
• Stainless steel oven doors • Stainless-look sculptured handles

Trivection/Convection Upper Oven

• Speed baking mode • Speed broiling mode
• Five embossed rack positions

Convection Lower Oven

• Seven embossed rack positions

Trivection/Convection Upper, Convection Lower



GE Profile 30" Built-In Double Oven with Trivection Technology

JT980WH White on white
• Frameless glass oven doors • Sculptured handles
JT980CH Bisque on bisque (not shown)
JT980BH Black on black (not shown)

Trivection/Convection



GE Profile 30" Built-In Single Oven with Trivection Technology

JT930SH Stainless steel
• Speed baking mode • Speed broiling mode • Five embossed rack positions • Stainless steel oven door
• Stainless-look sculptured handle

JT930WH White on white (not shown)
• Frameless glass oven door • Sculptured handle

JT930CH Bisque on bisque (not shown)

JT930BH Black on black (not shown)

Slide-In Range: 30" Electric with Trivection technology

This model includes • Trivection technology • Precise Air convection system • Single-rack and multi-rack convection bake • Convection roast • TrueTemp system • Chef's Guide glass touch controls • Auto Recipe conversion • Self-clean oven with light self-clean option • Proof mode • Warm mode • Defrost mode • Three heavy-duty racks • Dual 6"/9" heating element • 8" ribbon heating element • Two 6" ribbon heating element • Two halogen interior oven lights • Big View window • Certified Sabbath mode

Note: bold = feature upgrade from previous model



Speed modes cook foods up to five times faster than a traditional thermal oven.*



Provides ideal convection baking for multiple racks of food.



A smooth ceramic-glass CleanDesign cooktop makes cleaning quick and easy.



Optional backguard kit attaches to the back of range when unit is installed into a free-standing cutout.

*Pending final substantiation.

Not all features available on all models.



GE Profile 30" Slide-In Range with Trivection Technology

JS998SH Stainless steel

- Speed baking mode • Speed broiling mode
- Patterned black ceramic glass cooktop
- Frameless stainless steel oven door
- Stainless-look sculptured handle



GE Profile 30" Slide-In Range with Trivection Technology

JS998TH True white

- True white ceramic glass cooktop • Frameless glass oven door • Sculptured handle

JS998KH True bisque (not shown)

- True bisque ceramic glass cooktop



GE Profile 30" Slide-In Range with Trivection Technology

JS998BH Black on black

- Patterned black ceramic glass cooktop

GE® Built-In Single and Double Wall Ovens

GE Profile™ wall ovens perform beautifully in any kitchen.

GE Profile wall ovens have improved upon true European convection with the Precise Air™ convection system, which uses an innovative fan that reverses direction. The result is uniform heating throughout, and an oven that bakes more evenly than any other convection wall oven.* The largest** oven capacity in America and multiple rack positions give you the flexibility to cook more food at once. Among the many convenient features is the proof setting for rising dough, Sabbath mode for preparing foods in accordance with kosher law, warm mode for keeping foods at serving temperature and the option of closed door broiling.



*Among leading manufacturers' brands.

**Among leading manufacturers' brands, except 30" convection ovens.

The versatile design works with every cooking style, every kitchen.

Versatility extends to installation, as well. GE wall ovens go wherever they're needed: in a wall, cabinet or under a counter.

These wall ovens fit into common cutouts, making it easy to upgrade or replace an older GE wall oven. And the flush installation appearance makes the most of your kitchen space.



GE flexibility gives you more ways to cook great food!



Convection options

GE Profile wall ovens use True European convection, now delivered through the Precise Air™ convection system. Meats are beautifully browned, yet tender and juicy inside and breads and desserts are baked to golden perfection.



Precise Air convection system

This exclusive system uses an innovative fan that rotates one way, then reverses direction for optimal air and heat circulation. Plus, a third heating element surrounds the fan and delivers consistent heat. These ovens bake more evenly than any other convection wall oven.*



Auto Recipe™ conversion

Auto Recipe eliminates guesswork by automatically converting standard recipe temperatures to proper convection settings. Simply set the control according to recipe instructions and the oven automatically adjusts for convection baking.



Largest** capacity

GE wall ovens now feature the largest** capacity wall ovens in America. Great for holiday meals and dinner parties, you have greater flexibility to cook more food at once!

*Among leading manufacturers' brands.

**Among leading manufacturers' brands, except 30" convection ovens.

Not all features available on all models.

The maximum in cooking performance and versatility.



Heavy-duty racks

The durable construction of the heavy-duty racks provides additional support for large cooking needs, such as that Thanksgiving turkey.



Eight-pass bake element*

With eight turns of the powerful heating element, heat is distributed more evenly providing complete coverage throughout the oven cavity.



Innovative design

The glass touch controls, combined with a digital timer and large easy-to-read graphics, offer a clean and sophisticated look. The frameless oven aligns nearly flush with cabinetry for a smooth and integrated design.



Multiple cooking modes

A variety of flexible cooking modes help make cooking convenient. The proof mode allows dough to rise properly. The warm mode keeps meals warm and ready to serve. And the certified Sabbath mode keeps food warm in accordance with kosher law.

*Six-pass on 27" models.

Built-In Double Ovens: 30" Electric

These models include

- The largest* capacity wall oven in America! • Flush appearance installation
- Fits most 30" cabinets
- TrueTemp™ system
- Light self-clean
- Certified Sabbath mode
- Control lock capability
- Big ClearView™ windows
- Optional closed door broiling

Note: bold = feature upgrade from previous model



Precise Air™ convection uses an innovative fan that reverses direction for optimal air and heat circulation.



Eight-pass power bake exemplifies the ultimate in heating performance with complete coverage.



CleanDesign oven interiors have a hidden bake element and a smooth, seamless surface, making cleanup easier than ever.

* Among leading manufacturers' brands except 30" convection ovens.

** Among leading manufacturers' brands.

Not all features available on all models.

Convection Self-Clean Upper/Self-Clean Lower



GE Profile™

30" Built-In Double Oven

JT955SF Stainless steel

- Bakes more evenly than any other convection wall oven** • **Electronic glass touch controls**
- CleanDesign oven interior/hidden bake element
- Stainless steel oven doors • **Halogen oven light**
- Convection cookbook

Convection Upper Oven

- Extra-large 4.1 cu. ft. self-clean oven
- Precise Air™ convection system • **Single-rack and multi-rack convection bake** • Convection roast
- Auto Recipe™ conversion • **Proof mode** • **Warm mode** • Three heavy-duty oven racks • Eight-pass bake element • Oven meat probe • Seven embossed rack positions

Thermal Lower Oven

- Extra-large 4.4 cu. ft. self-clean oven • Two heavy-duty oven racks

Convection Self-Clean Upper/Self-Clean Lower



GE Profile

30" Built-In Double Oven

JT955CF Bisque on bisque

- Frameless glass oven doors

JT955WF White on white (not shown)

JT955BF Black on black (not shown)

Convection Self-Clean Upper/Self-Clean Lower



GE Profile

30" Built-In Double Oven

JT952BF Black on black

- **Bakes more evenly than any other convection wall oven**** • **Electronic oven controls** • **CleanDesign oven interior/hidden bake element** • Convection cookbook

Convection Upper Oven

- Extra-large 4.1 cu. ft. self-clean oven • **Precise Air convection system** • **Convection bake** • **Convection roast** • **Auto Recipe conversion** • Three heavy-duty oven racks • **Eight-pass bake element** • **Oven meat probe** • Seven embossed rack positions

Thermal Lower Oven

- Extra-large 4.4 cu. ft. self-clean oven
- **Two heavy-duty oven racks**

JT952SF Stainless steel (not shown)

JT952WF White on white (not shown)

JT952CF Bisque on bisque (not shown)

Self-Clean (Both Ovens)



GE®

30" Built-In Double Oven

JTP50SH Stainless steel

- Stainless steel oven doors • Two extra-large 4.4 cu. ft. self-clean ovens with delay self-clean
- Interior oven light • Six-pass bake element
- Two oven racks (each oven) • Six embossed rack positions • Audible preheat signal



The largest* capacity wall oven in America gives you flexibility to cook more at once.



TrueTemp™ technology provides even heat distribution and maximum control.

Self-Clean (Both Ovens)



GE

30" Built-In Double Oven

JTP48SF Stainless steel with black accents

- Stainless steel oven doors • **Two extra-large 4.4 cu. ft. self-clean ovens with delay self-clean**
- Interior oven light • Six-pass bake element
- Two oven racks (each oven) • Six embossed rack positions • Audible preheat signal

JTP48WF White on white (not shown)

- Frameless glass oven doors

JTP48CF Bisque on bisque (not shown)

JTP48BF Black on black (not shown)

Self-Clean Upper/Standard Lower



GE

30" Built-In Double Oven

JTP28BF Black on black

- Frameless glass oven doors • Two oven racks (each oven)
- Six embossed rack positions • Audible preheat signal

Upper Oven

- Extra-large 4.4 cu. ft. self-clean oven with delay self-clean
- Electronic oven controls • Delay bake • Interior oven light

Lower Oven

- Extra-large 4.4 cu. ft. standard-clean oven • Rotary controls

JTP28SF Stainless steel (not shown)

- Stainless steel oven door

JTP28WF White on white (not shown)

JTP28CF Bisque on bisque (not shown)



Certified Sabbath mode keeps food warm in accordance with kosher law.

Built-In Double Combination Ovens: 30" and 27" Electric

These models include

- Flush appearance installation • Frameless glass oven doors
- Electronic controls
- TrueTemp™ system
- Control lock capability
- Variable broil • Optional closed door broil

Note: bold = feature upgrade from previous model



True European convection ovens provide even cooking and superior baking results.



Sensor microwave cooking controls take the guesswork out of cooking your favorite foods.



Electronic controls are simple to understand and easy to use. Just read and touch.

Microwave Upper/Convection Lower



GE Profile™

30" Built-In Double Oven

JT965SF Stainless steel

- Fits most 30" cabinets

Microwave Upper Oven

- 1.6 cu. ft. cavity • Sensor cooking controls for Auto Cook and Reheat • Turntable • 1000 watts

Convection Lower Oven

- Extra-large 4.1 cu. ft. self-clean oven • **CleanDesign oven interior/hidden bake element** • Exclusive Big ClearView™ window • **True European convection system** • **Convection bake** • **Convection roast** • **Three heavy-duty oven racks** • **Oven meat probe** • **Eight-pass power bake element** • **Halogen interior oven lights** • **Seven embossed rack positions**

JT965BF Black on black (not shown)

JT965WF White on white (not shown)

JT965CF Bisque on bisque (not shown)

Microwave Upper/Self-Clean Lower



GE®

30" Built-In Double Oven

JTP86WF White on white

- Fits most 30" cabinets • Upfront interior oven lights

Microwave Upper Oven

- 1.6 cu. ft. cavity • Sensor cooking controls for Auto Cook and Reheat • Turntable • 1000 watts

Lower Oven

- Extra-large 4.4 cu. ft. self-clean oven with Delay Clean option • Two oven racks • Six embossed rack positions • Big ClearView window

JTP86SH Stainless steel (not shown)

JTP86CF Bisque on bisque (not shown)

JTP86BF Black on black (not shown)

Microwave Upper/Self-Clean Lower



GE

27" Built-In Double Oven

JKP86BF Black on black

- Fits most 27" cabinets • Upfront interior oven lights

Microwave Upper Oven

- 1.6 cu. ft. cavity • Auto Roast • Auto Cook • Turntable • 1000 watts

Lower Oven

- Extra-large 3.9 cu. ft. self-clean oven with Delay Clean option • Big ClearView window • Two oven racks

JKP86SH Stainless steel (not shown)

JKP86WF White on white (not shown)

JKP86CF Bisque on bisque (not shown)

Built-In Double Ovens: 27" Electric

These models include

- Bakes more evenly than any other convection wall oven*
- The largest** capacity wall oven in America!
- Flush appearance installation
- Fits most 27" cabinets
- TrueTemp™ system
- Light self clean
- Certified Sabbath mode
- Control lock capability
- Big ClearView windows
- Variable broil
- Convection cookbook

Note: bold = feature upgrade from previous model



Precise Air™ convection uses an innovative fan that reverses direction for optimal air and heat circulation.



The largest** capacity wall oven in America gives you flexibility to cook more at once.



CleanDesign oven interiors have a hidden bake element and a smooth, seamless surface, making cleanup easier than ever.

Not all features available on all models.

Convection Upper/Self-Clean Lower



GE Profile

27" Built-In Double Oven

JK955SF Stainless steel

- Electronic glass touch controls
- CleanDesign oven interior/hidden bake element
- Stainless steel oven doors
- Halogen oven light

Convection Upper Oven

- Extra-large 3.9 cu. ft. self-clean oven
- Precise Air™ convection system
- Single-rack and multi-rack convection bake
- Convection roast
- Auto Recipe™ conversion
- Proof mode
- Warm mode
- Three heavy-duty oven racks
- Six-pass bake element
- Oven meat probe

Thermal Lower Oven

- Extra-large 3.9 cu. ft. self-clean oven
- Two heavy-duty oven racks



GE Profile

27" Built-In Double Oven

JK955CF Bisque on bisque

- Frameless glass oven doors



GE Profile

27" Built-In Double Oven

JK955BF Black on black

JK955WF White on white (not shown)

* Among leading manufacturers' brands.

** Among leading manufacturers' brands except 30" convection ovens.

Built-In Double Ovens: 27" Electric

These models include • The largest* capacity wall oven in America! • Flush appearance installation • Fits most 27" cabinets

- TrueTemp™ system • Certified Sabbath mode • Control lock capability • Frameless glass oven doors • Big ClearView™ windows
- Variable broil

Note: bold = feature upgrade from previous model



The largest* capacity wall oven in America gives you flexibility to cook more at once.



TrueTemp™ technology provides even heat distribution and maximum control.



Six-pass power bake provides unparalleled baking throughout the oven interior. The results are succulent, evenly cooked food.

Self-Clean (Both Ovens)



GE® 27" Built-In Double Oven

JKP50SH Stainless steel

- Two extra-large 3.9 cu. ft. self-clean ovens with delay self-clean • Electronic oven controls
- Four embossed rack positions • Two oven racks (each oven)

Self-Clean (Both Ovens)



GE 27" Built-In Double Oven

JKP48BF Black on black

- **Two extra-large 3.9 cu. ft. self-clean ovens with delay self-clean** • Electronic oven controls • Four embossed rack positions • Two oven racks (each oven)

JKP48CF Bisque on bisque (not shown)

JKP48WF White on white (not shown)

Self-Clean Upper/Standard Lower



GE 27" Built-In Double Oven

JKP28WF White on white

- Two oven racks (each oven) • Audible preheat signal

Upper Oven

- Extra-large 3.9 cu. ft. self-clean oven with Delay Clean option • Electronic controls • Delay bake

Lower Oven

- Extra-large 3.9 cu. ft. standard-clean oven
- Rotary control

JKP28BF Black on black (not shown)

*Among leading manufacturers' brands except 30" convection ovens.

Not all features available on all models.

Built-In Single Ovens: 30" Electric

These models include • Bakes more evenly than any other convection wall oven* • The largest** capacity wall oven in America! • Flush appearance installation • Fits most 30" cabinets • TrueTemp™ system • Light self clean • Certified Sabbath mode • Control lock capability • Big ClearView window • Variable broil • **Convection cookbook** Note: bold = feature upgrade from previous model



Precise Air™ convection uses an innovative fan that reverses direction for optimal air and heat circulation.



Cook more at once! Take advantage of more oven capacity with the versatility of multiple rack positions.



CleanDesign oven interiors have a hidden bake element and a smooth, seamless surface, making cleanup easier than ever.

Installation Flexibility

30" wall ovens can be installed in a wall or most 30" cabinets, or undercounter installation with either a gas or electric cooktop above. Refer to specifications page for approved cooktop use.

* Among leading manufacturers' brands.
** Among leading manufacturers' brands except 30" convection ovens.

Not all features available on all models.

Self-Clean Convection



GE Profile™ 30" Built-In Single Oven

JT915SF Stainless steel
• Extra-large 4.1 cu. ft. self-clean oven with Delay Clean option • Precise Air™ convection system
• **Single-rack and multi-rack convection bake**
• Convection Roast • Auto Recipe™ conversion
• **Proof mode** • **Warm mode** • Eight-pass bake element • Three heavy-duty oven racks
• **Electronic glass touch controls** • CleanDesign oven interior/hidden bake element • Stainless steel oven door • **Halogen oven light** • Oven meat probe
• Seven embossed rack positions



GE Profile 30" Built-In Single Oven

JT915WF White on white
• Frameless glass oven door
JT915CF Bisque on bisque (not shown)
JT915BF Black on black (not shown)



GE Profile 30" Built-In Single Oven

JT912BF Black on black
• Extra-large 4.1 cu. ft. self-clean oven with Delay Clean option • **Precise Air™ convection system**
• **Convection bake** • **Convection roast** • **Auto Recipe conversion** • **Eight-pass bake element** • **Three heavy-duty oven racks** • Electronic oven controls
• **CleanDesign oven interior/hidden bake element** • **Frameless glass oven door** • **Interior oven light**
• **Oven meat probe** • **Seven embossed rack positions**
JT912SF Stainless steel (not shown)
JT912WF White on white (not shown)
JT912CF Bisque on bisque (not shown)

Built-In Single Ovens: 30" Electric

These models include • The largest* capacity wall oven in America! • Flush appearance installation • Fits most 30" cabinets

- **TrueTemp™ system** • Electronic oven controls • Certified Sabbath mode • Control lock capability • Big ClearView™ window
- **Upfront interior oven light** • Variable broil

Note: bold = feature upgrade from previous model



The largest* capacity wall oven in America gives you flexibility to cook more at once.



TrueTemp™ technology provides even heat distribution and maximum control.

Installation Flexibility

30" wall ovens can be installed in a wall or most 30" cabinets, or in an undercounter installation with either a gas or electric cooktop above. Refer to specifications page for approved cooktop use.

Self-Clean



GE®

30" Built-In Single Oven

JTP25SH Stainless steel

- Stainless steel oven door • Extra-large 4.4 cu. ft. self-clean oven with light self-clean option • Two oven racks • Six embossed rack positions • Six-pass bake element

Self-Clean



GE

30" Built-In Single Oven

JTP20SF Stainless steel with black accents

- Stainless steel oven door • Extra-large 4.4 cu. ft. self-clean oven with light self-clean option
- Two oven racks • Six embossed rack positions
- Six-pass bake element

Self-Clean



GE

30" Built-In Single Oven

JTP20BF Black on black

- Frameless glass oven door

JTP20CF Bisque on bisque (not shown)

JTP20WF White on white (not shown)

*Among leading manufacturers' brands except 30" convection ovens.

Not all features available on all models.

Built-In Single Ovens: 27" Electric

These models include • Bakes more evenly than any other convection wall oven* • **The largest** capacity wall oven in America!** • **Flush appearance installation** • Fits most 27" cabinets • Electronic oven controls • **Certified Sabbath mode** • **Big ClearView window** • Variable broil • **Control lock capability** (except model JKS06) **Note: bold = feature upgrade from previous model**



The durable construction of the heavy-duty racks provides additional support for large cooking needs.



Certified Sabbath mode keeps food in accordance with kosher law.

Installation Flexibility

27" wall ovens can be installed in a wall or 27" cabinet, or in an undercounter installation with either a gas or electric cooktop above. Refer to specifications page for approved cooktop use.

Self-Clean Convection



GE Profile™ 27" Built-In Single Oven

JK915SF Stainless steel
• Extra-large 3.9 cu. ft. self-clean oven with Delay Clean option • **Precise Air™ convection system** • **Single-rack and multi-rack convection bake** • **Convection roast** • **Auto Recipe™ conversion** • **Electronic glass touch controls** • **Proof mode** • **Warm mode** • **Six-pass bake element** • **Three heavy-duty oven racks** • **Convection cookbook** • **CleanDesign oven interior/hidden bake element** • **Stainless steel oven door** • **Halogen oven light** • **Oven meat probe**

Self-Clean Convection



GE Profile 27" Built-In Single Oven

JK915WF White on white
• **Frameless glass oven door**
JK915CF Bisque on bisque (not shown)
JK915BF Black on black (not shown)

Self-Clean



GE 27" Built-In Single Oven

JKP25SH Stainless steel
• Extra-large 3.9 cu. ft. self-clean oven with light self-clean option • **Two oven racks** • **Four embossed rack positions**

Self-Clean/Standard Clean



GE 27" Built-In Single Oven

JKP20CF Bisque on bisque
• **Extra-large 3.9 cu. ft. self-clean oven with light self-clean option** • **Two oven racks** • **Four embossed rack positions**
JKP20WF White on white (not shown)
JKP20BF Black on black (not shown)
JKS06BF Black on black (not shown)
• Extra-large 3.9 cu. ft. standard-clean oven

* Among leading manufacturers' brands.

** Among leading manufacturers' brands except 30" convection ovens.

Not all features available on all models.

Built-In Double and Single Ovens: 24" Electric

These models include

- Fits most 24" cabinets
- SmartSet electronic controls
- Frameless glass oven doors
- Designer-style handles
- Two oven racks (each oven)
- Variable broil

Note: bold = feature upgrade from previous model



SmartSet electronic controls are simple to understand and easy to use. Just read and touch.



GE®
24" Built-In Double Oven

JRP24BD Black on black

Upper Oven

- Self-clean oven with Delay Clean option
- Control lock capability
- Delay Bake option with Cook & Hold

Lower Oven

- Standard-clean oven
- Rotary controls



GE
24" Built-In Single Oven

JRP15WW White on white

- Self-clean oven with Delay Clean option
- Control lock capability
- Delay Bake option with Cook & Hold

JRP15BW Black on black (not shown)

JRS04BW Black on black (not shown)

- Standard-clean oven
- Delay Bake option with Cook & Hold

Built-In Single Ovens: 24" Gas

These models include

- Fits most 24" cabinets
- SmartSet electronic controls
- Electronic pilotless ignition
- Frameless glass oven door
- Designer-style handle

Note: bold = feature upgrade from previous model



Self-clean ovens provide easy clean convenience. Simply set the controls and the oven cleans itself.



GE
24" Built-In Single Oven

JGRP17WEW White on white

- Self-clean oven with Delay Clean option
- Control lock capability
- In-oven broiling
- Storage drawer

JGRP17BEW Black on black (not shown)



GE
24" Built-In Single Oven

JGRS14BEW Black on black

- Standard-clean oven
- Separate broiler drawer

Built-In Warming Drawers: 30" and 27" Electric

These models include • Flush appearance installation • Temperature control with proof and variable settings • Crisp/Moist humidity control • ON/OFF switch • "ON" indicator light • One-half rack • Frameless drawer front • Profile handle • Removable stainless steel drawer pan • Commercial pan set or wood panel kit (available at additional cost)



Half rack provides even heat distribution and allows extra space to keep food warm and tasty before serving.



Optional wood panel kit available for a custom built-in appearance.



Hidden temperature control has proof and variable settings for warming flexibility.



Warming drawer keeps plates warm, ready and waiting to serve that special meal.



GE Profile™ Built-In Warming Drawer

JTD915SF Stainless steel

• 30" width

JKD915SF Stainless steel (not shown)

• 27" width



GE Profile Built-In Warming Drawer

JTD915WF White on white

• 30" width

JKD915WF White on white (not shown)

• 27" width

JTD915CF Bisque on bisque (not shown)

• 30" width

JKD915CF Bisque on bisque (not shown)

• 27" width



GE Profile Built-In Warming Drawer

JTD915BF Black on black

• 30" width

JKD915BF Black on black (not shown)

• 27" width

GE caters to today's busy cooks with a wide variety of cooktop options.

GE Profile™ and GE® cooktops make a dramatic difference in the kitchen, both in terms of appearance and performance.

Distinguished by a continuous, smooth surface, these cooktops add immediate visual interest.

High-tech features include the Precise Digital Control System,™ an electronic sensor that automatically adjusts the size of the element to fit the pan, a sensor that indicates when an element is left on, and two convenient dual-size elements.



Now you can enjoy the superior performance of gas, along with ease of cleaning.

Thanks to GE innovation, serious cooks can make gas cooktops a prominent part of their kitchens without the usual worry about cleanability.

High-output or simmer burners give you precise control over heat intensity, while the smooth, sealed surface beneath these burners lets you control spills and messes. Professional-style continuous burner grates allow easy pot movement. And every model wipes clean, whether it's the deep recessed cooktop or the gas-on-glass style.





Electric cooktops offer an array of convenient extras.

Two dual elements let you match the element size to the size of the pan. Models with electronic controls also feature a cooking timer and lockout option. Models with a bridge element allow you to combine two elements into one large cooking surface.



Gas cooktops provide outstanding performance.

When it comes to power, our gas cooktops go to extremes. The 15,000-BTU burner supplies intense heat needed for sautéing and stir-frying. Gas cooktops also provide precise temperature control and consistent, gentle simmering.

Built-In Cooktops: 36" and 30" Electric CleanDesign


These models include • Smooth frameless ceramic-glass CleanDesign cooktop • Flush-mount installation capability (except Stainless steel models)
• Fingerprint- and scratch-resistant patterned glass cooktop • Hot surface indicator lights **Note: bold = feature upgrade from previous model**



The Precise Digital Control System™ is simple to understand and easy to operate. Just read and touch.



Pan presence sensor reminds you when an element is left on and automatically shuts it off when not in use.



Helps protect your family with control lock capability.



A convenient kitchen timer lets you set a reminder at the appropriate cooking time, making precision cooking easy.



GE Profile™

36" Electronic Touch Control Cooktop

JP969BH Black on black

• Frameless cooktop • **Precise Digital Control System™** • **Pan presence sensor** • **Pan size sensor** • **Control lockout** • **Kitchen timer** • Five ribbon heating elements: two 6", one 7" with warmer, one dual (6"/9") and one dual (5"/8") element

JP969SH Stainless steel (not shown)

JP969WH White on white (not shown)

JP969CH Bisque on bisque (not shown)

GE Profile

36" Electric CleanDesign Cooktop

JP961TH True White

• Frameless true bisque cooktop • Five ribbon heating elements: two 6", one 7", one dual (6"/9") and one dual (5"/8") element

JP961SH Stainless steel (not shown)

JP961KH True Bisque (not shown)

JP961BH Black on black (not shown)

GE Profile

36" Electric CleanDesign Cooktop

JP960SC Stainless steel

• Frameless cooktop • Five ribbon heating elements: one 6", one 7", one dual (6"/9") and two 7" with connecting bridge element

JP960BC Black on black (not shown)

JP960TC True white (not shown)

JP960KC True bisque (not shown)

GE Profile

30" Electronic Touch Control Cooktop

JP939WH White on white

• Frameless cooktop • **Precise Digital Control System** • **Pan presence sensor** • **Pan size sensor** • **Control lockout** • **Kitchen timer** • Four ribbon heating elements: one 6", one dual (6"/9"), one 7" and one dual (5"/8") element • Four hot surface indicator lights

JP939SH Stainless steel (not shown)

JP939CH Bisque on bisque (not shown)

JP939BH Black on black (not shown)



GE Profile

30" Electric CleanDesign Cooktop

JP931SH Stainless steel
 • Frameless cooktop • Four ribbon heating elements: one 6", one 8", one dual (6"/9") and one dual (5"/8") element • Four hot surface indicator lights

JP931TH True white (not shown)

JP931KH True bisque (not shown)

JP931BH Black on black (not shown)



Energy-efficient pan size sensor selects a 6" or 9" element to match the pan you are using.



GE Profile

30" Electric CleanDesign Cooktop

JP930TC True white
 • Frameless cooktop • Four ribbon heating elements: one 6", one dual (6"/9") and two 7" with connecting bridge element • Four hot surface indicator lights

JP930SC Stainless steel (not shown)

JP930KC True bisque (not shown)

JP930BC Black on black (not shown)



Flush-mount trim kit creates a stunning visual effect.
 (Not available on stainless steel models)



GE Profile

30" Electric CleanDesign Cooktop

JP350KC True bisque
 • Frameless cooktop • Four ribbon heating elements: one dual (6"/9"), two 8" and one 6" • Four hot surface indicator lights

JP350SC Stainless steel (not shown)

JP350TC True white (not shown)

JP350WC White on white (not shown)

JP350BC Black on black (not shown)



Bridge element for total cooking flexibility.



GE®

30" Electric CleanDesign Cooktop

JP340WC White on white
 • Frameless cooktop • Four ribbon heating elements: two 6" and two 8" • Hot surface indicator light

JP340BC Black on black (not shown)

JP340CC Bisque on bisque (not shown)



Dual element allows consumers the choice of using a 6" or 9" element.

Built-In Cooktops: 36" and 30" Electric Coil

These models include • Porcelain-enameled lift-up cooktop • Two 8" and two 6" plug-in heating elements

• Infinite heat rotary controls

Note: bold = feature upgrade from previous model



Cooktop filler trim kit available to fill in oversized cutout left by an older cooktop.



GE®

36" Electric Coil Cooktop

JP626WF White on white

• One-piece chrome drip bowls • Upfront color-matched glass control panel

JP626CF Bisque on bisque (not shown)



GE

30" Electric Coil Cooktop

JP328SF Stainless steel

• One-piece chrome drip bowls • Upfront color-matched glass control panel

JP328BF Black on black (not shown)

JP328WF White on white (not shown)

JP328CF Bisque on bisque (not shown)

Built-In Cooktops: 21" Compact



GE

21" Electric Coil Cooktop

JP201CB Stainless steel

• One 8" and one 6" plug-in heating element

• Infinite heat rotary controls • Removable one-piece chrome drip bowls • Heating element "ON" indicator light

JP202D White on white (not shown)

Built-In Cooktops: 30" Electric Downdraft

These models include • Smooth frameless ceramic-glass CleanDesign cooktop • Four ribbon heating elements: one 6", one dual (6"/9") and two 7" with connecting bridge element • Four hot surface indicator lights • Powerful 400-CFM downdraft venting system • Three-speed fan • Upfront controls



GE Profile™
30" Electric Downdraft Cooktop
JP989SD Stainless steel
JP989TD True white (not shown)
JP989BD Black on black (not shown)



GE Profile
30" Electric Downdraft Cooktop
JP989KD True bisque

Built-In Cooktops: 30" Gas Downdraft

These models include • Ceramic-glass cooktop • Four sealed gas burners • Continuous cast-iron grates • Electronic pilotless ignition • Powerful 400-CFM downdraft venting system • Three-speed fan • Upfront controls

Note: bold = feature upgrade from previous model



GE Profile
30" Gas Downdraft Cooktop
JGP989TC True white
JGP989KC True bisque (not shown)



GE Profile
30" Gas Downdraft Cooktop
JGP989BC Black on black

Built-In Cooktops: 36" Gas

These models include • Sealed burners • Electronic pilotless ignition

Note: bold = feature upgrade from previous model



Precise Simmer burner keeps delicate foods like sauces and gravies at a low setting.



Power Boil™ burner 15,000 BTU burner heats up fast with high power for skillets, woks or large pots.



GE glass cooktops are sleek and easy to clean. The flat surface and sealed burners make cleanup a snap.



GE Profile™

36" Deep Stainless Gas Cooktop

JGP963SEF Stainless steel

- **Deep stainless cooktop** • Continuous deluxe cast-iron grates • Five sealed gas burners • 15,000 BTU Power Boil™ burner • Two Precise Simmer burners • Dishwasher-safe grates

GE Profile

36" Deep Porcelain Gas Cooktop

JGP963BEC Black on black

- **Deep porcelain cooktop** • Continuous deluxe cast-iron grates • Five sealed gas burners • **15,000 BTU Power Boil burner** • Two Precise Simmer burners • Dishwasher-safe grates

JGP963WEC White on white (not shown)

JGP963CEC Bisque on bisque (not shown)

GE Profile

36" Gas on Glass Cooktop

JGP962SEC Stainless steel

- **Gas on glass ceramic cooktop** • Continuous deluxe cast-iron grates • Five sealed gas burners • 15,000 BTU Power Boil burner • Two Precise Simmer burners • Dishwasher-safe grates

JGP962TEC True white (not shown)

JGP962KED True bisque (not shown)

JGP962BEC Black on black (not shown)



GE®
36" Gas Cooktop

JGP960SED Stainless steel

• Tempered glass cooktop • Deluxe cast-iron
grates • Five sealed gas burners • Two Precise
Simmer burners • 12,000 BTU High Output
burner



GE
36" Gas Cooktop

JGP636CED Bisque

• Tempered glass cooktop • Deluxe cast-iron
grates • Five sealed gas burners • Two Precise
Simmer burners • 12,000 BTU High Output
burner

JGP636WED White on white (not shown)

JGP636BED Black on black (not shown)



GE
36" Deep Porcelain Gas Cooktop

JGP628CEC Bisque

• Deep porcelain cooktop • Precise Simmer
burner • Continuous grates

JGP628WEC White on white (not shown)

JGP628BEC Black on black (not shown)

Built-In Cooktops: 30" Gas

These models include • Sealed burners (except JGP320) • Electronic pilotless ignition

Note: bold = feature upgrade from previous model



Precise Simmer burner keeps delicate foods like sauces and gravies at a low setting.



Power Boil™ burner 15,000 BTU burner heats up fast with high power for skillets, woks or large pots.



GE glass cooktops are sleek and easy to clean. The flat surface and sealed burners make cleanup a snap.



GE Profile™

30" Deep Stainless Gas Cooktop

JGP933SEF Stainless steel
• **Deep stainless cooktop** • Continuous deluxe cast-iron grates • Four sealed gas burners • 15,000 BTU Power Boil burner • Precise Simmer burner • Dishwasher-safe grates

JGP933WEC White on white (not shown)
• Deep porcelain cooktop

JGP933CEC Bisque on bisque (not shown)

JGP933BEC Black on black (not shown)



GE Profile

30" Gas on Glass Cooktop

JGP932KED True bisque
• Gas on glass ceramic cooktop • Continuous deluxe cast-iron grates • Four sealed gas burners • 15,000 BTU Power Boil burner • Precise Simmer burner • Dishwasher-safe grates

JGP932TEC True white (not shown)



GE Profile

30" Gas on Glass Cooktop

JGP932BEC Black on black
• Gas on glass ceramic cooktop • Continuous deluxe cast-iron grates • Four sealed gas burners • 15,000 BTU Power Boil burner • Precise Simmer burner • Dishwasher-safe grates

JGP932SEC Stainless steel (not shown)



GE®

30" Gas Cooktop

JGP930SED Stainless steel
• Tempered glass cooktop • Deluxe cast-iron grates • Four sealed gas burners • Precise Simmer burner • 12,000 BTU High Output burner



GE

30" Gas Cooktop

JGP336WED White on white

• Tempered glass cooktop • Deluxe cast-iron grates • Four sealed gas burners • Precise Simmer burner • **12,000 BTU High Output burner**

JGP336CED Bisque on bisque (not shown)

JGP336BED Black on black (not shown)



GE

30" Deep Porcelain Gas Cooktop

JGP328BEC Black on black

• **Deep porcelain cooktop** • Four sealed gas burners • Precise Simmer burner • **Continuous grates**

JGP328WEC White on white (not shown)

JGP328CEC Bisque on bisque (not shown)



GE

30" Gas Cooktop

JGP326WEF White on white

• Four sealed gas burners • **Precise Simmer burner**

JGP326CEF Bisque on bisque (not shown)

JGP326BEF Black on black (not shown)



GE

30" Gas Cooktop

JGP320EV White or black

• Lift-up cooktop • Glass control panel • Standard porcelain-steel grates • Four standard gas burners

Built-In Cooktops: Downdraft Electric Select-Top™ Modular

These models include • Infinite heat rotary controls • Powerful 400-CFM downdraft venting system

- Heating element “ON” indicator light

Note: bold = feature upgrade from previous model

Optional Select-Top™ Modules (available at additional cost)



Grill Module
Front and rear controlled heating element for more cooking flexibility and energy savings. One-piece grill grate and porcelain-enameled reflector pan can be removed for cleaning in sink or dishwasher.



Griddle Accessory
(For use with optional grill module) Place over heating element and reflector pan from optional grill module. Griddle accessory has a non-stick coating and is self-draining.



Ribbon Module
Patterned glass top with one 8" and one 6" ribbon heating element.



Coil Module
One 8" and one 6" plug-in coil heating element with removable one-piece drip bowls.



Grill Cover
Covers grill area when not in use. Available in Black on black and White on white.



GE®
30" Dual Modular Cooktop
JP389WD White on white
• Three-speed fan • Porcelain-enameled cooktop
• Both sides accept optional cooking modules
Shown with optional Ribbon module JXDR50VW and Grill module JXDL44N.



GE
30" Dual Modular Cooktop
JP389BD Black on black
• Three-speed fan • Porcelain-enameled cooktop
• **Both sides accept optional cooking modules**
Shown with optional Ribbon modules JXDR50VB.

Optional Modules (available at additional cost)	Models	
	JP389WD	JP389BD
Coil Module	JXDC44RWH	JXDC43RBL
Ribbon Module	JXDR50VW	JXDR50VB
Grill Module	JXDL44N	JXDL44N
Griddle Accessory	JXDD44R	JXDD44R
Grill Cover	JXDM3	JXDM2

Built-In Cooktops: 30" Downdraft Gas Modular

These models include • Gas cooktop burner module (right side) • Left side accepts optional cooking modules • Powerful downdraft venting • Electronic pilotless ignition • Upfront controls

Note: bold = feature upgrade from previous model



GE Profile™ 30" Single Modular Gas Cooktop **JGP979SEF** Stainless steel

Shown with optional Grill module JXGG79.

Note: Unit not LP convertible.

Optional Modules (available at additional cost)

Two-burner gas module
JXGB79W—White on white
JXGB79B—Black on black

Gas grill module
JXGG79

Griddle for use with
optional Grill module
JXGL79

Grill Cover
JXGC89W—White on white
JXGC89B—Black on black

Grill and griddle feature
Excalibur® non-stick finish.



GE Profile 30" Single Modular Gas Cooktop **JGP979WEF** White on white

Shown with optional Grill module JXGG79.

JGP979BEF Black on black (not shown)

Note: Unit not LP convertible.

Common Cooktop Cutouts

Common Cutouts—30" Cooktops

Dimensions (W x D)	Model #	Description
28-1/2" x 19-5/8"	JP939	CleanDesign
	JP931	CleanDesign
	JP930	CleanDesign
	JP350	CleanDesign
	JP340	CleanDesign
	JP328	Calrod®
	JGP933—Gas	Sealed Burner
	JGP932—Gas	Sealed Burner
	JGP930—Gas	Sealed Burner
	JGP336—Gas	Sealed Burner
	JGP328—Gas	Sealed Burner
	JGP326—Gas	Sealed Burner
	JGP320—Gas	Standard Burner
28-7/8" x 20-5/8"	JP989	Electric Downdraft
	JP389	Modular Downdraft
	JGP989—Gas	Gas Downdraft
29" x 21"	JGP979—Gas	Modular Downdraft

Common Cutouts—36" Cooktops

Dimensions (W x D)	Model #	Description
33-7/8" x 19-1/8"	JP969	CleanDesign
	JP961	CleanDesign
	JP960	CleanDesign
	JP626	Calrod®
	JGP963—Gas	Sealed Burner
	JGP962—Gas	Sealed Burner
	JGP960—Gas	Sealed Burner
	JGP636—Gas	Sealed Burner
	JGP628—Gas	Sealed Burner
	JGP628—Gas	Sealed Burner

GE® Slide-In and Drop-In Ranges

The perfect fit.

GE slide-in and drop-in ranges fit every kitchen decor and cooking style. Slide-in ranges are available in electric or gas configurations and they install nearly flush with surrounding cabinetry and counters, creating a dramatic effect. Accenting the contemporary design is the sleek stainless exterior, which complements just about any color or wood finish.



GE slide-in and drop-in ranges give the effect of added space, opening up kitchens and making them more inviting.

Versatile features are the key ingredients to our slide-in and drop-in ranges.



Precise Air™ convection

This exclusive system uses an innovative fan that rotates one way, then reverses direction for optimal air and heat circulation. Plus, a third heating element surrounds the fan and delivers consistent heat for true European convection.



Electric cooktop versatility

Innovative heating elements make cooktop cooking easy. Combine two separate elements into one large bridge element, adjust a dual element to 6" or 9", or use a convenient fifth warming element for keeping foods warm and ready to serve.



Electronic control panel

The electronic control panel is innovatively styled with glass touch controls, a digital display and sleek, easy-turn dials. Plus, it's ergonomically angled for optimal, user-friendly operation.



Gas cooktop versatility

Four convenient burner sizes satisfy every cooktop need from boiling to simmering. The continuous grate surface makes it easy to slide pans between burners.

Slide-In Ranges: 30" Electric

These models include • TrueTemp™ system • **Big ClearView™ window** • Four hot surface indicator lights • Fingerprint- and scratch-resistant patterned ceramic-glass CleanDesign cooktop • Optional closed door broiling • Certified Sabbath mode • Extra-large self-clean oven with Delay Clean option • Control lock capability • Custom built-in look with simple slide-in installation

Note: bold = feature upgrade from previous model



Bridge element for total cooking flexibility.



The warming zone is a great way to keep food warm and ready to enjoy or melt butter or chocolate.



Fast and easy cleanup is made possible through our CleanDesign oven interior/hidden bake element.



Optional backguard kit attaches to the back of range when unit is installed into a free-standing cutout.



GE Profile™

30" Slide-In CleanDesign Convection Range

JS968SF Stainless steel

- Precise Air™ convection system • **Single-rack and multi-rack convection bake** • Convection Roast
- Auto Recipe™ conversion • **Proof mode** • Warm mode • Stainless steel oven door with window
- Three heavy-duty racks • Halogen interior oven light • **Electronic glass touch controls** • Two 7" ribbon heating elements with connecting bridge element • One dual (6"/9") and one 6" ribbon heating element • **Fifth element warming zone**
- CleanDesign oven interior/hidden bake element



GE Profile

30" Slide-In CleanDesign Convection Range

JS968TF True white

JS968KF True bisque (not shown)

JS968BF Black on black (not shown)



GE Profile

30" Slide-In CleanDesign Electric Range

JSP47CF Bisque on bisque

- Electronic controls • Two 8", one 6" and one dual (6"/9") ribbon heating element
- **Frameless glass oven door**

JSP47WF White on white (not shown)

JSP47BF Black on black (not shown)

Slide-In Ranges: 30" Electric

These models include • Lift-up overhanging porcelain-enameled cooktop • Two 8" and two 6" plug-in Calrod® heating elements

• Electronic clock and kitchen timer • Custom built-in look with simple slide-in installation

Note: bold = feature upgrade from previous model



Optional backguard kit for use with or without countertop backsplash.



Optional end cap kit for use when countertop has been notched for end caps.



Vertical side trim kit to close gap between range and adjacent base cabinet.



GE®

30" Slide-In Electric Coil Range

JSP34WD White on white

• Electronic controls • Self-clean oven with Delay Clean option • Frameless glass oven door with designer-style handle • Control lock capability

JSP34CD Bisque on bisque (not shown)

JSP34BD Black on black (not shown)



GE

30" Slide-In Electric Coil Range

JSP26BD White or Bisque

• Electronic controls • Self-clean oven with Delay Clean option • Control lock capability • Frameless glass oven door with designer-style handle



GE

30" Slide-In Electric Coil Range

JSS26BD Black on black

• Standard-clean oven • Frameless glass oven door with designer-style handle

JSS16PD White or Bisque (not shown)

• Standard-clean oven • Color-matched oven door • Visor handle

Slide-In Ranges: 30" Dual-Fuel

These models include • Gas cooktop • **Precise Air™ electric convection system** • TrueTemp™ system • Electronic controls • Extra-large self-clean oven • Electronic clock and automatic oven timer • Sealed burners • Continuous grates • Power Boil™ 15,000 BTU burner • Precise Simmer burner • High Output burner • Three oven racks • Six embossed rack positions • In-oven broiling • Extra-large broiler pan with grid • Interior oven light • Electronic pilotless ignition • Certified Sabbath mode

Note: bold = feature upgrade from previous model



Precise Air™ convection uses an innovative fan that reverses direction for optimal air and heat circulation.



Power Boil™ burner with 15,000 BTU, provides maximum output for fast heat-up and boiling.



Precise Simmer burner allows for low, even heat distribution for delicate foods and sauces.



Upfront glass touch controls look great and are easy to clean.



GE Profile™

30" Slide-In Dual-Fuel Range

J2S968SH Stainless steel

- **Precise Air electric convection system** • **Electric Convection Bake** • **Electric Convection Roast**
- Auto Recipe™ conversion • Warm mode
- Proof mode • Gas on glass cooktop • Stainless steel oven door with Big ClearView™ window
- Oven meat probe



GE Profile

30" Slide-In Dual-Fuel Range

J2S968BH Black on black

- Frameless glass oven door with Big ClearView™ window • Glass touch controls



GE Profile

30" Slide-In Dual-Fuel Range

J2S968KH True bisque

J2S968TH True white (not shown)

Slide-In Ranges: 30" Gas

These models include • Electronic pilotless ignition • **Frameless glass oven door with window** • Interior oven light • Broiler pan with grid

Note: bold = feature upgrade from previous model



High Output burner supplies the intense heat needed for boiling and sautéing.



Sealed burner design helps contain spills from dripping beneath cooktop for easy cleaning.



Extra-large capacity allows you to cook more at once.



GE Profile 30" Slide-In Gas Range

JGS968TH True white
• **Power Boil™ burner** • High Output burner
• Precise Simmer burner • Sealed burners
• Continuous grates • Gas on glass cooktop
• **Convection bake** • **Convection roast** • **Auto Recipe™ conversion** • **Warm mode** • **Proof mode**
• **Glass touch controls** • TrueTemp system

JGS968KH True bisque (not shown)

JGS968SH Stainless steel (not shown)

JGS968BH Black on black (not shown)



GE Profile 30" Slide-In Gas Range

JGSP48BH Black on black
• **Two High Output burners** • **Precise Simmer burner** • **Sealed burners** • **Continuous grates**
• **Gas on glass cooktop** • Electronic oven controls
• TrueTemp system • Self-clean oven with light self-clean option • Frameless glass oven door with Big ClearView window • Control lock capability
• Certified Sabbath mode

JGSP48CH Bisque on bisque (not shown)

JGSP48WH White on white (not shown)



GE® 30" Slide-In Gas Range

JGSP23WEY White on white
• **SmartSet electronic controls** • **Sealed burners**
• **Standard Simmer burner** • **Self-clean oven**
• **Control lock capability** • **Standard-cast grates**

JGSP23BEY Black on black (not shown)

JGSP23CEY Bisque on bisque(not shown)



GE 30" Slide-In Gas Range

JGSS05BEH Black on black
• **Extra-large standard-clean oven** • **Black porcelain-enameled lift-up cooktop** • **Separate broiler drawer with extra-large broiler pan and grid** • **Standard porcelain-steel grates**

Models shown with required filler strip provided.

Not all features available on all models.


Drop-In Ranges: 30" Electric

These models include • SmartSet electronic controls • Self-clean oven with delay option • Control lock capability

Note: bold = feature upgrade from previous model



Electronic controls are simple to understand and easy to operate. Just read and touch.



The warming zone is a great way to keep food warm and ready to enjoy.



Bridge element for total cooking flexibility.



Fast and easy cleanup is made possible through our CleanDesign oven interior/hidden bake element.



GE Profile™

30" Drop-In Convection Range

JD968SF Stainless steel

• Precise Air™ convection system • Single-rack and multi-rack convection bake • Convection roast • Auto Recipe™ conversion • Electronic glass touch controls • Proof mode • Warm mode • Stainless steel oven door with window • Three heavy-duty racks • Halogen interior oven light • Certified Sabbath mode • Two 7" ribbon heating elements with connecting bridge element • One dual (6"/9") and one 6" ribbon heating element • **Fifth element warming zone** • CleanDesign oven interior/hidden bake element



GE Profile

30" Drop-In Electric Range

JD968TF True white

JD968KF True bisque (not shown)

JD968BF Black on black (not shown)



GE Profile

30" Drop-In Electric Range

JDP47CF Bisque on bisque

• Extra-large self-clean oven with Delay Clean option • Two 8", one 6" and one dual (6"/9") ribbon heating element • Four hot surface indicator lights • Fingerprint- and scratch-resistant ceramic-glass CleanDesign cooktop • Frameless glass oven door with Big ClearView™ window • Certified Sabbath mode

JDP47WF White on white (not shown)

JDP47BF Black on black (not shown)



GE®
30" Drop-In Electric Range

JDP39BW Black on black

- Lift-up overhanging cooktop • Two 8" and two 6" plug-in heating elements • Removable one-piece drip bowls • Frameless glass oven door with window • Designer-style handle

JDP39WW White on white (not shown)



GE
30" Drop-In Electric Range

JDP36BW White

- Lift-up overhanging cooktop • Two 8" and two 6" plug-in heating elements • Removable one-piece drip bowls • Frameless glass oven door with window • Designer-style handle

JDP36BD Bisque (not shown)

JDS26BW White (not shown)

- Standard-clean oven

JDS26BD Bisque (not shown)

- Standard-clean oven

Drop-In Spacemaker™ Ranges: 27" Electric


These models include • Lift-up overhanging porcelain-enameled cooktop • One 8" and three 6" plug-in Calrod® heating elements

• Frameless glass oven door • Big View window • Chrome drip bowls

Note: bold = feature upgrade from previous model



Electronic oven control provides convenient cooking functions.



Calrod® heating elements unplug for easy removal of one-piece drip bowls for cleaning and access to the subtop.

Optional Backguards

White or black painted finish is available at additional cost for all models.

JX27RWH – White,
JX27RBK – Black



GE Profile™

27" Drop-In Electric Range

JMP31WC White on white

- Self-clean oven with automatic oven door lock
- Electronic clock and kitchen timer
- Auto oven shut-off
- **Sure Grip designer-style handle**



GE®

27" Drop-In Electric Range

JMP28BC White

- Self-clean oven with automatic oven door lock
- Electronic clock and minute timer
- Auto oven shut-off

JMP28BD Bisque (not shown)

JMS08BD White or Bisque (not shown)

- Standard-clean oven

Venting Options: Slide-Out Hoods

These models include

- See-through glass visor slides in and out
- 300-CFM performance with variable-speed fan control
- Auto heat sensor
- Compact housing leaves ample shelf space behind cabinet doors
- Vertical exhaust with 3-1/4" x 10" rectangular duct
- Cooktop light



GE Profile

36" Slide-Out Hood

JV960SC Brushed aluminum

30" Slide-Out Hood

JV930SC Brushed aluminum (not shown)

GE Profile

36" Slide-Out Hoods

JV696S Bisque on bisque

JV695S White on white (not shown)

JV694S Black on black (not shown)

30" Slide-Out Hoods


JV396S Bisque on bisque (not shown)

JV395S White on white (not shown)

JV394S Black on black (not shown)

Venting Options: Designer Hoods

These models include • Four-speed fan control • Two halogen cooktop lights (20 watts each) • Night light setting • Vertical exhaust (600-CFM) • Seven Sones rating • 7" round duct



Optional chimney cover available to cover exposed duct from the hood to the ceiling.



Commercial filter kit available for 30" and 36" designer hoods.



GE Profile

Designer Hoods

JV966DSS Stainless steel

- 36" width

JV936DSS Stainless Steel

(not shown)

- 30" width

Venting Options: Telescopic Downdraft Systems

These models include • 500-CFM fan • Upfront variable-speed fan with slide control • Raises to 8-3/4" over cooktop surface • Retracts when not in use • Ideal for island or peninsula installations • Use optional GE accessory cover (JXBC67) for outdoor installation of blower or the indoor blower mounting kit (JXRB67) for indoor remote mounting of the blower **Note: bold = feature upgrade from previous model**



Separate remote switch to raise/lower vent provides installation flexibility and convenience of operation (only available on JVB98 and JVB67).

Note: Approved for use with all GE Profile and GE electric and sealed burner gas cooktops. Not approved for use with standard burner gas cooktops.



GE Profile Telescopic Downdraft Systems

JVB98SH Stainless steel
• 36" width • Separate remote switch to raise/lower vent

JVB94SH Stainless steel (not shown) • 30" width



GE Profile Telescopic Downdraft Systems

JVB67HWW White on white
• 36" width • **Separate remote switch to raise/lower vent**

JVB67HCC Bisque on bisque (not shown)

JVB67HBB Black on black (not shown)



GE Profile Telescopic Downdraft Systems

JVB37HBB Black on black
• 30" width

JVB37HWW White on white (not shown)

JVB37HCC Bisque on bisque (not shown)

Note: Cooktops sold separately.

Venting Options: High-Performance, Performance, Deluxe and Standard Hoods

Note: bold = feature upgrade from previous model



GE Profile

High-Performance Hood

JV666H Stainless steel

• 36" width • Four-speed fan control • Two halogen cooktop lights (50 watts each) • Night light setting • Vertical (round 410 CFM, rectangular 380 CFM) or rear (390 CFM) exhaust • 3-1/4" x 10" rectangular duct (convertible to 7" round duct)

JV665H White on white, Bisque on bisque or Black on black (not shown)



GE Profile

High-Performance Hood

JV635H Black on black (shown), Bisque on bisque or White on white

• 30" width • Four-speed fan control • Two halogen cooktop lights (50 watts each) • Night light setting • Vertical (round 410 CFM, rectangular 380 CFM) or rear (390 CFM) exhaust

JV636H Stainless steel (not shown)



GE Profile

Performance Hoods

JV565H White on white (shown), Bisque on bisque or Black on black

• 36" width • Two-speed fan control • Vertical (round 250 CFM, rectangular 240 CFM) or rear (240 CFM) exhaust • Two halogen cooktop lights (50 watts each) • Convertible exhaust options (7" round, rectangular or non-vented) • Rectangular damper included

JV566H Stainless steel (not shown)

JV535H White on white, Bisque on bisque, or Black on black (not shown)

• 30" width

JV536H Stainless steel (not shown)

JXDA22 round damper accessory, available at additional cost (Models JV666/665/636/635/566/565/536/535).

Not all features available on all models.



GE®

Deluxe Hoods

JV367H White on white (shown), Bisque on bisque or Black on black

• 36" width • Rotary control • Three-speed fan • Convertible exhaust (shipped in non-vented configuration, convertible to 7" round or rectangular exhaust) • Rectangular damper included

JV347H White on white, Bisque on bisque or Black on black

• 30" width



GE

Standard Hoods

JV338H White (shown) or Bisque

• 3-1/4" x 10" rectangular duct • Rectangular damper included

JN327H White, Bisque or Almond (not shown)

• Non-vented

JXDA22 round damper accessory, available at additional cost (Models JV367/347/338).

JXHC1 cord kit allows a receptacle in the cabinet over the range to accommodate either an over-the-range microwave oven or a standard hood.

Light bulbs not included.

30" Built-In Double and Single Ovens with Trivection™ Technology

		GE Profile™
		JT980SH JT980WH JT980CH JT980BH
Features		
Oven	Upper Lower	Trivection™/Convection Convection
Oven capacity		4.3 upper/4.1 lower
Trivection™ technology		●
Speed baking		Upper
Speed broiling		Upper
Precise Air™ Convection System		●
Multi-rack convection bake		●
Single-rack convection bake		●
Convection roast		●
Auto Recipe™ Conversion		●
Self-clean oven w/Delay Clean option		●
Automatic self-clean oven door lock		●
Light self-clean option		●
TrueTemp™ System		●
Variable broil/Six-pass broil element		●
Dual power bake element		●
Chef's Guide™ controls		Glass touch
Programmable recipe recall		●
Proof mode		●
Warm mode		●
Defrost mode		●
Help mode		●
Optional closed door broiling		●
Temperature display		●
Delay Bake Option		●
C° and F° programmable		●
Audible preheat signal		●
Auto oven shut-off w/override		●
Electronic clock and kitchen timer		●
Control lock capability		●
Oven lights		2 Halogen
Certified Sabbath Mode		●
Oven racks	Upper Lower	3 Heavy-duty 3 Heavy-duty
Embossed rack positions		5 Upper/7 Lower
Roasting rack		●
Extra-large broiler pan with grid		●
Appearance		
Color appearance*		SS WW CC BB
Frameless oven doors		Stainless Steel White Glass Bisque Glass Black Glass
Big View window		●
Sculptured handles		Stainless look White Bisque Black
Trivection cookbook		●
Weights & Dimensions		
Approx. shipping wt. (lbs.)		322
Oven cabinet width required (in.)		30
Overall dimensions (WxHxD in inches)		29-3/4 x 52-7/8 x 23-1/2
Overall oven interior dimensions (WxHxD in inches)	Upper Lower	24 x 17-1/2 x 17-1/2 24 x 16-1/4 x 18-1/4
Power/Ratings		
KW rating @ 240V		8.9
208V		6.7
Amps @ 240V		40
208V		40
Convection wattage		2500
Broiler/bake wattage		2500/2500

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.


30" Slide-in Electric Range with Trivection Technology

		GE Profile
		JS998SH JS998TH JS998KH JS998BH
Features		
Oven		Trivection™/Convection
Oven capacity		4.3 cu. ft.
Trivection™ technology		●
Speed baking		●
Speed broiling		●
Precise Air™ Convection System		●
Multi-rack convection bake		●
Single rack convection bake		●
Convection roast		●
Auto Recipe™ Conversion		●
Self-clean oven w/Delay clean option		●
Light self-clean option		●
Automatic self-clean oven door lock		●
Oven racks		3 Heavy-Duty
TrueTemp™ system		●
Variable broil/Six-pass broil element		●
Dual power bake element		●
Ceramic-glass cooktop		Patterned Black True White True Bisque Patterned Black
Overhanging cooktop		●
Dual 6"/9" heating element		1 Ribbon (2500W)
8" heating elements		1 Ribbon (2000)
6" heating elements		2 Ribbon (1500W)
Infinite heat controls		●
Chef's Guide™ controls		Glass touch
Programmable recipe recall		●
Proof mode		●
Warm mode		●
Defrost mode		●
Help mode		●
Optional closed door broiling		●
Temperature display		●
Delay Bake option w/Cook & Hold		●
C° or F° programmable		●
Audible preheat signal		●
Auto oven shut-off w/override		●
Control lock capability		●
Electronic clock/kitchen timer		●
Hot surface indicator lights		4
Heating element "ON" indicator light		●
Certified Sabbath mode		●
Interior oven lights		2 Halogen
Storage drawer		Stainless White Bisque Black
Extra-large broiler pan with grid		●
Roasting rack		●
Trivection cookbook		●
Appearance		
Color appearance*		SS WW CC BB
Frameless glass oven door		Stainless steel White Bisque Black
Big View window		●
Sculptured handle		Stainless look White Bisque Black
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)		24 x 17-1/2 x 17-1/2
Approx. shipping weight (lbs.)		252
Power/Ratings		
KW rating @ 240V		12.8
208V		9.6
Amps @ 240V		40
208V		40
Convection Wattage		2500
Broiler/Bake Wattage		2500/2500

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.


30" Built-In Double Oven Dimensions (in inches) Model JT980

No change in cutout dimensions. Junction box may require relocation.

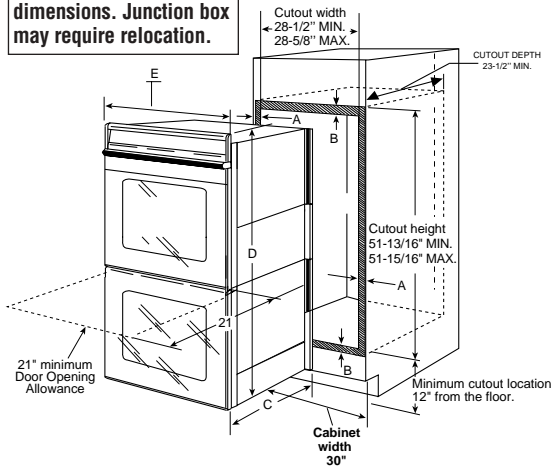

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT. THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE.

Cabinet	30"
A – Overlap of Oven Over Side Edges of Cutout	11/16" – 3/4"
B – Overlap of Oven at Top and Bottom of Cutout	1"
Oven	
C – Overall Depth	23-1/2"
D – Overall Height	52-7/8"
E – Overall Width	29-3/4"




Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data or download from GEAppliances.com.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least 194° F temperature rating.

30" Built-In Single Oven Dimensions (in inches) Model JT930



No change in cutout dimensions. Junction box may require relocation.

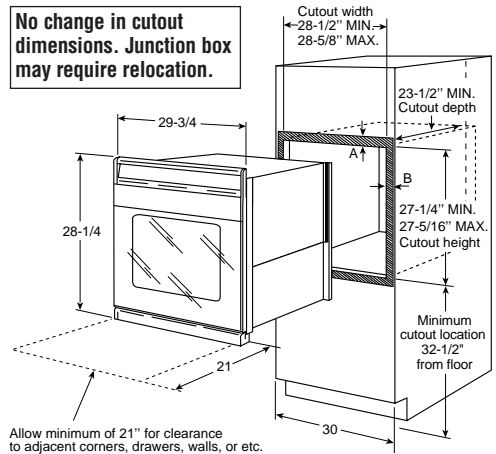

Allow minimum of 21" for clearance to adjacent corners, drawers, walls, or etc.

A=Allow 1" overlap of oven over top and bottom edges of cutout. B=Allow 11/16"-3/4" for overlap of oven over side edges of cutout.

Acceptable junction box location area SWO

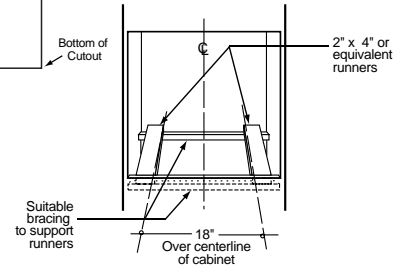



(Must support 200 LBS.)

Note: These ovens are *not* approved for stackable or side-by-side installations.

MOST 30" Wall Cabinets can be used with this unit. The opening between the inside walls must be at least 28-1/2" wide.

30" Slide-In Range Dimensions (in inches) Model JS998

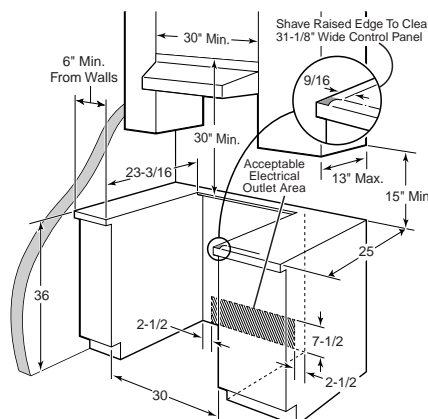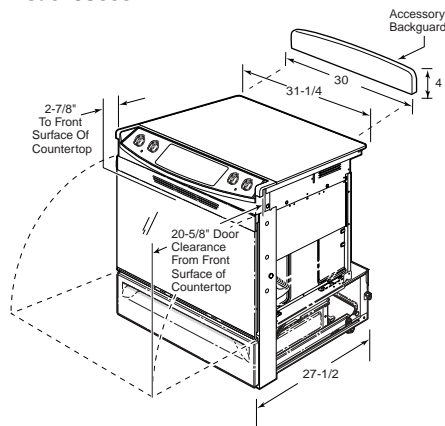

Note: Cabinets installed adjacent to slide-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

Note: All 30" Slide-In Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

Receptacle Locations: For all 30" Slide-In Ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Accessory Backguards (Shown above)
(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)
JXS37WW—White, JXS37CC—Bisque,
JXS37BB—Black/Stainless



Listed by Underwriters Laboratories



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

30" Built-In Double Ovens

		GE Profile™		GE®			GE Profile	GE
		Convection Double Ovens		Double Ovens			Microwave Double Ovens	
		JT955SF JT955WF JT955CF JT955BF	JT952SF JT952WF JT952CF JT952BF	JTP50SH	JTP48SF JTP48WF JTP48CF JTP48BF	JTP28SF JTP28WF JTP28CF JTP28BF	JT965SF JT965WF JT965CF JT965BF	JTP86SH JTP86WF JTP86CF JTP86BF
Features								
Oven	Upper	Convection/Self-Clean	Convection/Self-Clean	Self-Clean	Self-Clean	Self-Clean	Microwave	Microwave
	Lower	Thermal/Self-Clean	Thermal/Self-Clean	Self-Clean	Self-Clean	Standard	Convection/Self-Clean	Self-Clean
Cleaning time		Variable	Variable	Variable	Variable	Variable (upper)	Variable (lower)	Variable (lower)
Automatic self-clean oven door lock		●	●	●	●	Upper	Lower	Lower
Self-clean oven w/Delay Clean option		●	●	●	●	Upper	Lower	Lower
Light self-clean option		●	●	●	●	Upper		
TrueTemp™ System		●	●	●	●	Upper	Lower	Lower
CleanDesign oven interior/hidden bake		●	●				Lower	
Variable broil/Six-pass broil element		●		●	●	●	Lower	Lower
Eight-pass bake element		●	●				Lower	
Precise Air™ Convection System		Upper	Upper					
Convection bake		Multi/Single-rack Upper	Upper				Lower	
Convection roast		Upper	Upper				Lower	
Auto Recipe™ Conversion		Upper	Upper					
SmartSet controls		Glass Touch	●	●	●	Upper	●	●
Proof Mode		Upper						
Oven meat probe		Upper	Upper				Lower	
Warm Mode		Upper						
Optional closed door broiling		●	●	●	●	●	Lower	Lower
Temperature display		●	●	●	●	Upper	Lower	Lower
Delay Bake Option		●	●	●	●	Upper	Lower	Lower
C° and F° programmable		●	●	●	●	Upper	Lower	Lower
Audible preheat signal		●	●	●	●	Upper	Lower	Lower
Auto oven shut-off w/override		●	●	●	●	Upper	Lower	Lower
Electronic clock and kitchen timer		●	●	●	●	Upper	Lower	●
Control lock capability		●	●	●	●	Upper	Lower	Lower
Oven light		Halogen	●	●	●	●	Halogen (lower)	Lower
Certified Sabbath Mode		●	●	●	●	Upper		
Microwave Oven Features:								
Microwave cooking timer							99-Min./99-Sec.	99-Min./99-Sec.
Microwave power levels							10	10
Sensor functions							6	3
Electronic MWO touch controls							●	●
Microwave oven cavity (cu. ft.)							1.6	1.6
MWO power output watts							1000	1000
Turntable							●	●
Oven racks	Upper	3 Heavy-duty	3 Heavy-duty	2	2	2	3 Heavy-duty	2
	Lower	2 Heavy-duty	2 Heavy-duty	2	2	2		
Embossed rack positions		7 Upper/6 Lower	7 Upper/6 Lower	6 Upper/6 Lower	6 Upper/6 Lower	6 Upper/6 Lower	7 Lower	6 Lower
Roasting rack		Upper					Lower	
Broiler pan with grid		Upper	Upper	Upper	Upper	Upper	Lower	Lower
Appearance								
Color appearance*		SS WW CC BB	SS WW CC BB	SS	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB
		Stainless Steel White Glass Bisque Glass Black Glass	Stainless Steel White Glass Bisque Glass Black Glass	Stainless Steel	Stainless Steel White Glass Bisque Glass Black Glass	Stainless Steel White Glass Bisque Glass Black Glass	Stainless Steel White Glass Bisque Glass Black Glass	Stainless Steel White Glass Bisque Glass Black Glass
Frameless oven doors								
Big ClearView™ windows		●	●	●	●	●	Lower	Lower
Oven door handles		Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Stainless look	Black White Bisque Black	Black White Bisque Black	Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Stainless look White Bisque Black
Flush appearance installation		●	●	●	●	●	●	●
Convection cookbook		●	●				●	
Weights & Dimensions								
Approx. shipping wt. (lbs.)		260	260	260	260	260	177	177
Oven cabinet width required (in.)		30	30	30	30	30	30	30
Overall dimensions (WxHxD in inches)		29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 43-1/4 x 23-1/2	29-3/4 x 43-1/4 x 23-1/2
Overall oven Interior dimensions (WxHxD in inches)	Upper	24 x 16-1/4 x 18-1/4	24 x 16-1/4 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	16-1/4 x 9-5/8 x 15-3/4	16-1/4 x 9-5/8 x 15-3/4
	Lower	24 x 16-1/4 x 18-1/4	24 x 16-1/4 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 16-1/4 x 18-1/4	24 x 17-1/2 x 18-1/4
Power/Ratings								
KW rating @	240V	7.2	7.2	7.2	7.2	8.8	6.6	6.6
	208V	5.4	5.4	5.4	5.4	6.6	5.3	5.3
Amps @	240V	40	40	40	40	40	30	30
	208V	30	30	30	30	30	30	30
Convection wattage		2500	2500				2500	
Broiler/bake wattage		3600/2700	3600/2700	3600/3410	3600/3410	3600/3410	3600/2700	3600/3410



*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.



Listed by
Underwriters
Laboratories

30" Built-In Double Oven Dimensions (in inches)

Models JT955, 952, JTP50, 48, 28

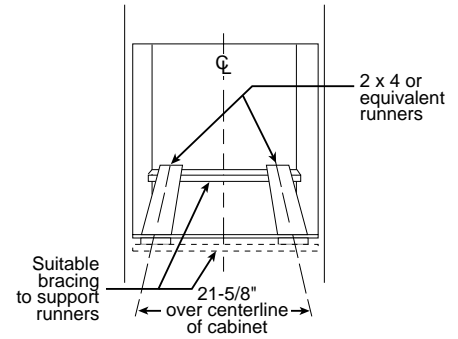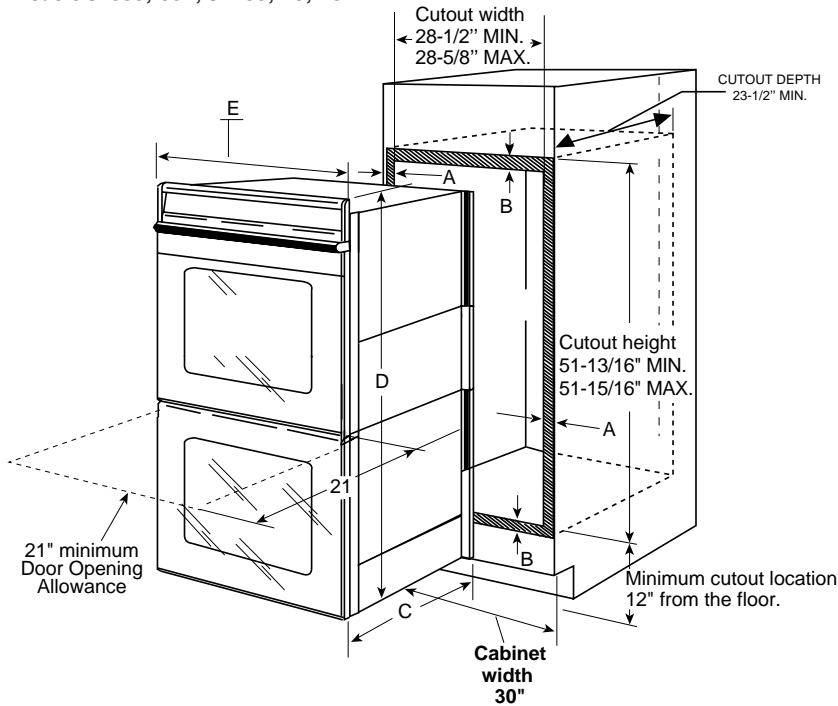

(Must support 275 lbs.)



Cabinet	30"
A – Overlap of Oven Over Side Edges of Cutout	11/16" – 3/4"
B – Overlap of Oven at Top and Bottom of Cutout	1"
Oven	
C – Overall Depth	23-1/2"
D – Overall Height	52-7/8"
E – Overall Width	29-3/4"

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT.
THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE.

30" Built-In Microwave Double Oven Dimensions (in inches)

Models JT965, JTP86

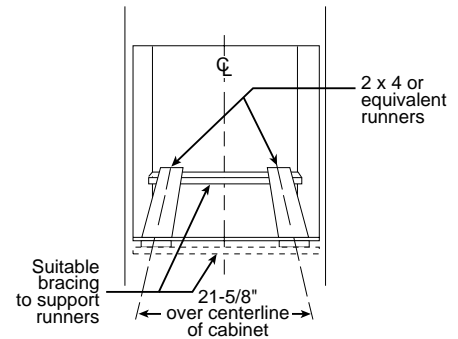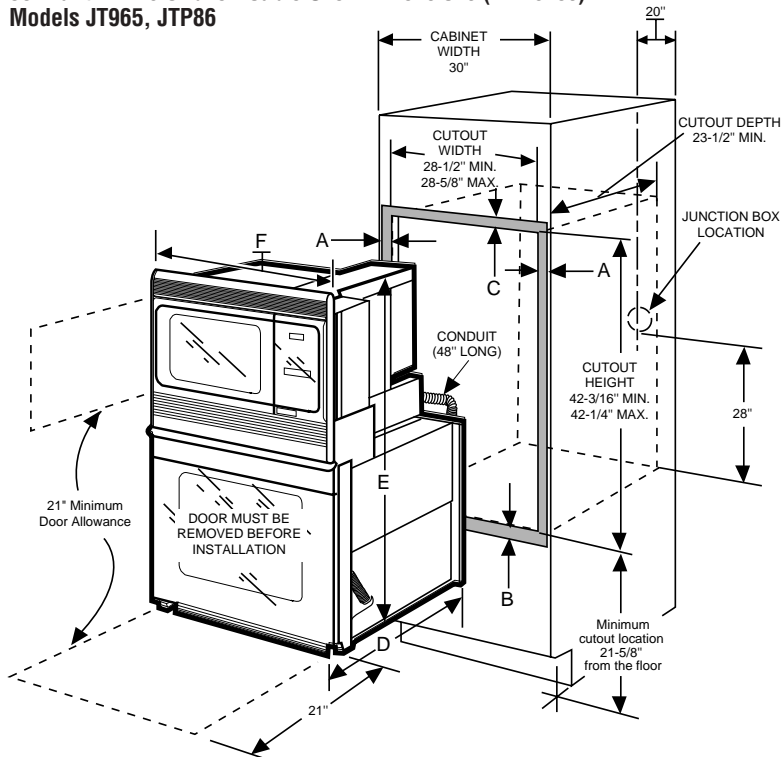

(Must support 275 lbs.)

Cabinet	30"
A – Overlap of Oven Over Side Edges of Cutout	11/16"
B – Overlap of Oven at Bottom of Cutout	1"
C – Overlap of Oven at Top of Cutout	1/2"
Oven	
D – Overall Depth	23-1/2"
E – Overall Height	43-1/2"
F – Overall Width	29-3/4"

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT.
THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE.

Electric wall ovens are not approved for installation with a plug and receptacle.
They must be hard wired in accordance with installation instructions.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.


30" Built-In Single Ovens

Features	GE Profile™		GE®	
	Convection Single Ovens		Single Ovens	
	JT915SF JT915WF JT915CF JT915BF	JT912SF JT912WF JT912CF JT912BF	JTP25SH	JTP20SF JTP20WF JTP20CF JTP20BF
Oven	Convection/Self-Clean	Convection/Self-Clean	Self-Clean	Self-Clean
Cleaning time	Variable	Variable	Variable	Variable
Automatic self-clean oven door lock	●	●	●	●
Self-clean oven w/Delay Clean option	●	●	●	●
Light self-clean option	●	●	●	●
TrueTemp™ System	●	●	●	●
CleanDesign oven interior/hidden bake	●	●		
Variable broil/Six-pass broil element	●	●	●	●
Eight-pass bake element	●	●		
Precise Air™ Convection System	●	●		
Convection bake	Multi/Single-rack	●		
Convection roast	●	●		
Auto Recipe™ Conversion	●	●		
SmartSet controls	Glass touch	●	●	●
Proof Mode	●			
Warm Mode	●			
Oven meat probe	●	●		
Optional closed door broiling	●		●	●
Temperature display	●	●	●	●
Delay Bake Option	●	●	●	●
C° and F° programmable	●	●	●	●
Audible preheat signal	●	●	●	●
Auto oven shut-off w/override	●	●	●	●
Electronic clock and kitchen timer	●	●	●	●
Control lock capability	●	●	●	●
Oven light	Halogen	●	●	●
Certified Sabbath Mode	●	●	●	●
Oven racks	3 Heavy-duty	3 Heavy-duty	2	2
Embossed rack positions	7	7	6	6
Roasting rack	●			
Broiler pan with grid	●	●	●	●
Convection cookbook	●	●		
Appearance				
	SS WW CC BB	SS WW CC BB	SS	SS WW CC BB
Color appearance*	Stainless steel White Glass Bisque Glass Black Glass	Stainless steel White Glass Bisque Glass Black Glass	Stainless Steel	Stainless steel White Glass Bisque Glass Black Glass
Frameless oven doors	●	●	●	●
Big ClearView™ window	●	●	●	●
Oven door handle	Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Stainless-Look	Black White Bisque Black
Flush appearance installation	●	●	●	●
Undercounter installation	●	●	●	●
Weights & Dimensions				
Approx. shipping wt. (lbs.)	135	135	133	130
Oven cabinet width required (in.)	30	30	30	30
Overall dimensions (WxHxD in inches)	29-3/4 x 28-1/4 x 23-1/2	29-3/4 x 28-1/4 x 23-1/2	29-3/4 x 28-1/4 x 23-1/2	29-3/4 x 28-1/4 x 23-1/2
Overall oven interior dimensions (WxHxD in inches)	24 x 16-1/4 x 18-1/4	24 x 16-1/4 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4
Power/Ratings				
KW rating @ 240V	3.6	3.6	3.6	3.6
208V	2.7	2.7	2.7	2.7
Amps @ 240V	20	20	20	20
208V	20	20	20	20
Convection wattage	2500	2500		
Broiler/bake wattage	3600/2700	3600/2700	3600/3410	3600/3410

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.


30" Built-In Single Oven Dimensions (in inches)

Single Oven Wall-Mount or Cabinet Installation (in inches)

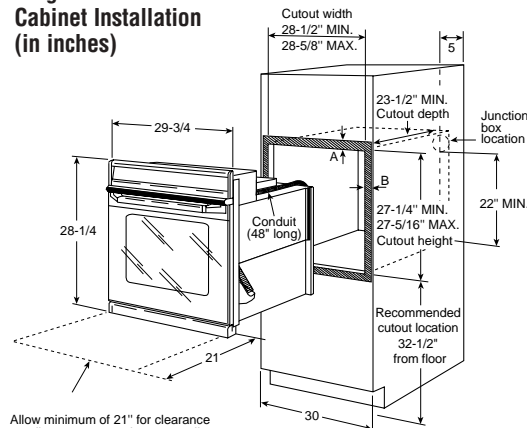

Allow minimum of 21" for clearance to adjacent corners, drawers, walls, or etc.

A=Allow 1" overlap of oven over top and bottom edges of cutout.
B=Allow 11/16"-3/4" for overlap of oven over side edges of cutout.

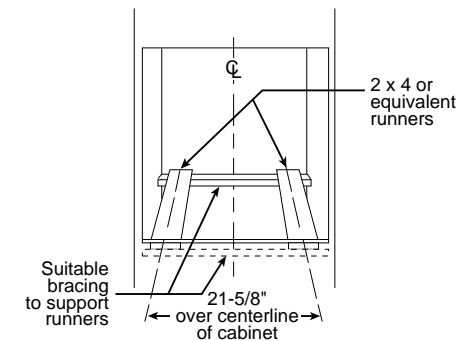

(Must support 275 lbs.)

Most 30" Wall Cabinets can be used with this unit.


Note: These ovens are *not* approved for stackable or side-by-side installations.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.




Listed by
Underwriters
Laboratories

Optional Undercounter Installation With 36" Gas Cooktop (in inches)

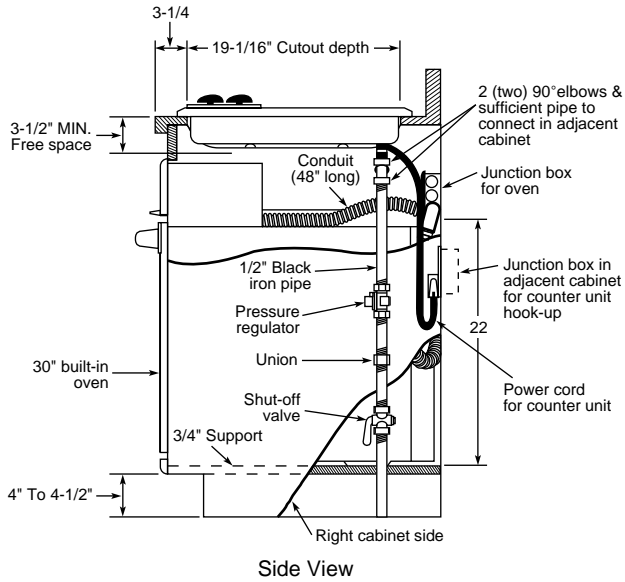

Note: For standard or sealed burner cooktop installation information over the 30" wall oven, refer to 27" wall oven installation, page 49.

Optional Undercounter Installation With 30" CleanDesign or Sealed Burner Gas Cooktop (in inches)

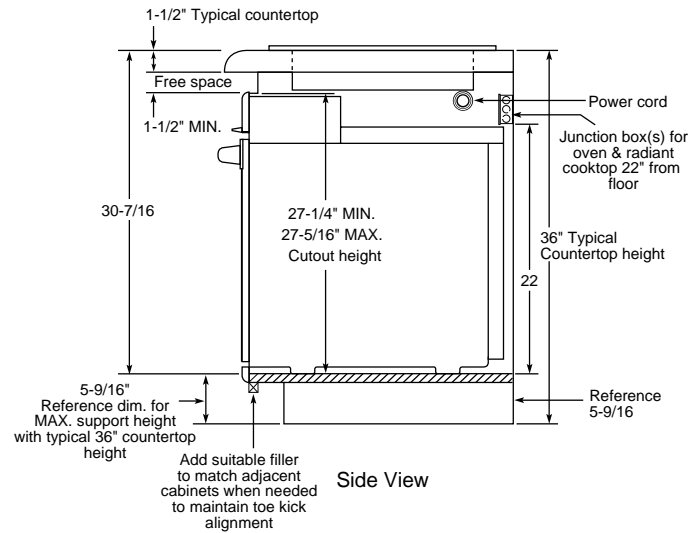


This installation is to achieve minimum gap between bottom of countertop and control panel.

Note: For this installation, the bottom trim **will not** be flush with a typical 4" toe kick.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Undercounter Installation (in inches)

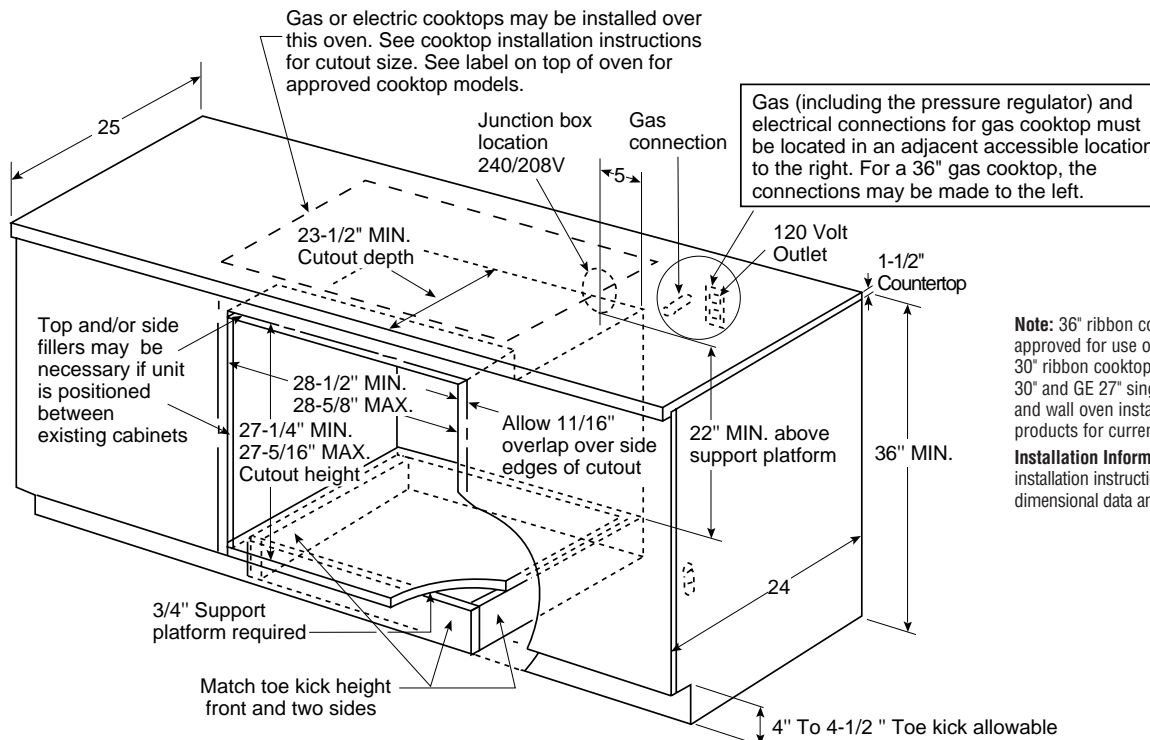

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Note: 36" ribbon cooktops (excluding JP960) are approved for use over GE 30" single wall ovens only. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens. Refer to cooktop and wall oven installation information packed with products for current dimensional data.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data and for alternate installation options.

27" and 24" Built-In Double Ovens


		GE Profile™	GE®				
		27" Convection Double Ovens	27" Double Ovens			27" Microwave Double Ovens	24" Double Oven
		JK955SF JK955WF JK955CF JK955BF	JKP50SH	JKP48WF JKP48CF JKP48BF	JKP28WF JKP28BF	JKP86SH JKP86WF JKP86CF JKP86BF	JRP24BD
Features							
Oven	Upper	Convection/Self-Clean	Self-Clean	Self-Clean	Self-Clean	Microwave	Self-Clean
	Lower	Thermal/Self-Clean	Self-Clean	Self-Clean	Standard	Self-Clean	Standard
Cleaning time		Variable	Variable	Variable	Variable (upper)	Variable (Lower)	Variable (upper)
Automatic self-clean oven door lock		●	●	●	Upper	Lower	Upper
Self-clean oven w/Delay Clean option		●	●	●	Upper	Lower	Upper
Light self-clean option		●	●	●	Upper		
TrueTemp™ System		●	●	●	Upper	Lower	
CleanDesign oven interior/hidden bake		●					
Variable broil		●	●	●	●	Lower	Upper
Precise Air™ Convection System		Upper					
Multi-rack convection bake		Upper					
Single-rack convection bake		Upper					
Convection roast		Upper					
Auto Recipe™ Conversion		Upper					
SmartSet Controls		Glass touch	●	●	Upper	Lower	Upper
Proof Mode		Upper					
Warm Mode		Upper					
Oven meat probe		Upper					
Optional closed door broiling		●	●	●	●	Lower	
Temperature display		●	●	●	Upper	●	Upper
Delay Bake Option		●	●	●	Upper	Lower	Upper
C° and F° programmable		●	●	●	Upper	Lower	Upper
Audible preheat signal		●	●	●	Upper	Lower	●
Auto oven shut-off w/override		●	●	●	Upper	Lower	Upper
Electronic clock and kitchen timer		●	●	●	●	●	●
Control lock capability		●	●	●	Upper	Lower	Upper
Oven light		Halogen	●	●	●	Lower	●
Certified Sabbath Mode		●	●	●	Upper		
Microwave Oven Features:							
Microwave cooking timer						99-Min./99-Sec.	
Microwave power levels						10	
Sensor functions						3	
Electronic MWO touch controls						●	
Microwave oven cavity (cu. ft.)						1.6	
MWO power output watts						1000	
Turntable						●	
Oven racks	Upper	3 Heavy-duty	2	2	2		2
	Lower	2 Heavy-duty	2	2	2	2	2
Embossed rack positions		4 Upper/4 Lower	4 Upper/4 Lower	4 Upper/4 Lower	4 Upper/4 Lower	4 Lower	2 Upper/2 Lower
Roasting rack		Upper					
Broiler pan with grid		Upper	Upper	Upper	Upper	Lower	●
Convection cookbook		●					
Appearance							
Color appearance*		SS WW CC BB	SS	WW CC BB	WW BB	SS WW CC BB	BB
		Stainless steel White Glass Bisque Glass Black Glass	Stainless Steel	White Glass Bisque Glass Black Glass	White Glass Black Glass	Stainless Steel White Glass Bisque Glass Black Glass	Black Glass
Frameless oven doors							
Big ClearView™ windows		●	●	●	●	Lower	●
		Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Stainless-Look	White Bisque Black	White Black	Stainless-Look White Bisque Black	Black
Oven door handles							
Flush appearance installation		●	●	●	●	●	
Weights & Dimensions							
Approx. shipping wt. (lbs.)		162	160	157	157	155	135
Oven cabinet width required (in.)		27	27	27	27	27	24
Overall dimensions (WxHxD in inches)		26-5/8 x 51 x 23-5/8	26-5/8 x 51 x 23-5/8	26-5/8 x 51 x 23-5/8	26-5/8 x 51 x 23-5/8	26-5/8 x 42-1/2 x 23-5/8	23-3/4 x 48-5/8 x 23-1/8
Overall oven Interior dimensions	Upper	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	16 x 11-1/8 x 13-3/8	17 x 15 x 18-1/2
	Lower	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	17 x 15 x 18-1/2
Power/Ratings							
KW rating @ 240V		6.8	6.8	6.8	7.1	6.4	7.1
208V		5.1	5.1	5.1	5.3	5.1	5.3
Amps @ 240V		30	30	30	30	30	30
208V		30	30	30	30	30	30
Convection wattage		2500					
Broiler/bake wattage		3400/2650	3400/2650	3400/2650	3400/2650	3400/2650	3400/2600

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.



Listed by
Underwriters
Laboratories


27"/24" Built-In Double Oven Dimensions (in inches)

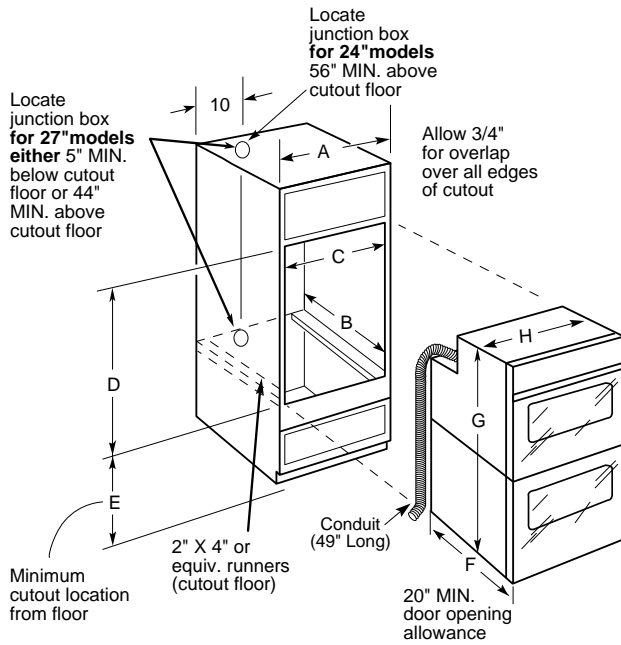

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: If marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

27" Built-In Microwave Double Oven Dimensions (in inches) Model JKP86

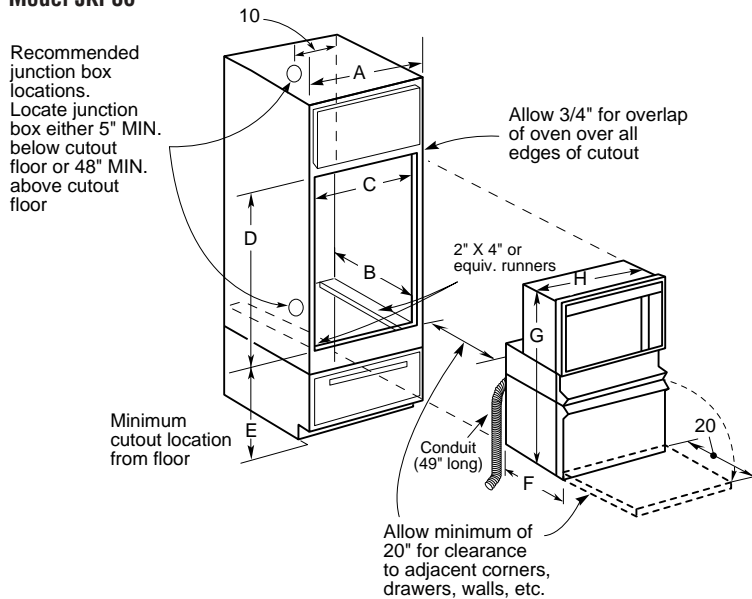


Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: If marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.


Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.


Oven Support For 27" Models

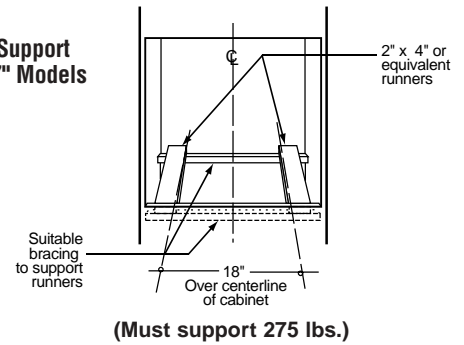

Oven Support For 24" Models

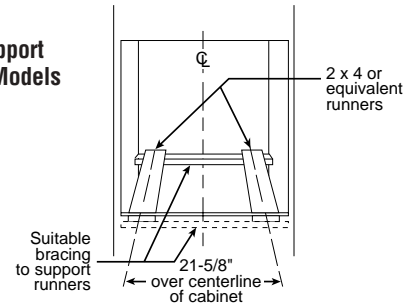

Cabinet	JK955/JKP50/48/28	JRP24
A – Cabinet Width Required	27" min.	24" min.
B – Minimum Cabinet Depth	23-5/8"	23-1/2"
C – Opening Width	25" min. - 25-1/4 max.	22-1/2"
D – Opening Height	50-1/8" max.	48-1/8" min.
E – Recommended Minimum Cutout Location from Floor	13-1/4"	14"
Oven		
F – Overall Depth	23-5/8"	23-1/8"
	w/o trim	48-1/8"
	with trim	49-1/4"
G – Overall Height	51"	49-1/4"
H – Overall Width	26-5/8"	23-3/4"

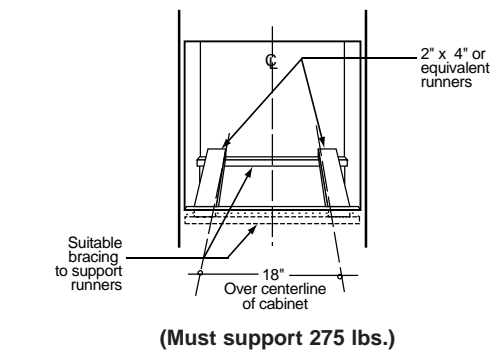


Cabinet	27"
A – Cabinet Width Required	27" min.
B – Minimum Cabinet Depth	23-5/8"
C – Opening Width	25" min. - 25-1/4 max.
D – Opening Height	41-1/4" max.
E – Minimum Cutout Location from Floor	22"
Oven	
F – Overall Depth	23-5/8"
	w/o trim
	41-3/8"
G – Overall Height	with trim
	42-1/8"
H – Overall Width	26-5/8"

27" and 24" Built-In Single Ovens

27"/24" Built-In Single Oven Dimensions (in inches)

	GE Profile™	GE®				
	27" Convection Single Ovens	27" Single Ovens			24" Single Ovens	
	JK915SF JK915WF JK915CF JK915BF	JKP25SH	JKP20WF JKP20CF JKP20BF	JKS06BF	JRP15WW JRP15BW	JRS04BW
Features						
Oven	Convection/ Self-Clean	Self-Clean	Self-Clean	Standard-Clean	Self-Clean	Standard
Cleaning time	Variable	Variable	Variable		Variable	
Automatic self-clean oven door lock	●	●	●		●	
Self-clean oven w/Delay Clean option	●	●	●		●	
Light self-clean option	●	●	●			
TrueTemp™ System	●	●	●	●		
CleanDesign oven interior/hidden bake	●					
Variable broil	●	●	●	●	●	●
Precise Air™ Convection System	●					
Multi-rack convection bake	●					
Single-rack convection bake	●					
Convection roast	●					
Auto Recipe™ Conversion	●					
SmartSet Controls	Glass touch	●	●	●	●	●
Proof Mode	●					
Warm Mode	●					
Oven meat probe	●					
Optional closed door broiling	●	●	●	●		
Temperature display	●	●	●	●	●	●
Delay Bake Option	●	●	●	●	●	●
C° and F° programmable	●	●	●	●	●	●
Audible preheat signal	●	●	●	●	●	●
Auto oven shut-off w/override	●	●	●	●	●	●
Electronic clock and kitchen timer	●	●	●	●	●	●
Control lock capability	●	●	●	●	●	●
Oven light	Halogen	●	●	●	●	●
Certified Sabbath Mode	●	●	●	●		
Oven racks	3 Heavy-duty	2	2	2	2	2
Embossed rack positions	4	4	4	4		
Roasting rack	●					
Broiler pan with grid	●	●	●	●	●	●
Convection cookbook	●					
Appearance						
	SS WW CC BB	SS	WW CC BB	BB	WW BB	BB
Color appearance*	Stainless Steel White Glass Bisque Glass Black Glass	Stainless Steel	White Glass Bisque Glass Black Glass	Black Glass	White Glass Black Glass Standard	Black Glass
Frameless oven doors	●	●	●	●	●	●
Big ClearView™ windows	●	●	●	●	●	●
Oven door handles	Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Stainless-Look	White Bisque Black	Black	White Black	Black
Flush appearance installation	●	●	●	●		
Undercounter installation	●	●	●	●		
Weights & Dimensions						
Approx. shipping wt. (lbs.)	98	96	93	91	114	82
Oven cabinet width required (in.)	27	27	27	27	24	24
Overall dimensions (WxHxD in inches)	26-5/8 x 29 x 23-5/8	26-5/8 x 29 x 23-5/8	26-5/8 x 29 x 23-5/8	26-5/8 x 29 x 23-5/8	23-3/4 x 28-3/16 x 23-1/8	23-3/4 x 28-3/16 x 23-1/8
Overall oven interior dimensions (WxHxD in inches)	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1	21-1/2 x 17 x 18-1/4	21-1/2 x 17 x 18-1/4	17 x 15 x 18-1/2	17 x 15 x 18-1/2
Power/Ratings						
KW rating @ 240V	3.4	3.4	3.4	3.4	3.4	3.4
208V	2.6	2.6	2.6	2.6	2.6	2.6
Amps @ 240V	20	20	20	20	20	20
208V	20	20	20	20	20	20
Convection wattage	2500					
Broiler/bake wattage	3400/2650	3400/2650	3400/2650	3400/2000	3400/2600	3400/2000

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

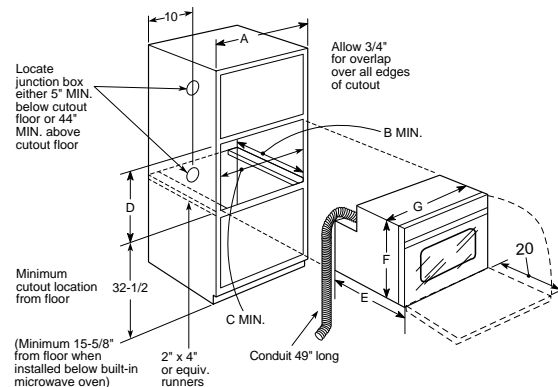

Cabinet	JK915/JKP25, 20, JKS06	JRP15, JRS04
A – Cabinet Width Required	27" min.	24" min.
B – Minimum Cabinet Depth	23-5/8"	23-1/2"
C – Opening Width	25" min. - 25-1/4 max.	22-1/2"
D – Opening Height	27-5/8" min. - 28-1/8" max.	27-5/8" min.
E – Overall Depth	23-5/8"	23-1/8"
F – Overall Height	29"	28-3/16"
G – Overall Width	26-5/8"	23-3/4"


Note: Models JKS06, JRP15, JKP20, JKP25, JK915 and JRS04 are *not* approved for stackable or side-by-side installations.

Note: Models JK915 and JKP20, JKP25 can be installed side-by-side in separate enclosures, with no less than 30" distance between center-to-center of each oven.


Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: For 27" built-in single ovens, if marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

Oven Support For 27" Models

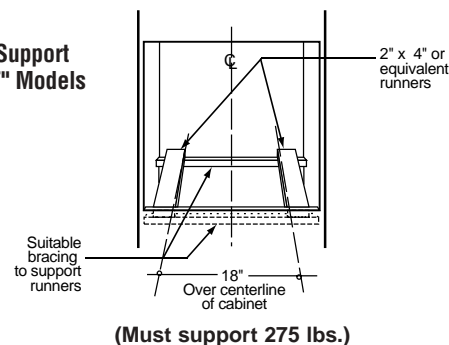


Oven Support For 24" Models

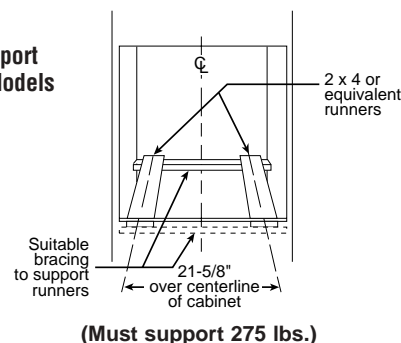

Undercounter Installation Dimensions (in inches)

Models JK915, JKP25, 20 and JKS06


Gas or electric cooktops may be installed over this oven. See cooktop installation instructions for cutout size. See label on top of oven for approved cooktop models.

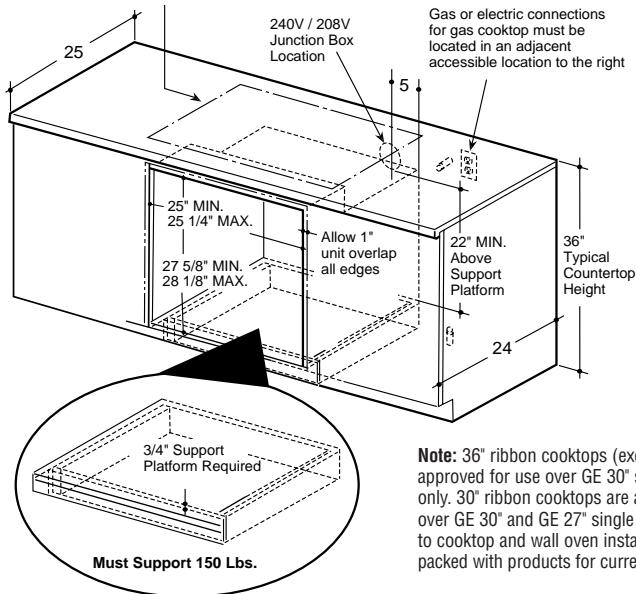


Note: 36" ribbon cooktops (excluding JP960) are approved for use over GE 30" single wall ovens only. 30" ribbon cooktops are approved for use over GE 30" and GE 27" single wall ovens. Refer to cooktop and wall oven installation information packed with products for current dimensional data.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Sealed Burner Gas Cooktop Installation Dimensions (in inches)

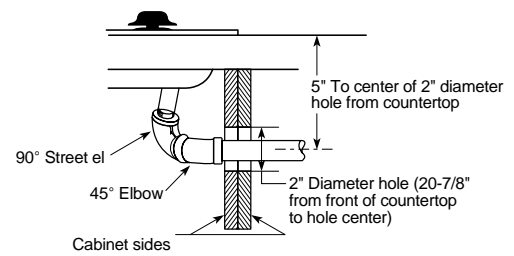

Standard Burner Gas Cooktop Installation Dimensions (in inches)

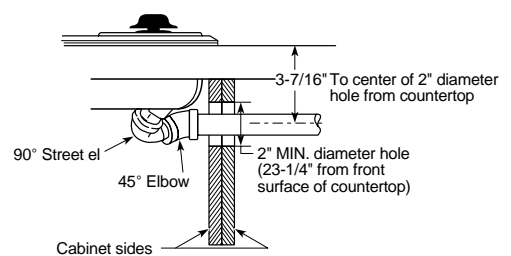

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.



Note: Oven is rated for use only under 30" standard or sealed burner gas and selected 30" CleanDesign and Calrod® electric cooktops.

24" Built-In Gas Ovens

	GE	
	JGRP17WEW JGRP17BEW	JGRS14BEW
Features		
Oven interior	Self-Clean	Standard
Automatic self-clean oven door lock	●	
Delay Clean option	●	
In-oven broiling	●	
Separate broiler drawer		●
Storage drawer	●	
SmartSet controls	●	●
Temperature display	●	●
Start pad	●	●
Delay Bake option w/Cook & Hold	●	●
C° or F° programmable	●	●
Audible preheat signal	●	●
Auto oven shut-off w/override	●	
Electronic clock and kitchen timer	●	●
Control lock capability	●	
Oven light pad	●	●
Oven racks	2	2
Broiler pan with grid	●	●
Electronic pilotless ignition	●	●
Appearance		
Color appearance*	WW BB	BB
Frameless oven door	White Glass Black Glass	Black Glass
Oven door with window	●	●
Designer-style handle	●	●
Weights & Dimensions		
Approx. shipping weight (lbs.)	144	139
Oven cabinet width required (in inches)	24	24
Overall dimensions (WxHxD in inches)	← 23-3/4 x 38-3/8 x 23 →	
Overall oven interior dimensions (WxHxD in inches)	← 17 x 15 x 18-7/8 →	
Power/Ratings		
Gas oven electrical rating	120V, 60Hz, 5A	120V, 60Hz, 15A
Oven /broiler burners (000's BTU's)	14.5 - Oven 13.0 - Broil	14.5

*WW = White on white, BB = Black on black.
Factory set for natural gas.

Built-In Gas Oven Dimensions (in inches)

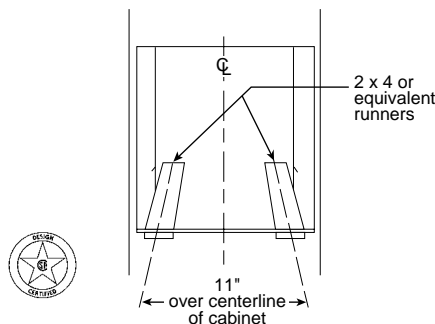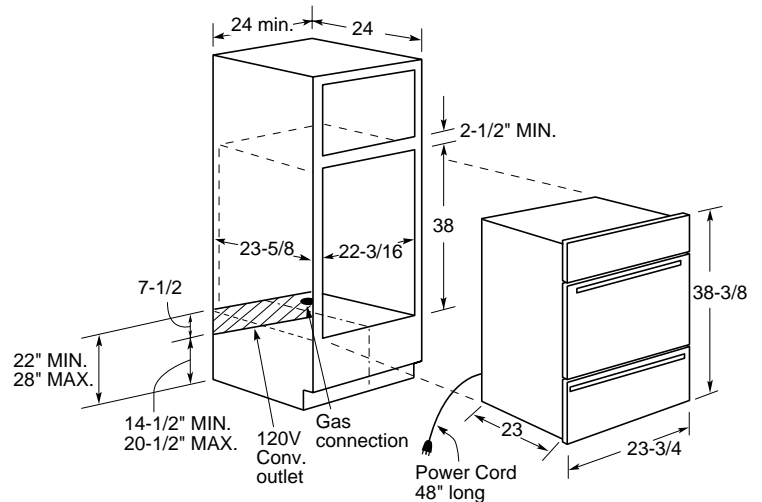

(Must support 275 lbs.)



Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

30" and 27" Warming Drawers


	GE Profile™	
	30" Warming Drawers	27" Warming Drawers
	JTD915SF JTD915WF JTD915CF JTD915BF	JKD915SF JKD915WF JKD915CF JKD915BF
Features		
Temperature control	•	•
Proof (80°F)	•	•
Low (140°F)	•	•
Medium (170°F)	•	•
High (210°F)	•	•
Humidity control	Crisp/Moist	Crisp/Moist
Hidden control	•	•
ON/OFF switch	•	•
"ON" indicator light	•	•
Half rack	•	•
Full extension drawer glide	•	•
Removable stainless steel pan	•	•
Appearance		
	SS WW CC BB	SS WW CC BB
Color appearance*	Stainless Steel White glass Bisque glass Black glass	Stainless Steel White glass Bisque glass Black glass
Frameless drawer front	Stainless-look White Bisque Black	Stainless-look White Bisque Black
Sculptured handle		
Weights & Dimensions		
Interior dimensions (WxHxD in inches)	23-7/8 x 6-1/4 x 22-1/16	20-7/8 x 6-1/4 x 22-1/16
Cutout dimensions (WxHxD in inches)	28-1/2 x 9-1/4 x 23-1/2	25-1/2 x 9-1/4 x 23-1/2
Approx. shipping weight (lbs.)	65	59
Power/Ratings		
KW rating @ 120V	.45	.45
Amps @ 120V	15	15
Element wattage	450	450
Accessories		
1/4" panel kit capability	ZXD30B	ZXD27B
Pan set (2 pans with lids)	JXPN2	JXPN2

*SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

Warming Drawer Dimensions (in inches)

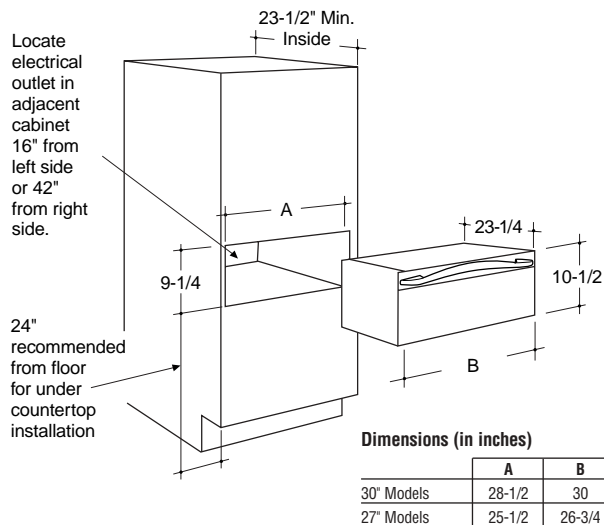


Under Oven Installation (in inches)

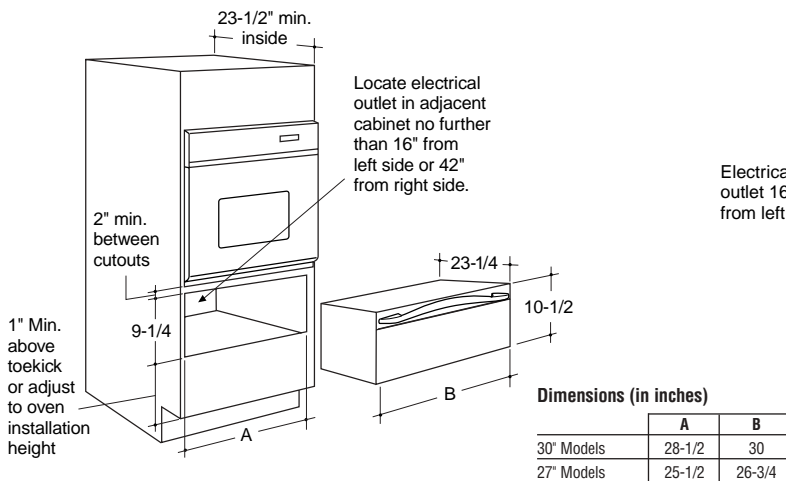

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Optional Accessory: Pan Set For Warming Drawer – JXPN2

Undercounter Installation (in inches)

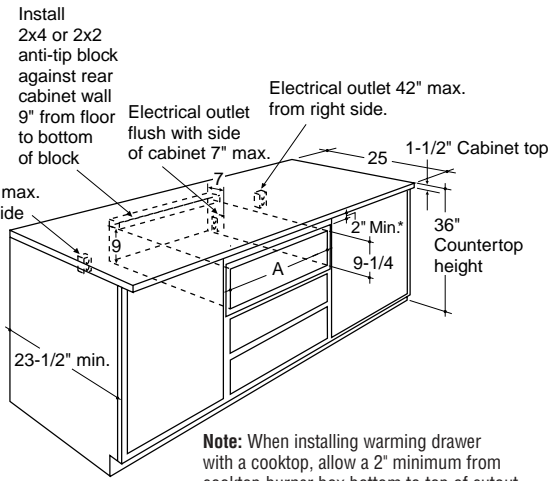


Built-In CleanDesign Cooktops


	GE Profile							GE®
	JP969SH JP969WH JP969CH JP969BH	JP961SH JP961TH JP961KH JP961BH	JP960SC JP960TC JP960KC JP960BC	JP939SH JP939WH JP939CH JP939BH	JP931SH JP931TH JP931KH JP931BH	JP930SC JP930TC JP930KC JP930BC	JP350SC JP350TC JP350WC JP350KC JP350BC	JP340WC JP340CC JP340BC
Features								
Ceramic-glass surface	Patterned Black Patterned White Patterned Bisque Patterned Black	Patterned Black True White True Bisque Patterned Black	Patterned Black True White True Bisque Patterned Black	Patterned Black Patterned White Patterned Bisque Patterned Black	Patterned Black True White True Bisque Patterned Black	Patterned Black True White True Bisque Patterned Black	Patterned Black True White Patterned White True Bisque Patterned Black	Patterned White Patterned Bisque Patterned Black
Number of elements	5 Ribbon	5 Ribbon	5 Ribbon	4 Ribbon	4 Ribbon	4 Ribbon	4 Ribbon	4 Ribbon
Dual 6 7/8" heating elements	1 Ribbon (2500W)	1 Ribbon (2500W)	1 Ribbon (2500W)	1 Ribbon (2500W)	1 Ribbon (2500W)	1 Ribbon (2500W)	1 Ribbon (2500W)	
Dual 5 7/8" heating elements	1 Ribbon (2200W)	1 Ribbon (2200W)		1 Ribbon (2200W)	1 Ribbon (1900W)			
8" heating elements					1 Ribbon (2000W)		2 Ribbon (2000W)	2 Ribbon (2000W)
7" heating element	1 Ribbon w/Warmer (1500W)	1 Ribbon (1500W)	1 Ribbon (1500W)	1 Ribbon (1500W)				
7" heating elements			2 Ribbon (1800W)			2 Ribbon (1800W)		
Bridge element			1 Ribbon (800W)			1 Ribbon (800W)		
Total wattage			4400W			4400W		
6" heating elements	2 Ribbon (1200W)	2 Ribbon (1200W)	1 Ribbon (1200W)	1 Ribbon (1200W)	1 Ribbon (1200W)	1 Ribbon (1200W)	1 Ribbon (1200W)	2 Ribbon (1200W)
Hot surface indicator lights	5	5	5	4	4	4	4	1
Precise Digital Control System™	●			●				
Pan presence sensor	●			●				
Pan size sensor	●			●				
Kitchen timer	●			●				
Control lock capability	●			●				
Appearance								
	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	WW CC BB
Color appearance*	●	●	●	●	●	●	●	●
Frameless								
Weights & Dimensions								
Cooktop width (in inches)	36	36	36	30	30	30	30	30
Approx. shipping weight (lbs.)	45	44	44	38	38	38	38	35
Power/Ratings								
KW rating @ 240V	8.6	9.6	9.6	7.4	7.6	8.1	7.7	6.4
208V	6.5	7.2	7.2	5.6	5.7	6.1	5.8	4.8
Amps @ 240V	36	40	40	31	32	40	40	30
208V	31	40	40	27	27	30	30	30

*SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

Cooktop Dimensions (in inches)



Counter Installation Dimensions (in inches)

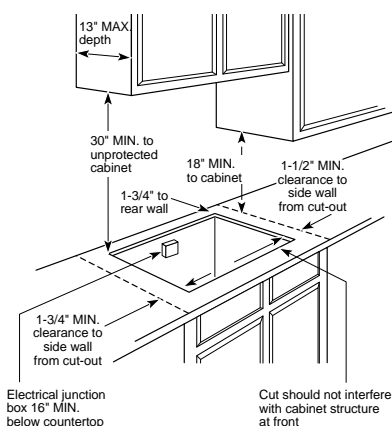

Cooktop Dimensions (in inches)

Model	Overall			Cutout			To Edge of Front Counter (Min.)
	W	D	H	E	F	G	
JP969WH/CH/BH	36	20-3/8	3-1/4"	33-7/8	19-1/8	2-1/2	
JP961TH/KH/BH	36	20-3/8	3-1/4"	33-7/8	19-1/8	2-1/2	
JP960TC/KC/BC	36	20-3/8	3-1/4"	33-7/8	19-1/8	2-1/2	
JP939WH/CH/BH	29-3/4	20-7/8	3-1/4"	28-1/2	19-5/8	2-1/2	
JP931TH/KH/BH	29-3/4	20-7/8	3-1/4"	28-1/2	19-5/8	2-1/2	
JP930TC/KC/BC	29-3/4	20-7/8	3-1/4"	28-1/2	19-5/8	2-1/2	
JP350TC/WC/KC/BC	29-3/4	20-7/8	3-1/4"	28-1/2	19-5/8	2-1/2	
JP340WC/CC/BC	29-3/4	20-7/8	3-1/4"	28-1/2	19-5/8	2-1/2	

*Depth of unit at conduit connection location (rear) is 6-1/4" on models JP969/939 and 4-5/8" on models JP961/960/931/930/350/340.

Stainless Steel Cooktop Dimensions (in inches)

Model	Overall			Cutout			To Edge of Front Counter (Min.)
	W	D	H	E	F	G	
JP969SH	36-1/8	21	3-1/4"	33-7/8	19-1/8	2-1/2	
JP961SH	36-1/8	21	3-1/4"	33-7/8	19-1/8	2-1/2	
JP960SC	36-1/8	21	3-1/4"	33-7/8	19-1/8	2-1/2	
JP939SH	29-7/8	21-1/2	3-1/4"	28-1/2	19-5/8	2-1/2	
JP931SH	29-7/8	21-1/2	3-1/4"	28-1/2	19-5/8	2-1/2	
JP930SC	29-7/8	21-1/2	3-1/4"	28-1/2	19-5/8	2-1/2	
JP350SC	29-7/8	21-1/2	3-1/4"	28-1/2	19-5/8	2-1/2	

*Depth of unit at conduit connection location (rear) is 6-1/4" on models JP969/939 and 4-5/8" on models JP961/960/931/930/350.

Built-In CleanDesign Cooktops

Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

36" Ribbon cooktops (excluding JP960) are approved for use over GE 30" Single Wall Ovens and Warming Drawers. 30" Ribbon cooktops are approved for use over GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Notes: If installing with a GE Profile Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. JGP939S, JGP930S, JP350S and JGP932S require 23-5/8" flat surface area. In addition, other clearances to the front edge of the countertop must be considered.

Note: Consult cabinet and countertop manufacturer's specs for flush mount installation prior to install.

Filler Trim Kit

When replacing an old GE 30" cooktop (with larger opening) with Models JP939/931/930/350/340, use the following one-piece trim kit to fill in the over-size hole. Available at additional cost.

JXTR31W (True White)
JXTR31C (True Bisque)
JXTR31B (Black—use with black glass cooktops with a white, bisque or black pattern)

Flush Mount Installation Kit

Accommodates both 30" and 36" installations. Not for use with stainless steel models.

JXFLMTW (True White)
JXFLMCC (True Bisque)
JXFLMBB (Black—use with black glass cooktops with a white, bisque or black pattern)

Optional Accessory

ZX375GRD Universal Griddle is non-stick and fits all electric smooth top ranges, cooktops, electric bridge elements and gas ranges.

Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data.

Built-In Electric Cooktops

GE®				
	JP626WF JP626CF	JP328SF JP328WF JP328CF JP328BF	JP201CB	JP202D
Features				
Cooktop surface	Porcelain-Enameled	Stainless Steel Porcelain-Enameled Porcelain-Enameled	Stainless Steel	Porcelain-Enameled
Lift-up cooktop with support rod	●	●		
8" heating elements	2 Plug-In	2 Plug-In	1 Plug-In	1 Plug-In
6" heating elements	2 Plug-In	2 Plug-In	1 Plug-In	1 Plug-In
One-piece removable chrome drip bowls	●	●	●	●
Infinite heat rotary controls	●	●	●	●
Control panel location	Upfront	Upfront	Upfront	Upfront
Control panel	White Glass Bisque Glass	Black Glass White Glass Bisque Glass Black Glass		
Surface element "ON" indicator light	●	●	●	●
Appearance				
Color appearance*	WW CC	SS WW CC BB	SS	WW
Weights & Dimensions				
Cooktop width (in inches)	35-1/2	30-1/4	21-1/4	21-1/4
Approx. shipping weight (lbs.)	38	36	18	18
Power/Ratings				
KW rating @ 240V	7.4	7.4	3.4	3.4
208V	5.6	5.6	2.5	2.5
Amps @ 240V	40	40	20	20
208V	30	30	20	20

*SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

Built-In Electric Cooktops

Required free area between the bottom of the cooktop and any combustible material, i.e., shelving is 5" minimum on models JP626/328 and 1-1/2" minimum on models JP201/202. Free area not required when installing wall oven underneath. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

Cooktop model JP328 is approved for use over select GE 27" or 30" Single Wall Ovens. JP626 is approved for use over GE 30" Single Wall Ovens only. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Cooktop models JP201CB and JP202D are approved for use over GE undersink dishwasher model GSM2100. Refer to cooktop installation instructions packed with product for current dimensional data.

Note: If installing with a GE Profile Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.


Note: The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

Filler Trim Kit—When replacing an old GE 30" cooktop (with larger opening) with Models JP328WF, JP328CF, JP328BF, JP328SF, use the following one-piece trim kits to fill in the over-size hole. Available at additional cost.
JXTR31W (White)
JXTR31C (Bisque)
JXTR31B (Black)


Installation Information:

Before installing, consult installation instructions packed with product for current dimensional data.

Counter Installation Dimensions (in inches)

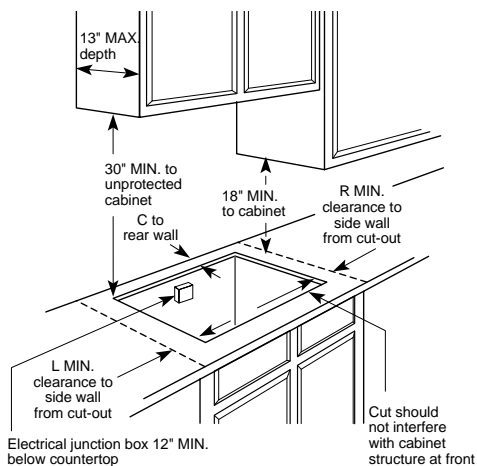

Built-In Cooktop Dimensions (in inches)

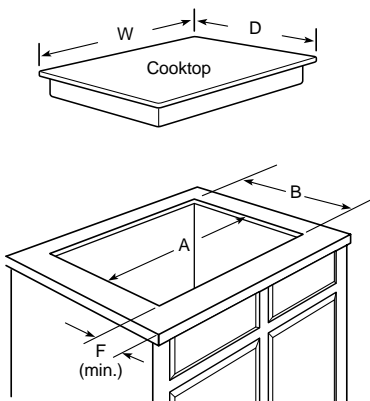

Dimensions (in inches)

Model	Overall		Cutout		Minimum Spacing To Nearest Combustible Wall			To Edge of Front Counter (Min.)
	W	D	A	B	C	R	L	
JP626	35-1/2	21	33-7/8	19-1/8	2-1/2	3-3/4	3-3/4	2-1/2
JP328	30-1/4	21-1/4	28-1/2	19-1/2	1-3/4	2	5-1/2	2-1/2
JP202	21-1/4	16-5/8	20-1/8	16-1/8	2	2	2	2-3/4
JP201	21-1/4	16-5/8	20-1/8	16-1/8	2	2	2	2-3/4

Built-In Electric Downdraft Cooktops

	GE Profile™		
	JP989SD	JP989TD JP989KD	JP989BD
Features			
Downdraft exhaust (CFM)	400	400	400
Three-speed downdraft vent fan	●	●	●
Ceramic-glass surface	Black	True White True Bisque	Black
Number of elements	4	4	4
Dual 6/9" heating elements	1 Ribbon (2500W)	1 Ribbon (2500W)	1 Ribbon (2500W)
7" heating elements	2 Ribbon (1800W)	2 Ribbon (1800W)	2 Ribbon (1800W)
Bridge element	1 Ribbon (800W)	1 Ribbon (800W)	1 Ribbon (800W)
Total wattage	4400W	4400W	4400W
6" heating elements	1 Ribbon (1500W)	1 Ribbon (1500W)	1 Ribbon (1500W)
Infinite heat controls	●	●	●
Hot surface indicator lights	4	4	4
Heating element "ON" indicator light	●	●	●
Appearance			
Color appearance*	SS	WW CC	BB
Frameless	●	●	●
Weights & Dimensions			
Cooktop width (in inches)	30	30	30
Overall dimensions (WxD in inches)	29-7/8 x 21-7/8		
Approx. shipping weight (lbs.)	72	72	72
Power/Ratings			
KW Rating @ 240V	8.8	8.8	8.8
208V	6.7	6.7	6.7
Amps @ 240V	40	40	40
208V	40	40	40

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.


Built-In Gas Downdraft Cooktops

	GE Profile		
	JGP989TC	JGP989KC	JGP989BC
Features			
Cooktop burners	Sealed	Sealed	Sealed
Electronic pilotless ignition	●	●	●
Ceramic-glass surface	True White	True Bisque	Black
Burner grates	2	2	2
Downdraft exhaust (CFM)	400	400	400
Appearance			
Color appearance*	WW	CC	BB
Frameless	●	●	●
Weights & Dimensions			
Cooktop width (in inches)	30	30	30
Overall dimensions (WxD in inches)	29-7/8 x 21-7/8		
Approx. shipping weight (lbs.)	90	90	90
Power/Ratings			
Gas cooktop electrical rating	120V	120V	120V
Burners (000's/BTU's)**	(2) 9.1/8.5	(2) 9.1/8.5	(2) 9.1/8.5
Natural Gas/LP Gas	(1) 11.5/11.0 (1) 5.5/5.5	(1) 11.5/11.0 (1) 5.5/5.5	(1) 11.5/11.0 (1) 5.5/5.5


*WW = White on white, CC = Bisque on bisque, BB = Black on black.

**A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.

Built-In Electric and Gas Downdraft Cooktops Dimensions (in inches)

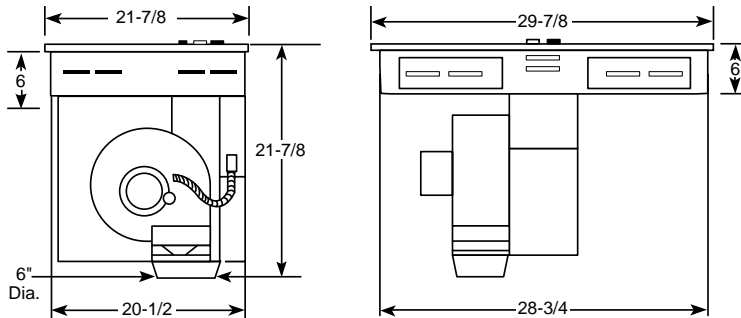


Built-In Electric and Gas Cutout Dimensions (in inches)

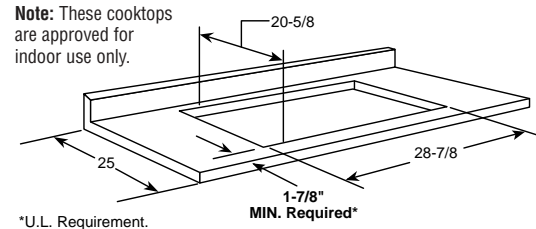

*U.L. Requirement.

Note: A 5" minimum spacing to adjacent side wall is required on JGP989. A 6" minimum spacing to adjacent side wall is required on JP989.

Built-In Electric and Gas Cabinet Dimensions (in inches)

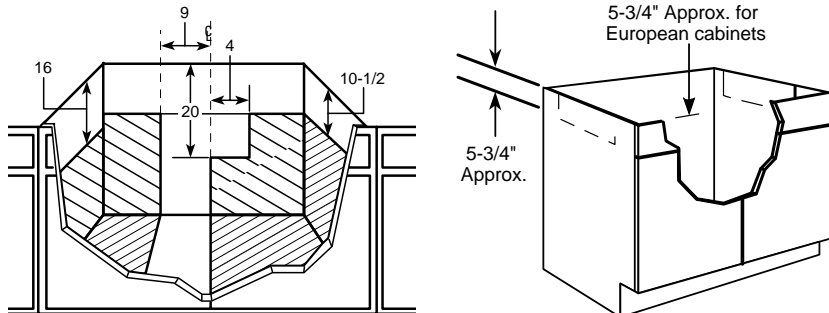

Receptacle Location


Install an approved junction box within shaded area shown in diagram. Junction box must be at least 10-1/2" below top of cabinet.

Preparing the Cabinet for Installation


In some cabinets, the sides may need to be scooped or cut down 5-3/4" as shown (right) and the corner braces removed in order to accommodate the cooktop.

Built-In Electric and Gas Downdraft Cooktops (continued)

Built-In Electric and Gas Downdraft Cooktop Venting Options

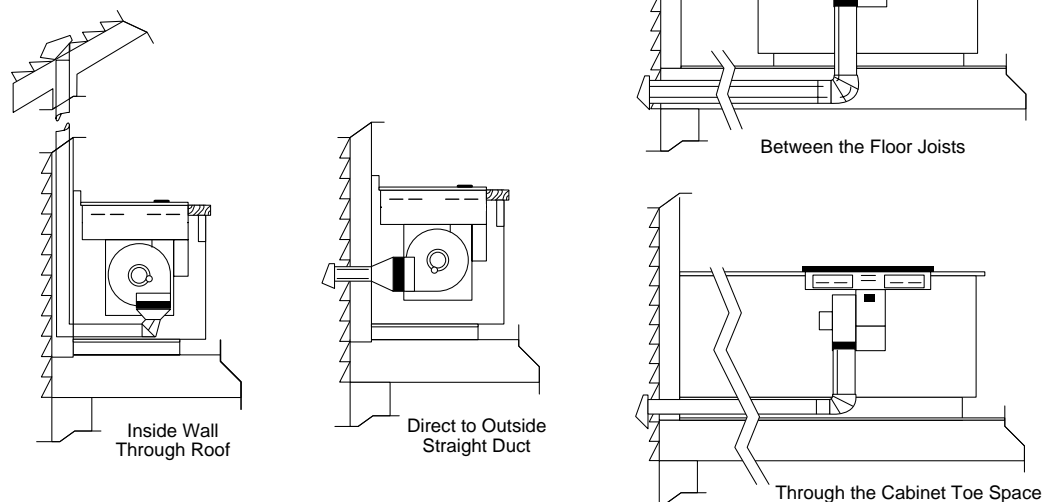

Built-In Electric and Gas Downward Venting (in inches)

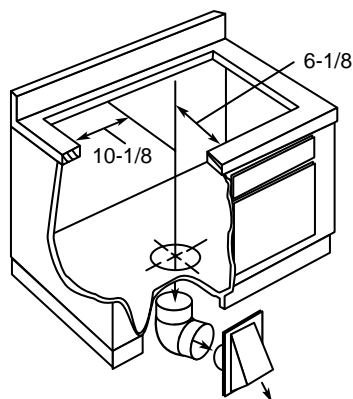

Wall Installation

Wall installations require 25" countertop depth. When cabinet is flush against the wall, the fan housing can be rotated to the horizontal position for direct venting through rear wall. Make a countertop cutout in the range cabinet according to unit dimensions and installation type. Duct hole is positioned in back of cabinet for through-the-wall ducting. Requires special offset adapter JXRW89.

Peninsula or Island Installation

For peninsula/islands a minimum 26" countertop depth is suggested. Blower should be in vertical position. Island or peninsula cabinets may require adjustment in cutout depth and/or location within the width dimensions. Duct hole is positioned in bottom of cabinet for island or peninsula installation.

Slab Installation

For peninsula or island installation and rear wall ducting, **6" PVC duct or locally approved piping should be used if installing under a poured concrete slab.**

Note: Electrical cable is not supplied with unit

JXRW89 Rear Wall Installation Kit


Optional accessories may be ordered for installation on rear wall.

JXCK89 Electrical Connection Kit

Optional accessory kit for JP989 electric downdraft cooktop only, includes junction box and conduit.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Built-In Electric and Gas Rear Wall Venting (in inches)

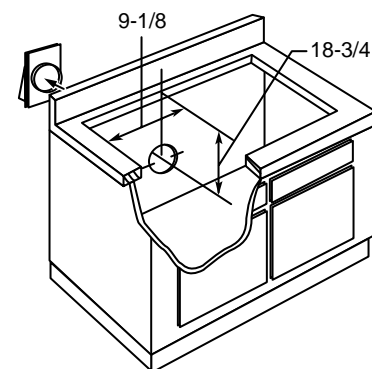

Installing the Ductwork

Use galvanized or aluminum duct in 6" round or 3-1/4" x 10" size, or combination of both. **PVC duct or locally approved piping should be used if installing under a poured concrete slab.** Local building code must be followed in specifying type and schedule of all duct used.

Note: Ductwork must be vented to outside. Do not vent into a wall, ceiling, crawl space, attic or any concealed space. Always use an appropriate roof or wall cap with damper. **Laundry-type wall caps should never be used.** For maximum efficiency use the shortest and straightest duct run possible, with as few fittings as possible. For satisfactory performance the duct run should not exceed 100 feet equivalent length. Refer to the table of equivalent lengths (shown in installation instructions) for various duct configurations.


Built-In Gas Cooktops

	GE Profile™				GE®								
	JGP963SEF	JGP962SEC	JGP933SEF	JGP932SEC		JGP636WED		JGP336WED	JGP628WEC	JGP328WEC	JGP326WEF		
	JGP963WEC	JGP962TEC	JGP933WEC	JGP932TEC									
	JGP963CEC	JGP962KED	JGP933CEC	JGP932KED									
JGP963BEC	JGP962BEC	JGP933BEC	JGP932BEC	JGP960SED	JGP636BED	JGP930SED	JGP336BED	JGP628BEC	JGP328BEC	JGP326CEF	JGP326BEF	JGP320EV	
Features													
Cooktop burners	5 Sealed	5 Sealed	4 Sealed	4 Sealed	5 Sealed	5 Sealed	4 Sealed	4 Sealed	4 Sealed	4 Sealed	4 Sealed	4 Sealed	4 Standard
Power Boil burner	●	●	●	●									
High Output burner					●	●	●	●					
Precise Simmer burner(s)	2	2	●	●	2	2	●	●	●	●	●	●	
Electronic pilotless ignition	●	●	●	●	●	●	●	●	●	●	●	●	●
Cooktop surface	Stainless Porcelain	Ceramic-Glass	Stainless Porcelain	Ceramic-Glass	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass	Porcelain- Enameled	Porcelain- Enameled	Porcelain- Enameled	Porcelain- Enameled	
Cooktop grates	Continuous Deluxe Cast	Continuous Deluxe Cast	Continuous Deluxe Cast	Continuous Deluxe Cast	Deluxe Cast	Deluxe Cast	Deluxe Cast	Deluxe Cast	Continuous	Continuous	Medium Cast	Standard Steel	
One-piece drip pans					Porc.-Enam.	Porc.-Enam.	Porc.-Enam.	Porc.-Enam.	Porc.-Enam.	Porc.-Enam.	Porc.-Enam.	Chrome	
Control panel	Stainless White Bisque Black	Stainless True White Bisque Black	Stainless White Bisque Black	Stainless True White Bisque Black		White Bisque Black		White Bisque Black	White Bisque Black	White Bisque Black	White Bisque Black	White Bisque Black	White/Black
Controls	Upfront	Upfront	Right Side	Right Side	Upfront	Upfront	Right Side	Right Side	Upfront	Right Side	Right Side	Right Side	
Appearance													
	SS	SS	SS	SS									
	WW	WW	WW	WW		WW		WW	WW	WW	WW	WW	
	CC	CC	CC	CC		CC		CC	CC	CC	CC	CC	
Color appearance*	BB	BB	BB	BB	SS	BB	SS	BB	BB	BB	BB	BB	WH/BL
Weight & Dimensions													
Cooktop width (in inches)	36	36	30	30	36	36	30	30	36	30	30	30	30
Approx. shipping weight (lbs.)	54	59	44	49	38	38	30	30	51	44	44	44	31
Power/Ratings													
Gas cooktop electrical rating					120V, 60Hz, 5A								
	(1) 15.0/14.0 (1) 11.0/10.0 (1) 9.1/8.1 (2) 6.0/6.0	(1) 15.0/14.0 (1) 11.0/10.0 (1) 9.1/8.1 (2) 6.0/6.0	(1) 15.0/14.0 (1) 11.0/10.0 (1) 9.1/8.1 (2) 6.0/6.0	(1) 15.0/14.0 (1) 11.0/10.0 (1) 9.1/8.1 (2) 6.0/6.0	(1) 12.0/9.4 (2) 9.5/7.0 (2) 5.0/4.0	(1) 12.0/9.4 (2) 9.5/7.0 (2) 5.0/4.0	(1) 12.0/9.4 (2) 9.5/7.0 (1) 5.0/4.0	(1) 12.0/9.4 (2) 9.5/7.0 (1) 5.0/4.0	(3) 9.1/8.1 (1) 6.0/6.0	(3) 9.1/8.1 (1) 6.0/6.0	(3) 9.1/8.1 (1) 6.0/6.0	(4) 9.1/8.0	
Burners													
Nat. Gas/ (000's/BTU's):													
LP Gas †													


*SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black, WH = White, BL = Black.

†A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.

Cooktop Dimensions (in inches)

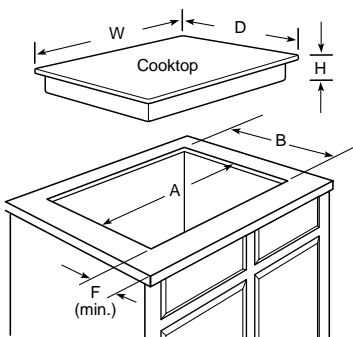

Counter Installation Dimensions (in inches)

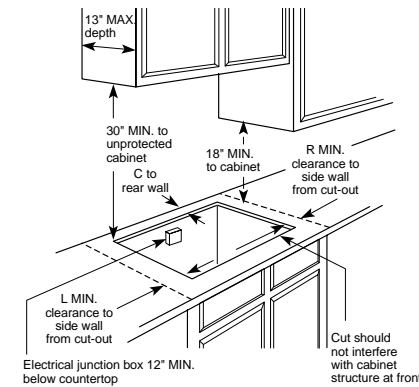

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Dimensions (in inches)


	Overall			Cutout		Minimum Spacing To Nearest Combustible Wall			To Edge of Front Counter
Model	W	D	H	A	B	C	L	R	F
JGP963	36	21	3-3/16	33-7/8	19-1/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP933	30	21	3-3/16	28-1/2	19-5/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP962	36	20-7/16	3-1/16	33-7/8	19-1/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP932	29-3/4	21	3-3/16	28-1/2	19-5/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP960	36	21	3-1/16	33-7/8	19-1/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP636	36	21	3-1/16	33-7/8	19-1/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP628	36	21	3-3/16	33-7/8	19-1/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP930	30	21	2-1/2	28-1/2	19-5/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP336	30	21	2-1/2	28-1/2	19-5/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP328	30	21	3-3/16	28-1/2	19-5/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP326	30	21	2-1/2	28-1/2	19-5/8	2-1/4	3-3/4	3-3/4	2-1/2
JGP320	30-1/4	21-1/4	3-9/32	28-1/2	19-5/8	1-3/4	3	3	3-1/4

*Allow 5-3/4" depth at rear for electrical and gas connections.


Note: All gas cooktop models require 7/16" free area below cooktop height to combustible material. 0" clearance is required between left and right sides of cooktop below countertop. Requires 18" minimum from countertop to adjacent overhead cabinets.*
*AGA requirement.

Note: If installing with a GE Profile Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

Gas Connection Models JGP963/962/636/628



Gas Connection Models JGP933/932/336/328/326/320



Installation With Single Wall Oven Information:

30" Gas Cooktops are approved for use over GE 27" Wall Ovens. 36" and 30" Gas Cooktops are approved for use over 30" Wall Ovens. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.

Optional Gas Range Wok Accessory (Available at additional cost)

JXWK = Wok accessory holder sits on top of maximum burner grate to hold a **round-bottom** wok. For use with JGP960/930/636/336 models only.

JXWK2 = Wok accessory holder sits on top of maximum burner grate to hold a **round-bottom** wok. For use with JGP963/933/962/932 models only.

Select-Top™ Modular Downdraft Cooktops

GE®	
Dual Modular	
JP389WD JP389BD	
Features	
Configuration	Dual Modular
Cooktop finish	White Porc.-Enam. Black Porc.-Enam.
Infinite heat controls	Rotary
Heating element "ON" indicator light	●
Downdraft exhaust (CFM)	400
Single-speed downdraft vent fan	
Three-speed downdraft vent fan	●
Appearance	
Color appearance*	WW BB
Weights & Dimensions	
Cooktop width (in inches)	30
Approx. shipping weight (lbs.)	72
Power/Ratings	
Amps @ 240V	40
KW rating @ 240V	8.0
Accessories	
Ribbon heating elements (one 8" and one 6")	JXDR50VW JXDR50VB
Coil heating elements (one 6", one 8" element with removable one-piece bowls)	JXDC44RWH JXDC43RBL
Grill Module†	JXDL44N
Griddle Accessory	JXDD44R
Grill Cover	JXDM3 JXDM2

*WW = White on white, BB = Black on black.

†Grill Module includes coil heating element, one-piece grill grate, and porcelain reflector pan.

Cooktop Options

GE lets you customize your cooktop with flexible modules to suit your taste. These optional versatile modules—*Grill, Coil, Ribbon, Griddle Opening Accessory and Grill Cover*—are available at additional cost. Simply plug the modules you want into either side of the cooktop (single modular cooktops accept modules on left side only) and unplug them for easy cleaning and storage.

Grill Module, JXDL44N

Includes front/rear controlled heating element, one-piece grill grate, and porcelain-enameled reflector pan.

Griddle Accessory, JXDD44R (Use with optional Grill Module.)

Place over heating element and reflector pan from optional grill module. Griddle accessory has a non-stick coating and is self-draining.

Ribbon Modules

Patterned glass top with one 8" and one 6" ribbon heating element
JXDR50VW—White on white, JXDR50VB—Black on black

Coil Modules

One 8" and one 6" plug-in heating element with one-piece bowls
JXDC43RBL—Black porcelain-enameled, JXDC44RWH—White porcelain-enameled

JXCK89 Electrical Connection Kit

Optional accessory kit for JP389 downdraft cooktop only, includes junction box and conduit.

Wall Installation

Wall installations require 25" countertop depth. When cabinet is flush against the wall, the fan housing can be rotated to the horizontal position for direct venting through rear wall. Make a countertop cutout that is centered in the range cabinet according to unit dimensions and installation type. Duct hole is positioned in back of cabinet for through-the-wall ducting.


Peninsula or Island Installation

For peninsula/islands a minimum 26" countertop depth is suggested. Blower should be in vertical position. Island or peninsula cabinets may require adjustment in cutout depth and/or location within the width dimensions. Duct hole is positioned in bottom of cabinet for island or peninsula installation.


Slab Installation

For peninsula or island installation and rear wall ducting, **PVC duct or locally approved piping should be used if installing under a poured concrete slab.**

Built-In Downdraft Cooktops Dimensions (in inches)

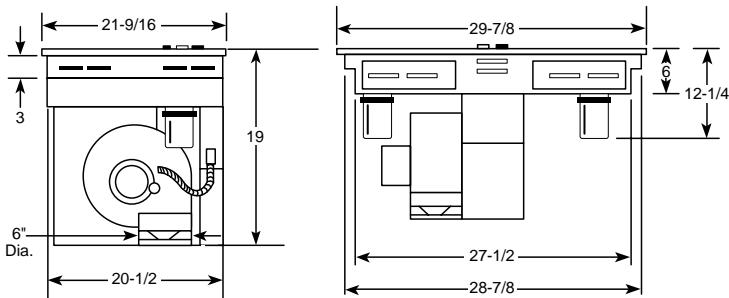


Cabinet Dimensions (in inches)

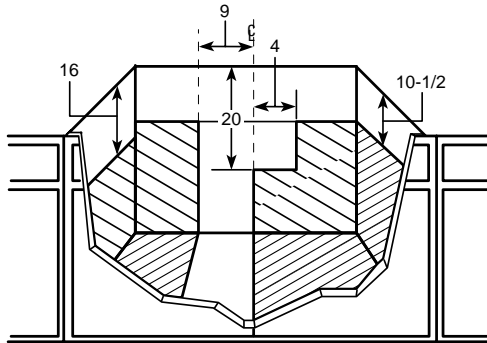

Receptacle Location


Install an approved junction box within shaded area shown in diagram. Junction box must be at least 10-1/2" below top of cabinet.

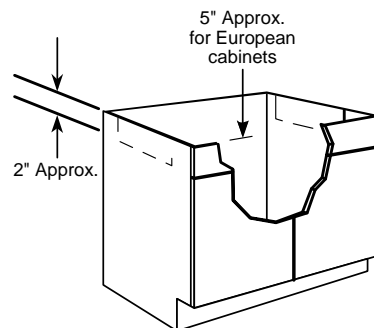

Preparing the Cabinet for Installation

In some cabinets, the sides may need to be scooped or cut down 2" as shown (right) and the corner braces removed in order to accommodate the cooktop.

Cutout Dimensions (in inches)




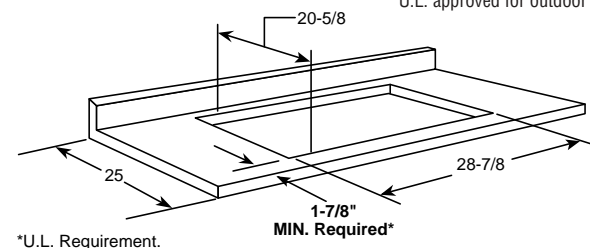


*U.L. Requirement.

Note: A 6" minimum spacing to adjacent side wall is required


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Venting Options

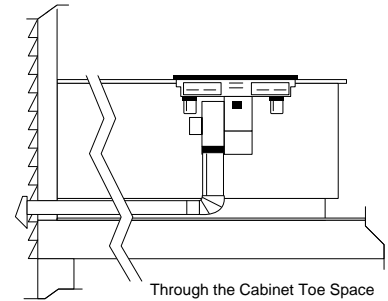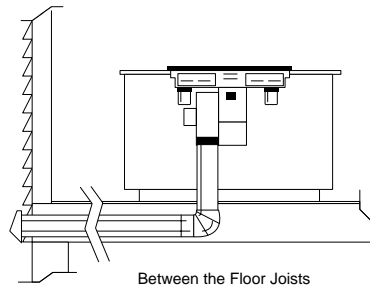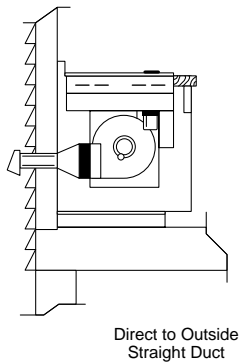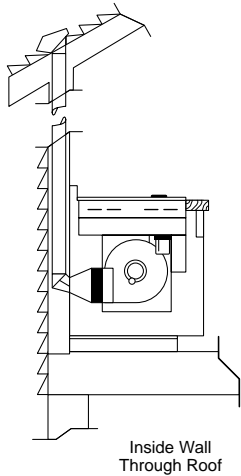


Note: Ductwork must be vented to outside. Do not vent into a wall, ceiling, crawl space, attic or any concealed space. Always use an appropriate roof or wall cap with damper. **Laundry-type wall caps should never be used.** For maximum efficiency use the shortest and straightest duct run possible, with as few fittings as possible. For satisfactory performance the duct run should not exceed 100 feet equivalent length. Refer to the table of equivalent lengths (shown in Pub. No. 49-8552) for various duct configurations.

Downward Venting (in inches)



Rear Wall Venting (in inches)



Installing the Ductwork

Use minimum 26-gauge galvanized or 24-gauge aluminum duct in 6" round or 3-1/4" x 10" size, or combination of both. **PVC duct or locally approved piping should be used if installing under a poured concrete slab.**


Built-In Downdraft Gas Modular Cooktops

GE Profile™	
JGP979SEF JGP979WEF JGP979BEF	
Features	
Configuration	Single modular
Cooktop surface	Stainless steel Porcelain Porcelain
Cooktop grates	Black porcelain-coated cast iron
Accepts modules	Left side
Gas cooktop burner module (right side)	2 Sealed
Electronic pilotless ignition	●
Downdraft vent fan	●
Downdraft exhaust (CFM)	375
Appearance	
Color appearance	Stainless steel White on white Black on black
Upfront controls	●
Weight & Dimensions	
Cooktop width (in inches)	30
Overall dimensions (W x D in inches)	30 x 21-3/4
Approx. shipping weight (lbs.)	76
Power/Ratings	
Gas cooktop electrical rating	120V, 60Hz, 15A
BTU's (000's)	Right side (burners) 10.0
Natural gas*	Grill Unit 8.0

*JGP979 cooktop is factory set for natural gas. It is not LP convertible.

Note: Shipped with sealed gas burner module, right side. Left side accepts optional modules that must be ordered and are available at additional cost.

Installation Information (in inches)

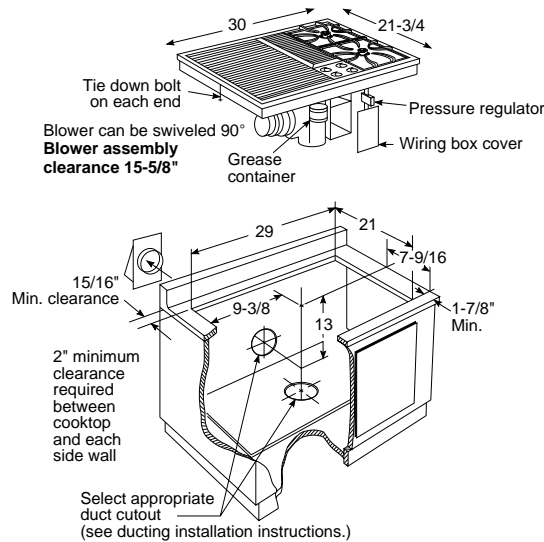

Optional Modules (Available at additional cost)

Two-Burner Gas Module (sealed burners)—
JXGB79W—White on white
JXGB79B—Black on black
Gas Grill Module—JXGG79
Griddle—JXGL79
(use with optional Grill module)
Grill Cover—
JXGC89W—White on white
JXGC89B—Black on black

Grill and griddle feature Excalibur® non-stick finish.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.



30" Slide-In Electric Ranges

	GE Profile™		GE®		
	JS968SF JS968TF JS968KF JS968BF	JSP47WF JSP47CF JSP47BF	JSP34WD JSP34CD JSP34BD	JSP26BD	JSS26BD JSS16PD
Features					
Self-clean oven w/Delay clean option	●	●	●	●	Standard Clean
Light self-clean option	●	●			
Variable cleaning time	●	●	●	●	
Automatic self-clean oven door lock	●	●	●	●	
Oven racks	3 Heavy-Duty	2	2	2	2
CleanDesign oven interior/hidden bake	●				
TrueTemp™ system	●	●			
Variable broil/Six-pass broil element	●	●			
Ceramic-glass cooktop	Patterned Black True White True Bisque Patterned Black	Patterned White Patterned Bisque Patterned Black			
Overhanging cooktop	●	●	●	●	●
Dual 6/9" heating element	1 Ribbon (2500W)	1 Ribbon (2500W)			
8" heating elements		2 Ribbon (2000W)			
7" heating elements	2 Ribbon (1800W)				
Bridge element	1 Ribbon (800W)				
Total wattage	4400W				
6" heating element	1 Ribbon (1500W)	1 Ribbon (1500W)	2 Plug-In	2 Plug-In	2 Plug-In
Warming zone	1 Ribbon (120W)				
Infinite heat controls	●	●	●	●	●
Precise Air™ Convection System	●				
Convection bake	Multi/Single-rack				
Convection roast	●				
Auto Recipe™ Conversion	●				
SmartSet controls	Glass touch	●	●	●	
Proof mode	●				
Warm mode	●				
Oven meat probe	●				
Optional closed door broiling	●	●			
Temperature display	●	●	●	●	
Start pad	●	●	●	●	
Delay Bake option w/Cook & Hold	●	●	●	●	
C° or F° programmable	●	●	●	●	
Audible preheat signal	●	●	●	●	
Auto oven shut-off w/override	●	●	●	●	
Control lock capability	●	●	●	●	
Electronic clock/kitchen timer	●	●	●	●	●
Hot surface indicator lights	4	4			
Heating element "ON" indicator light	●	●	●	●	●
Certified Sabbath mode	●	●			
Interior oven light	Halogen	●	●	●	●
Storage drawer	Stainless White Bisque Black	White Bisque Black	White Bisque Black	CM*	Black CM*
Broiler pan with grid	●	●	●	●	●
Roasting rack	●				
Convection cookbook	●				
Appearance					
Color appearance*	SS WW CC BB	WW CC BB	WW CC BB	WH/CT	BB WH/CT
Frameless glass oven door*	Stainless White Bisque Black	White Bisque Black	White Bisque Black	CM*	Black Painted
Oven door with window	Big ClearView™	Big ClearView™	●	●	●
Oven door handle	Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Sculptured White Sculptured Bisque Sculptured Black	White Bisque Black	Black	Black Painted
Weights & Dimensions					
Overall oven interior dimensions (WxHxD in inches)	24 x 16-1/4 x 18-1/8	24 x 17-1/2 x 18-1/4	22-3/4 x 15-3/4 x 17	22-3/4 x 15-3/4 x 17	22-3/4 x 15-3/4 x 17
Approx. shipping weight (lbs.)	205	200	175	175	160
Power/Ratings					
KW rating @ 240V	12.1	11.6	10.8	10.8	10.8
208V	9.1	8.7	8.1	8.1	8.1
Amps @ 240V	40	40	40	40	40
208V	40	40	40	40	40
Convection Wattage	2500				
Broiler/Bake Wattage	3600/2700	3600/3400	3400/2585	3400/2585	3400/2585

*SS = Stainless steel with black accents, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door, WH = White with black glass door, CT = Bisque with black glass door, CM = Color-Matched indicates color of drawer matches range cooktop (either white or bisque)

Note: Cabinets installed adjacent to slide-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

Note: All 30" Slide-In Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below countertop. To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.

Receptacle Locations: For all 30" Slide-In Ranges locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.




All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by Underwriters Laboratories

30" Slide-In Range Dimensions (in inches) Models JS968 and JSP47

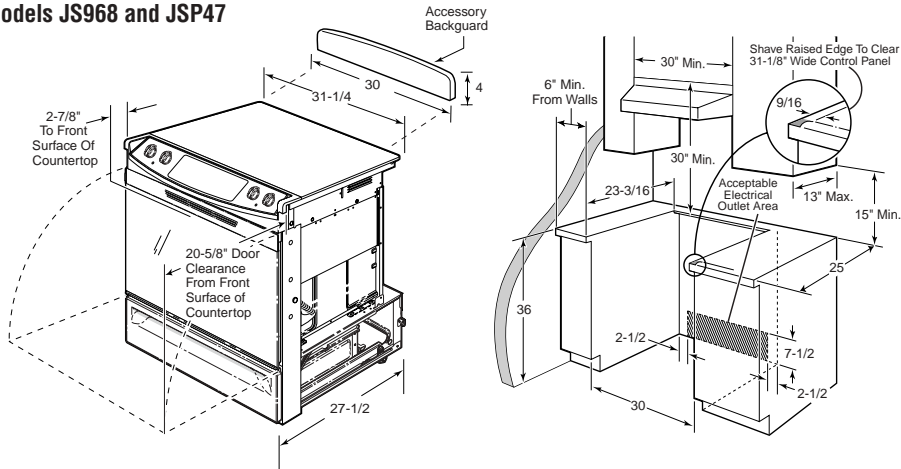

Optional Kits for Slide-In Electric Ranges (Models JS968 and JSP47) (Available at additional cost)

Accessory Backguards

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)
JXS37WW—White
JXS37CC—Bisque
JXS37BB—Black/Stainless

Body Sides

(Slide-in ranges are sold without sides installed. Can be installed on either left or right when unit has one exposed side [no cabinet adjacent]. Kit contains 1 body side)
JXS76WW—White
JXS76CC—Bisque
JXS76BB—Black

Vertical Side Trim Kits

(If cabinet cutout width is more than 30", a vertical side trim kit may be used to close the gap between the range and cabinet)
JXS86WW—White
JXS86CC—Bisque
JXS86BB—Black


Optional Lower Trim Kits

(If counter height is greater than 36.5", a lower trim kit is recommended to extend the useful height to 38" maximum)
JXS56WW—White
JXS56CC—Bisque
JXS56BB—Black


Optional Top Filler Kits

JXS66BB—Black
JXS66CC—Bisque
JXS66WW—White


If you are NOT using the optional Filler or Backguard:



If you are using the optional Filler or Backguard:



30" Slide-In Range Dimensions (in inches) Models JSP34/26 and JSS26/16

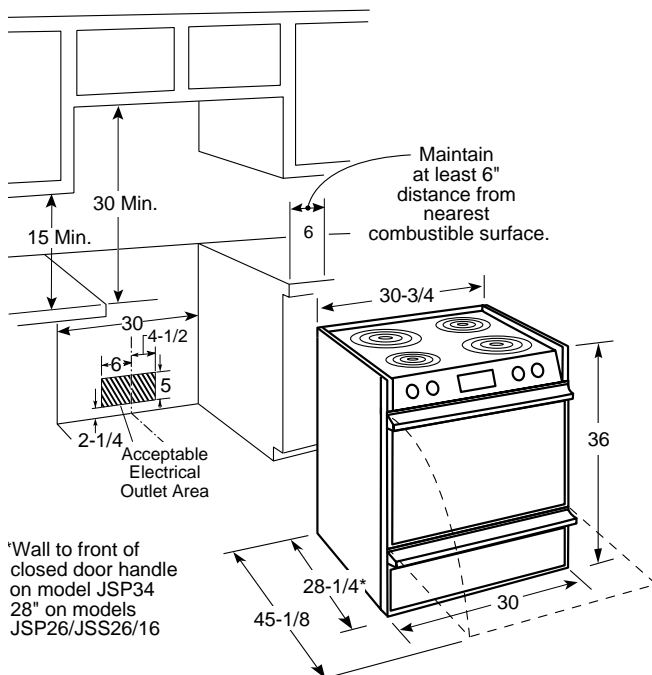

Optional Kits for Slide-In Electric Ranges (Models JSP34/26 and JSS26/16) (Available at additional cost)

Models shown are shipped with rear filler strip kit.

Rear Filler Strip Kit

JXS28—Rear Filler Strip Kit
(Brushed-chrome)

Accessory Backguards

JXS31—White Accessory Backguard
JXS32—Brushed-Chrome Accessory Backguard
JXS34—Black Accessory Backguard
JXS35—Bisque Accessory Backguard


Endcap Kit

JXS40—Endcap kit to accommodate replacement where countertop may already be notched.


Lower/Side Trim Kits

(If countertop height is greater than 37", it is recommended to use a lower trim kit.)
JXS52BB—Lower trim (Black)
JXS53WW—Lower trim (White)
JXS55CC—Lower trim (Bisque)
Pub. No. 3-A040—Vertical Side Trim Kit
(Brushed-Chrome)

If you are NOT using the optional Filler or Backguard:



If you are using the optional Filler or Backguard:



Note: Range may be placed with 0" clearance (flush) at the back wall and side walls below countertop if the range side trims above the countertop extend beyond the cabinet fronts at least 1/4" (self-clean models only). Maintain at least 6" distance from nearest combustible surface.

30" Slide-In Gas Ranges

	GE Profile™			GE®	
	Dual-Fuel	Gas	Gas	Gas	Gas
	JGS968SH JGS968TH JGS968KH JGS968BH	JGS968SH JGS968TH JGS968KH JGS968BH	JGSP48WH JGSP48CH JGSP48BH	JGSP23WEY JGSP23CEY JGSP23BEY	JGSS05BEH
Features					
Self-clean oven w/Delay clean option	●	●	●	●	Standard-Clean
Light self-clean option	●	●	●	●	
Variable cleaning time	●	●	●	●	
Automatic self-clean oven door lock	●	●	●	●	
Oven racks	3 Heavy-Duty	3 Heavy-Duty	2 Heavy-Duty	2	
CleanDesign oven interior/ hidden bake	●	●	●	●	
TrueTemp™ system	●	●	●	●	
Cooktop	Black Glass True White Glass True Bisque Glass Black Glass	Black Glass True White Glass True Bisque Glass Black Glass	Patterned White Glass Patterned Bisque Glass Black Glass	White Porc. Enamel Black Porc. Enamel	Black Porcelain Enamel
Overhanging cooktop	●	●	●	●	●
Cooktop burners	Sealed	Sealed	Sealed	Sealed	Sealed
Power Boil™ Burner	(1) 15,000 BTU/ 180° Simmer	(1) 15,000 BTU/ 180° Simmer			
High Output burner (Nat.)	(1) 11,000 BTU/ 150° Simmer	(1) 11,000 BTU/ 150° Simmer	(2) 11,000 BTU/ 150° Simmer		
Precise Simmer burner (Nat.)	(1) 6,000 BTU/ 140° Simmer	(1) 6,000 BTU/ 140° Simmer	(1) 6,000 BTU/ 140° Simmer		
All-purpose burners (Nat.)	(1) 9,100 BTU/ 150° Simmer	(1) 9,100 BTU/ 150° Simmer	(1) 9,100 BTU/ 150° Simmer		
Cooktop grates	Matte Black Hvy-Cast Grey Hvy-Cast Taupe Hvy-Cast Shiny Black Hvy-Cast	Matte Black Hvy-Cast Grey Hvy-Cast Taupe Hvy-Cast Shiny Black Hvy-Cast	Grey Taupe Shiny Black	Grey Standard Cast Black Standard Cast	Black Standard Porcelain Steel
Continuous grates	●	●	●	●	●
One-piece drip pans				Porc.-Enameled	
Ignition system	Electronic	Electronic	Electronic	Electronic	Electronic
Infinite heat controls	●	●	●	●	●
Precise Air™ convection system	●	●	●	●	●
Convection bake	Single/Multi-Rack	●	●	●	●
Convection roast	●	●	●	●	●
Auto Recipe™ conversion	●	●	●	●	●
Electronic controls	Glass touch	Glass touch	●	●	●
Proof mode	●	●	●	●	●
Warm mode	●	●	●	●	●
Oven Meat probe	●	●	●	●	●
Optional closed door broiling	●	●	●	●	●
Temperature display	●	●	●	●	●
Delay Bake option	●	●	●	●	●
C° or F° programmable	●	●	●	●	●
Audible preheat signal	●	●	●	●	●
Auto oven shut-off w/override	●	●	●	●	●
Control lock capability	●	●	●	●	●
Electronic clock/kitchen timer	●	●	●	●	●
Certified Sabbath mode	●	●	●	●	●
Interior oven light	Halogen	Halogen	●	●	●
Storage drawer	Stainless Steel White Bisque Black	Stainless Steel White Bisque Black	White Bisque Black	White Bisque Black	●
Slide-out broiler drawer	●	●	●	●	●
Broiler pan	●	●	●	●	●
Roasting rack	●	●	●	●	●
Convection cookbook	●	●	●	●	●
Appearance					
Color appearance	SS/WW/CC/BB	SS/WW/CC/BB	WW/CC/BB	WW/CC/BB	BB
Frameless oven door	Stainless Steel White Glass Bisque Glass Black Glass	Stainless Steel White Glass Bisque Glass Black Glass	White Glass Bisque Glass Black Glass	White Glass Bisque Glass Black Glass	Black Glass
Oven door with window	Big ClearView™	Big ClearView	Big ClearView	●	●
Sculptured oven door handle	●	●	●	●	●
Weights & Dimensions					
Overall oven interior dimensions (WxHxD in inches)	24 x 16-1/4 x 18-1/4	24 x 16-1/4 x 18-1/4	22-3/4 x 13 x 17	22-3/4 x 13 x 17	24 x 17 x 19
Approx. shipping weight (lbs.)	225	220	215	192	165
Power/Ratings					
Top burners (000's BTU's) Nat/LP	(1) 15.0/13.0 (1) 11.0/9.1 (1) 6.0/6.0 (1) 9.1/8.0	(1) 15.0/13.0 (1) 11.0/9.1 (1) 6.0/6.0 (1) 9.1/8.0	(2) 11.0/9.1 (1) 6.0/6.0 (1) 9.1/8.0	(3) 9.5/7.0 (1) 5.0/4.0	(4) 9.0/8.0
Range electrical rating	240v/208v, 60Hz/40A	120v, 60Hz, 5A	120v, 60Hz, 5A	120v, 60Hz, 5A	120v, 60Hz, 5A
Convection Wattage	2,500				
Broiler/Bake Wattage/BTU	3,600/2,700 watts	12,000/16,000 BTU	12,000/16,000 BTU	16,000/16,000 BTU	16,000/16,000 BTU
LP conversion kit (included)	●	●	●	●	●

SS = Stainless steel with black accents, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door
Factory set for Natural Gas. A set of LP orifices is included with each range for LP conversion.

Optional Kits for Slide-In Gas Ranges:
(Available at additional cost on all models except JGSS05)

Rear Filler Strip Kits

Model JGSP23 is shipped with required "vented" rear filler strip.

Lower/Side Trim Kits

JXS52BB—Lower Trim Kit (Black)
JXS53WW—Lower Trim Kit (White)
JXS55CC—Lower Trim Kit (Bisque)

Accessory Backguards

JXS31—White Accessory Backguard
JXS32—Brushed-Chrome Accessory Backguard
JXS34—Black Accessory Backguard
JXS35—Bisque Accessory Backguard

Endcap Kit


JXS40—Endcap kit to accommodate replacement where countertop may already be notched.

Optional Gas Range Wok Accessory


(Available at additional cost)
JXWK = Wok accessory holder sits on top of burner grate to hold a round-bottom wok.

Counter Cutout Dimensions (in inches) Models J2S968, JGS968, JGSP48 and JGSP23

If you are NOT using the optional Filler or Backguard:




If you are using the optional Filler or Backguard:



You must use the rear filler strip kit shipped with the range or the optional accessory backguard (JXS31, JXS32, JXS33, JXS34) when installing these ranges.

Note: Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194°F temperature rating.

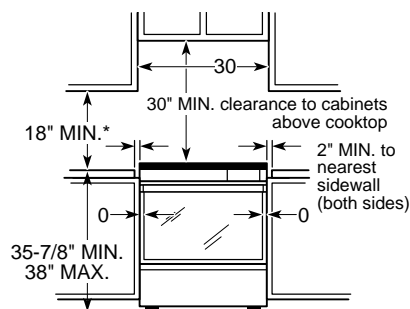

*ANSI Requirement




All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



Listed by
Underwriters
Laboratories

30" Slide-In Gas Ranges Dimensions (in inches) Models J2S968, JGS968, JGSP48 and JGSP23

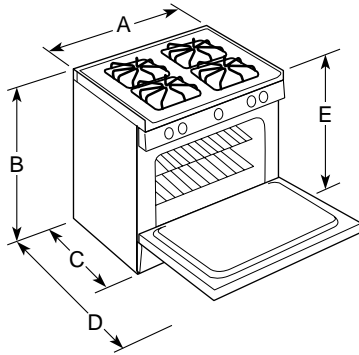

Dimensions (in inches)

Model	A*	B	C**	D	E
J2S968	30	38	28	44-3/4	35-3/4 to 36-1/2
JGS968	30	38	28	44-3/4	35-3/4 to 36-1/2
JGSP48	30	38	28	44-3/4	35-3/4 to 36-1/2
JGSP23	30	36-1/4	28-7/8	45-1/8	35-7/8 to 38

*Cooktop width including overhang 30-3/4".


**Depth including handle:

25-1/2"—Wall to front of closed oven door

26-1/4"—Depth to front top edge of control panel


Model JGSP23

Recommended area for 120V outlet on rear wall and area for through-the-wall connection of pipe stub and shut-off valve

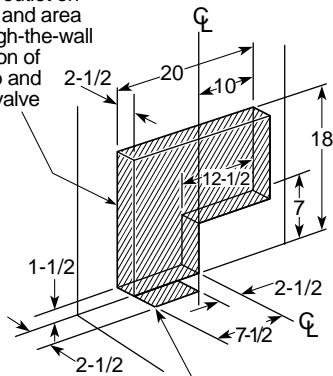


Recommended area for through-the-floor connection of pipe stub and shut-off valve


Models J2S968, JGS968 and JGSP48

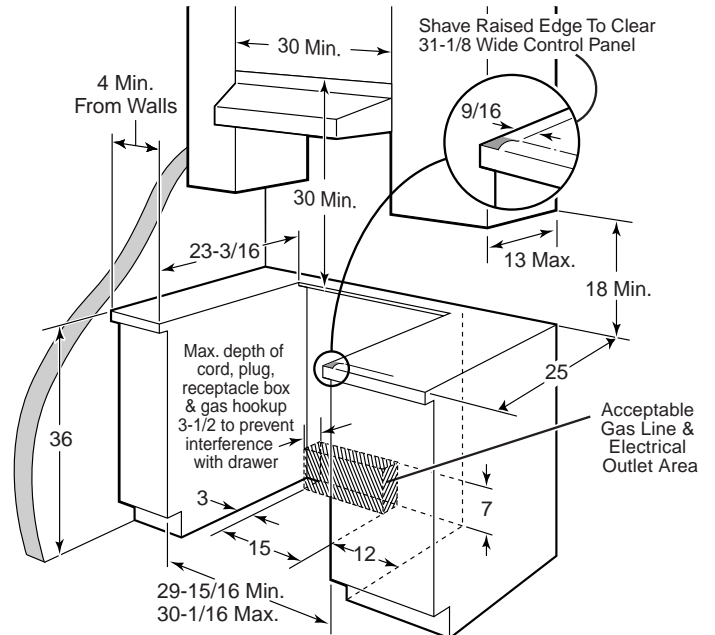

30" Slide-In Gas Range Dimensions (in inches) Model JGSS05

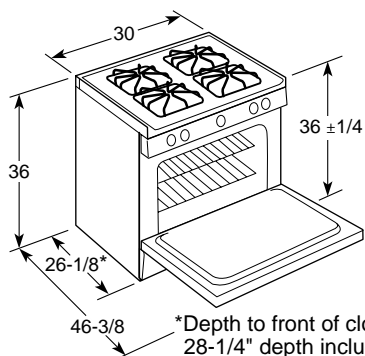

*Depth to front of closed oven door
28-1/4" depth including handle
25-1/4" depth to front top edge of cooktop

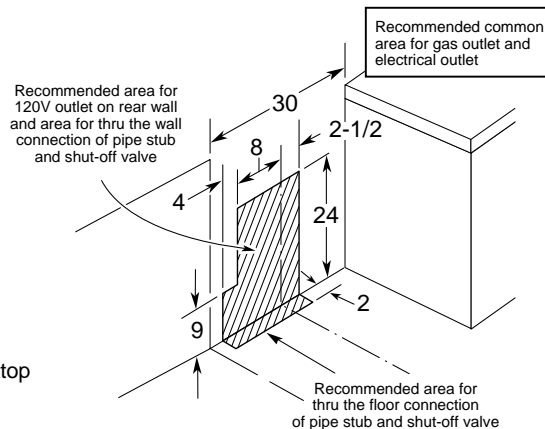

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

30" Drop-In Electric Ranges

	GE Profile™		GE®		
	JD968SF JD968TF JD968KF JD968BF	JDP47WF JDP47CF JDP47BF	JDP39WW JDP39BW	JDP36BW JDP36BD	JDS26BW JDS26BD
Features					
Self-clean oven w/Delay clean option	●	●	●	●	Standard-clean
Light self-clean option	●	●			
Variable cleaning time	●	●	●	●	
Automatic self-clean oven door lock	●	●	●	●	
Oven racks	3 Heavy-Duty	2	2	2	2
CleanDesign oven interior/hidden bake	●				
TrueTemp™ system	●	●			
Variable broil/Six-pass broil element	●	●			
Ceramic-glass cooktop	Patterned Black True White Patterned Bisque Patterned Black	Patterned White Patterned Bisque Patterned Black			
Dual 6"/9" heating element	1 Ribbon (2500W)	1 Ribbon (2500W)			
8" heating elements		2 Ribbon (2000W)	2 Plug-In	2 Plug-In	2 Plug-In
7" heating elements	2 Ribbon (1800W)				
Bridge element	1 Ribbon (800W)				
Total wattage	4400W				
6" heating element	1 Ribbon (1500W)	1 Ribbon (1500W)	2 Plug-In	2 Plug-In	2 Plug-In
Warming zone	1 Ribbon (120W)				
Infinite heat controls	●	●	●	●	●
Precise Air™ convection system	●				
Multi-rack convection bake	●				
Single rack convection bake	●				
Convection roast	●				
Auto Recipe™ conversion	●				
SmartSet controls	Glass Touch	●	●	●	●
Proof mode	●				
Warm mode	●				
Oven meat probe	●				
Temperature display	●	●	●	●	●
Delay Bake option	●	●	●	●	●
C° or F° programmable	●	●	●	●	●
Audible preheat signal	●	●	●	●	●
Auto oven shut-off w/override	●	●	●	●	●
Control lock capability	●	●	●	●	●
Electronic clock/kitchen timer	●	●	●	●	●
Hot surface indicator lights	4	4			
Heating element "ON" indicator light	●	●	●	●	●
Certified Sabbath mode	●	●			
Interior oven light	Halogen	●	●	●	●
Broiler pan with grid	●	●	●	●	●
Roasting rack	●				
Appearance					
	SS WW CC BB	WW CC BB	WW BB	WH CT	WH CT
Color appearance*					
Frameless glass oven door*	Stainless White Bisque Black	White Bisque Black	White Black	Black	Black
Oven door with window	Big ClearView™	Big ClearView	●	●	●
Oven door handle	Sculptured Stainless-look Sculptured White Sculptured Bisque Sculptured Black	Sculptured White Sculptured Bisque Sculptured Black	White Black	Black	Black
Convection cookbook	●				
Weights & Dimensions					
Overall oven interior dimensions (WxHxD in inches)	24 x 16-1/4 x 18-1/4	24 x 17-1/2 x 18-1/4	22-3/4 x 15-3/4 x 17	22-3/4 x 15-3/4 x 17	22-3/4 x 15-3/4 x 17
Approx. shipping weight (lbs.)	175	170			
Power/Ratings					
KW rating @ 240V	12.1	11.6	11.6	11.6	11.6
208V	9.1	8.7	8.7	8.7	8.7
Amps @ 240V	40	40	40	40	40
208V	40	40	40	40	40
Convection Wattage	2500				
Broiler/Bake Wattage	3600/2700	3600/3400	3400/2585	3400/2585	3400/2585

**SS = Stainless steel with black accents, WW = White with white glass door, CC = Bisque with bisque glass door, BB = Black with black glass door, WH = White with black glass door, CT = Bisque with black glass door

Optional Kits For JD968/JDP47 Electric Ranges (Available At Additional Cost)

Maintop Filler (JD968/JDP47)

(Fills gap between cooktop and wall when unit is installed in 30" free-standing cutout)

JXS66WW—White

JXS66CC—Bisque

JXS66BB—Black

Accessory Backguards (JD968/JDP47)

(Attaches to the back of range as a backguard when unit is installed in 30" free-standing cutout)

JXS37WW—White

JXS37CC—Bisque

JXS37BB—Black/Stainless

Lower Trim Kits

(When a drop-in is installed in an existing cutout greater than 27-1/4" from the counter to the cabinet cross-rail, a lower trim kit should be used to fill the gap at the bottom of the range)

JXS96WW—White

JXS96CC—Bisque

JXS96BB—Black

Note: Cabinets installed adjacent to drop-in electric ranges must have an adhesion spec of at least a 194°F temperature rating.

Note: All 30" Drop-In Radiant Ranges conform to U.L. requirements for 0" spacing from range to adjacent walls below cooktop. To reduce possibility of scorching the side walls above the countertop when no load is present on burners, it is recommended that a minimum 6" spacing from adjacent side wall be allowed for possible extended high-heat element operation.


Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

IMPORTANT: 30" DROP-IN RANGES ARE DESIGNED TO HANG FROM THE COUNTERTOP. IT DOES NOT REST ON THE FLOOR. FOR INSTALLATION ALTERNATIVES, REFER TO INSTALLATION INSTRUCTIONS PACKED WITH PRODUCT.



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.

Countertop Cutout—Top View Models JDP39/36 and JDS26

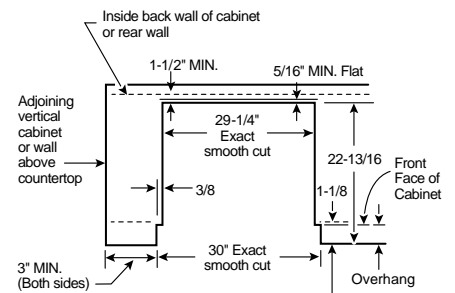


If countertop edge is formed, this dimension must extend to flat area

Drop-In ranges are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.




Listed by
Underwriters
Laboratories

30" Drop-In Range Dimensions (in inches)

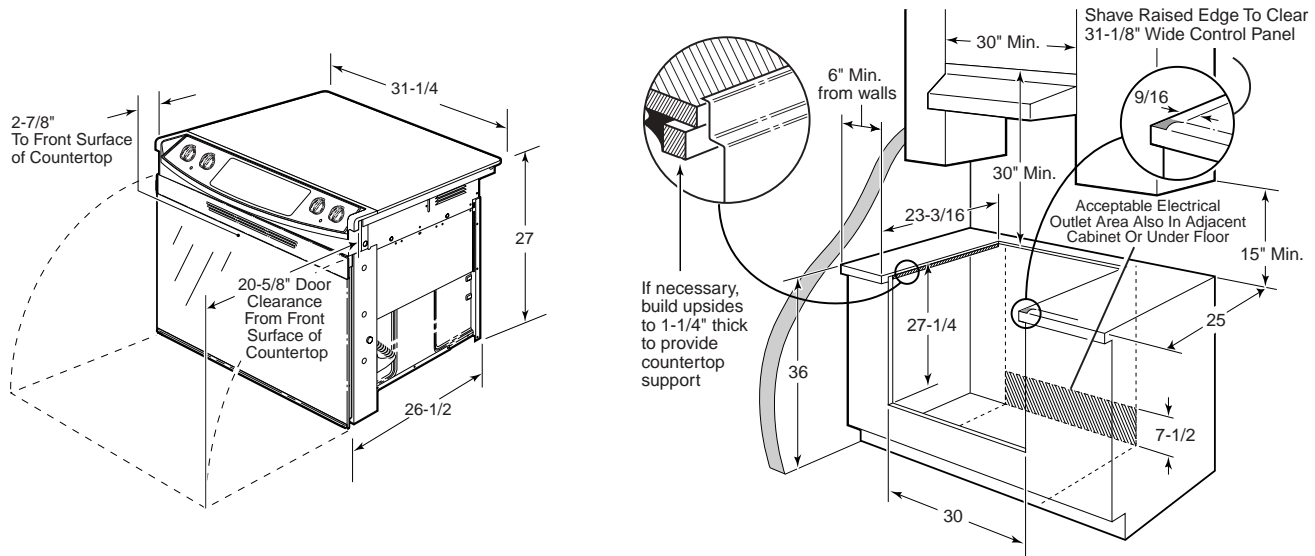

30" Drop-In Range Dimensions (in inches)

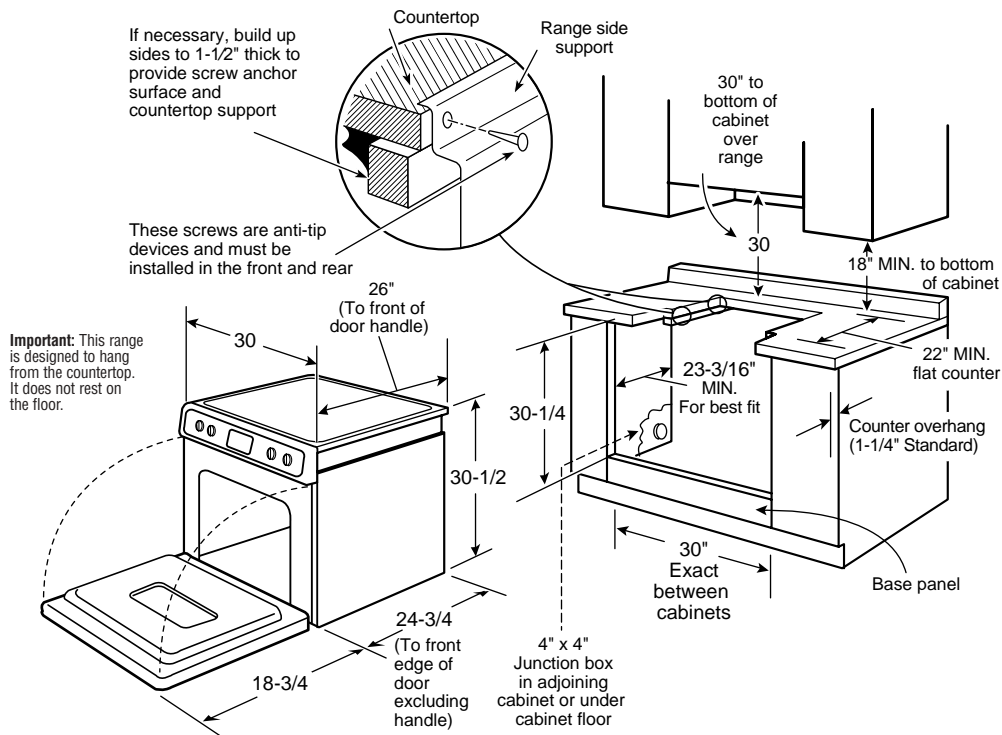

Spacemaker™ 27" Drop-In Electric Ranges

	GE Profile™	GE®	
	JMP31WC	JMP28BC JMP28BD	JMS08BD
Features			
Oven cleaning	Self-Clean	Self-Clean	Standard Clean
Variable cleaning time	●	●	
Automatic self-clean oven door lock	●	●	
Oven racks	2	2	2
Lift-up overhanging cooktop	White Porcelain-Enameled	White Porc.-Enam. Bisque Porc.-Enam.	White or Bisque Porcelain-Enameled
8" heating elements	1	1	1
6" heating elements	3	3	3
Plug-in Calrod® heating elements	●	●	●
Infinite heat controls	●	●	●
Removable one-piece drip bowls	Chrome	Chrome	Chrome
Electronic clock and kitchen timer	●	●	
Delay Bake option	●	●	
Auto oven shut-off	●	●	
Electronic oven control	●	●	
Heating element "ON" indicator light	●	●	●
Interior oven light	●	●	●
Broiler pan with grid	●	●	●
Appearance			
Color appearance*	WW	WH CT	WH/CT
Frameless oven door	White Glass	Black Glass	Black Glass
Oven door with window	Big View	Big View	Big View
Lift-off oven door	●	●	●
Designer-style handle	Sure Grip	●	●
Weights & Dimensions			
Overall oven interior dimensions (WxHxD in inches)	19 x 15 x 18		
Approx. shipping weight (lbs.)	119	119	119
Power/Ratings			
KW rating @ 240V	9.8	9.8	10.1
208V	7.3	7.3	7.6
Amps @ 240V	40	40	40
208V	40	40	40

Optional Backward

Optional Backguard

(Available at additional cost)


JX27RBK = Black

JX27RWH = White




27" Drop-In Range Dimensions (in inches)

Important: This range is designed to hang from the countertop. It does not rest on the floor.

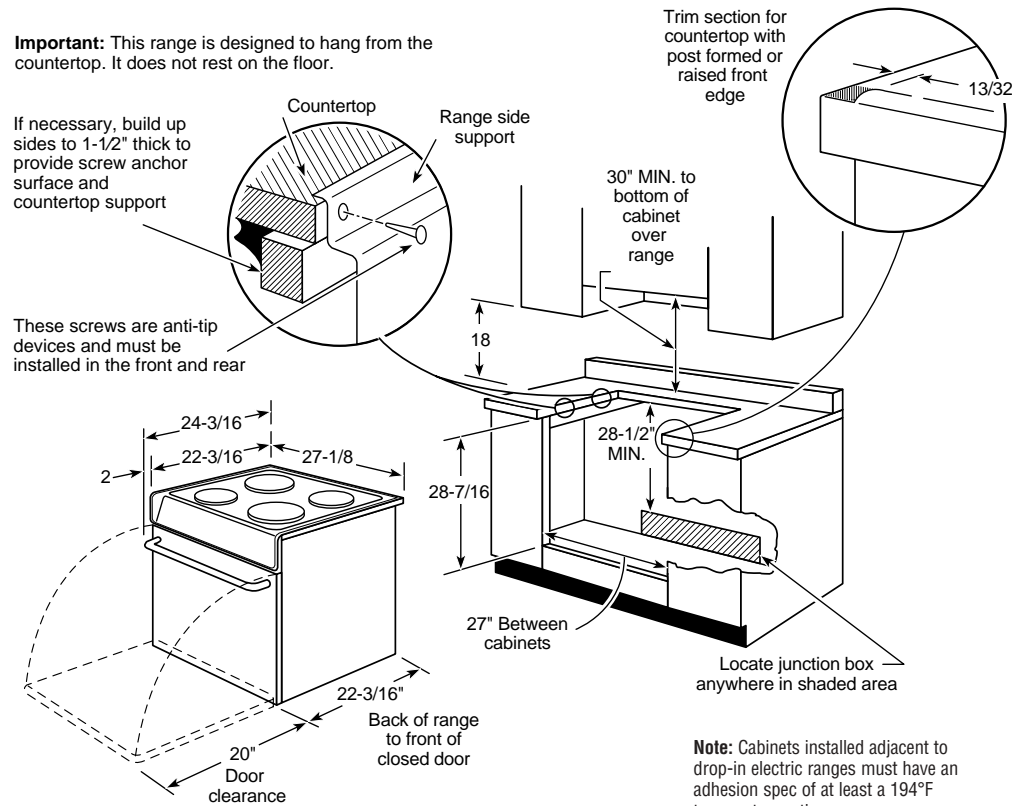

Countertop Cutout—Top View

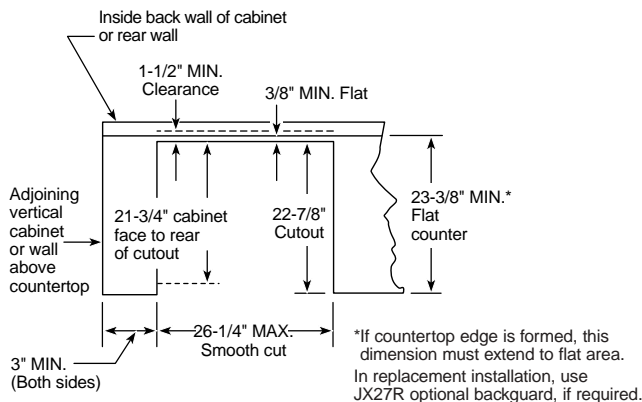

Note: All 27" Drop-In Electric Ranges conform to U.L. requirements for minimum spacing between range and side wall below countertop.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data

Slide-Out Hoods

	GE Profile							
	JV960SC	JV930SC	JV696S	JV695S	JV694S	JV396S	JV395S	JV394S
Features								
Variable-speed fan control	●	●	●	●	●	●	●	●
Auto heat sensor	●	●	●	●	●	●	●	●
Vertical exhaust (CFM)	300	300	300	300	300	300	300	300
Sones rating: Top exhaust	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Removable grease filter*	●	●	●	●	●	●	●	●
Filter size (sq. in.)	147	147	147	147	147	147	147	147
Cooktop light	●	●	●	●	●	●	●	●
3-1/4" x 10" rectangular duct	●	●	●	●	●	●	●	●
Appearance								
Color appearance**	BA	BA	CC	WW	BB	CC	WW	BB
Weights & Dimensions								
Width (in inches)	36	30	36	36	36	30	30	30
Approx. shipping weight (lbs.)	43	40	43	43	43	40	40	40
Power/Ratings								
Current rating amps @ 120V	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7

*Has washable one-piece smoke/grease filter.

**WW = White on white, BB = Black on black, CC = Bisque on bisque, BA = Brushed Aluminum.

Note: These vented hoods include an installed damper.

Note: The unit is ducted vertically. Horizontal ducting can be accomplished as shown.


Note: Remove glass visor from unit before installing hood in cabinet to protect visor from damage.

Installation Information: Before installing, consult Use & Care/installation instructions packed with product for current dimensional data.





Listed by
Underwriters
Laboratories

Installation Information (in inches)

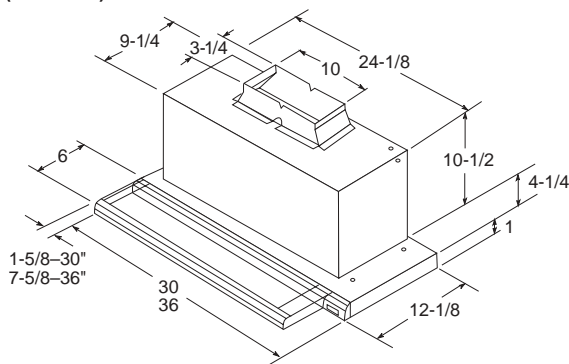

Dimensions (in inches)

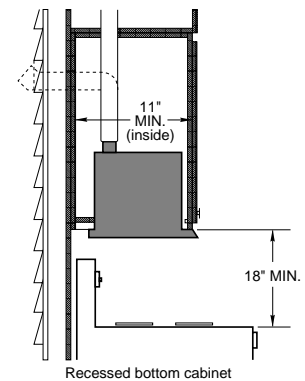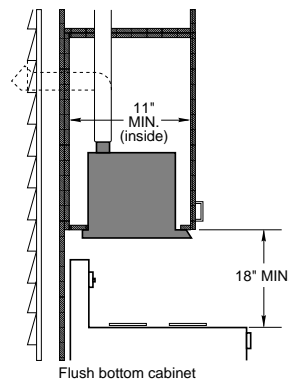


Telescopic Downdraft Systems

	GE Profile™			
	JVB98SH	JVB94SH	JVB67HWW JVB67HCC JVB67HBB	JVB37HWW JVB37HCC JVB37HBB
Features				
Upfront variable-speed fan w/slide control	•	•	•	•
Separate remote raise/lower switch	•	•	•	•
Blower rating (CFM)	500	500	500	500
Optional blower mount capabilities	•	•	•	•
3-1/4" x 10" rectangular duct	•	•	•	•
Minimum 6" round duct capability	•	•	•	•
Removable grease filters	•	•	•	•
Appearance				
Color appearance*	SS	SS	WW CC BB	WW CC BB
Cover plate	SS	SS	White Bisque Black	White Bisque Black
Telescopic snorkel assembly	Black	Black	Black	Black
Weights & Dimensions				
Width (in inches)	36	30	36	30
Approx. shipping weight (lbs.)	76	72	76	72
Power/Ratings				
Current rating amps @ 120V	4.0	4.0	4.0	4.0

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

Note: Approved for use with GE Profile and GE® electric and sealed burner gas cooktops.

Blower Position

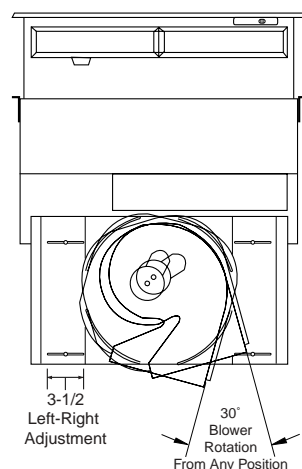

Note: Telescopic downdraft vents are not recommended to be installed with cooktops that are flush mounted.

Approved for use with the following GE Profile and GE cooktops—36" and 30" electric models, 36" and 30" gas sealed burner models and 36" and 30" induction models.

Note: Not approved for use with standard burner gas cooktops.

Note: The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

Note: Dimensions shown are for reference only. Before cutting out countertop, refer to instructions packed with **downdraft** and **cooktop**.


Note: Installation in cabinets/countertops against the wall will not be possible in most applications. Against the wall installations are limited to dimension requirements. Refer to installation instructions packed with product for further details.

JXBC67 Outdoor Cover. Optional accessory may be ordered for installation of motor and blower assembly on outside wall.


JXRB67 Indoor Remote Accessory. Optional accessory may be ordered for installation of motor and blower assembly in an indoor remote location.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.


Overall Dimensions (in inches) Model JVB98/67

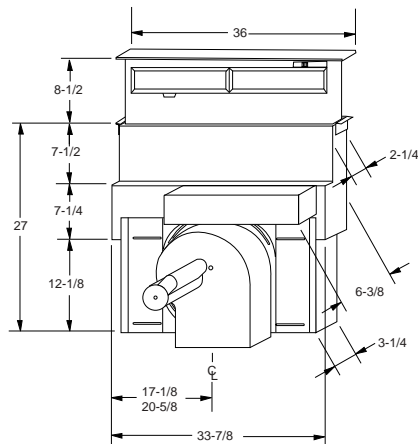


Model JVB94/37

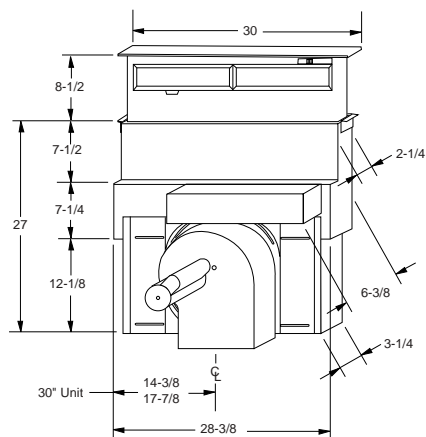


Venting Options (Through the Floor)

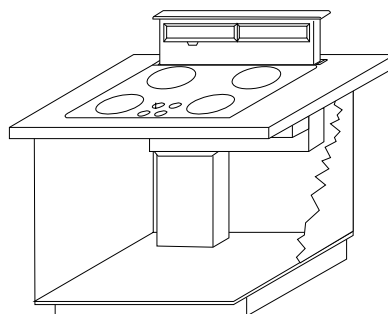


In Cabinet Discharge (Down)

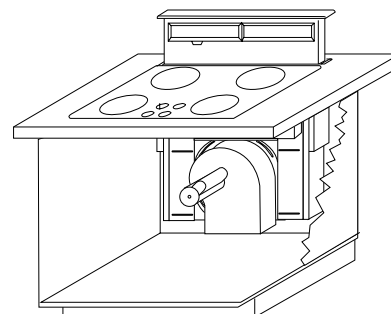

In Cabinet Discharge (Right)

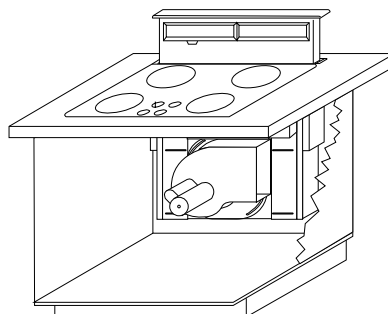

In Cabinet Discharge (Left)

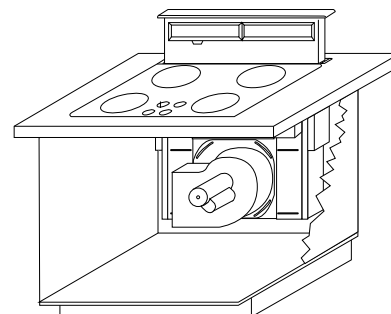

36" and 30" Designer Hoods

	GE Profile™	
	JV966D	JV936D
General		
Width	36"	30"
Height	18"	18"
Features		
Ducting	Vertical Only	Vertical Only
Duct size	7" round	7" round
CFM rating	600	600
Sones rating	7	7
Filters	●	●
Filter cleaning	Dishwasher-Safe	Dishwasher-Safe
Lighting	Dual Halogen	Dual Halogen
Control type	Manual	Manual
Control location	Hidden	Hidden
Four-speed fan control	●	●
Light settings	Off/High/Night	Off/High/Night
Blower/light switch color	Black	Black
Appearance		
Color appearance*	SS	SS
Weights & Dimensions		
Approx. shipping weight (lbs.)	77	68
Power/Ratings		
Current rating Amps @ 120V	3.9	3.9
Accessories/Kits		
Baffle filter kit	●	●
Optional chimney kit	●	●

*SS = Stainless steel.

Optional Kits for 36" Designer Hoods

JXBF36SS—36" Commercial Filter
JXCHSS—Stainless Chimney Kit
JXDW1—7" round to 3-1/4" x 10" rectangular duct transition for rear wall discharge.

Optional Kits for 30" Designer Hoods


JXBF30SS—30" Commercial Filter
JXCHSS—Stainless Chimney Kit
JXDW1—7" round to 3-1/4" x 10" rectangular duct transition for rear wall discharge.




Listed by
Underwriters
Laboratories

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Installed Above a Cooktop (Shown with Optional Chimney Kit) Dimensions (in inches)

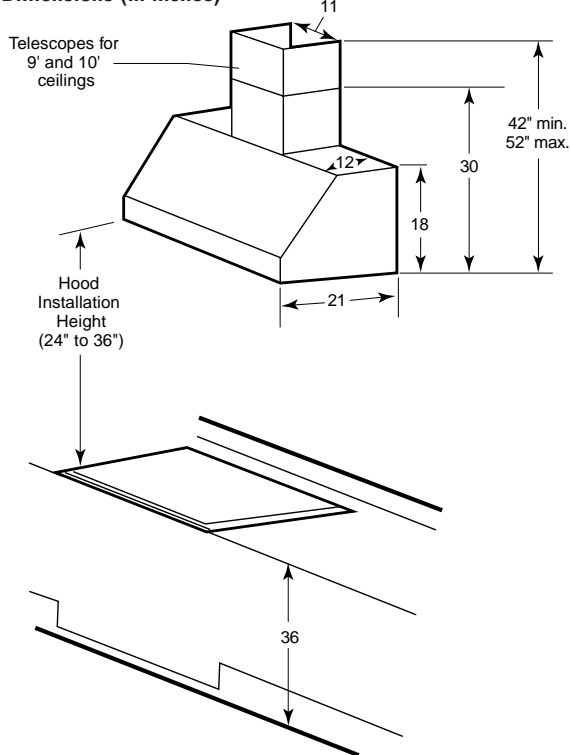

Installed Above a Range (Shown with Optional Chimney Kit) Dimensions (in inches)

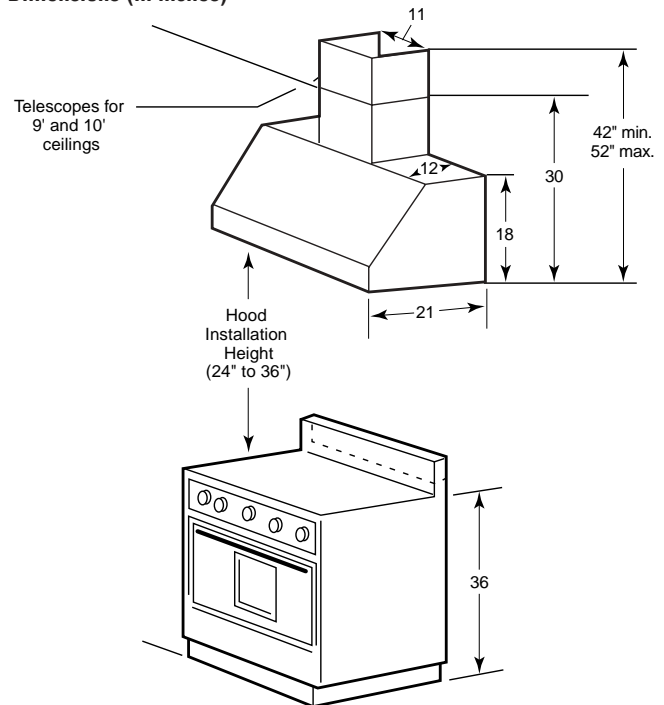

Hoods

	GE Profile						
	Width	High-Performance				Performance	
		30"		JV636H	JV635H	JV536H	JV535H
	36"	JV666H	JV665H		JV566H	JV565H	
Features							
Two-speed fan control					●	●	
Four-speed fan control	●	●	●	●			
Damper included (rectangular)	●	●	●	●	●	●	
Optional damper accessory (round)	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	JXDA22	
CFM/Sone rating:							
Back rectangular	390/7.5	390/7.5	390/7.5	390/7.5	240/4.5	240/4.5	
Top round	410/7.0	410/7.0	410/7.0	410/7.0	250/4.5	250/4.5	
Top rectangular	380/7.5	380/7.5	380/7.5	380/7.5	240/5.0	240/5.0	
Removable grease filters	2†	2†	2†	2†	2††	2††	
Cooktop light(s)*	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	2 Halogen (50 watt)	
Night light position on light switch	●	●	●	●			
3-1/4" x 10" rectangular duct	●	●	●	●	●	●	
7" round duct	●	●	●	●	●	●	
Non-vented					●	●	
Appearance							
Color appearance**	SS	WW/CC/BB	SS	WW/CC/BB	SS	WW/CC/BB	
Weights & Dimensions							
Approx. shipping weight (lbs.)	35	35	30	30	30	30	
Power/Ratings							
Current rating amps @ 120V	2.5	2.5	2.5	2.5	1.4	1.4	

*Light bulbs not furnished.

**SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.


†WB02X11011 (30") or WB02X11012 (36") removable grease filter is available for additional cost (Models JV666, 665, 636, 635).

††WB02X11000 (30") or WB02X11001 (36") removable charcoal filter is available for additional cost (Models JV566, 565, 536, 535).

Call toll-free 800.626.2002.

Dimensions (in inches)

Model	A	B	C	D
JV666/JV665	7-1/4	35-7/8	20	12
JV636/JV635	7-1/4	29-7/8	20	12
JV536/JV535	7-1/4	29-7/8	20	12
JV566/JV565	7-1/4	35-7/8	20	12
JV367	5-1/2	35-7/8	17-1/2	12
JV347	5-1/2	29-7/8	17-1/2	12
JV338	5-1/2	29-7/8	17-1/2	12
JN327	5-1/2	29-7/8	17-1/2	12

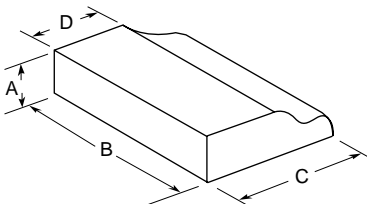

JXHC1 Cord Kit

EXACT® Cold Kit
Allows a receptacle in the cabinet over the range to accommodate either an over-the-range microwave oven or a standard hood.

	Width	GE®		
		Deluxe	Standard	
	30"	JV347H	JV338H	JN327H
	36"	JV367H		
Features				
Two-speed fan control			●	●
Three-speed fan control		●		
Vertical exhaust (CFM)		200	170	
Rear exhaust (CFM)		180	160	
Damper included (rectangular)		●	●	
Optional damper accessory (round)		JXDA22	JXDA22	
Sones rating:				
Top exhaust		6.0	5.5	
Rear exhaust		7.0	7.0	
Removable grease filters		Disposable 1-Pc. Filter†	1†	Disposable 1-Pc. Filter†
Filter size (sq. in.)		90	90	90
Cooktop light(s)*		1	1	1
3-1/4" x 10" rectangular duct		●	●	
7" round duct		●	●	
Non-vented				●
Appearance				
Color appearance**		WW/CC/BB	WW/CC	WW/CC/AA
Weights & Dimensions				
Approx. shipping weight (lbs.)		20	17	19
Power/Ratings				
Current rating amps @ 120V		2.5	2.5	2.5

*Light bulbs not furnished.

*WW = White on white, CC = Bisque on bisque, BB = Black on black, W = White, C = Bisque, A = Almond.


*WB02X9381 replacement grease filter and WB02X10700 replacement charcoal filter are available for additional cost. Call toll-free 800.626.2002 (Models JV367/347/338 and JN327).

Hood Dimensions (in inches)

1 Models JV666H, JV665H, JV636H, JV635H, JV536H, JV535H, JV566H and JV565H

Exhaust outlet connects to 3-1/4" x 10" duct (vertically or horizontally) and 7" round (vertically). Includes rectangular damper and 7" round damper adapter.


Round damper accessory, JXDA22 available at additional cost.

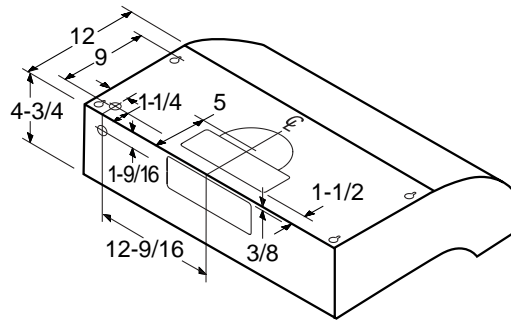

2 Models JV367H,* JV347H and JV338H

*JV367H, JV347H and JV338H—Refer to this drawing for rectangular exhaust option. Refer to drawing 3 for round exhaust option.


Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.

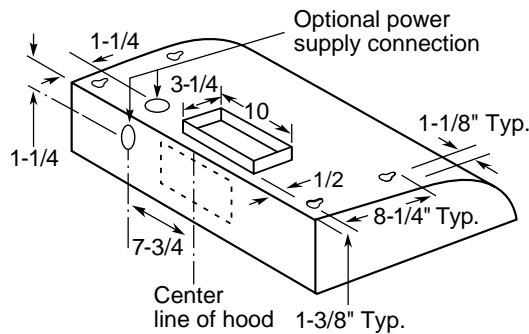


3 Models JV367H, JV347H and JV338H*

*JV367H, JV347H and JV338H—Refer to this drawing for round exhaust option. Refer to drawing 2 for rectangular exhaust option.

Exhaust outlet connects to 7" diameter duct. Vent top only. Round damper accessory, JXDA22, available at additional cost.

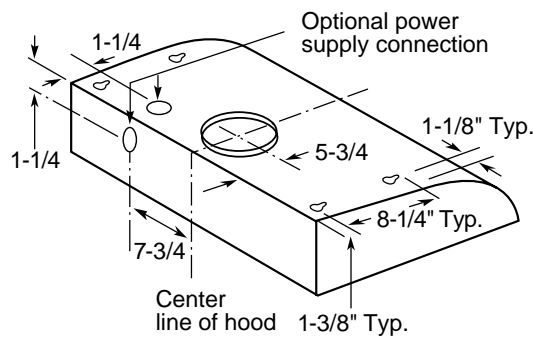

4 Model JN327H

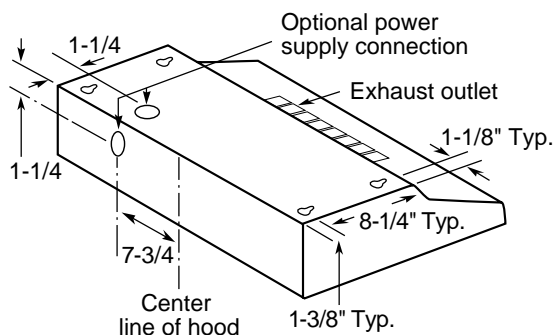

(Models JV347, JV367, and JV338 only)



Listed by Underwriters Laboratories

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

Answers that click!
GE puts everything you need at your fingertips.



GE Appliances web site — 16 million visitors a year!
Visit us at GEAppliances.com

Everything you need to know about GE products is here. Access up-to-date information, find out "what's new," obtain dimensions, get installation tips and more. Extremely user-friendly, this one-stop site lets you research by brand, category or model number and even buy online through a local GE dealer.

GE Answer Center® saves you time.
800.626.2000

This 24-hour-a-day, 7-day-a-week service provides answers on product features, installation, service and more.



A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.



GE Appliances

GE Consumer Products
General Electric Company
Louisville, Kentucky 40225
GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2003 General Electric Company
Pub. No. 3-S143 PC35936