

GE PROFILE™ AND GE® DISHWASHERS

"The cleanest wash you never heard."™



Home Products and Services



We bring good things to life.

Relax.
The kitchen is clean and quiet.

Imagine a dishwasher that gets plates and
pans **spotless**, while giving you peace and

quiet in the kitchen. The GE Profile Triton™

and GE Nautilus™ dishwashers have advanced

technology to get dishes **cleaner**, while the

innovative GE sound package keeps kitchens

quieter. The GE Triton TriClean™ wash

system, and the GE Nautilus PowerScrub™

feature provide powerful sprays of water,

so every glass sparkles, every dish gleams.

Our GE QuietPower™ motor,

PermaTuf® tub and effective sound


insulation add serenity to even the busiest

kitchens. Add a GE Disposall® food disposer to

put kitchen **convenience** at your disposal.

Never pre-rinse again

Now you'll never need to soak, scrub or
rinse dishes before you put them in the
dishwasher. Our revolutionary TriClean™
Wash System has three powerful wash
arms to clean every spot on every dish.

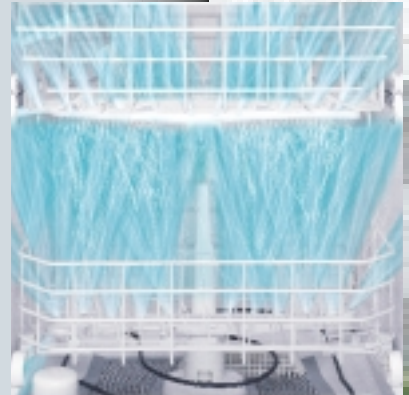

Sanitize dishes, cutting boards and baby bottles

Assure your family's health and well being
by reducing bacteria. Our NSF* Certified
SaniWash™ cycle reduces 99.999%
of the bacteria found on dishes.



Shorten dishwashing time by 30 minutes

Busy schedules don't leave much time
for washing dishes. Our SpeedWash™ and
SpeedDry™ cycles reduce wash and
dry time by half an hour.**



Get cleaner water for every cycle

Cleaner water means cleaner dishes. Our
100% Triple Filtration with dual pumps
removes food particles from water after
every wash and rinse cycle.





GE Profile Performance Triton™ Built-In Dishwashers

These models include • TriClean™ Wash System (3 wash arms, 100% triple water filtration with dual pumps, Piranha™ hard food disposer)
• CleanSensor • Electronic controls • SaniWash • SpeedWash™ and SpeedDry™ • China/Crystal cycle* • 8-hour Delay Start • QuietPower™ III sound package • QuietPower™ motor • ActiveVent • Quiet Water Valve • Trimless appearance • Child lock • Super Capacity Plus silverware basket with 2 cell covers

Note: bold = feature upgrade from previous model

ONLY GE HAS IT!



TriClean™ Wash System has 3 Wash Arms that provide complete coverage, eliminating pre-rinsing, soaking and scrubbing.

ONLY GE HAS IT!




100% Triple Water Filtration with Dual Pumps eliminates recirculating food particles.

ONLY GE HAS IT!



Piranha™ Hard Food Disposer grinds and pulverizes food particles.



SaniWash Cycle reduces 99.999% of the bacteria found on dishes.

*Developed in consultation with Lenox,® the leading manufacturer of fine china.

Not all features available on all models.



GE Profile Performance™
Built-In Dishwasher

GSD5940FSS Stainless steel exterior

• Variable cycles/options • **Power Pre-Soak option**
• **Super upper rack with 2 rows of fold down tines**
• **SmartShelf with StemSafe** • **Super lower rack with 4 rows of fold-down tines**

GSD5950FCC Bisque (not shown)

GSD5930FWW White on white (not shown)

GSD5920FBB Black on black (not shown)

GSD5910FAA Almond on almond (not shown)



GE Profile Performance™
Built-In Dishwasher

GSD5630DWW White on white

• Variable cycles/options

GSD5650DCC Bisque (not shown)

GSD5620DBB Black on black (not shown)

GSD5610DAA Almond on almond (not shown)



NSF Protocol for Sanitization and Cleaning Performance of Household Spray-Type dishwashers (1997)

GE Profile Triton™ Built-In Dishwashers

These models include • TriClean™ Wash System (3 wash arms, 100% triple water filtration with dual pumps, Piranha™ hard food disposer)
 • Electronic controls • Pots & Pans cycle • China/Crystal cycle* • Hi-Temp Rinse option • Hi-Temp Wash option • 8-hour Delay Start
 • SmartShelf • QuietPower™ motor **Note: bold = feature upgrade from previous model**



GE Profile™ Built-In Dishwasher

GSD5360FSS Black/Stainless

• 5 cycles/34 options • **Light Wash cycle** • **QuietPower™ III** sound package • **ActiveVent** • **Super lower rack with 2 rows of fold down tines** • **Super Capacity silverware basket with 2 cell covers**

GSD5350DCC Bisque (not shown)

GSD5330DWW White on white (not shown)

GSD5320DBB Black on black (not shown)

GSD5310DAA Almond on almond (not shown)



GE Profile™ Built-In Dishwasher

*"Quietest for the Money"****

GSD5130DWW White on white

• 4 cycles/26 options • Super racks • **QuietPower™ II** sound package • Super Capacity silverware basket with 1 cell cover

GSD5150FCC Bisque (not shown)

GSD5120DBB Black on black (not shown)

GSD5110DAA Almond on almond (not shown)




*Developed in consultation with Lenox,® the leading manufacturer of fine china.

**As rated by consumers in the \$375-\$425 price range.

Built-In Dishwashers

These models include • Normal Wash cycle • Heated Dry On/Off option • Trimless appearance • Rinse Only (on dial) • Deluxe Plus upper rack • Deluxe lower rack • Deluxe split silverware basket • QuietPower™ motor

Note: bold = feature upgrade from previous model




SureClean™ Wash System lets you count on shiny, sparkling dishes every time. GE design assures powerful sprays of water are directed at every dish.

ONLY GE HAS IT!



Piranha™ Hard Food Disposer eliminates the need to pre-rinse dishes.



Delay Start lets you wash dishes whenever it's convenient. Start the dishwasher even when no one's home.



PermaTuf® Tub won't chip, peel, crack or rust under normal use.



GE Profile™

HPS Exclusive Built-In Dishwasher

GSD4010ZAA Almond on almond

- 4 cycles/26 options • SureClean™ Wash System
- **Electronic controls** • **QuietPower™ II sound package**
- Light Wash cycle • **Dual Filtration** • Piranha™ Hard Food Disposer • **2/4/6-hour Delay Start option**
- **Hi-Temp Rinse**

GSD4030ZWW White on white (not shown)

GSD4020ZBB Black on black (not shown)




GE

Energy Star Built-In Dishwasher

GSD3825FBB Black on black

- 6 cycles/35 options • SureClean™ Wash System • 6 Hour Delay Start • TouchTap™ controls • QuietPower™ I sound package • **Piranha™ Hard Food Disposer** • **Heavy Wash cycle**
- Pots & Pans cycle • Rinse Aid dispenser with indicator
- **HotStart™** option



GSD3835FWW

White on white (not shown)

GSD3855FCC

Bisque (not shown)

GE Nautilus™ Built-In Dishwashers

These models include • Normal Wash cycle • Heated Dry On/Off option • Trimless appearance • Rinse Only (on dial)

• QuietPower™ motor • Deluxe silverware basket • Short Wash cycle (on dial) • HotStart™ option

Note: bold = feature upgrade from previous model



PowerScrub™ Wash System has 2 wash arms mounted on top and lower levels, plus a spray tower in the middle.



HotStart™ Option preheats water prior to main wash for great wash performance every time.



TouchTap™ control panel has no buttons to trap dirt or grime.



Enjoy a more peaceful kitchen while reducing energy costs with our most energy efficient GE QuietPower™ motor.



GE
HPS Exclusive Built-In Dishwasher

GSD3210FAA Almond on almond

• 5 cycles/22 options • PowerScrub™ Wash System • QuietPower™ I sound package • Pots & Pans cycle • Plate Warmer cycle • Hi-Temp Wash option • Deluxe rack system • PermaTuf® Tub



GE
HPS Exclusive Built-In Dishwasher

GSD2230FWW White on white

• 5 cycles/12 options • QuietDesign™ sound package • Standard Wash System • Pots & Pans cycle • Plate Warmer cycle (on dial) • Deluxe lower rack

GE

HPS Exclusive Built-In Dishwasher

GSD3630FWW White on white

• 6 cycles/31 options • **TouchTap™** controls • PowerScrub™ Wash System • QuietPower™ I sound package • Pots & Pans cycle • Plate Warmer cycle (on dial) • Hi-Temp Wash option • **Light Wash cycle** • **“Cycle On” indicator light** • Deluxe rack system • 6-hour Delay Start option

GSD3650FCC Bisque (not shown)

GSD3620FBB Black on black (not shown)

GSD3610FAA Almond on almond (not shown)

GSD3230FWW

White on white (not shown)

GSD3220FBB

Black on black (not shown)

GSD2231FWW*

White on white (not shown)

GSD2250FCC

Bisque (not shown)

Available July 1, 2001

GSD2220FBB

Black on black (not shown)

GSD2200FWH

White front panels/black control panel (not shown)

GSD2200FAD

Almond front panels/black control panel (not shown)

*With power cord attached.

Not all features available on all models.

GE Nautilus Dishwashers “All you’ll notice is the clean.”™

Built-In Dishwasher



GSD2050FCC Bisque (not shown) Available July 1, 2001

GSD2030FWW White on white (not shown)

GSD2000FWH White front panels/black control panel (not shown)

GSD2000FAD Almond front panels/black control panel (not shown)

GE

HPS Exclusive Built-In Dishwasher

GSD2020FBB Black on black

- 4 cycles/9 options • Normal Wash cycle
- Heated Dry On/Off option • Trimless appearance • Rinse Only (on dial)
- QuietPower™ Motor • Standard Wash system • HotStart™ option • Heavy Wash cycle (on dial) • Short Wash cycle (on dial)
- Standard upper rack • Deluxe lower rack
- Deluxe silverware basket • PermaTuf® Tub

Spacemaker® Under-the-Sink Dishwasher



Installed under a single sink



Installed under a cooktop

GE

Under-the-Sink Dishwasher

GSM2130FWW/GSM2110FAA

- 5 cycles/12 options • Pots & Pans cycle • Normal Wash cycle • Short Wash cycle (on dial) • Rinse Only cycle (on dial) • Plate Warmer cycle (on dial) • HotStart™ option • PermaTuf® interior • Spacemaker® upper rack
- Deluxe lower rack • Deluxe silverware basket • 2 wash levels • QuietPower™ motor

Note: Under-the-Sink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Spacemaker® 18" Built-In Dishwasher



GE

18" Built-In Dishwasher

GSS1800Z

- 4 cycles/7 options • 2 wash levels • Pots & Pans cycle • Normal Wash cycle (on dial) • Light Wash cycle (on dial) • Standard silverware basket • Heated Dry On/Off option • Reversible color panels Black, Almond, White

GE Nautilus™ Convertible Dishwashers

These models include • New PowerScrub™ Wash System • Pots & Pans cycle • Normal Wash cycle • Short Wash cycle (on dial)
• Plate Warmer cycle (on dial) • Rinse Only cycle (on dial) • HotStart™ option • Heated Dry option • Hi-Temp Wash option • 3 wash levels
• Deluxe rack system • Rinse Aid dispenser • QuietPower™ motor • Trimless appearance **Note: bold = feature upgrade from previous model**



PowerScrub™ Wash System has 2 wash arms mounted on top and lower levels, plus a spray tower in the middle.



Enjoy a more peaceful kitchen while reducing energy costs with our most energy efficient GE QuietPower™ motor.



HotStart™ Option preheats water prior to main wash for great performance every time.

ONLY GE HAS IT!



Piranha™ Hard Food Disposer eliminates the need to pre-rinse dishes.



Portable now



Built-in later



GE
Convertible Dishwasher

GSC3430FWW/GSC3400FBL

• 7 cycles/39 options • TouchTap™ control pads • China/Crystal cycle* • 6-hour delay start option • Deluxe upper rack • Deluxe lower rack • Split silverware basket • Rinse Aid dispenser with indicator • QuietPower™ I sound package



GE
Convertible Dishwasher

GSC3200FBL/GSC3230FWW

• 5 cycles/22 options • Deluxe upper rack • Deluxe lower rack • Deluxe silverware basket • QuietPower™ I sound package

*Developed in consultation with Lenox,® the leading manufacturer of fine china.

Not all features available on all models.

GE Disposall®—"Kitchen convenience at your disposal."™

These models include • Stainless Steel, Dual Swivel, Anti-Jam Grinding Blades • EZ-Mount Installation • Stainless Steel Sink Flange • Manual Reset Overload Protector • Removable Splash Guard (continuous feed models only) • Sink Stopper • Drain Connector Kit

GE Continuous Feed Disposers

GFC1020F

- Heavy Duty 1 HP motor • 2800 RPM grinding action
- Super Capacity • QuietPower™ III sound insulation package
- 1-year full replacement plus 6-year limited warranty*

GFC720F

- Heavy Duty 3/4 HP motor • 2700 RPM grinding action
- Super Capacity • QuietPower™ II sound insulation package
- 1-year full replacement plus 4-year limited warranty*

GFC530F

- Heavy Duty 1/2 HP motor • 2600 RPM grinding action
- Extra Large Capacity • QuietPower™ I sound insulation package
- 1-year full replacement plus 2-year limited warranty*

GFC535F

Similar to GFC530 but has attached line cord

GFC520F

- Heavy Duty 1/2 HP motor • 2600 RPM grinding action
- Large Capacity • Standard sound insulation package
- 1-year full replacement plus 2-year limited warranty*

GFC525F

Similar to GFC520 but has attached line cord

GFC320F

- 1/3 HP motor • 1900 RPM grinding action • Large Capacity • Standard sound insulation package • 1-year full replacement warranty*

GFC325F

Similar to GFC320 but has attached line cord

GE Batch Feed Disposer

GFB760F

- Heavy Duty 3/4 HP motor • 2700 RPM grinding action
- Super Capacity • QuietPower™ II sound insulation package
- 1-year full replacement plus 4-year limited warranty*

*See written warranty for details.



GFC1020F



GFC720F



**GFC530F/
GFC535F**



**GFC520F/
GFC525F**



**GFC320F/
GFC325F**



GFB760F

Built-In Compactors



GE Profile™

Built-In Compactor

GCG1540FSS Stainless steel

- Built-in only • 1.4 cu. ft. capacity
- 1/3-horsepower • Removable key lock
- Toe pedal opener • Rear wheels allow easy movement and installation
- Heavy-gauge steel construction

GCG1550FCC Bisque (not shown)

GCG1530FWW White on white (not shown)

GCG1520FBB Black on black (not shown)

Not all features available on all models.

GE Profile Performance and GE Profile Triton™ Built-In Dishwashers

Dishwasher Accessories

Dishwasher Panel Kits and Accessories:

GE Profile Performance™ models: GSD5900 and 5600 Series. GE Profile™ models: GSD5300 and 5100 Series.

GPF400C/S/W/B/A—panel kit
GPF600C/W/B/A—trimless door panel
GPF700C/W/B/A—trimless access panel

Note: C = Bisque, S = Stainless Steel, W = White, B = Black, A = Almond


Wood Panel Capability:

GPF475—GE Profile Performance™ and GE Profile™ 3/4" trimless panel kit (door and access)

[GPF100—heavy-duty spring kit included]

GPF425A/B/W/C—GE Profile Performance™ and GE Profile™ 1/4" panel trim kit (door and access)
GPF100—Optional heavy door spring kit

Wood Insert Cut-Out Dimensions

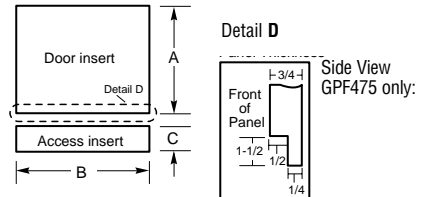

Models/Kit	A	B	C	D – Panel Thickness
GE Profile Performance™ and GE Profile™ models/GPF425	19-3/4"	23-9/16"	3-11/16"	1/4"
GE Profile Performance™ and GE Profile™ models/GPF475	19-7/8"	23-5/8"	4-1/4" to 3-11/16"	3/4"

*Bottom of panel must be notched 1-1/2" x 1/2" to clear access panel. (See illustration above)

**Adjustment required to match adjacent cabinet fronts due to leveling adjustment, 4" nominal.

Power Cord Installation Information:

The power cord and connections must comply with the National Electrical Code, Section 422 and/or local codes and ordinances. The cord must be no longer than 6 ft. from the junction box to the receptacle.

Electrical Rating

Voltage AC120
Hertz.....60
Total connected load amperage.....8.2
Calrod® heater watts500
Calrod® heater watts (GSD5900 and GSD5600 series models).....725

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.




Features	GE Profile Performance™		GE Profile™	
	GSD5950FCC GSD5940FSS GSD5930FWW GSD5920FBB GSD5910FAA	GSD5650DCC GSD5630DWW GSD5620DBB GSD5610DAA	GSD5360FSS GSD5350DCC GSD5330DWW GSD5320DBB GSD5310DAA	GSD5150FCC GSD5130DWW GSD5120DBB GSD5110DAA
Wash System				
TriClean™ Wash System	•	•	•	•
Dual Pumps	•	•	•	•
3 wash arms – 6 levels	•	•	•	•
Triple Water Filtration system	100%	100%	100%	100%
Piranha™ Hard Food Disposer	•	•	•	•
CleanSensor	•	•	•	•
Cycles	Variable	Variable	5	4
Pots & Pans	•	•	•	•
Normal Wash	•	•	•	•
Light Wash	•	•	•	•
China/Crystal	•	•	•	•
SpeedWash™	•	•	•	•
SaniWash	•	•	•	•
Rinse only	•	•	•	•
Options	Variable	Variable	34	26
Child Lock Option	•	•	•	•
Delay Start	2-4-8-Hour	2-4-8-Hour	2-4-8-Hour	4-6-8-Hour
Heated Dry On/Off	•	•	•	•
SpeedDry™	•	•	•	•
Hi-Temp Wash	•	•	•	•
Hi-Temp Rinse	•	•	•	•
Power Pre-Soak	•	•	•	•
Racks, shelf & basket				
Upper Rack	Super w/2 Rows of Fold-Down Tines	Super	Super	Super
Lower Rack	Super w/4 Rows of Fold-Down Tines	Super w/2 Rows of Fold-Down Tines	Super w/2 Rows of Fold-Down Tines	Super
SmartShelf	with StemSafe	•	•	•
Silverware Basket	Super Capacity Plus w/2 cell covers	Super Capacity Plus w/2 cell covers	Super Capacity w/2 cell covers	Super Capacity w/1 cell cover
Control type	Electronic	Electronic	Electronic	Electronic
Cycle progress indicators	6 LEDs	6 LEDs	1 "Clean"	1 "Clean"
Touchpads	11	10	11	10
Rinse Aid dispenser	with Indicator	with Indicator	with Indicator	with Indicator
Center throw door latch	•	•	•	•
Economical & Quiet				
Quiet				
Sound insulation package	QuietPower™ III	QuietPower™ III	QuietPower™ III	QuietPower™ II
PermaTuf® Tub and door liner	•	•	•	•
QuietPower™ motor	•	•	•	•
ActiveVent	•	•	•	•
Quiet Water Valve	•	•	•	•
Appearance				
Colors available*	CC, SS, WW, BB, AA	CC, WW, BB, AA	SS, CC, WW, BB, AA	CC, WW, BB, AA
Color panels—Door & Access	Trimless	Trimless	Trimless	Trimless
Weights & Dimensions				
Approx. shipping weight (lbs.)	80	80	80	80
Height w/legs retracted (in.)	34	34	34	34
Overall width (in.)	24	24	24	24
Overall depth (in.)	25-3/4	25-3/4	25-3/4	25-3/4
Accessories				
Requires kit for 1/4" panel capability with trim	GPF425C/W/B/A	GPF425C/W/B/A	GPF425C/W/B/A	GPF425C/W/B/A
Requires kit for trimless 3/4" panel capability	GPF475	GPF475	GPF475	GPF475


*Colors available: CC = Bisque, SS = Stainless Steel, WW = White on white, BB = Black on black, AA = Almond on almond.

All GE Profile Performance™ and GE Profile™ Dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, horizontal mechanism, leveling screws.

Built-In Dishwasher Dimensions (in inches)

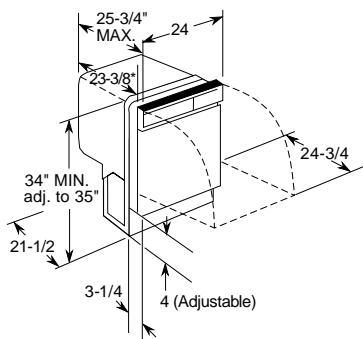

Built-In Dishwasher Installation Information (in inches)

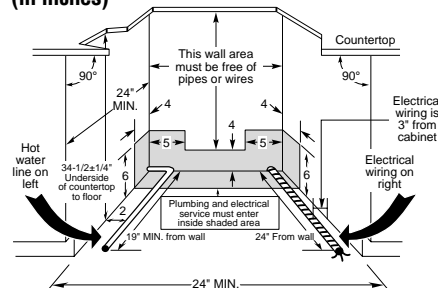

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Note: If a flush look is needed, a 25" base cabinet needs to be used.

GE Nautilus™ Convertible Dishwashers


	GE	
	GSC3430FWW GSC3400FBL	GSC3230FWW GSC3200FBL
Features		
Wash System		
PowerScrub™ Wash System	●	●
Wash levels	3	3
Filtration System	Dual	Dual
Piranha™ Hard Food Disposer	●	●
Cycles	7	5
Pots & Pans	●	●
Normal Wash	●	●
Light Wash	●	
China/Crystal	●	
Short Wash	Dial	Dial
Plate Warmer	Dial	Dial
Rinse Only	Dial	Dial
Options	39	22
Delay Start	1-6 Hour	
Heated Dry	●	●
Hi-Temp Wash	●	●
HotStart™	●	Dial
Racks (upper/lower)	Deluxe/Deluxe	Deluxe/Deluxe
Silverware basket	Deluxe Split w/2 cell covers	Deluxe
Cycle progress indicator	1 "Cycle On"	Dial
TouchTap™ control pads	8	
Pushbuttons		6
Rinse Aid dispenser	with Indicator	●
Economical/Quiet		
Quiet		
Sound insulation package	QuietPower™ I	QuietPower™ I
PermaTuf® Tub and door liner	●	●
QuietPower™ motor	●	●
Sealed toe-kick	●	●
Appearance		
Colors available*	WW, BL	WW, BL
Color panels—Door & Access	Trimless	Trimless
Decorative wood laminate top	Grey/Woodgrain	Grey/Woodgrain
Weights & Dimensions		
Approx. shipping wt (lbs.)	130	130
Overall height w/legs extended (in.)	36-3/8	36-3/8
Overall width (in.)	24-7/8	24-7/8
Overall depth (in.)	27	27

*Colors available: WW = White on white, BL = Black control panel and front panels w/almond side panels.

Dimensions (in inches)


GSC3230FWW, GSC3200FBL, GSC3430FWW and GSC3400FBL

Portable

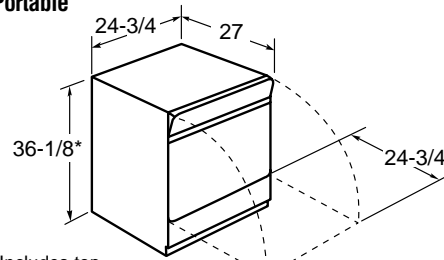

*Includes top and wheels

Built-In

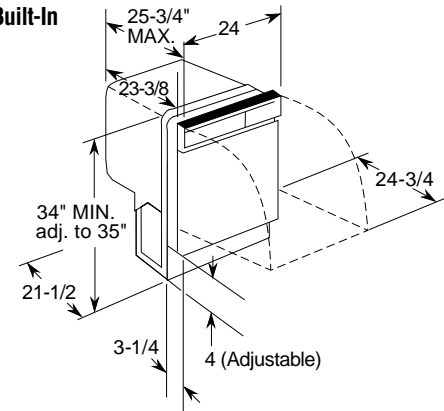


Important Note: GE kit number WD35M34 needed when adapting GE convertible dishwasher to a built-in installation. Contains built-in dishwasher water valve, hardware and complete instructions for changing a GE convertible dishwasher for under-the-counter installation.

GE Spacemaker® Built-In 18" Dishwasher

	GE	
	GSS1800Z	
Features		
Wash System		
Wash levels	2	
Cycles	4	
Pots & Pans	Dial	
Normal Wash	Dial	
Light Wash	Dial	
Rinse & Hold	Dial	
Options	7	
Heated Dry On/Off	Rocker	
Racks (upper/lower)	Standard	
Silverware basket	Standard	
Control type	Turn-To-Start	
Cycle progress indicator	Dial	
Rinse Aid dispenser	●	
120°F inlet water capability	●	
Leveling screws	●	
Economical/Quiet		
Tub Insulation	Standard	
Appearance		
Colors (panels available)	Black, Almond, White	
Weights & Dimensions		
Approx. shipping weight (lbs.)	70	
Height w/legs retracted (in.)	34-1/8	
Overall width (in.)	18	
Overall depth (in.)	25-3/8	

Dimensions (in inches)

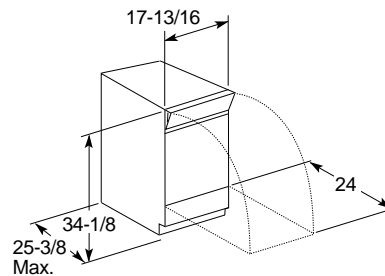

Dishwasher Rough-In Information

Note: Dishwasher must not be installed more than 10 feet from sink for proper drainage. All plumbing and electrical work must be in accordance with local codes.

Most of the installation work should be done before the dishwasher is moved into place. First, select a location as close to the sink as possible for ready access to water and drain lines. For proper operation and appearance of the dishwasher, the cabinet opening should be square and have dimensions as shown in Figure 1. If the dishwasher is to be installed in a corner, there must be sufficient clearance to open the door as shown in Figure 2. A minimum clearance of 2" is recommended.

Rough-in the water, electrical, and drain lines before proceeding with the installation. The lines should run straight to their connections on the dishwasher.

Note: Make sure that the lines do not cross in front of the dishwasher motor or its legs.

Note: For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order Pub. No. 5-A007.

Figure 1


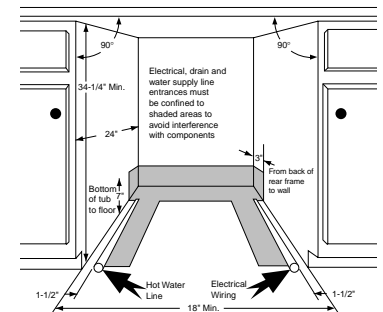


Figure 2




GE Spacemaker® Under-the-Sink Dishwashers


GE	
GSM2130FWW/GSM2110FAA	
Features	
Wash levels	2
Cycles	5
Pots & Pans	●
Normal Wash	●
Short Wash	Dial
Plate Warmer	Dial
Rinse Only	Dial
Options	12
Heated Dry On/Off	●
HotStart™	Dial
Racks, shelf & basket	
Upper Rack	Spacemaker®
Lower Rack	Deluxe
Silverware basket	Deluxe
Control type	Turn-To-Start
Cycle progress indicator	Dial
Pushbuttons	4
Rinse Aid dispenser	●
Economical/Quiet	
PermaTuf® Tub and door liner	●
QuietPower™ motor	●
Appearance	
Colors available*	WW, AA
Door	Trimless
Color Panels	Access Trimless
Weights & Dimensions	
Approx. shipping weight (lbs.)	72
Height w/legs retracted (in.)	34
Overall width (in.)	24
Overall depth (in.)	25-3/4

*Colors available: WW = White control panel with white front panels.
AA = Almond control panel with almond front panels.

Cabinet Cut-Out for Sink



Cabinet cut-outs for offset single and double bowl sinks. Dishwasher not provided with complete enclosure. Enclosures for sides, top, bottom, and back must be provided by installer at time of installation.



Wood Insert Cut-Out Dimensions (in inches)

Inserts must not exceed 1/4\" thickness within 5/16\" of edge around full circumference.
Order GPF325 kit.

Note: Under-the-Sink dishwashers can be installed under GE cooktop models JP200V and JP201CV. Refer to cooktop installation instructions.

Stainless Steel Sinks Single and Double Compartment Models (Dimensions in Inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2\" Radius Corners		No. Of 1-1/2\" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2


Note: Drain opening size is 3-1/2\".

Above models are fully sound deadened.

*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.

Plumbing/Electrical Rough-In

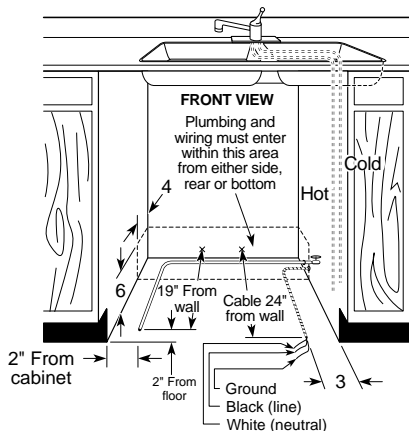


Plumbing: Hot Water Only: Use 3/8\" O.D. copper tubing or 1/2\" O.D. plastic tubing min. inlet line. Water valve has 3/8\" internal threads. Hand cut-off valve is recommended.

Electrical: Fuse circuit with 15 amp or 20 amp standard fuse or circuit breaker. Total amp load is 8.6. Dishwasher operates on 120V, 60 Hz power. Two-wire cable (14 Ga. Min.) with ground must be installed.

Note: All rough-in, both plumbing and electrical, must be completed before the dishwasher is installed. All plumbing and electrical work must be in accordance with local codes.


Specifications: Inlet Water Temperature Recommended: Minimum 120°F. at dishwasher. Inlet Water Pressure Required: 15 to 120 lbs./sq. in.

Cabinet Rough-In

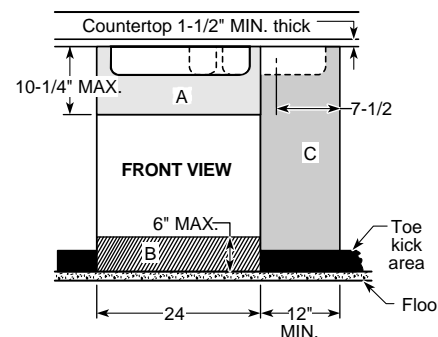


Either single- or double-bowl sink may be used, centered or offset, as shown in the front illustration above. The 20-1/2\" max. dimension from wall to front of sink bowl must be accurate if dishwasher is to fit properly under sink. Water lines to sink faucet and drain from sink can be run through area "A." HOT WATER line to dishwasher is installed in area "B." Garbage disposer, water lines to faucet, trap, waste air gap and water cut-off valve are installed in 12\" wide cabinet shown in area "C." Sink opening for garbage disposer must be dimensioned as shown in front view, area "C" above (7-1/2\"). This will provide clearance for disposer and plumbing in cabinet "C" when using double bowl sink. If the sink bowl is more than 20-1/2\" max. specified distance from the wall, or if the base cabinet is less than the 24\" min. depth from the wall, a gap between the tub front flange and the front of the base cabinet may result.

Rough-In for Installation with Disposer

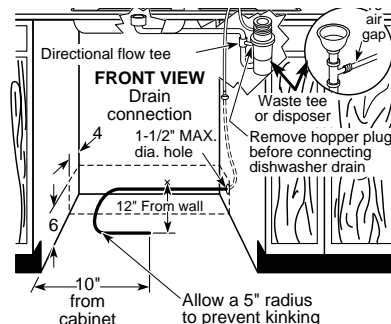

A close-fitting elbow or special shallow sink strainer is necessary to provide clearance between sink drain and dishwasher. Dishwasher furnished with 1/2\" I.D. drain hose, 78\" long. If using copper tubing, 2\" length of 1/2\" I.D. rubber hose must be provided to connect copper tubing to pump outlet. Disposer should have 7/8\" I.D. dishwasher drain connector.

Rear View Plumbing Arrangement

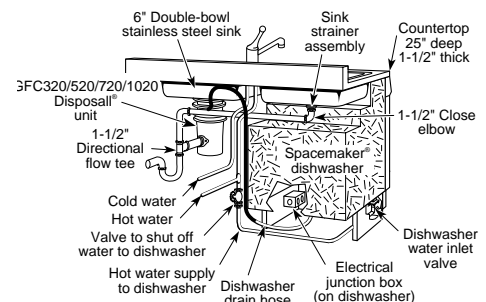

GE Disposall® — Food Waste Disposer

	GE Continuous Feed								Batch Feed	
	GFC1020F	GFC720F	GFC530F	GFC535F	GFC520F	GFC525F	GFC320F	GFC325F	GFB1060F	GFB760F
Features										
Motor horsepower	1	3/4	1/2	1/2	1/2	1/2	1/3	1/3	1	3/4
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Wall Switch	Stopper	Stopper
Feed type	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous	Batch	Batch
Power connection	Direct Wire	Direct Wire	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Line Cord	Direct Wire	Direct Wire
Impellers										
Dual swivel	•	•	•	•	•	•	•	•	•	•
Jam resistant	•	•	•	•	•	•	•	•	•	•
Stainless steel	•	•	•	•	•	•	•	•	•	•
Armature shaft material	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel	Cold-rolled Carbon Steel
Grinding speed (RPM's)	2,800	2,700	2,600	2,600	2,600	2,600	1,900	1,900	2,800	2,700
Capacity	Super	Super	Extra Large	Extra Large	Large	Large	Large	Large	Super	Super
Mounting type	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount	EZ Mount
Turntable material	Stainless	Stainless	Stainless	Stainless	Galv. Steel	Galv. Steel	Galv. Steel	Galv. Steel	Stainless	Stainless
2 Level precut	•	•	•	•	•	•	•	•	•	•
Stainless steel sink flange	•	•	•	•	•	•	•	•	•	•
Manual reset overload protector	•	•	•	•	•	•	•	•	•	•
Splash guard	•	•	•	•	•	•	•	•	•	•
Sink stopper	•	•	•	•	•	•	•	•	•	•
Dishwasher drain connector	•	•	•	•	•	•	•	•	•	•
Drain elbow	•	•	•	•	•	•	•	•	•	•
Quiet										
Sound insulation package	QuietPower™ III	QuietPower™ II	QuietPower™ I	QuietPower™ I	Standard	Standard	Standard	Standard	QuietPower™ III	QuietPower™ II
Weights & Dimensions										
Approx. shipping weight (lbs.)	14.9	12.45	9.6	9.9	8.8	9.1	8.4	8.7	16.35	13.75
Net weight (lbs.)	13.2	10.7	8.05	8.35	7.8	8.1	7.4	7.7	14.3	11
Dishwasher inlet diameter (in.)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
Power Ratings										
Volts, Hertz, Amps	120; 60; 7.0	120; 60; 6.0	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.5	120; 60; 4.0	120; 60; 4.0	120; 60; 7.0	120; 60; 6.0
Warranty*										
1-year full replacement							•	•		
1-year full replacement plus 1-year limited replacement					•	•				
1-year full replacement plus 2-year limited replacement			•	•						
1-year full replacement plus 4-year limited replacement		•								•
1-year full replacement plus 6-year limited replacement	•								•	

*See written warranty for details.


Built-In Compactors

	GE Profile™
	GCG1550FCC, GCG1540FSS, GCG1530FWW, GCG1520FBB
Features	
Cycle time	27 seconds max., 14 seconds min.
Drive system	2-Point
Motor horsepower	1/3
Compression ratio (average)	75% reduction of volume
Ram force (lb.) (max.)	2,300
Front level legs and rear wheels	•
Capacity	1.4 cu. ft.
Side release bin	•
Toe/foot pedal drawer opener	•
Lock/start control w/removable key	•
Automatic anti-jam	•
Slide-out drawer	•
Appearance	
Color appearance*	CC, SS, WW, BB
Color-Matched	•
Heavy-gauge steel construction	•
1/4" panel capability	•
Weights & Dimensions	
Total shipping weight (lbs.)	152
Total appliance weight (lbs.)	141
Overall height (in.)	34-1/8 to 34-1/2
Overall width (in.)	15
Overall depth (in.)	24-1/4
Cutout dimensions H x W x D (in.)	34-1/4 x 15-1/8 x 24-3/4
Clearance for drop-down drawer side	6" or more on right side
Drawer extension for removal	23" or more in front of appliance
Custom panel size H x W (in.)	23-15/16 x 14-5/8
Accessories	
Compactor bags (5 included)	WC60X5017
Warranty	
Full 1-year warranty**	•

*Colors available: CC = Bisque, SS = Stainless, WW = White on white, BB = Black on black.

**See written warranty for details.

Compactor dimensions (in inches)



Compactor Accessories:

New 1/4" panel trim kits (color-matched)

GPF82S—Stainless steel
GPF82W—White
GPF82C—Bisque
GPF82B—Black

Disposer Warranty

Full One Year Warranty:

For one year from date of original purchase, GE will replace the entire disposer if there is a defect in materials or workmanship relating to functional parts only (appearance parts excluded). During this full one-year warranty, GE will also provide, free of charge, all labor charges related to replacing the original disposer.

Extended Warranty:

For the additional time period specified by model, we will provide, free of charge, a replacement disposer due to a manufacturing defect relating to functional parts only of the original disposer (appearance parts excluded). During this extended limited warranty period, you will be responsible for all installation charges relating to the replacement disposer.

See written warranty for details.

Industry leading service support from—



America's
#1
Preferred
Appliance
Brand

GE is the appliance brand most often mentioned among the brands rated as offering the best products and services in America.*

*Source: *Louis Harris Poll* – 2000

GE Appliances on the Web
www.GEAppliances.com

Everything you want to know about GE appliances.

The GE Answer Center®
800.626.2000

Questions? Call anytime.

GE Genuine Parts
800.626.2002

Accessories to enhance, upgrade or fix it.

GE Appliance Service
800.432.2737
(800.GE.CARES)

Product service at your convenience.



GE Appliances

General Electric Company
Louisville, Kentucky 40225
www.GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2001 General Electric Company
Pub. No. 24-C211 PC23403