

GE Appliances: The #1 choice of property managers.

(Source: The Stevenson Co., 1998)



Featuring GE and Hotpoint appliances.



We bring good things to life.

GE gives you the industry's best service and support

Professional Sales Support and Authorized Distributors

Knowledgeable and responsive inside *and* outside sales teams know your market and understand your needs giving unmatched support in the industry. For customers who want local support and showrooms, GE authorized distributors are an excellent resource. They serve the property management industry and offer custom services to fit almost any special need.



GE Answer Center®

800.626.2000

A free call to the GE Answer Center® can answer all your questions about any GE and Hotpoint appliances. Everything from product specifications, installation, feature and benefit information and more. Call anytime. We never close!

Get connected to GE support with GE CustomerNet

www.gecustomernet.com

Sign up online or call your ASM to get linked to GE's free CustomerNet service. If you have internet access in your office, you can connect with GE instantly 24 hours a day. See how much you can accomplish online:

- Place appliance orders and check availability
- Place parts orders and check availability
- Print original invoices
- Receive proof-of-delivery notices
- Print spec sheets
- Review order history



GE Appliances Online

www.gepropertymanagement.com

Get immediate access to installation instructions, manuals and information on all GE products, parts, service contracts and more at our easy-to-use website—24 hours a day!

GE Power Buyer Service

www.powerbuyerservice.com

800.432.2847

Access many national vendors who provide exclusive services to the property management industry. Benefits include money back performance guarantees, free inspections/surveys, extended warranties and more. National vendors include York International—HVAC, GE Silicons—roofing, SLI Lighting—lighting, Shaw—carpentry, American Water—water management plus many more.

Availability and delivery you can count on.

Get the appliances you want, whenever and wherever you want with our efficient computerized Availability Management System. We'll ship directly to our customers and distributors or to a network of more than 100 scheduled delivery service locations which will provide local delivery to you.



port right at hand.

GE Genuine Parts

800.851.6200

Depend on GE for quality parts and accessories. See the back of this publication for details on our complete parts program.

GE makes servicing appliances our job—not yours.

800.GE.CARES

If you need repairs, you'll get a quick response from the largest manufacturer-owned and authorized service organization in the appliance industry. And now you can schedule repair service online (www.geappliances.com)—over one thousand highly-trained technicians are just one click away!

GE Commercial Service Program

800.626.8690

If you manage properties, a maintenance problem in one or two of your units is critical! With our Commercial Service Program, GE's expert service is available to help at *your* convenience.

- No "trip charges"
- Flat rate labor pricing saves you money.
Discounts for multiple repair calls.
- Same day/next day service minimizes delays
- More than 85% of our repair calls are complete in one visit

Maintenance and repair training

Learn how to maintain and repair your on-site GE appliances. Call your ASM to find out about potential maintenance training opportunities in your area.

- Use and Care
- Maintenance
- Minor repair work
- Trouble shooting
- Teardown and reassembly

GE QuickSpecs

800.432.3729

Simplify your project planning with our fax-on-demand service! Receive product features and dimensions within minutes—free of charge!

Call GE QuickSpecs 24 hours a day, 7 days a week.



Designed specifically for your properties, GE ap



#1 Start with the highest quality refrigerator in America!*

We're so confident about the quality of our refrigerators that we surveyed the toughest customers. Several hundred maintenance managers randomly selected from a national list of property management firms were asked to rate 13 to 17 cu. ft. refrigerators for quality. GE was mentioned as the brand with the highest quality by more than a 2 to 1 margin over every other brand.

GE refrigerators satisfy the most demanding customers.

Maintenance managers prefer GE refrigerators because these quality appliances make their jobs easier. They can count on GE refrigerators for reliable, long-lasting performance.

Inside and out, GE refrigerators are built to last.

- The galvanized finish stands up to the most humid environments, providing protection from rust.
- Recessed pocket handles and up-front condenser coils are easy to clean and fit through most passageways.
- The heavy-duty hinge system is factory-set for proper door alignment and helps support heavier door loads.
- The fresh food door cross-bracing provides extra support and eliminates door sagging under heavy loads.

Convenient features make them easy to maintain.

- An easy-to-set temperature control ensures improved optimal air distribution and temperature stability.

*Results (among 13-17 cu. ft. models) based on a 1999 survey of property management maintenance personnel.

GE appliances are attractively styled and easy to coordinate. GE has earned a reputation for quality by consistently providing products and services that satisfy consumers. Choose GE and offer your customers the features they want.

Appliances are the perfect choice.

Maintenance managers aren't the only people who give GE rave reviews. Builders, remodelers and property managers like you rate GE #1 in overall customer satisfaction. And tenants prefer GE, too. According to the 1999 Louis Harris poll, GE is the appliance brand most often mentioned among the brands rated as offering the best products and services in America. And while our refrigerators serve as excellent examples of GE quality, we offer a full line of appliances with a host of exclusive, apartment-friendly features.



The GE Nautilus™ dishwasher quietly delivers super clean dishes.

In most apartments, the kitchen is in close proximity to the family room, so quiet operation is a must. The new GE Nautilus dishwasher meets this demand. This innovative dishwasher operates with the exclusive:

- GE QuietPower™ motor—GE's quietest motor ever.
- QuietDesign™ sound package—"All you'll notice is the clean."™
- HotStart™ option delivers hot water for cleaner dishes.



The Spacemaker® laundry pair makes the most of a tight situation.

The new GE stackable washer and dryer pair has a unique configuration that eases its way into any situation. And wherever it is—out of the way or out of sight—this stackable laundry pair works wonders with:

- GE's new, sturdy Stack Rack provides more space between the washer and dryer.

- A built-in fluorescent light shines down from the Stack Rack to illuminate the wash tub.
- The newly enlarged 2.7-cubic foot capacity can handle almost any load.
- New digital controls allow programming convenience with loading-sensing capabilities.



The GE ranges have the largest* oven in America!

The GE oven is designed with a full 5.0 cubic feet. That means users no longer have to take an a la carte approach to cooking—the oven's capacity is spacious enough to accommodate a large quantity of food.

- GE's exclusive six rack capability accommodates a variety of cookware.
- Calrod® heating elements provide even heat distribution for better cooking performance.

These new appliances are just some of the ways you can make life easier for yourself and your tenants (and let's not forget your maintenance managers). To learn more, call the GE Answer Center® day or night at 1.800.626.2000. Or visit our website: www.gepropertymanagement.com.

*Among leading manufacturers' brands.

GE Refrigerators: Side-By-Side Model



Quiet Package I reduces noise.



TFX20SAB

- 19.7 cu. ft. capacity
- Quiet Package I
- Equipped for optional automatic icemaker
- 2 classic white crispers, 1 sealed • 4 fixed fresh food door shelves, 2 with gallon storage
- Wire Everwhite shelves • Deluxe handles

Top-Freezer No-Frost Model Features



Recessed Handles to reduce damage. Design makes it easy to reverse door swing in minutes.

Reversible Door swing can be changed easily. (Some models can be ordered with right or left door swing.)




Quality Construction Foam insulated doors save energy; fresh food compartment door is cross-braced for extra strength. Metal gasket retainer adds support, makes gasket replacement quick and easy.



Nice Cubes™ Icemaker makes rounded-shape ice, designed for better fit into a glass, reduces ice clogging as you drink a beverage.

Easy To Move Rollers make it easy to move the refrigerator for delivery or cleaning, without damaging floors.

Top-Freezer No-Frost & Side-By-Side Model Features

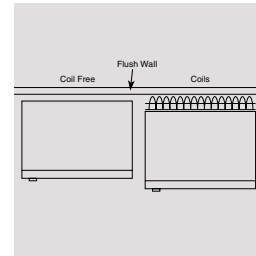

Coil-Free Back refrigerators move through doorways easily; install close to wall. Condenser coils are accessible for convenient cleaning without moving refrigerator.

Easy To Clean Seamless liners have no cracks or crevices; glossy surface resists stains and odors, wipes clean easily. Textured steel exteriors hide fingerprints.

GE Refrigerators: Top-Freezer No-Frost Models



TBX18SAB

- 18.2 cu. ft. capacity • Fixed gallon door storage • Snack pan • Classic white pans
- Equipped for optional automatic icemaker

TBX18SIB (not shown)

- Similar features and appearance as TBX18SAB, except is equipped with factory-installed Nice Cubes™ icemaker.

TBX18SYB (not shown)

- 18.2 cu. ft. capacity • 2 fixed gallon door shelves • Opaque snack pan • 2 opaque vegetable/fruit crispers • Recessed handles



TBX16SIB

- 16.4 cu. ft. capacity • Equipped with factory-installed Nice Cubes™ icemaker.

TBX16SAB (not shown)

- Similar features and appearance as TBX16SIB, except is equipped for optional automatic icemaker.

TBX16SYB (not shown)

- Similar features and appearance as TBX16SIB, except has recessed handles and is equipped for optional automatic icemaker.

TBX16RIC (not shown)

- Similar features and appearance as TBX16SIB, except is only 64" high (2-3/4" shorter than TBX16SIB).

TBX16SSB (not shown)

- Similar features and appearance as TBX16RIC, except is equipped for optional automatic icemaker, only 64" high.



TBX14SYB

- 14.4 cu. ft. capacity • Equipped for optional automatic icemaker • Recessed handles

TBX14SIB (not shown)

- Similar features and appearance as TBX14SYB, except is equipped with factory-installed Nice Cubes™ icemaker.

TBX14SAB (not shown)

- Similar features and appearance as TBX14SYB, except is equipped for optional automatic icemaker. Color matched handles



TBX12SAX

- 12.1 cu. ft. capacity • 2 Ice 'N Easy trays
- 2 full-width wire Everwhite cabinet shelves • Equipped for optional automatic icemaker

Cycle Defrost Refrigerator




TDX11SNY*

- 11.0 cu. ft. capacity • 2.4 cu. ft. freezer
- 2 modular door bins, 2 stationary shelves
- 3 adjustable wire Everwhite cabinet shelves • Full-width vegetable/fruit crisper
- Full-width freezer shelf

*Two-door models provide automatic defrosting in fresh food compartment and manual defrosting in the zero-degree freezer.

For additional features, specifications and color availability, refer to pages 26 and 27.

GE Free-Standing Electric Ranges: 30" QuickClean™ Self-Clean Models

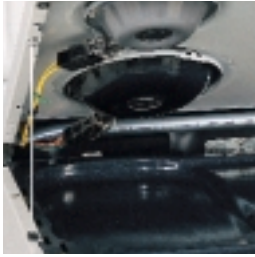

Lift-up cooktop stays up for easy cleaning under cooktop surface.



Clean-Well™ Cooktop System on most free-standing ranges are designed with a combination of features for total cleaning simplicity. Includes upswept cooktop, spill containment system, seamless subtop with spill wells, one-piece drip bowls and lift-up cooktop on some models.



JBP24BB

- Self-Cleaning • Largest* oven in America
- Super large 5.0 cu. ft. capacity oven • Auto Self-Clean • Clean-Well™ Cooktop System
- Lift-up cooktop • Standard window
- QuickSet II oven controls • Available in white or almond



JBP21WB

- Self-Cleaning • Auto Self-Clean • Clean-Well™ Cooktop System • Lift-up cooktop • QuickSet II oven controls • Frameless solid white glass oven door • Designer-style handle



Calrod® Heating Elements provide even heat distribution for better cooking performance.



Chrome Drip Bowls provide tough, durable finish making clean-up easy at the sink or in the dishwasher.



Indicator Lights includes oven cycling light as well as surface element "ON" indicator light.



JBP21BB

- Self-Cleaning • Auto Self-Clean • Clean-Well™ Cooktop System • Lift-up cooktop • QuickSet II oven controls • Frameless solid black glass oven door • Designer-style handle



QuickSet Oven Controls provide an easy, two-step self-cleaning oven operation. Simply latch the oven door and turn oven knob to "Auto Self-Clean."



Easy Level System with simple up-front adjustment makes leveling range easy and convenient.



Removable Full-Width Storage Drawer provides convenient storage, pulls out for easy cleaning under the range.

Not all features available on all models.
*Among leading manufacturers' brands.

GE Free-Standing Electric Ranges: 30" QuickClean™ Standard-Clean Models



JBS27BC

- Largest* oven in America • Super large 5.0 cu. ft. capacity oven • Standard clean oven
- Lift-up cooktop • Plug-in Calrod® heating elements, two 8" and two 6" • Electronic clock and minute timer • Heating element "ON" indicator light • Frameless black glass oven door with window • Designer-style handle
- Removable full-width storage drawer



JBS26C

- Largest* oven in America • Super large 5.0 cu. ft. capacity oven • Standard clean oven
- Clean-Well™ Cooktop System • Electronic clock and minute timer • Plug-in Calrod® heating elements, one 8" and three 6"
- Removable one-piece chrome drip bowls • Heating element "ON" indicator light • Color-matched oven door with window • Designer-style handle • Removable full-width storage drawer



JBS07C

- Largest* oven in America • Super large 5.0 cu. ft. capacity oven • White on white
- Standard clean oven • Plug-in Calrod® heating elements, one 8" and three 6"
- Oven door with window • Designer-style handle • Interior oven light switch

30" Front Control Model



JBS03BC

- Largest* oven in America • Super large 5.0 cu. ft. capacity oven • Standard clean oven
- Plug-in Calrod® heating elements, one 8" and three 6" • Frameless solid black glass oven door • Designer-style handle
- Removable full-width storage drawer



JBS03C

- Similar features and appearance as JBS03BC, except has solid color-matched oven door and chrome visor handle.



JBS05Y

- Standard clean oven • Upfront controls
- Plug-in heating elements, one 8" and three 6" • Removable one-piece chrome drip bowls • Two oven shelves • Color-matched oven door with window • Chrome visor handle • Storage drawer

*Among leading manufacturers' brands.

For additional features, specifications and color availability, refer to page 28.
See page 22 in the Hotpoint section for 20" & 24" Electric Ranges.

GE Electric Ranges: 30" Slide-In Models



JSP26BW

- Lift-up overhanging porcelain-enameled cooktop
- Two 8" and two 6" plug-in Calrod® heating elements
- Electronic clock and kitchen timer • Self-cleaning oven with Delay Clean option • Frameless glass oven door with designer-style handle • Control lock capability • Available in white or almond

JSS16PW (not shown)

- Standard clean oven • Color-matched oven door
- Visor handle • Available in white or almond


GE Electric Ranges: 27" Drop-In Models



JMS08BA

- Standard clean oven • White or almond cooktop
- Rotary oven controls • Lift-up overhanging porcelain-enameled cooktop • One 8" and three 6" plug-in Calrod® heating elements • Frameless glass oven door • Big view window • Chrome drip bowls

GE 30" Standard Hoods

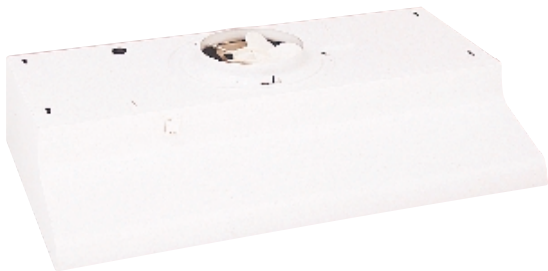

JV327X

- Vented • 30" width • 7" round duct • Easy-to-use rocker switches • Two-speed fan • Cooktop light
- Available in white or almond

JXDA22 round damper accessory available at additional cost.




JN327X

- Non-vented • 30" width • Easy-to-use rocker switches
- Two-speed fan • Cooktop light • Available in white or almond

See page 22 in the Hotpoint section for 20" & 24" Electric Ranges.


GE Gas Ranges: 30" XL44™ Free-Standing Models



One-piece upswept cooktop raised edge helps contain spills; has no cracks or crevices to trap dirt or food particles.



Extra-large XL44™ oven capacity is large enough to prepare an entire holiday dinner at once.



Easy-clean subtop cooktop lifts and locks into place for easy access to the seamless porcelain-enameled subtop.



Extra-large broiler pan with grid is extra-large for extra broiling space.

Not all features available on all models.

For additional features, specifications and color availability, refer to page 29.

See page 23 in the Hotpoint section for 20" & 24" Gas Ranges.



JGBP24BEA

- Extra-large self-cleaning oven • Standard burners • Square, standard porcelain steel grates • Lift-up cooktop • QuickSet II oven controls • Frameless black glass oven door with designer-style handle.



JGBS20BEA

- Extra-large standard clean oven • Standard burners • Square, standard porcelain steel grates • Lift-up cooktop • Electronic clock and minute timer • Frameless black glass oven door with designer-style handle • Slide-out broiler drawer

JGBS17PEA (not shown)

- Similar features and appearance as JGBS20BEA, except has color-matched porcelain-enameled oven door with window.



JGBS04PEA

- Extra-large standard clean oven • Standard burners • Black standard porcelain steel grates • Color-matched porcelain-enameled oven door • Electronic pilotless ignition

JGBS04PPA (not shown)

- Similar features and appearance as JGBS04PEA, except has standing pilot ignition.



JGBS04BEA

- Extra-large standard clean oven • Frameless solid black glass oven door with designer-style handle • Electronic pilotless ignition

JGBS04BPA (not shown)

- Similar features and appearance as JGBS04BEA, except has standing pilot ignition.

GE Clothes Care: Washer and Dryer Models




Auto Balance Suspension System is designed to virtually eliminate off-balanced loads. This system is designed to operate on wood floors as well as concrete.



PermaTuf II™ Basket resists peeling, chipping, rusting or flaking for long-term durability.



100% Front Serviceable for easy access to operational parts without moving the unit.



Reverse-A-Door adapts easily to any laundry arrangement with doors that can reverse from right-hand to left-hand swing.



WCSE3100A Washer

- Super capacity • 3 wash/spin speed combinations • 10 wash cycles • 3 water levels • 3 wash/rinse temperatures
- Fabric softener dispenser • Bleach dispenser • Quiet-By-Design™ • 100% front serviceable

WCXR1070A Washer (not shown)

- Extra-large capacity • 1 wash/spin speed combination • 7 wash cycles • 3 water levels • 3 wash/rinse temperatures • Self-cleaning filter • Quiet-By-Design™ • 100% front serviceable



DCL333EA Electric Dryer

DCL333GA Gas Dryer

- Extra-large capacity • Automatic Dry Control • 3 drying cycles • 3 heat selections
- Reverse-A-Door • Up-front lint filter
- 100% front serviceable

DCXR463EA Electric Dryer (not shown)

DCXR463GA Gas Dryer (not shown)

- Extra-large capacity • Automatic Dry Control • 6 drying cycles • 4 heat selections
- Reverse-A-Door • Quiet-By-Design™
- 100% front serviceable

GE Clothes Care: Front Load Models



WSXH208A 120V Washer*

- Front loading • High-efficiency washer
- 8 cycles: Regular (Heavy Soil, Medium Soil), Permanent Press (Medium Soil, Light Soil), Knits/ Delicates, Pre-Wash, Extra-Rinse Cycle/Auto Option, 3 standard rinse cycles • 4 wash/rinse temperatures • Automatic water level adjustment • Available in White on white




DSXH43EA/GA 240V Dryer*


- Tumble drying • 4 Time Dry cycles (Regular, Permanent Press, Knits/Delicates, Air Fluff)
- 3 Auto Dry cycles (Regular, Permanent Press, Knits/Delicates) • 3 temperature options • End-of-cycle signal • Drum light
- Dryer Rack • Available in White on white

*Units can be stacked or built-in. Undercounter kits required for undercounter use.

GE Clothes Care: Spacemaker® Portable/Stationary Models



Extra-Large 2.7 cu. ft. stainless steel tub with lint filter.




Easily accessible detergent/fabric softener dispenser.




WSLP1100A 120V Portable/Topload Washer
 • 24" extra-large capacity • 1 wash/spin speeds • 10 cycles • 4 wash/rinse temperatures • 4 water levels • Load sensing • Colorlogic™ 2000 • Lint filter • Easy roll rollers • Bisque available July 2000

WSLS1100A 120V Stationary/Topload Washer (not shown)
 • 24" extra-large capacity • 1 wash/spin speeds • 10 cycles • 4 wash/rinse temperatures • 4 water levels • Load sensing • Lint filter • Bisque available July 2000



DSLR24AW shown with WSLP1100A Washer and DSKS433EA Dryer



DSLR24AW Stack Rack with Light
 (Available at additional Cost)
 • For use with Portable or Stationary Washers and Dryers



DSKS433EA
 240V Stationary Dryer
 • 3 drying cycles
 • 4 heat selections



DSKP233EA
 120V Portable/Stationary Dryer
 • 3 drying cycles
 • 2 heat selections
 • 15-amp dryer cord attached

GE Clothes Care: Unitized Washer/Dryer Models



WSM2700W Electric
WSM2780W Gas
 • Full size 27" wide
 • Extra-Large capacity
 Washer features 3 cycles (Regular, Permanent Press and Delicate), 3 wash temperature options, 3 water level selections
 • Dryer features Automatic Dry Control, 4 cycles: Automatic Regular Dry (Medium Heat), Timed Dry (High Heat), Delicate (Low Heat), Air Fluff (No Heat)
 • Available in White on white and Almond on almond



WSM2420T Electric
WSM2480T Gas
 • 24" wide • Washer features 3 cycles (Regular, Permanent Press and Delicates), 3 wash/rinse temperatures, 3 water levels • Dryer features Automatic Dry Control, 4 cycles: Automatic Regular, Automatic Permanent Press, Timed Dry, and Air Fluff • Available in White on white
 • Electric model also available in Almond on almond

Unitized models ideal for closet installations, unitized washer/dryer combinations fit in space as small as 24" wide.

Not all features available on all models.

See pages 30 and 31 for special dryer installation requirements and exhausting information.

GE Dishwashers: Built-In Models



QuietPower Motor is quieter and more energy efficient.



GSD2230FWW

- 5 cycles/12 options • QuietDesign™ sound package • Standard Wash system • HotStart™ option • Plate Warmer cycle (on dial)
- Short Wash cycle (on dial) • Heavy Wash cycle • Deluxe silverware basket • Deluxe lower rack

GSD2220FBB (not shown)

- Black on black

GSD2200FWH (not shown)

- White front panels/black control panel

GSD2200FAD (not shown)

- Almond front panels/black control panel

GSD2020FBB

- 4 cycles/9 options • Standard Wash system • HotStart™ option
- Heavy Wash cycle (on dial) • Short Wash cycle (on dial)
- Standard upper rack • Deluxe lower rack • Deluxe silverware basket • PermaTuf® Tub

GSD2030FWW (not shown)

- White on white

GSD2000FWH (not shown)

- White front panels/black control panel

GSD2000FAD (not shown)

- Almond front panels/black control panel



GE Spacemaker® Under-the-Sink Models

120° F. inlet water capability gives good cleaning results even when water temperature is turned down for safety and energy savings.



GSM2130DWW/2110DAA

- 5 cycles/8 options • POTSCRUBBER Cycle
- Normal Wash cycle • Short Wash cycle (on dial)
- Plate Warmer cycle (on dial) • Rinse Only/Hold cycle (on dial) • 2 wash levels • Spacemaker® upper rack • Deluxe lower rack • Deluxe silverware basket • PermaTuf® tub

Two Flexible Installation Options

Spacemaker® Under-the-Sink Dishwashers can be installed where space is limited, with this special 24" wide model. UL-approved.



Under a single sink bowl or offset installation for use with a disposer.



Under GE cooktop models JP200V and JP200CV. Refer to cooktop installation instructions.

GE Spacemaker® 18" Built-In Model



GSS1800Z

- 4 cycles/6 options
- 2 wash levels • Pots & Pans cycle • Normal Wash cycle (on dial)
- Light Wash cycle (on dial) • Standard silverware basket
- Heated Dry On/Off option • Reversible color panels Black/Harvest, Almond/White



For additional features, specifications and color availability, refer to page 32.

GE Disposall®: The Original Disposer

Food disposer minimizes plumbing maintenance; good cleaning results without pre-rinsing dishes.



- GFC300Y**
 Continuous feed disposer features
- 1/2-horsepower motor
 - 8000 RPM grinding action
 - Fast Mount installation
 - Removable splash guard


- GFC305Y**
- Similar features and appearance as GFC300Y, except has attached line cord.



- GFC290Y**
 Continuous feed disposer features
- 1/3-horsepower motor
 - 8000 RPM grinding action
 - Fast Mount installation
 - Removable splash guard

- GFC295Y**
- Similar features and appearance as GFC290Y, except has attached line cord.

GE SmartWater™ Filtration System



SmartWater™ Faucet—Separate faucet is used only when filtered water is needed, extending filter life.

Dual Stage



- GNUL30B**
- System rated for 1250 gallons of water
 - Long-reach faucet with electronic monitor. Amber filter light indicates when to replace filters for highest quality water.
 - Lead and Cyst Reduction Filters included (FXUSB and FXULB)

Reduces
Lead
Cysts
Taste & Odor
Chlorine
Sediment
Rust



NSF Certified—NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects, tests and certifies our product performance.

Single Stage



- GX1S15C**
- Short-reach faucet without electronic monitor
 - Quick connect installation fittings
 - Lead and Cyst Reduction Filter included (FXUSC)
 - System rated for 1250 gallons of water

Reduces
Lead
Cysts
Taste & Odor
Chlorine
Sediment
Rust



Simple Installation—Can be easily installed under a sink, in bathroom or mini bar.

Not all features available on all models.

For additional features, specifications and color availability, refer to pages 32 and 33.

GE Spacemaker™ Over-the-Range Microwave Ovens



This powerful 300 CFM venting system quickly removes smoke and steam from your cooktop.

GE's Largest Capacity Over-The-Range Microwave Oven Ever!



JVM1630BB

- 1.6 cu. ft. oven cavity • 1000 watts* • CircuWave™ 1000 Cooking System
- Convenience Cooking Controls for Popcorn, Beverage and Reheat pads
- Turntable • Auto/Time Defrost • Express Cook • Add 30 Seconds



JVM1631BB

- (not shown)
- Non-vented model

JVM1630WB

- (not shown)
- White on white

JVM1631WB

- (not shown)
- Non-vented model



Convenience Cooking Controls allow you to defrost, cook or reheat at the touch of a pad.



JVM1420WB

- White on white • 1.4 cu. ft. oven cavity • 950 watts* • CircuWave™ Plus Cooking System
- Convenience Cooking Controls for Popcorn, Beverage and Reheat pads
- Turntable • Auto/Time Defrost • Express Cook • Add 30 Seconds



JVM1420BB

- (not shown)
- Black on black

GE Spacemaker II™ Countertop Microwave Ovens



Undercabinet Mounting
Install a GE countertop microwave oven under kitchen cabinets and leave countertop free for other uses.

(Undercabinet installation kit, Pub. No. 4-A019 available at additional cost for Spacemaker II™ Compact and Subcompact models)

Undercabinet Hanging Kit Available for Selected Countertop Models

*IEC-705 Test Procedure



JEM25GY

- Black with greystone case • Mid-size .9 cu. ft. oven cavity • 800 watts*
- Convenience Cooking Controls for Popcorn, Beverage, Reheat, Snacks and Cook pads
- Delay Start/Reminder • Time Defrost • Auto Defrost
- Time Cook I & II
- Express Cook • Instant On Controls • Sound On/Off • Built-in or undercabinet hanging kit available at additional cost



JEM25WY

- Similar features and appearance as JEM25GY, except White on white.

For additional features, specifications and color availability, refer to page 33.

Not all features available on all models.

Built-In “J” Series: Slope-Top Chassis Only Models



Cool Only Units



Models	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	Wall Case
AJCS06LC	6000	115	9.5	–	RAB46/47/48
AJCS08AC	8000	115	9.2	–	RAB46/47/48
AJCS10AC	9900	115	9.2	–	RAB46/47/48
AJCS09DC	8900/8700	230/208	9.5/9.5	–	RAB46/47/48
AJCS10DC	9900/9700	230/208	9.2/9.2	–	RAB46/47/48
AJCS12DC	11,600/11,400	230/208	9.0/9.0	–	RAB46/47/48

Cool Only Units

Offer a variety of capacities to cool many applications.

Heat/Cool Unit

Provides summer cooling, plus supplemental heat for cold weather—units combine air conditioning with electric resistance heat.

Units include attractive room-side grille of high-impact polystyrene.

These units are chassis-only models and require a separately purchased solid-sided wall case (RAB46, RAB47 or RAB48) and exterior grille (RAG13 or RAG14) for installation.

Heat/Cool Unit



Models	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	Wall Case
AJES12DC	11,600/11,400	230/208	9.0/9.0	11,600/9,500	RAB46/47/48

Built-In “J” Series: Hi-Mount Chassis Only Models



Cool Only Units



Models	BTUH Cooling	Volts	EER	BTUH Electric Resistance Heating	Wall Case
AJCH10AC	9900	115	9.2	–	RAB46/47/48
AJCH10DC	9900/9700	230/208	9.2/9.2	–	RAB46/47/48
AJCH12DC	11,600/11,400	230/208	9.0/9.0	–	RAB46/47/48

For high-mount installations where control accessibility is difficult, GE offers “J” Series models with controls located in the lower corner of the room-side cabinet.

Units include attractive room-side grille of high-impact polystyrene.

Each unit requires a solid-sided wall case (RAB46, RAB47 or RAB48) and exterior grille (RAG13 or RAG14) for installation.

For additional features, specifications and color availability, refer to page 34.

HOTPOINT®



**Hotpoint appliances
are the right choice!**

- Offers value and affordability
- Combines convenience and low maintenance
- Strong value plus recognized brand name
- A respected brand backed by GE



**Hotpoint...
affordable dependability
for budget apartments!**

Side-by-side non-dispenser refrigerators

CSX20BAB

- 19.7 cubic foot capacity
- 6.79 cubic foot freezer
- Adjustable wire
- Everwhite cabinet shelves
- Classic white vegetable/fruit crispers
- Fixed gallon door storage
- Equipped for optional automatic icemaker



CSX20BAB

Top-freezer no-frost refrigerators

CTX18CIB

- 18.2 cubic foot capacity
- 5.13 cubic foot freezer
- One full-width classic white vegetable/fruit crisper
- Two full-width wire
- Everwhite cabinet shelves
- Equipped with factory-installed Nice Cubes™ icemaker

CTX18CAB (not shown)

- Similar features and appearance as CTX18CIB except equipped for optional automatic icemaker



CTX18CIB

Hotpoint refrigerators



CTX16CZB



CTX14CIB

Top-freezer no-frost refrigerators

CTX16CZB

- 15.6 cubic foot capacity
- Only 64" high (2-3/4" shorter than CTX16CYB)
- Two adjustable wire Everwhite cabinet shelves
- Tall bottle door storage
- Two white vegetable/fruit crispers
- Recessed door handles
- Equipped for optional automatic icemaker

CTX16CYB (not shown)

- Similar features and appearance as CTX16CZB, except 16.4 cu. ft. capacity

CTH16CYB (not shown)

- Similar features and appearance as CTX16CYB, except 15.6 cu. ft. capacity
- High efficiency model

CTX16BYB (not shown)

- 15.6 cubic foot capacity
- Tall bottle door storage
- White snack pan
- Recessed door handles
- Equipped for optional automatic icemaker

CTX16CIB (not shown)

- 16.4 cubic foot capacity
- Two adjustable wire Everwhite cabinet shelves
- Equipped with factory-installed Nice Cubes™ icemaker

CTX16CAB (not shown)

- Similar features and appearance as CTX16CIB except equipped for optional automatic icemaker

CTX16WIB (not shown)

- 15.6 cubic foot capacity
- Two adjustable wire Everwhite cabinet shelves

CTX14AYB (not shown)


- 14.4 cubic foot capacity
- 3.86 cubic foot freezer
- One full-width classic white vegetable/fruit crisper
- Two full-width wire Everwhite cabinet shelves
- Equipped for optional automatic icemaker

CTX14CIB

- 14.4 cubic foot capacity
- Two adjustable wire Everwhite cabinet shelves
- Equipped with factory-installed Nice Cubes™ icemaker


CTX14CAB (not shown)

- Similar features and appearance as CTX14CIB, except equipped for optional automatic icemaker

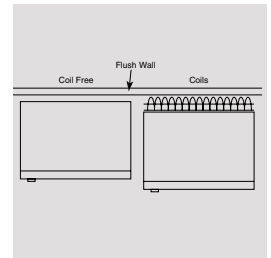


Coil-free back

Refrigerators move through doorways easily; install close to wall. Condenser coils are accessible for convenient cleaning without moving refrigerator.

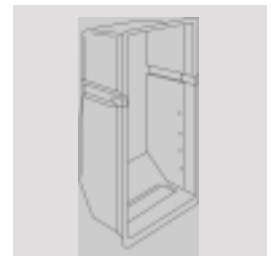

Durable cabinet and door liner

Seamless liners have no cracks or crevices to hide dirt; glossy surface wipes clean easily, resists stains.

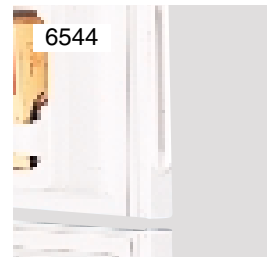

Color-matched recessed handles

Trimline design reduces damage to handles, even when moving refrigerator; makes it easier to reverse door swing.

CTX14CYB (not shown)

- 14.4 cubic foot capacity
- Two adjustable wire Everwhite cabinet shelves
- Tall bottle door storage
- Recessed door handles
- Equipped for optional automatic icemaker

CTH14CYB (not shown)

- Similar features and appearance as CTX14CYB. High efficiency model

Not all features available on all models.

See page 7 in GE section for 11-12 cu. ft. models.

For detailed features and specifications refer to page 36.

30" electric ranges with self-cleaning ovens

RB757BB

- White or almond model
- Self-cleaning oven
- Electronic clock and minute timer
- Auto oven shut-off
- Two 8" and two 6" plug-in Calrod® heating elements with one-piece porcelain-enameled drip bowls
- Lift-up cooktop
- Solid, frameless, black glass oven door
- Visor handle



RB757BB

RB753BB

- White or almond model
- Two 8" and two 6" plug-in Calrod® heating elements with one-piece chrome drip bowls
- Frameless, black glass oven door
- Visor handle



RB753BB

Quality electric ranges offer cooking convenience, plus a variety of features to minimize cleaning chores.



Lift-up cooktop

Cooktop lifts up to allow easy clean-up of hard-to-reach spots underneath.



Calrod® surface elements

Surface elements simply unplug and remove for easy cleaning of drip bowls.



One-piece upswept cooktop

No cracks or crevices to trap dirt! The porcelain enamel-on-steel surface wipes clean easily.



Easy level system

Design provides an easily accessible leveling system. Simply slide-out storage drawer. Located in the front of each front leg is its leveling adjustment. Up-front adjustment makes leveling range easy and convenient. (Available on models RB536GW and RB525GV.)

Not all features available on all models.

See pages 8, 9 and 10 in GE section for electric range models.

For detailed features and specifications refer to page 37.

Hotpoint electric ranges

30" electric ranges with standard cleaning ovens

RB536BC

- White or almond model
- 5.0 cu. ft. capacity
- Two oven shelves
- Standard clean oven
- Electronic clock and minute timer
- Lift-up cooktop
- Two 8" and two 6" Calrod® heating elements
- Broiler pan with grid
- Frameless black glass oven door with window
- Designer-style handle

RB525BC

- White or almond model
- 5.0 cu. ft. capacity
- Two oven shelves
- Standard clean oven
- One 8" and three 6" Calrod® heating elements
- Frameless solid black glass oven door
- Broiler pan with grid
- Chrome visor door handle

RB525C (not shown)

- Same features as RB525BC, except has color-matched painted oven door.



RB536BC

RB525BC

24" free-standing electric range

RA524W

- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights

20" free-standing electric range

RA520W

- Standard clean oven
- One 8" and three 6" plug-in heating elements with chrome drip bowls
- Lift-up cooktop with porcelain-enameled subtop
- Two heating element "ON" indicator lights



RA524W


RA520W

30" free-standing gas ranges

Equip your kitchen with versatile gas ranges with easy-to-clean design.

RGB744BEA

- Extra-large self-cleaning oven
- In-oven broiling
- Frameless solid black glass oven door
- EasySet II clock and oven timer
- Twin cooktop burners
- Lift-up cooktop
- Removable black porcelain-enameled drip pans
- Storage drawer

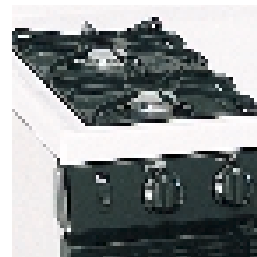

RGB528BEA

- Extra-large standard oven
- Frameless black glass oven door with window
- Electronic clock and timer
- Twin cooktop burners
- Lift-up cooktop

Square grates

Burner grates feature durable porcelain-enamel finish; square design creates a continuous cooking platform.

RGB524PEA

- Extra-large standard oven
- Solid color-matched porcelain-enameled oven door
- Twin cooktop burners
- Lift-up cooktop
- Slide-out broiler drawer
- Electronic pilotless ignition system



RGB524PPA (not shown)

- Same features as RGB524PEA, except with standing pilot ignition system.

Capacity Plus™

The largest usable oven capacity among leading manufacturers allows you to prepare an entire family-size meal at one time!

RGB508PEA

- Extra-large standard oven
- Solid color-matched porcelain-enameled oven door
- Twin cooktop burners
- Lift-up cooktop
- Drop-down broiler drawer
- Electronic pilotless ignition system



RGB508PPA (not shown)

- Same features as RGB508PEA, except with standing pilot ignition system.

Lift-up cooktop with easy-clean subtop

Standard burner models have a cooktop that lifts up for easy access to porcelain-enameled subtop. Twin rod supports allow cooktop to lift and lock into place. No pipes or wires to interfere with clean-up.

20" compact gas ranges with standard oven

RGA520EW

- Standard oven
- Electronic pilotless ignition system
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls



Extra-large broiler pan/grid

Porcelain-enameled broiler pan and grid are extra large. Allows for extra broiling space.

RGA520PW (not shown)

- Same features as RGA520EW, except with standing pilot ignition system.

24" compact gas ranges with standard oven

RGA524EW

- Standard oven
- Electronic pilotless ignition
- Porcelain-enameled oven door
- Recessed, lift-up cooktop
- Round burner grates
- Push-to-turn controls

RGA524PW (not shown)

- Same features as RGA524EW, except with standing pilot ignition system.

RGB744BEA

RGB528BEA

RGB524PEA/PPA

RGB508PEA/PPA

RGA524EW

RGA520EW/PW

Hotpoint microwave ovens



The design of the Counter Saver Plus™ microwave oven complements any kitchen. In the place of a range hood, enjoy the convenience of microwave cooking with eye-level controls, directly above your range or cooktop, increasing the livability of your apartment.

Counter Saver Plus™ over-the-range microwave ovens

RVM1425WA

- White on white
- 1.4 cu. ft. oven cavity
- 900 watts*
- Electronic scrolling display with clock and AM/PM pad
- Variable scroll speed
- Concurrent programming
- Turntable
- Instant On Controls
- Time Defrost/Auto Defrost
- 10 power levels
- Child Lock-out
- Full-view cooktop lighting

RVM1425BA (upper left)

- Same features as RVM1425WA, in Black

*IEC-705 Test Procedure




RVM1425WA

See page 16 in GE section for over-the-range and countertop microwave ovens.


For detailed features and specifications refer to page 38.

Hotpoint laundry

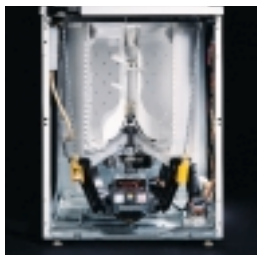

Balance Pro™ Suspension System

An innovative rod and spring floating suspension system designed to handle off-balanced loads on any type of floor. All Hotpoint washers are 100% front serviceable.

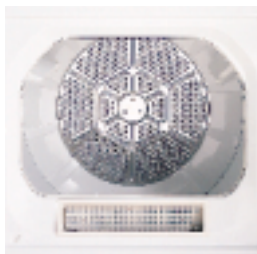

Double-coated drum interior

Provides long-lasting dependability and durability.

Not all features available on all models.

Washer and dryer pairs

VBSR2080W

- Super capacity washer
- 3 water levels
- 8 cycles
- 2 wash/spin speed combinations

NBXR453EV (Electric) NBXR453GV (Gas)

- 6.0 cu. ft. extra-large capacity dryer
- Automatic dry control
- 5 cycles
- 4 heat selections
- Up-front lint filter
- Reversible door

VBXR1070W


- Extra-large capacity washer
- 3 water levels
- 7 cycles
- 1 wash/spin speed combination
- 3 wash/rinse temperature settings
- Self-cleaning filter

NVL333EY (Electric) NVL333GY (Gas)

- 5.7 cu. ft. extra-large capacity dryer
- Automatic dry control
- 3 cycles
- 3 heat selections
- Up-front lint filter



VBSR2080W

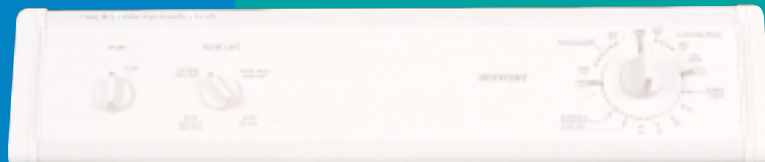

NBXR453EV/GV



VBXR1070W



NVL333EY/GY

See page 13 in GE section for unitized and compact laundry models.

For detailed features and specifications refer to page 38.

High quality features for performance and convenience



HDA3220ZBB



HDA2020ZBB/HDA2000ZWH/AD



HDA1000ZWH

HDA3220ZBB

- 5 cycles/14 options
- Power Wash II system
- Pots and Pans cycle
- Water Saver cycle (on dial)
- Plate Warmer cycle (on dial)
- Hi-Temp Wash option
- Deluxe upper rack
- Deluxe silverware basket

Also available in White on white as Model HDA3230ZWW.

HDA2020ZBB/ HDA2000ZWH/AD

- 4 cycles/7 options
- Water Saver cycle (on dial)
- Rinse and Hold cycle (on dial)
- Heavy Wash cycle (on dial)
- Heated Dry On/Off (on rocker)
- Standard upper rack
- Deluxe silverware basket

Also available in White on white as Model HDA2030ZWW.

HDA1000ZWH

- 1 cycle/2 options
- Normal Wash cycle (on dial)
- Heated Dry On/Off (on rocker)
- Standard upper rack
- Standard silverware basket

Hotpoint dishwashers offer new features for today's customers



Power Wash II System

Three-level wash action with powerful jet action for effective food soil removal and great wash performance.



Pots & Pans cycle

Removes dried-on and baked-on (but not burned-on) food from pots, pans and dishes.



Durable tub and door liner

Guaranteed against leakage from cracking, peeling, chipping or rusting for ten years.



3-Level "Wall of Water"

Completely covers any item in dishwasher, providing excellent wash performance.



Toe kick & access panel insulation

Fiberglass insulation in the toe kick and access panel minimizes operating noise.

Self-cleaning filter

Water recirculates through filtering system, food particles are washed away as water drains and filter cleans itself.

Not all features available on all models.

See pages 14 and 15 in GE section for disposers and undersink dishwasher.

For detailed features and specifications refer to page 38.


GE Specifications

Top-Freezer No-Frost Refrigerators

	GE "R" Series		GE "S" Series						
	TBX16RIC	TBX18SAB TBX18SIB	TBX18SYB	TBX16SAB TBX16SIB	TBX16SYB	TBX16SSB	TBX14SAB TBX14SIB	TBX14SYB	TBX12SAX
Capacity									
Total (cu. ft.)	15.6	18.2	18.2	16.4	16.4	15.6	14.4	14.4	12.1
Fresh food (cu. ft.)	11.69	13.04	13.04	12.58	12.58	11.69	10.58	10.58	9.1
Freezer (cu. ft.)	3.89	5.13	5.13	3.86	3.86	3.86	3.86	3.86	3.0
Shelf area (sq. ft.)	16.4	23.1	20.3	$\frac{17.5}{16.7}$	17.5	17.2	$\frac{17.2}{16.4}$	17.2	13.6
Features									
Automatic factory-installed icemaker	●	Opt. (IM3) ●	Opt. (IM3)	Opt. (IM3) ●	Opt. (IM3)	Opt. (IM3)	Opt. (IM3) ●	Opt. (IM3)	Opt. (IM3)
Ice 'N Easy trays		2	2	2	2	2	2	2	2
Ice storage bin	●	Utility-WH Bucket-WH		●			●		
High ice shelf				●	●	●	●	●	
Cabinet shelves (adjustable)	2 Wire Everwhite 2 F/W	3 Wire Everwhite 2 Split, 1 F/W	3 Wire Everwhite 2 Split, 1 F/W	2 Wire Everwhite 2 F/W	2 Wire Everwhite 2 F/W	2 Wire Everwhite 2 F/W	2 Wire Everwhite 2 F/W	2 Wire Everwhite 2 F/W	2 Wire Everwhite 2 F/W
Snack pan		●	●						
Vegetable/fruit crisper(s)	2	2	2	2	2	2	2	2	Divided
Fixed door shelves	2-tall bottle storage	2 w/gallon storage	2 w/gallon storage	2-tall bottle storage	2-tall bottle storage	2-tall bottle storage	2-tall bottle storage	2-tall bottle storage	2-1/2
Dairy compartment	●	●	●	●	●	●	●	●	●
Freezer compartment shelf(s) (wire Everwhite)		1 F/W (2-Pos.)	Step shelf						
Freezer door shelves	2	2	2	2	2	2	2	2	2
Cross-brace and retainer	●	●		●	●	●	●	●	●
Economical/Quiet									
Cabinet/door insulation	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam
Cabinet liner	ABS	ABS	Permalon II	ABS	ABS	ABS	ABS	ABS	ABS
Door liner	ABS	ABS	Permalon II	ABS	ABS	ABS	ABS	ABS	ABS
Appearance									
Color(s) available*	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WH, AD
Deluxe door handle(s)	Color-Matched	Color-Matched	Recessed	Color-Matched	Color-Matched Recessed	Color-Matched	Color-Matched	Color-Matched Recessed	Black
Customer installed handles		●							
Textured steel doors & case	●	●	●	●	●	●	●	●	●
Reversible doors	●	●	●	●	●	●	●	●	●
Right or left door opening available	●	●	●	●	●	●	●	●	●
Weights & Dimensions									
Height to top of hinge (in.) A	64-3/4	64-3/4	67-1/4	67-3/8	67-3/8	64-3/4	61-3/4	61-3/4	60-5/8
Height to top of case (in.) B	64-1/4	64	66-3/4	66-7/8	66-7/8	64-1/4	61-1/4	61-1/4	60-1/4
Case depth without door (in.) C	25-3/8	27-3/4	26-1/2	26-1/4	26-1/4	25-3/8	25-3/8	25-3/8	27-7/16
Case depth less door handle (in.) D	27-7/8	30	30	28-3/4	28-3/4	27-7/8	27-7/8	27-7/8	29-11/16
Case depth with door handle (in.) E	29-3/4	31-3/4	31-1/4	30-5/8	28-3/4	29-3/4	29-3/4	29-3/4	31-7/16
Depth with door open 90° (in.) F	54-3/8	58-1/8	55-7/8	55-1/4	55-1/4	54-3/8	54-3/8	54-3/8	51-9/16
Width (in.) G	28-1/4	29-3/8	28	28-1/4	28-1/4	28-1/4	28-1/4	28-1/4	23-3/8
Width with door open 90° less door handle (in.) H	28-1/4	29-3/8	30-1/2	28-1/4	28-1/4	28-1/4	28-1/4	28-1/4	23-9/16
Air clearances									
Each side (in.)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Top (in.)	1	1	1	1	1	1	1	1	2
Back (in.)	1	1	1	1	1	1	1	1	3/4
Approx. ship. wt. (lbs.)	170	230	230	$\frac{190}{195}$	188	170	174	168	152
Accessories									
Black Acrylic panel kit	N/A	TBP18XB	N/A	N/A	N/A	N/A	N/A	N/A	N/A

*Color(s) available: WW = White on white, AA = Almond on almond, WH = White, AD = Almond.

Top-Freezer No-Frost Refrigerator

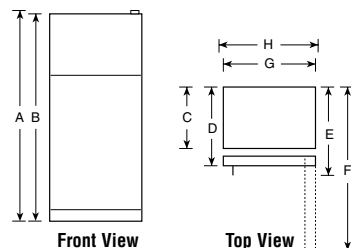

Note: All Top-Freezer No-Frost Right-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.
All Top-Freezer No-Frost Left-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.


Side-By-Side Refrigerator

GE "S" Series	
TFX20SAB	
Capacity	
Total (cu. ft.)	19.7
Fresh food (cu. ft.)	12.95
Freezer (cu. ft.)	6.79
Shelf area (sq. ft.)	20.6
Features	
Automatic icemaker and ice bin	Opt. (IM3)
Ice 'N Easy trays	2
Ice storage bin	●
Cabinet shelves	3 Wire Everwhite
(adjustable)	3
Vegetable/fruit crisper (upper)	2 (1 Sealed)
	4 (2 w/ gallon storage)
Modular door bins	
Dairy compartment w/butter dish	●
Interior light(s)	1
Freezer compartment shelves (wire Everwhite)	4 Adj.
Freezer storage bin(s)	1 White Sliding
Freezer door shelves	6
Economical/Quiet	
Quiet Package	●
Automatic Energy Saver (condenser loop)	●
Cabinet and door insulation	Foam
Cabinet liner-Baked enamel-on-steel	●
Door liner-ABS	●
Appearance	
Color(s) available*	WW, AA
Deluxe door handle(s)	CM
Textured steel doors and case	●
Weights & Dimensions	
Height to top of hinge (in.) A	67-5/8
Height to top of case (in.) B	66-5/8
Case depth without door (in.) C	28
Case depth less door handle (in.) D	30-1/4
Case depth with door handle (in.) E	32-1/2
Depth with door open 90° (in.) F	47-3/8
Width (in.) G	31-1/2
Width with door open 90° less door handle (in.) H	32-1/4
Air clearances	Each side (in.) 3/4†
	Top (in.) 1
	Back (in.) 1
Approx. shipping weight (lbs.)	296
Accessories	
Aluminum trim kit	N/A
Black panels	N/A
Black acrylic panels and trim kit	N/A
Stainless steel panels	N/A

*Color(s) available: WW = White on white, AA = Almond on almond.
 CM = Color-Matched indicates color of handle(s) matches exterior.
 †If installed against a wall, allow clearance of 11-1/4" on freezer side to remove ice bin.
 To remove fresh food pans, remove door bins.
 Clearances required to remove fresh food full-size pan without disassembling is 10-1/2" on 20/22 cu. ft.

AVAILABLE IN U.S. AND CANADA.

Side-By-Side Refrigerator

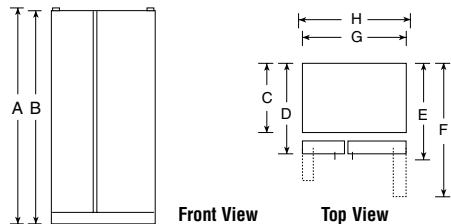


Cycle Defrost Refrigerator

GE	
TDX11SNY	
Capacity	
Total (cu. ft.)	11.0
Fresh food (cu. ft.)	8.6
Freezer (cu. ft.)	2.4
Shelf area (sq. ft.)	15.5
Features	
Ice 'N Easy trays	2 Mini
Cabinet shelves Wire Everwhite	3 Adj.
Vegetable/fruit crisper	1 F/W
	2 Modules, 2 Stationary Shelves
Door shelves	
Tall bottle storage on door	●
Dairy compartment(s)	2
Freezer compartment shelf(s)	1 F/W
Economical/Quiet	
Cabinet/door insulation	Foam
Cabinet/door liner	Plastic
Appearance	
Color(s) available	White
Door handle(s)	White
Reversible doors	●
Weights & Dimensions	
Height to top of hinge (in.) A	63-1/2
Height to top of case (in.) B	63
Case depth without door (in.) C	20-1/2
Case depth with door less handle (in.) D	23-1/4
Case depth with door handle (in.) E	24-1/2
Depth with door open 90° (in.) F	46
Width (in.) G	23-1/4
Width with door open 90° less door handle (in.) H	23-3/4
Air clearances	Each side (in.) 1/2
	Top (in.) 2
	Back (in.) 2
Approx. shipping weight (lbs.)	139

*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about **two weeks**. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.

Cycle Defrost Two Door Refrigerator

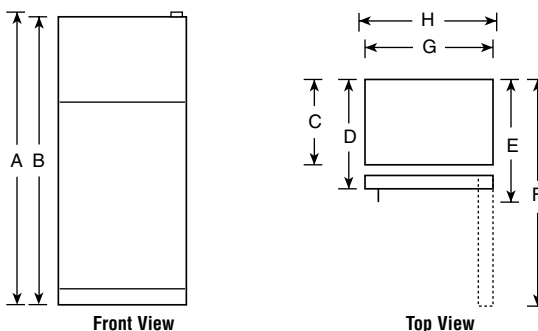

GE Specifications

30" Free-Standing QuickClean™ Electric Ranges

	GE								
	JBP24BB	JBP21BB	JPB21WB	JBS27BC	JBS26C	JBS07C	JBS05Y	JBS03BC JBS03C	
Features									
Oven cleaning	Self-Cleaning	Self-Cleaning	Self-Cleaning	Standard	Standard	Standard	Standard	Standard	
Oven capacity (cu. ft.)	5.0	3.7	3.7	5.0	5.0	5.0	3.7	5.0	
Oven shelves	2	2	2	2	2	2	2	2	
Upswept porcelain-enameled cooktop	●	●	●	●	●	●		●	
Clean-Well™ Cooktop System	●	●	●	●	●	●		●	
Lift-up cooktop with dual support rods	●	●	●	●	●	●		●	
8" heating elements	2 (5 turns)	2 (5 turns)	2 (5 turns)	2 (5 turns)	2 (4 turns)	1 (5 turns)	1 (6 turns)	1 (5 turns)	
6" heating elements	2 (4 turns)	2 (4 turns)	2 (4 turns)	2 (4 turns)	2 (3 turns)	3 (4 turns)	3 (5 turns)	3 (4 turns)	
Infinite heat controls	●	●	●	●	●	●	●	●	
Plug-in Calrod® heating elements	●	●	●	●	●	●		●	
Removable 1-piece drip bowls	Chrome	Chrome	Chrome	Chrome	Chrome	Chrome	Chrome	Chrome	
Convenience controls	●	●	●	●	●	●		●	
QuickSet oven controls	QuickSet II	QuickSet II	QuickSet II						
Digital temperature display	●	●	●						
Auto oven shut-off	w/override	w/override	w/override						
Auto self-clean	●	●	●						
Self-clean cool down display	●	●	●						
Audible preheat signal	●	●	●						
Clock and minute timer	●	●	●	●	●				
Dual element bake	●	●	●	●	●	●	●	●	
Heating element "ON" indicator light	●	●	●	●	●	●	●	●	
Interior oven light	Switch	Switch	Switch	Switch	Switch	Auto/Switch			
Preheated oven light	●	●	●						
Removable full-width storage drawer	CM*	CM*	CM*	CM*	CM*	White	CM*	CM*	
Broiler pan with grid	●	●	●	●	●	●	●	●	
Appearance									
Color appearance*	WH/AD	WH/AD	WW	WH/AD	WH/AD	WW	WH/AD	WH/AD	
Frameless oven door*	BG	BG	WG	BG	CM	White	CM	BG CM	
Oven door with window	●	●	●	●	●	●	●	●	
Removable oven door	●	●	●	●	●	●	●	●	
Designer-style handle	●	●	●	●	●	●	Visor	Visor	
Textured steel side panels	●	●	●	●	●	●	●	●	
Weights & Dimensions									
Overall oven interior dimensions (WxHxD in inches)	24-1/4 x 19 x 19	← 23 x 16 x 17-3/4 →			← 23-3/4 x 19 x 18-1/2 →			22-3/4 x 15-3/4 x 17	23-3/4 x 19 x 18-1/2
Approx. shipping weight (lbs.)	170	144	144	158	159	141	157	154	
Power/Ratings									
KW rating @ 240V	11.7	10.8	10.8	12.6	11.1	11.5	9.3	11.4	
208V	8.8	8.1	8.1	9.9	8.8	9.1	6.9	9.0	

*CM = Color-Matched—indicates color oven door or storage drawer matches range cooktop (either Almond or White).
 WW = White on White, WG = White Glass, WH = White, AD = Almond, BG = Black Glass

30" Range Hoods

	GE	
	JV327X	JN327X
Features		
Two-speed fan control	●	●
Vertical exhaust (CFM)	160	
Optional damper accessory (round)	JXDA22	
Sones rating: Top exhaust	8.0	
Removable grease filters	1	Disposable 1-Pc. Filter
Filter size (sq. in.)	90	90
Cooktop light(s)**	1	1
7" round duct	●	
Non-vented		●
Appearance		
Color appearance	Almond or White	Almond or White
Weights & Dimensions		
Approximate shipping weight (lbs.)	14	19
Power/Ratings		
Current rating amps @ 120V	2.5	2.5

*WB13X5008 removable charcoal filter (for non-vented use) is available at additional cost. Call toll-free 800-626-2002.

**Light bulbs not furnished.

30" Slide-In Electric Ranges

	GE	
	JSP26BW	JSS16PW
Features		
Self-clean oven with Delay Clean option	●	Standard Clean
Variable cleaning time	●	
Oven shelves	2	2
Lift-up cooktop	CM* Porc.-Enam.	CM* Porc.-Enam.
Overhanging cooktop	●	●
Removable one-piece drip bowls	Porc.-Enam.	Chrome
Plug-in Calrod® heating elements	●	●
8" heating elements	2	2
6" heating elements	2	2
Infinite heat controls	●	●
SmartSet Controls	●	
Temperature display	●	
Start pad	●	
Delay Bake option w/Cook & Hold	●	
C° or F° programmable	●	
Audible preheat signal	●	
Auto oven shut-off w/override	●	
Control lock capability	●	
Electronic clock and kitchen timer	●	●
Heating element "ON" indicator light	●	●
Interior oven light	●	●
Storage drawer	CM*	CM*
Broiler pan with grid	●	●
Appearance		
Color appearance*	WH/AD	WH/AD
Frameless glass oven door	CM*	Painted
Oven door with window	●	●
Lift-off oven door	●	●
Designer-style handle	●	Visor
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	← 22-3/4 x 15-3/4 x 17 →	
Approx. shipping weight (lbs.)	175	160
Power/Ratings		
KW rating @240V	10.8	11.6
208V	8.1	8.7
Amps @ 240V	40	40
208V	40	40
Accessories		
Optional backguard (available at additional cost)	JXS33/31	JXS33/31

*WH = White, AD = Almond.
CM = Color-matched indicates color of the oven door matches range cooktop and drawer face (either almond or white).

*WH = White, AD = Almond, CM = Color-Matched indicates color of oven door matches cooktop (either White or Almond).
**Electrical rating not applicable to standing pilot models.
†JGBS04BPA and JGBS04PPA have standing pilot ignition.
Factory set for Natural Gas. A set of LP orifices is included with each XL44™ range for LP conversion.

Spacemaker™ 27" Drop-In Electric Range

	GE	
	JMS08BW	
Features		
Oven cleaning	Standard Clean	
Oven shelves	2	
Lift-up overhanging cooktop	White or Almond Porc.-Enam.	
8" heating elements	1	
6" heating elements	3	
Plug-in Calrod® heating elements	●	
Infinite heat controls	●	
Removable one-piece drip bowls	Chrome	
Heating element "ON" indicator light	●	
Interior oven light	●	
Broiler pan with grid	●	
Appearance		
Color appearance*	WH/AD	
Frameless oven door	Black Glass	
Oven door with window	Big View	
Lift-off oven door	●	
Designer-style handle	●	
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	19 x 15 x 18	
Approx. shipping weight (lbs.)	119	
Power/Ratings		
KW rating @240V	10.1	
208V	7.6	
Amps @ 240V	40	
208V	40	

*WH = White, AD = Almond.
Optional backguard in white, black or almond is available at additional cost for all models.
JX27RWH = White,
JX27RBK = Black,
JX27RAD = Almond.

30" Free-Standing Standard Burner Gas Ranges

	GE				
	JGBP248EA	JGBS208EA	JGBS17PEA	JGBS04BEA JGBS04BPA	JGBS04PEA JGBS04PPA
Capacity					
Extra-large oven	●	●	●	●	●
Features					
Oven cleaning	Self-Cleaning	Standard Clean	Standard Clean	Standard Clean	Standard Clean
Cooktop burners	Std./Twin	Std./Twin	Std./Twin	Std./Twin	Std./Twin
Valves (degree of turn)	270	140	140	140	140
QuickSet oven controls	QuickSet II				
Auto Self-Clean	●				
Electronic clock and timer	●	●	●		
Audible preheat signal	●				
Auto oven shut-off	●				
Porcelain-enameled cooktop	One-Piece Upswept	One-Piece Upswept	One-Piece Upswept	●	●
Lift-up cooktop	●	●	●	●	●
Easy-clean porcelain-enameled subtop	●	●	●	●	●
Porc.-Enam. one-piece drip pans	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.	Opt. Access.
Removable square grates	Black Standard Porcelain Steel	Black Standard Porcelain Steel	Black Standard Porcelain Steel	Black Standard Porcelain Steel	Black Standard Porcelain Steel
Ignition system	Electronic	Electronic	Electronic	Electronic Pilot †	Electronic Pilot †
Oven racks	2	2	2	2	2
Six embossed rack positions	●	●	●	●	●
Extra-large broiler pan/grid	●	●	●	●	●
Porcelain-enameled backguard	●	●	●	●	●
Interior oven light	●	●	●		
In-oven broiling	●				
Slide-out broiler drawer		●	●	●	●
Appearance					
Color appearance*	WH/AD	WH/AD	WH/AD	WH/AD	WH/AD
Frameless removable oven door*	Solid Black Glass	Black Glass	CM* Porc.-Enam.	Solid Black Glass	CM* Porc.-Enam.
Oven door with window		●	●		
Designer-style handle	●	●	●	●	Chrome Visor
Four levelling legs	●	●	●	●	●
Weights & Dimensions					
Overall oven interior dimensions (WxHxD in inches)	← 24 x 17 x 19 →				
Approx. shipping weight (lbs.)	200	175	175	165	165
Power/Ratings					
Top burners (000's BTU's) Nat/LP	← (4) 9.0/8.0 →				
Oven/broiler burners (000's BTU's) Nat/LP	16.0/16.0 Oven 13.5/12.0 Broil	← 18.0/16.5 →			
Gas range electrical rating**	120V, 60Hz, 5A				
LP conversion kit (included)	●	●	●	●	●

GE Specifications

Washers

	GE	
	WCSE3100A	WCXR1070A
Capacity		
Capacity	Super Plus	Extra-Large
Cubic Feet	3.2	2.7
Features		
Wash/rinse temperatures	3	3
Wash/spin speed comb.	3	1
Water levels	3	3
Fabric softener dispenser	●	
Bleach dispenser	●	
Self-cleaning filter	●	●
GentlePower™ Agitator	●	
FlexCare™ Agitator		●
Number of wash cycles	10	7
Cottons Regular		
Extra Heavy Soil		
Heavy Soil	●	●
Medium Soil	●	●
Light Soil	●	●
Auto Soak (15 Min.)	●	
Easy Care		
Heavy Soil	●	
Medium Soil	●	
Light Soil	●	●
Delicates		
Light Soil	●	●
100% Front Serviceable	●	●
PermaTuf II™ Basket	●	●
Quiet		
Quiet-By-Design™	●	●
Appearance		
Colors available*	WW, AA	WW, AA
Weights		
Approx. ship. weight (lbs.)	160	160

*Colors available: WW = White on white, AA = Almond on almond.

Dryers

	Electric Gas	GE	
		DCXR463EA DCXR463GA	DCL333EA DCL333GA
Capacity			
Capacity		Extra-Large	Extra-Large
Cubic Feet		6.0	5.7
Features			
Rotary controls		●	●
Automatic Dry control		●	●
Heat selections		4	3
Number of cycles		6	3
Auto Cottons			
Auto Cottons Cycle		●	●
Easy Care			
Auto Wrinkle Free/Perm. Press Cycle		●	●
Timed Dry			
Actual minutes on timer		80	70
Damp Dry		●	
Dewrinkle		●	
Quick Dry		●	
Removable up-front lint filter		●	●
Reverse-A-Door		●	●
Dryer interior light		●	
DuraDrum™ interior		●	
Painted steel interior			●
100% Front Serviceable		●	●
Quiet			
Quiet-By-Design™		●	●
Appearance			
Colors available*		WW, AA	WW, AA
Weights			
Approx. shipping weight (lbs.)	Electric	112	107
	Gas	115	124

*Colors available: WW = White on white, AA = Almond on almond. GE electric dryers are available with long-ducting capability.

Washer Specifications

Circuit Requirements:

An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or time-delay fuse is required.

Electrical Rating:

115V, 60Hz, 10A

Washer Note: Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Dryer Specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom
Gas: 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit Requirements:

Electric: An individual, properly-grounded branch circuit, protected by a 30 amp circuit breaker or a time-delay fuse is required.

Electric Dryer Rating:

120/240V, 5600W, 24A
120/208V, 4400W, 22A

Gas: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or time-delay fuse is required.

Gas Dryer Electric Rating:

120V, 60Hz, 6A

Gas (BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit, 5.7 cu. ft. model kit is WE25X10003, 6.0 and 7.0 cu. ft. model kit is WE25X0217. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Spacemaker® Washers and Dryers

Individual Spacemaker® Washers	GE	
	Stationary WSL1100A	Portable WSLP1100A
Capacity		
Capacity	Extra-Large	Extra-Large
Features		
Wash/spin speed combinations	1	1
Wash/rinse temperatures	4	4
Water levels	4	4
Number of cycles	10	10
Regular		
Heavy Soil	●	●
Medium Soil	●	●
Perm. Press		
Medium Soil	●	●
Light Soil	●	●
Delicates		
Spin Only	●	●
One Touch Load Sensing	●	●
Automatic cool down	●	●
Bleach dispenser	●	●
Fabric softener dispenser	●	●
Automatic detergent dispenser	●	●
Lint filter	2 Removable	2 Removable
Easy-roll rollers		●
Appearance		
Colors available	WW, Bisque	WW, Bisque
Weights & Dimensions		
Circuit requirements	120V, 60 Hertz, 15 or 20 Amps	
Dimensions (HxWxD in inches)*	37-1/2" x 23-5/8 x 26	38 x 23-5/8 x 26
Approx. shipping wt. (lbs.)	106	106

*Depth measured from front of control knob.

**With leveling legs extended.

Individual Spacemaker® Dryers	GE	
	Stationary DSKS433EA	Portable/Stationary DSKP233EA*
Capacity		
Capacity	Compact	Compact
Features		
Dry control	Automatic	Automatic
Heat selections	4	2 (timer)
Number of dry cycles	3	3
Auto. Reg.—Perm. Press		●
Auto. Perm. Press & Delicate	●	
Auto. Reg.	●	
Timed Regular (min.)	140	105
Air Fluff (min.)	(Heat Selection)	10
Separate start switch	●	●
Control location	Mid-Band	Top
End-of-cycle signal		●
Lint filter	Up-Front	Back of Drum
Appearance		
Colors available	WW, Bisque	WW, Bisque
Weight & Dimensions		
Exhaust options**	4-Way 240/208V†, 60 Hertz, 30 Amp	Rear 120V, 60 Hertz, 15 Amp
Circuit requirements	No cord	6 feet
Power cord		
Dimensions (HxWxD in inches)	33-1/4 x 23-7/8 x 24-1/2	32 x 23-7/8 x 23-5/8
Approx. shipping wt. (lbs.)	108	100

*Dryer comes equipped with casters and stationary leveling legs. DSKP233EA is approved for DSR24RW only.
**DSKS433EA shipped exhausted through the top.
DSKP233EA exhausted to rear only.
†240/208 volt outlet: Rear-mounted outlet on DSKS433EA approved for use with Washer/Dryer Stack Rack DSR24RW or DSLR24AW.

Circuit Requirements: An individual, properly-grounded branch circuit of the proper voltage and frequency as specified on the rating plate, with no other appliances or fixtures in circuit, is required.

To Install Spacemaker® Washers With Matching Dryers, Use Accessory Kit:

DSR24RW and DSLR24AW—Metal rack for stationary dryer with portable or stationary washer.

Note: To obtain matching appearance between the washers and dryers, the dryers must be "T" model year.

Accessories

Stack Rack DSR24RW

For use with stationary dryers and storage of washer WSKP2060W/WSKS2060W underneath.



Listed by Underwriters Laboratories

Unitized Spacemaker® Washers and Dryers

GE Front Load Washer/Matching Dryer

	GE			
	Electric		Gas	
Washer	WSM2700W		WSM2420T	
	WSM2780W		WSM2480T	
	Washer	Dryer	Washer	Dryer
Capacity				
Capacity	X-Large	X-Large	Compact	Compact
Features				
Wash/spin speed combinations	1		2	
Wash/rinse temperatures	3		3	
Water levels	3		3	
Number of wash cycles	3		3	
Regular	●		●	
Perm. Press	●		●	
Delicates	●		●	
Unbalanced load control	●		●	
Lint filter	●		●	
Dryer				
Features				
Automatic dry control		●		●
Number of dry cycles		4		4
Auto Regular		●		●
Auto Perm Press				●
Delicates		●		
Timed		●		●
Air Fluff		●		●
Control location		Mid-Band		Mid-Band
Exhaust options		Rear		Rear/Sides
Appearance				
Colors available	White on white, Almond on almond		White on white**	
Weight & Dimensions				
Dimensions (HxWxD in inches)	75-1/2 x 27 x 30-13/16*		71-3/4 x 23-7/8 x 27-1/4*	
Approx. shipping wt. (lbs.)	300		238	

*Depth dimension assumes water hook-up is recessed in the wall.
 **Electric model is also available in Almond on almond.
Note: The third prong on the WSM2780W plug configuration is a flat spade type rather than a typical round probe. It requires a matching wall outlet.

Electrical Requirements

WSM2700W: Electric Dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with neutral connected to the frame. Power cord should be purchased separately.

WSM2420T: Electric Dryer—This appliance should be connected to an individual, properly-grounded branch circuit with 120/240V or 120/208V single-phase 60 Hz electrical service and should be protected by 30-amp time-delay fuses or circuit breakers. This appliance is manufactured with the neutral connected to the frame. Power cord should be purchased separately.

NOTE: THESE APPLIANCES ARE NOT APPROVED FOR 120-VOLT OPERATION.

WSM2480T: Gas Dryer—This appliance should be connected to an individual, properly-grounded branch circuit with a three-prong grounding-type receptacle and 120-volt single-phase 60 Hz electrical service and should be protected by 15 or 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 6-foot long flexible U.L. listed 20-amp power cord to match a 15-amp receptacle.

Gas Rated input 10,500 BTU/HR. Factory equipped for natural gas. Tested for LP gas.

WSM2780W: Gas Dryer—This appliance should be connected to an individual branch circuit with 120-volt single-phase 60 Hz electrical service and should be protected by 20-amp time-delay fuses or circuit breakers. This appliance is equipped with a 4-foot long flexible U.L. listed 20-amp power cord to match a 20-amp receptacle.

Gas Rated input 20,000 BTU/HR. Factory equipped for natural gas.

LP gas supply requires a conversion kit.

Kits: WSM2780W – WE25X206

WSM2480T – WE25X0219

Have a qualified gas technician install a conversion kit before use.

For complete information see installation instructions packed with the product.

See installation instructions packed with product for alcove or closet installations.

	GE
Washer	WSXH208A
Capacity	
Capacity	Extra-Large
Cubic Feet	2.7
Features	
Wash/rinse temperatures	4
Water levels	Automatic Adjustment
Standard Rinse Cycles	3
Motor Speeds	Agitation 1, Spin 2
Combinations*	HC, WW, WC, CC
Detergent dispenser (Liquid/Powder)	●
Bleach dispenser	●
Fabric softener dispenser	●
End-of-cycle signal	Adjustable
Number of wash cycles	8
Regular	
Heavy Soil	●
Medium Soil	●
Perm. Press	
Medium Soil	●
Light Soil	●
Knits/Delicates	●
Pre-Wash	●
Extra-Rinse Cycle/Auto Option	●
Leveling legs	●
Rear rollers	●
Stainless steel wash drum	●
Appearance	
Color available	White on white
Weights & Dimensions	
Electrical requirements	120V, 60 Hertz, 12.0 Amps
Dimensions (HxWxD in inches)	36 x 26-3/4 x 24-3/4
Approx. shipping wt. (lbs.)	217
Flexible installation	Undercounter, Stacked, Side-by-Side

*HC = Hot-Cold, WW = Warm-Warm, WC = Warm-Cold, CC = Cold-Cold.

Front Loading Installation Information

Undercounter Installation

- Accessory mounting kits are required for undercounter installation. To order, call 1-800-848-7722.
- Washer—Order Pub. No. 14-A037
- Dryer—Order Pub. No. 14-A008

Stacked Installation

- Brackets for stacking dryer over washer are included with the dryer.

Dryer Exhausting Information – Excluding DSXH43EA/GA

For complete information see installation instructions packed with dryer.

Ducting Materials

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If "all rigid metal" duct cannot be used, then "flexible all metal" venting can be used, but it will reduce the maximum recommended duct length. The following kit or parts are available from your local service organization.

Kit WX8X75—7" aluminum duct and 4' hood, short tail. (OR individual parts):

WX8X65 7" aluminum flex duct only

WX8X58 4' clamps (2)

WX8X67 4' exhaust hood

See installation instructions for complete information.

Exhaust length calculation:

- Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
- The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. The maximum lengths for flexible ducts are less than for rigid duct. See table in installation instructions. A turn of 45° or less

	GE
Dryer	DSXH43EA/GA
Capacity	
Capacity	Extra-Large
Cubic Feet	6.0
Features	
Tumble Drying	●
Time Dry Cycles	4
Auto Dry Cycles	3
Temperature Options	4
High	●
Medium	●
Low	●
Air Fluff/No Heat (Cool Down)	●
Timed Dry Cycles	4
Regular	●
Permanent Press	●
Knits/Delicate	●
Air Fluff	●
Auto Dry Cycles	
Regular	●
Permanent Press	●
Knits/Delicate	●
Cool Down	●
Quick Clean Lint Screen	●
End-of-Cycle Signal	Adjustable
Drum Light	●
Reverse-A-Door	●
Dura Finish Top and Drum	●
Spill-Saver Top	●
Poly Tumbling Vanes	●
Leveling Legs	●
Total Front Serviceability	●
Exhaust Options (Electric/Gas)	4/3
Heavy-Duty Suspension System	●
Appearance	
Color available	White on white
Weights & Dimensions	
Dimensions (HxWxD in inches)	36 x 26-7/8 x 25-3/4
Approx. Shipping Weight (Elec/Gas)	116
Flexible installation	Undercounter, Stacked

Electrical Requirements: 120/240V, 3 wire, 5600W, 24A

120/208V, 3 wire, 4400W, 22A

Gas Requirements: 120V, 60Hz, 6A

Dryer Specifications

Exhaust length calculation:

Undercounter Installation

- Electric:** 4-way via rear, right, left and bottom.
- Gas:** 3-way via rear, right and bottom. Dryer is shipped exhausted to the rear.

Exhaust Elbow Kit: Order Pub. No.14-A018.

See installation instructions for alcove, closet, bathroom or bedroom installations.

may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.

Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down. Other terminations, such as lowered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

GE Specifications

Built-In Dishwashers

Features	GE	
	GSD2230FWW GSD2220FBB GSD2200FAD/WH	GSD2030FWW GSD2020FBB GSD2000FAD/WH
Wash System		
Standard Wash System	●	●
Wash levels	2	2
Food disposer	●	●
Cycles	5	4
Heavy Wash	●	Dial
Normal Wash	●	Dial
Short Wash	Dial	Dial
Plate Warmer	Dial	
Rinse Only/Hold	Dial	Dial
Options	12	9
Heated Dry On/Off	●	Rocker
HotStart™	Dial	Dial
Racks, shelf & basket		
Upper Rack	Standard	Standard
Lower Rack	Deluxe	Deluxe
Silverware basket	Deluxe	Deluxe
Control type	Turn-To-Start	Turn-To-Start
Pushbuttons	4	
Rinse Aid dispenser	●	●
Economical/Quiet		
Quiet		
Sound Insulation Package	QuietDesign™	Standard
PermaTuf™ tub and door liner	●	●
QuietPower™ Motor	●	
GE Motor		●
Appearance		
Colors available*	WW, BB, WH, AD	WW, BB, WH, AD
Color Panels—Door & Access	Trimless	Trimless
Weights & Dimensions		
Approx. shipping weight (lbs.)	100	100
Height w/legs retracted (in.)	34	34
Overall width / Overall depth (in.)	24 / 25-1/8	24 / 25-1/8
Accessories		
Requires kit for 1/4" panel capability with trim	GPF325W/B/A	GPF325W/B/A
Requires kit for trimless 3/4" panel capability	GPF375	GPF375

All GE Dishwashers are equipped with the following: 120°F inlet water capability, Easy-Glide roller system, convection drying, 120V/60Hz/8.6A, horizontal mechanism, leveling screws.

*Colors available: WW = White on white, BB = Back on black, WH = White body w/black control panel, AD = Almond body w/black control panel.

Spacemaker® Built-In 18" Dishwasher

Features	GE	
	GSS1800Z	
Wash System		
Wash levels	2	
Cycles	4	
Pots & Pans	Dial	
Normal Wash	Dial	
Light Wash	Dial	
Rinse Only/Hold	Dial	
Options	6	
Heated Dry On/Off	Rocker	
Racks, shelf & basket (upper/lower)	Standard	
Silverware basket	Standard	
Control type	Turn-To-Start	
Cycle progress indicators	Dial	
Rinse Aid dispenser	●	
120°F @ inlet water capability	●	
Leveling screws	●	
Economical/Quiet		
Sound Insulation Package	Standard	
Appearance		
Colors available	Black/Almond/White	
Color panels Door & Access (2 Reversible)	Black/Harvest/ Almond/White	
Weights & Dimensions		
Approx. shipping weight (lbs.)	70	
Height w/legs retracted (in.)	34-1/8	
Overall width / Overall depth (in.)	17-13/16 / 23-3/4	

Note: For trim kit to install wood panel up to 3/16" thick on GSS1800Z model only, order Pub. No. 5-A007.

Spacemaker® Undersink Dishwasher

Features	GE	
	GSM2130DWW GSM2110DAA	
Wash System		
Wash levels	2	
Cycles	5	
POTSCRUBBER	●	
Normal Wash	●	
Short Wash	Dial	
Plate Warmer	Dial	
Rinse Only/Hold	Dial	
Options	8	
Heated Dry On/Off	●	
Racks, shelf & basket		
Upper Rack	Spacemaker™	
Lower Rack	Deluxe	
Silverware basket	Deluxe	
Control type	Turn-To-Start	
Indicator lights	Dial	
Pushbuttons	4	
Rinse Aid dispenser	●	
Economical/Quiet		
PermaTuf™ tub and door liner	●	
GE Motor	●	
Appearance		
Colors available*	WW, AA	
Door	Trimless	
Color Panels Access	Trimless	
Weights & Dimensions		
Approx. shipping weight (lbs.)	100	
Height w/legs retracted (in.)	34	
Overall width / Overall depth (in.)	24 / 24	

*Colors available: WW = White control panel with white front panels, AA = Almond control panel with almond front panels.

Stainless Steel Sinks Single and Double Compartment Models (Dimensions in Inches)

Model Number	Overall Size		Inside Each Compartment		
	L	W	L	W	D
GPF95 (Single Bowl, R)*	25	21-1/4	21	15-3/4	5-3/8
GPF96 (Single Bowl, L)*	25	21-1/4	21	15-3/4	5-3/8
GPF97 (Double Bowl)	33	21-1/4	14	15-3/4	5-3/8

Model Number	Cutout In Countertop 1-1/2" Radius Corners		No. Of 1-1/2" Dia. Faucet Holes	Ship. Wt. Lbs.
	L	W		
GPF95 (Single Bowl, R)*	24-3/8	20-5/8	3 or 4**	10
GPF96 (Single Bowl, L)*	24-3/8	20-5/8	3 or 4**	10
GPF97 (Double Bowl)	32-3/8	20-5/8	3 or 4**	12-1/2

Note: Drain opening size is 3-1/2".


Above models are fully sound deadened.

*Suffix "L" or "R" means drain outlet is located in upper left or right corner of sink compartment.

**All have four holes, but one hole has a removable plug.

Disposal® Food Waste Disposers

Features	GE			
	Continuous Feed Models			
	GFC305Y	GFC300Y	GFC295Y	GFC290Y
Motor horsepower	1/2	1/2	1/3	1/3
Control method	Wall Switch	Wall Switch	Wall Switch	Wall Switch
Feed type	Continuous	Continuous	Continuous	Continuous
Power connection	Line Cord	Direct Wire	Line Cord	Direct Wire
Impellers	Dual swivel	●	●	●
	Jam resistant	●	●	●
	Stainless steel	●	●	●
Stainless steel sink flange	●	●	●	●
Mounting type	Fast Mount	Fast Mount	Fast Mount	Fast Mount
Precutiter	●	●	●	●
Splash guard	Removable	Removable	Removable	Removable
Sink stopper	●	●	●	●
Dishwasher drain connector	●	●	●	●
Manual reset overload protector	●	●	●	●
Permanently lubricated bearing	●	●	●	●
Plastic drain elbow	●	●	●	●
Turrtable	Galvanized	Galvanized	Galvanized	Galvanized
Polyester drain housing	●	●	●	●
Grinding speed (RPM's)	8000	8000	8000	8000
Hopper	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Hopper liner and grinding ring	Galvanized	Galvanized	Galvanized	Galvanized
Weights & Dimensions				
Approx. shipping weight (lbs.)	8.4	8.4	8.4	8.4
Net weight (lbs.)	7.6	7.6	7.6	7.6
Dishwasher inlet diameter (in.)	7/8	7/8	7/8	7/8
Drain outlet diameter (in.)	1-1/2	1-1/2	1-1/2	1-1/2
Accessories				
White sink flange & stopper	GPF71	GPF71	GPF71	GPF71
Almond sink flange & stopper	GPF72	GPF72	GPF72	GPF72



Spacemaker II™ Countertop Microwave Ovens

	GE	
	JEM25WY	JEM25GY
Capacity		
Oven cavity (cu. ft.)	.9	.9
Features		
Watts (IEC-705 Test Procedure)	800	800
Electronic Touch Controls	●	●
Electronic digital display w/clock	●	●
Beverage	●	●
Cook	●	●
Popcorn	●	●
Reheat	●	●
Snacks	●	●
Express Cook	●	●
Instant On Controls	●	●
Add 30 Seconds	●	●
Auto Defrost/Time Defrost	●	●
Power levels	10	10
Sound On/Off	●	●
Child Lock Out	●	●
Appearance		
Door color	White on White	Black on Black
Case color	White	Greystone
Weights & Dimensions		
Approx. shipping wt. (lbs.)	41	41
WxHxD Cavity	16-1/2 x 7-7/16 x 11-1/4	
(in inches) Exterior †	23-25/32 x 11-3/16 x 12-9/32	
Power/Ratings		
Frequency (MHz)	2450	2450
Electrical input Watts @ 120V	1300	1300
Amperage	11.5	11.5
Accessories		
Hanging kit (Pub. No. 4-A019)*	Optional	Optional
Optional built-in kit	JX827WN	JX827BN JX827SS

*Pub. No. 4-A019 is available at additional cost.
†Exterior dimensions: height includes feet.

GE SmartWater™ Filtration Systems

	GE	
	GNUL30B	GX1S15C
Features		
SmartWater™ Faucet	Electronic Monitor	Short-Reach
Faucet Color	Chrome w/black	Chrome w/black
Feed Water Pressure (psi)	40 min -125 max	40 min -125 max
Feed Water Temperature	40-100°F	40-100°F
Filtered Water Flow (gpm)	0.6	0.6
Filter I (Sediment/Taste/Odor)	FXUSB	FXULC
Filter Cartridge	Polyspun Depth Filter	Spiral Bound Act. Carbon
Filter II	FXULB (Lead,Cysts)	N/A
Filter Cartridge	Block Act. Carbon	N/A
Particulate Removal	Absolute 1 micron	Nominal .5 micron
Chlorine Reduction (percent / gals.)	99.5/1250	98/1250
Filter Life	6 months	6 months
Lead Reduction (percent / gals.)	95.7/1250	99/1250
Cyst Reduction (percent)	99.98	99.99
Turbidity Reduction (percent)	99.7	99
Lindane Reduction (percent / gals.) (A Pesticide)		91/1250
Asbestos Reduction (percent)		99
Filter Change Indicator	Electronic	Sticker
Installation Kit	●	●
Fittings	●	●
Optional Basement Installation (hardware not included)	●	●
Appearance		
Style	Bracket	Bracket
Unit Color	White	White
Filter Housing	White	White
Weights & Dimensions		
Approximate Shipping Weight (lbs.)	7	3.8
Overall W x H x D (in.)	12 x 13 x 4-5/8	5-1/2 x 13 x 4-3/4
Power/Ratings		
Faucet Monitor Power Requirement	2 AA batteries (incl.)	N/A
Accessories (available at additional cost)		
Icemaker Connection Kit	UCKIT	UCKIT
Faucet	UCFCTWW WOW	UNFCTWW WOW

Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

Spacemaker™ Over-The-Range Microwave Ovens

	GE		
	JVM1631BB* JVM1630BB	JVM1631WB* JVM1630WB	JVM1420BB JVM1420WB
Capacity			
Oven cavity (cu. ft.)	1.6	1.6	1.4
Features			
Watts (IEC-705 Test Procedure)	1000	1000	950
Electronic touch controls	●	●	●
SmartControl System w/Interactive Display	●	●	●
Electronic scrolling digital display	●	●	●
Clock and AM/PM Pad	●	●	●
Variable Scroll Speed	●	●	●
Concurrent programming	●	●	●
Display On/Off	●	●	●
Convenience Beverage Pad	●	●	●
Controls Popcorn Pad	●	●	●
Reheat Pad	●	●	●
Express Cook (1-6 min.)	●	●	●
Instant On Controls	●	●	●
Time Cook	I & II	I & II	I & II
Add 30 Seconds	●	●	●
Auto Defrost/Time Defrost	●	●	●
Power Levels	10	10	10
Turntable	●	●	●
Delay Start	●	●	●
Reminder	●	●	●
CircuWave™ Cooking System	●	●	●
Full-View cooktop lighting	●	●	●
Timer On/Off	●	●	●
Cooking Complete Reminder	●	●	●
Child lock out	●	●	●
Two-speed high-capacity exhaust fan	300 CFM	300 CFM	300 CFM
Appearance			
Color appearance**	BB	WW	BB/WW
Case color	Black	White	Black/White
Designer-style handle	●	●	●
Big View window	●	●	●
Weights & Dimensions			
Approx. shipping weight (lbs.)	67	67	67
Cavity	20-1/4 x 9-9/32 x 14-13/32		19-5/16 x 9-5/16 x 13-3/16
WxHxD (in inches) Exterior †	29-7/8 x 16-15/32 (rear) x 15-1/16		29-7/8 x 16-1/2 (rear) x 14-5/16
Power/Ratings			
Frequency (MHz)	2450	2450	2450
Electrical input Watts @ 120V	1480	1480	1480
Amperage	15	15	15

*Non-vented model.

**Colors available: BB = Black on black, WW = White on white.

†Exterior dimensions: depth excludes handle.

GE Specifications

Built-In “J” Series Units and Heat Pumps

Models	GE								
	Chassis/Cool						Chassis/Cool High Mount		
	AJCS06LC	AJCS08AC	AJCS10AC	AJCS09DC	AJCS10DC	AJCS12DC	AJCH10AC	AJCH10DC	AJCH12DC
Capacity									
BTUH-AHAM	6000	8000	9900	8900/8700	9900/9700	11,600/11,400	9900	9900/9700	11,600/11,400
E.E.R.	9.5	9.2	9.2	9.5/9.5	9.2/9.2	9.0/9.0	9.2	9.2/9.2	9.0/9.0
Dehumidification (pints/hr.)	1.4	2.0	2.6	2.5	2.6	3.2	2.6	2.6	3.2
Features									
Fan speeds (Cool/Fan Only)	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Airflow (cfm) roomside hi/low	210/180	250/210	250/210	250/210	250/210	265/230	250/210	250/210	265/230
Air exchange exhaust	•	•	•	•	•	•	•	•	•
Variable setting thermostat	•	•	•	•	•	•	•	•	•
Filter type	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out	Slide-Out
Rotary compressor	•	•	•	•	•	•	•	•	•
Economical/Quiet									
Fan cycle switch	•	•	•	•	•	•	•	•	•
Appearance									
Slide-out chassis	•	•	•	•	•	•	•	•	•
Installation	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall	Wall
Wall case required	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48	RAB46/47/48
Weights & Dimensions									
Height (in inches) A	← 15-5/8 →								
Width (in inches) B	← 26 →								
Depth (in inches) C (Case Only)	← 16-7/8 →								
Approx. net weight (lbs.)	66	73	82	75	82	84	82	84	84
Approx. shipping weight (lbs.)	75	82	90	84	90	93	90	93	93
Power/Ratings									
Voltage	115	115	115	230/208	230/208	230/208	115	230/208	230/208
Amps-AHAM	5.7	7.9	9.7	4.2/4.6	4.9/5.3	5.8/6.3	9.7	4.9/5.3	5.8/6.3
Watts input	630	870	1075	935/915	1075/1055	1290/1265	1075	1075/1055	1290/1265
Line cord plug	Parallel	Parallel	Parallel	Tandem	Tandem	Tandem	Parallel	Tandem	Tandem
Recommended circuit protection (time delay)	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps

Models	GE
	Chassis/Heat/Cool AJES12DC
Capacity	
BTUH-AHAM	11,600/11,400
E.E.R.	9.0/9.0
Dehumidification (pints/hr.)	3.2
Features	
Fan speeds (Heating/Cooling)	2/2
Fan Only speeds	2
Airflow (cfm) roomside hi/low	265/230
Air exchange exhaust	•
Variable setting thermostat	•
Filter type	Slide-Out
Rotary compressor	•
Economical/Quiet	
Fan cycle switch	•
Appearance	
Slide-out chassis	•
Wall case required	RAB46/47/48
Installation	Wall
Window installation kit	Optional
Weights & Dimensions	
Height (in inches) A	15-5/8
Width (in inches) B	26
Depth (in inches) C (Case Only)	16-7/8
Approx. net weight (lbs.)	84
Approx. shipping weight (lbs.)	93
Power/Ratings	
Voltage	230/208
Amps-AHAM	5.8/6.3
Watts input	1290/1265
Line cord plug	Perpendicular
Recommended circuit protection (time delay)	20 Amps
Electric Resistance Heating	
BTUH-AHAM	11,600/9480
Amps (max. connected load)	15.9/14.2
Watts output	3400/2780

All cooling with electric heat models and heat pumps are corrosion treated. Specifications and design subject to change without notice.

Wall Outlets

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations. Electrical outlet should be in reach of line cord.

Note: Aluminum wiring may pose special problems—consult a qualified electrician.



Parallel
115V.
15 Amp.



Perpendicular
230/208V.
20 Amp.



Tandem
230/208V.
15 Amp.



Large Tandem
230/208V.
30 Amp.

GE Warranties

The condensed list below is a convenient overview of the written warranties offered on various GE appliances described in this catalog. For complete warranty details on a specific GE appliance model, contact your nearest GE appliance supplier, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

Appliance	Length	Type	Warranty Covers	Parts Or Labor	Where Serviced*	
Refrigerators	1-Year	Full	Entire Appliance	Both	In-Home	
	Additional 4-Year (5 years total)	Full	Sealed Refrigeration System, Compressor	Both	In-Home	
	Lifetime	Limited	See-Thru Vegetable/Fruit Crispers	Parts	Carry-In**	
Washers	1-Year	Full	Entire Appliance	Both	In-Home	
	Additional 4-Year (5 years total)	Limited	Auto Balance Suspension System, ArmorGuard Lid & Cover Protection, Steel Drive Transmission	Parts	In-Home***	
	Additional 9-Year (10 years total)	Limited	Outer Tub	Parts	In-Home***	
	Additional 19-Year (20 years total)	Limited	PermaTuf II™ Basket	Parts	In-Home***	
Dryers (Large Capacity and Spacemaker®)	1-Year	Full	Entire Appliance	Both	In-Home	
Dryers (Extra-Large and Super Capacity)	1-Year	Full	Entire Appliance	Both	In-Home	
	Additional 4-Year (5 years total)	Limited	Dryer Drum	Parts	In-Home***	
Electric and Gas Ranges	1-Year	Full	Entire Appliance	Both	In-Home	
Hoods	1-Year	Full	Entire Appliance	Both	In-Home	
Microwave Ovens	1-Year	Full	Entire Appliance	Both	In-Home	
	JVM1430BA/WA, JVM1431BA/WA	Additional 9-Year (10 years total)	Limited	Magnetron Tube	Part	In-Home***
	JEM25GY/WY	1-Year	Limited	Entire Appliance	Both	Carry-In**
Dishwashers	1-Year	Full	Entire Appliance	Both	In-Home	
	GSD2230Z, GSD2220Z, GSD2200Z, GSM2100Z	Additional 1-Year (2 years total)	Limited	Water Distribution System	Parts	In-Home***
		Additional 9-Year (10 years total)	Full	PermaTuf® Tub and Door Liner	Both	In-Home
GSD2030Z, GSD2020Z, GSD2000Z, GSS1800Z	1-Year	Full	Entire Appliance	Both	In-Home	
	Additional 9-Year (10 years total)	Full	PermaTuf® Tub and Door Liner	Both	In-Home	
Disposers	1-Year	Full	Entire Appliance	Both	In-Home	
GE SmartWater™ Filtration Systems	1-Year	Full	Entire Appliance (excludes filters)	Both	In-Home	
GE SmartWater™ Softening Systems	1-Year	Full	Entire Appliance	Both	In-Home	
	Additional 2-Year (3 years total)	Limited	Electronic Monitor	Parts	In-Home***	
	Additional 9-Year (10 years total)	Limited	Brine Tank, Resin Tank	Parts	In-Home***	
Air Conditioners (Window, Window Built-In and Built-In Units)	1-Year	Full	Entire Appliance	Both	In-Home	
	Additional 4-Year (5 years total)	Full	Sealed Refrigeration System	Both	In-Home	

*Except in Alaska. See warranty for details.

**In-Home service available at extra cost.

***Does not include service trip and labor charges.

Instant Dimensional & Installation Information

From the speed of a touchtone phone, order installation information to be delivered through your fax machine.



GE QUICKSPECS
1-800-432-3729

This automated fax-on-demand system provides a quick reference to product dimensions for Monogram®, Profile Performance Series,™ Profile,™ GE and Hotpoint appliances.

- Touchtone Activated**
 Simply follow the voice prompts to make your selection from any touchtone phone.
- Model Specific Installation Dimensions**
 Select accurate installation dimensions by individual model numbers for virtually every model. Make your selection from the List of Available Documents (available by fax from GE QuickSpecs). Select up to fifteen documents per call.
- Feature and Appearances**
 Feature information and product illustrations are included for most models.
- Fax Information to Any Fax Telephone Number**
 Once you make your selection, you will be asked to enter the fax telephone number where you wish your request to be faxed (your office, job site, customer). It will be faxed to the specified fax number within 15 minutes.
- Available 24 Hours a Day, 7 Days a Week**

Hotpoint specifications

Side-by-side no-frost refrigerator

	CSX20BAB
Capacity	
Total (cu. ft.)	19.7
Fresh food (cu. ft.)	12.95
Freezer (cu. ft.)	6.79
Shelf area (sq. ft.)	20.6
Features	
Automatic icemaker	Opt. (IM3)
Ice 'N Easy trays	2
Ice storage bin	■
Cabinet shelves (total) (adjustable)	3 Wire Everwhite 3
Vegetable/fruit crisper(s) (upper)	Sealed (classic white)
Meat pan (lower)	Sealed (classic white)
Door shelves (total)	4 (2 w/ gal. storage)
Dairy compartment	(w/door)
Utility bin	■
Freezer compartment shelf(s) (Wire Everwhite)	4 (3 Adj.)
Freezer sliding storage bin	1
Freezer door shelves (total)	6
Economical/Quiet	
QuietSound Noise Reduction System	■
Energy Saver (condenser loop)	■
Insulation (cabinet and doors)	Foam
Cabinet liner	Baked-Enamel-on-Steel
Door liner	ABS
Appearance	
Color(s) available*	WH, AD
Door handle(s)	Black
Textured steel case & doors	■
Adjustable rollers	■
Door stops	■
Coil-free back	■
Weights & Dimensions	
Height to top of hinge (in.)	67-5/8
Height to top of case (in.)	66-5/8
Case depth without door (in.)	28
Case depth (less handle) with door (in.)	30-1/2
Case depth with door handle (in.)	32-1/2
Depth with door open 90° (in.)	47-3/8
Width (in.)	31-1/2
Width with door open 90° less door handle (in.)	32-1/4
Air clearances Each side (in.)	3/4†
Top (in.)	1
Back (in.)	1
Approx. shipping weight (lbs.)	311

*Color(s) available: WH = White/Black handles, AD = Almond/Black handles.
†If installed against a wall, allow clearance of 11-1/4" on freezer side to remove ice bin.

Top-freezer no-frost refrigerators

	CTX18CAB CTX18CIB	CTX16CAB CTX16CIB	CTX16CZB CTX16CYB	CTX16WIB CTH16CYB	CTX16BYB	CTX14AYB	CTX14CAB CTX14CIB	CTX14CYB	CTH14CYB
Capacity									
Total (cu. ft.)	18.2	16.4	15.6 16.4	15.6 16.4	15.6	14.4	14.4	14.4	14.4
Fresh food (cu. ft.)	13.04	12.58	11.69 12.58	11.69 12.58	11.69	10.58	10.58	10.58	10.58
Freezer (cu. ft.)	5.13	3.86	3.86	3.86	3.86	3.86	3.86	3.86	3.86
Shelf area (sq. ft.)	20.1	17.5	17.2 17.5	16.4 17.5	19.2	16.1	17.2 16.4	17.2	17.2
Features									
Automatic icemaker	Opt. (IM3) ■	Opt. (IM3) ■	Opt. (IM3) ■	Opt. (IM3) ■	Opt. (IM3) ■	Opt. (IM3) ■	Opt. (IM3) ■	Opt. (IM3) ■	Opt. (IM3) ■
Ice 'N Easy trays	2	2	2	2	2	1	2	2	2
Ice storage bin	■	■	■	■	■	■	Bucket	■	■
Ice tray shelf	■	■	■	■	■	■	■	■	■
Cabinet shelves (total) (adjustable)	2 F/W Wire 2	2 F/W Wire 2	2 F/W Wire 2	2 F/W Wire 2	2 F/W Wire 2	2 F/W Wire 2	2 F/W Wire 2	2 F/W Wire 2	2 F/W Wire 2
Door shelves w/tall bottle storage	2	2	2	2	2	2 Fixed	2	2	2
Vegetable/fruit crisper(s)	1 F/W (classic white)	2 (classic white)	2 (classic white)	2 (classic white)	2 (classic white)	1 F/W (classic white)	2 (classic white)	2 (classic white)	2 (classic white)
Snack pan	■	■	■	■	■	■	■	■	■
Dairy compartment(s)	1 White	1 White	■	■	1 White	■	1 White	1 White	■
Utility bin	■	■	■	■	■	■	■	■	■
Freezer compartment shelf(s) (Wire Everwhite)	Trivet	■	■	■	Step shelf	■	■	■	■
Freezer door shelves	2	2	2	2	2	2	2	2	2
Quiet/Economical									
Cabinet/door insulation	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam	Foam
Cabinet/door liner	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS
Energy Saver Switch	■	■	■	■	■	■	■	■	■
High Energy Efficiency	■	■	■	■	■	■	■	■	■
Appearance									
Color(s) available*	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA	WW, AA
Door handle(s)	CM	CM	CM Recessed	CM Recessed	CM Recessed	Recessed	CM	Recessed	Recessed
Customer installed handles	■	■	■	■	■	■	■	■	■
Textured steel case & doors	■	■	■	■	■	■	■	■	■
Reversible doors	■	■	■	■	■	■	■	■	■
Right or left door opening	■	■	■	■	■	■	■	■	■
Coil-free back	■	■	■	■	■	■	■	■	■
Adjustable rollers	■	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)	4 Fixed (2 Level Legs)
Door stops	■	■	■	■	■	■	■	■	■
Weights & Dimensions									
Height to top of hinge (in.)	64-3/4	67-3/8	64-3/4 67-3/8	64-3/4 67-3/8	64-3/4	61-3/4	61-3/4	61-3/4	61-3/4
Height to top of case (in.)	64	66-7/8	64-1/4 66-7/8	64-1/4 66-7/8	64-1/4	61-1/4	61-1/4	61-1/4	61-1/4
Case depth without door (in.)	27-3/4	26-1/4	25-3/8 26-1/4	25-3/8 26-1/4	25-3/8	25-3/8	25-3/8	25-3/8	25-3/8
Case depth with door less handle (in.)	30	28-3/4	27-7/8 28-3/4	27-7/8 28-3/4	27-7/8	27-7/8	27-7/8	27-7/8	27-7/8
Case depth with door handle (in.)	31-3/4	30-5/8	29-3/4 28-3/4	29-3/4 28-3/4	27-7/8	27-7/8	29-3/4	27-7/8	27-7/8
Depth with door open 90° (in.)	58-1/8	55-1/4	54-3/8 55-1/4	54-3/8 55-1/4	54-3/8	54-3/8	54-3/8	54-3/8	54-3/8
Width (in.)	29-3/8	28	28	28	28	28	28	28	28
Width with door open 90° less door handle (in.)	29-3/8	28-1/4	28-1/4	28-1/4	28-1/4	28-3/8	28-1/4	28-1/4	28-3/8
Air clearances Each side (in.)	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†	3/4†
Top (in.)	1	1	1	1	1	1	1	1	1
Back (in.)	1	1	1	1	1	1	1	1	1
Approx. shipping weight (lbs.)	213	190 195	170 188	170 190	186	165	170 174	174	168

CM = Color-Matched
*Color(s) available: WW = White on white, AA = Almond on almond.
†If installed against a wall, allow clearance of 11-1/4" on freezer side to remove ice bin.

Note: Right-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right.
Left-hand Refrigerator Door: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.

30" electric ranges

	RB757BB	RB753BB	RB536BC	RB525BC	RB525C
Features					
Oven cleaning	Self-Clean	Self-Clean	Standard	Standard	Standard
Oven capacity	3.7	3.7	5.0	5.0	5.0
Cleaning time	Variable	Variable			
Oven shelves	2	2	2	2	2
Porcelain-enameled upswept cooktop	■	■	■	■	■
Lift-up cooktop	■		■		
8-inch heating elements	2	1	2	1	1
6-inch heating elements	2	3	2	3	3
Plug-in Calrod® heating elements	■	■	■	■	■
Removable one-piece drip bowls	Black Porc.-Enam.	Chrome	Chrome	Chrome	Chrome
Clock and minute timer	Electronic	Electronic	Electronic		
Heating element "ON" indicator lights	■	■	■	■	■
Oven cycling light	■	■	■	■	■
Interior oven light	■	Switch	■		
Broiler pan with grid	■	■	■	■	■
Appearance					
Color appearance*	WH/AD	WH/AD	WH/AD	WH/AD	WH/AD
Oven window door	■		■		
Door handle	Visor	Visor	Designer-style	Visor	Visor
Lift-off oven door	■	■	Black Glass	Black Glass	CM* Glass
Full-width storage drawer	■	■	■	■	■
Weights & Dimensions					
Overall oven interior dimensions (W x H x D in inches)	23 x 16 x 17-3/4		23-3/4 x 19 x 18-1/2		
KW rating @ 240V	11.7	10.2	12.6	10.1	10.1
	208V	8.8	7.7	9.9	8.0
Approx. shipping weight (lbs.)	155	149	158	150	155

*WH = White on white, WH = White, AD = Almond, CM = Oven door is color-matched to cooktop and drawer front (either White or Almond).

24" and 20" electric ranges

	RA524W	RA520W
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	■	■
Porcelain-enameled subtop	■	■
8-inch heating elements	1 Plug-in	1 Plug-in
6-inch heating elements	3 Plug-in	3 Plug-in
Removable drip bowls	Chrome	Chrome
Push-to-turn controls	■	■
Heating element "ON" indicator lights	2	2
Oven cycling light	■	■
Broiler pan with grid	■	■
Appearance		
Color appearance*	WH/AD	WH/AD
Porcelain-enameled oven door	Solid CM*	Solid CM*
Four leveling legs	■	■
Weights & Dimensions		
Overall oven interior dimensions (W x H x D in inches)	19 x 14 x 19	16 x 15 x 19
KW rating @ 240V	8.2	8.2
	208V	6.2
Approx. ship. wt. (lbs.)	145	120

*WH = White, AD = Almond, CM = Color-Matched.

30" gas ranges

	RGB744BEA	RGB528BEA	RGB524PEA/ RGB524PPA	RGB508PEA/ RGB508PPA
Features				
Extra-large oven	Self-cleaning	Standard	Standard	Standard
Cooktop burners	Twin	Twin	Twin	Twin
Clock and minute timer	EasySet II	Electronic		
Automatic oven timer	■			
Porcelain-enameled cooktop	Upswept	Upswept	■	■
Lift-up cooktop	■	■	■	■
Easy clean subtop	■	■	■	■
Valves (degree of turn)	270°	140°	140°	140°
Removable drip pans	Black Porc.-Enam.	Opt. Access.	Opt. Access.	Opt. Access.
Removable square grates	Black	Black	Black	Black
Ignition system	Electronic	Electronic	Elec./Pilot	Elec./Pilot
Oven shelves	2	2	2	2
Six embossed rack positions	■	■	■	■
Interior oven light	■	■		
In-oven broiling	■			
Slide-out broiler drawer		■	■	Drop-down door
Removable storage drawer	■			
Appearance				
Color appearance*	WH/AD	WH/AD	WH/AD	WH/AD
Frameless oven door	Solid Black Glass	Black Glass	Solid CM* Porc.-Enam.	Solid CM* Porc.-Enam.
Oven door with window		■		
Handle style	Designer-style	Designer-style	Visor	Visor
Removable oven door	■	■	■	■
Weights & Dimensions				
Overall oven interior dimensions (WxHxD in inches)	← 24 x 17 x 19 →			
Approx. shipping weight (lbs.)	185	165	147	165
Power/Ratings				
Gas range electrical rating†	← 120V, 60 Hz, 5A →			
Top burners** (000's BTU's) NAT/LP	← 9.0/8.0 →			
Oven/broiler burners** (000's BTU's) NAT/LP	16.0/16.0 – Oven	← 18.0/16.5 →		
	13.5/12.0 – Broil			
Accessories				
LP conversion kit	■	■	■	

*WH/AD = White or Almond, CM = Indicates color of oven door matches range cooktop (either White or Almond)

**Factory set for natural gas. A set of LP orifices is included with each range for LP gas conversion.

†Electrical rating not applicable to standing pilot models RGB524PPA/RGB508PPA.

24" and 20" gas ranges

	RGA524EW/PW	RGA520EW/PW
Features		
Oven cleaning	Standard	Standard
Oven shelves	2	2
Recessed lift-up cooktop	■	■
Porcelain-enameled subtop	■	■
Round grates	■	■
Ignition system	Electronic/Pilot	Electronic/Pilot
Push-to-turn controls	■	■
Broiler pan with grid	■	■
Separate broiler drawer (with tip down door)	■	■
Appearance		
Color appearance*	WH/AD	WH/AD
Porcelain-enameled oven door	Solid CM*	Solid CM*
Removable oven door	■	■
Four leveling legs	■	■
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	19 x 14 x 19	14-7/8 x 16 x 19-1/2
Approx. ship. wt. (lbs.)	140	124
Power/Ratings		
Gas range electrical rating**	120V, 60 Hz, 5A	120V, 60 Hz, 5A
Burner BTU's:		
Top (Nat/LP)	10,000/9,000	10,000/9,000
Oven (Nat/LP)	18,500/18,500	18,500/18,500

*WH = White, AD = Almond, CM = Color-Matched, Almond model RGA524EW/PW must be special ordered.

**Electrical rating not applicable to standing pilot models RGA524PW and RGA520PW.

Factory set for natural gas.

Can be converted to LP by a qualified technician.

Hotpoint specifications

Counter Saver Plus™ over-the-range microwave ovens

Features	RVM1425WA RVM1425BA
Watts (IEC-705 Test Procedure)	900
Oven cavity (cu. ft.)	1.4
Door/Case color	White Black
Power levels	10
Electronic touch controls	■
Interactive display system	■
Electronic scrolling digital display w/Clock and AM/PM Pad	■
Variable Scroll Speed	■
Concurrent programming	■
Display On/Off	■
Time Cook	I & II
Auto Defrost/Time Defrost	■
Popcorn Pad	■
Reheat Pad	■
Express Cook Pads (1-6 minutes)	■
Instant on controls	■
Cooking complete reminder	■
Delay Start	■
Timer On/Off	■
Reminder	■
Child lock-out	■
Full-View cooktop lighting	■
Two-speed high-capacity exhaust fan	300 CFM
Easy Mount installation	■
Frequency (MHz)	2450
	Watts 1480
Electrical input @ 120V	Amps 15
Warranty*	1-Yr. In-Home
Limited four-year magnetron warranty* (5 years total)	■
Dimensions	Cavity 19-5/16 x 9-5/16 x 13-3/16
WxHxD (in inches)	Exterior 29-7/8 x 16-1/2 x 14-5/16
Approx. shipping weight (lbs.)	70

*Full One-Year Warranty. In-home parts and labor included. Plus additional four-year limited warranty on magnetron tube (parts only). See written warranty for details.

Washers

Features	VBSR2080W	VBXR1070W
Capacity/Cubic feet	Super/3.2	Extra-Large/2.7
Wash/spin speed combination(s)	2 (timer)	1
Wash/rinse temperatures	3	3
Water levels	3	3
FlexCare™ agitator	■	■
Front lid opening	■	■
Lid instructions	■	■
Tuf Tub™ basket	■	■
Self-cleaning filter	■	■
Number of wash cycles	8	7
Perm press	■	■
Knits	■	■
Delicates	■	■
Heavy soil	■	■
Normal soil	■	■
Light soil	■	■
Front serviceable	■	■
Colors available*	WW/AA	WW/AA
Approx. shipping weight (lbs.)	160	152

*Colors available: White on White or Almond on Almond

Washer specifications

Electrical rating: 115v, 60 Hz, 10 amps

Circuit requirements:

An individual properly-grounded branch circuit, with a three prong grounding-type receptacle protected by a 15 or 20 amp circuit breaker or time-delay fuse, is required.

Built-in dishwashers

Features	HDA3230ZWW/ HDA3220ZBB	HDA2030ZWW/HDA2020ZBB HDA2000ZWH/AD	HDA1000ZWH
Performance			
Cycles/Options	5/14	4/7	1/2
Power Wash II System	■		
Pots & Pans cycle	■		
Normal Wash cycle	■	Dial	Dial
Water Saver cycle	Dial	Dial	
Heavy Wash cycle		Dial	
Plate Warmer cycle	Dial		
Rinse Only/Hold cycle	Dial	Dial	
Hi-Temp Wash On/Off option	■		
Heated Dry On/Off option	Rocker	Rocker	Rocker
Wash levels	3	2	2
Pushbuttons	4		
Rinse Aid dispenser	■	■	■
Quiet			
Sound insulation package	Standard	Standard	
Capacity			
Rack System	Upper Deluxe Lower Deluxe	Standard Deluxe	Standard Deluxe
Silverware Basket	Deluxe	Deluxe	Standard
Dependability			
Control type	Turn-to-Start	Turn-to-Start	Turn-to-Start
1-yr./10-yr. warranty***	■	■	
1-yr. warranty***			■
Color panels	Door Trimless Access Trimless	Trimless	Trimless Textured
General Features			
Colors available*	WW, BB	WW, BB, WH, AD	WH
Order kits for 1/4" and 3/4" panel capability**	■†	■†	■†
Approx. shipping wt. (lbs.)	81	81	81

*WW = White on white, BB = Black on black, WH= White/Black, AD = Almond/Black

**Certificate enclosed in Use and Care Book for ordering information.

***See written warranty for details.

†For the 1/4" panel capability with trim order GPF325A/W/B. For the 3/4" trimless panel capability order GPF375.

Dryers

Features	Electric Gas	NBXR453EV NBXR453GV	NVL333EY NVL333GY
Capacity/Cubic feet		Extra-Large/6.0	Large/5.4
Automatic dry control	■	■	■
Double-coated drum	■	■	■
Porcelain drum interior	■	■	■
Removable upfront lint filter	■	■	■
Heat selections	4	3 (timer)	
Number of dry cycles	5	3	
Auto cottons			
Cottons cycle	■	■	■
Auto perm press			
Perm press cycle	■	■	■
Timed dry			
Actual minutes on timer		80	70
Damp dry	■		
De-wrinkle	■		
Timed (no-heat)			■
Front serviceable	■	■	■
Reversible door	■		
Colors available*		WW/AA	WW/AA
Approx. shipping weight (lbs.)	Electric 110 Gas 115	110 115	118 136

*Colors available: White on White or Almond on Almond

Note: Before installing, consult installation instructions packed with product for current dimensional data.

Hotpoint electric dryers are available with long ducting capability.

Dryer specifications

Exhaust options:

Electric: 4-way via rear, right, left and bottom.

Gas: 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit requirements:

Electric: An individual properly-grounded branch circuit protected by a 30 amp circuit breaker or time-delay fuse, is required.

Gas: An individual, properly-grounded branch circuit with a

three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or time-delay fuse, is required. (BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires a conversion kit. Check installation instructions for correct kit and have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Electric dryer rating: 208/240V, 5600W, 60 Hz, 30 Amp

Gas dryer electric rating: 120V, 60 Hz, 15 Amp

The condensed list below is a convenient overview of the written warranties offered on various Hotpoint and GE appliances described in this catalog. For complete warranty details on a specific appliance model, contact your nearest Hotpoint/GE appliance supplier, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

Appliance	Length	Type	Warranty Covers	Parts Or Labor	Where Serviced*
Refrigerators	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Full	Sealed Refrigeration System, Compressor	Both	In-Home
	Lifetime	Limited	See-Thru Vegetable/ Fruit Crispers	Parts	Carry-In**
Ranges	1-Year	Full	Entire Appliance	Both	In-Home
Microwave Ovens RVM1425WA/BA	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Magnetron Tube	Part	In-Home***
Washers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Transmission	Parts or Reconditioned Transmission	In-Home***
	Additional 19-Year (20 years total)	Limited	Tuf Tub™ basket	Parts	In-Home***
Dryers	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 4-Year (5 years total)	Limited	Extra-Large Capacity Drum	Parts	In-Home***
Dishwashers HDA3230Z, HDA3220Z, HDA2030Z, HDA2020Z, HDA2000Z HDA1000Z	1-Year	Full	Entire Appliance	Both	In-Home
	Additional 9-Year (10 years total)	Full	Polypropylene Tub and Door Liner	Both	In-Home
	1-Year	Full	Entire Appliance	Both	In-Home

*See warranty for details


**In-Home service available at additional cost

***Does not include service trip and labor charges



GE offers four convenient ways to receive the parts and accessories you need.

Now it's easier than ever to order the replacement parts and accessories for all GE and Hotpoint major appliances.

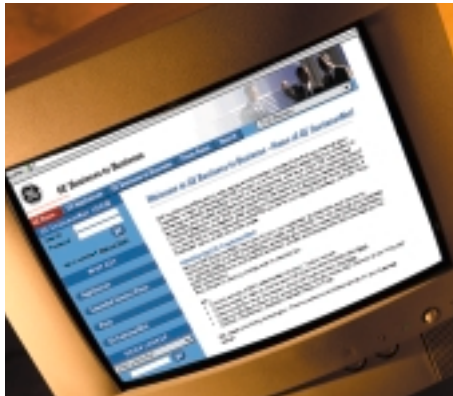

- **Order Online:** It's convenient to order many of our most popular replacement parts and accessories online, any time, day or night at www.gecustomernet.com. Sign up for your account online today.
- **By Phone:** Receive personal service when you call 800.851.6200. Place your order from 7 a.m. to 7 p.m. CST.
- **By Fax:** Send your order by fax 24 hours a day to 800.322.0914.
- **From our National Distributor Network:** For local service, visit one of our authorized parts distributors. See your ASM for details.

GE makes it easy for you to save time and money, with:

- Easy on-line access to look up and purchase the parts you need 24 hours a day
- Over 50,000 parts in stock
- 9 warehouses nationwide
- FREE shipping and handling (minimum order required)
- Competitive everyday prices with volume discounts (Full details in our Wholesale Parts catalog. Call 800.851.6200 to receive a free copy, or contact your ASM.)
- Convenient payment terms

All parts and accessories are backed by a full or limited GE warranty and a 30-day satisfaction guarantee. See written warranty for details.

Can't find your parts account?

If you already have an appliance account with GE, your parts account has already been established. Just call 800.851.6200 and the friendly staff in our parts department will be glad to help.

Quick Reference Guide Directory		
ASM	_____	_____
	Name	Phone
Telesales ASM	_____	_____
	Name	Phone
Parts Orders	800.851.6200	_____
		Account #
Appliance Orders	800.523.7277	_____
		Account #
Factory Service	800.GE.CARES	
Local Delivery Co.	_____	_____
	Name	Phone
GE Answer Center®	800.626.2000	
Other	_____	_____



GE Appliances