

GFWH1200H




*GE Appliances Energy Star® 3.6 DOE IEC Cu. Ft. Capacity
Front Load Washer With Stainless Steel Basket*

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

ELECTRIC RATING

120V	12.0A, 60Hz
------	-------------

INSTALLATION INFORMATION: For complete information, see installation instructions packed with your washer.

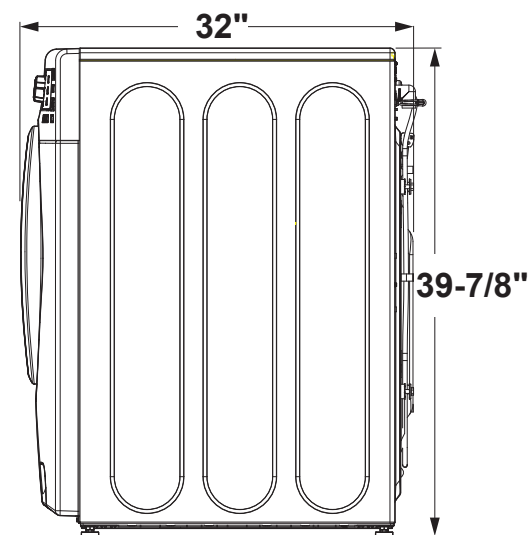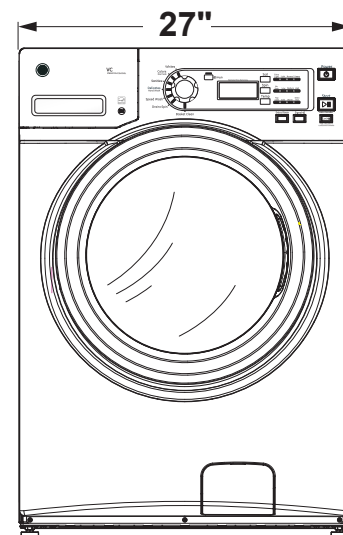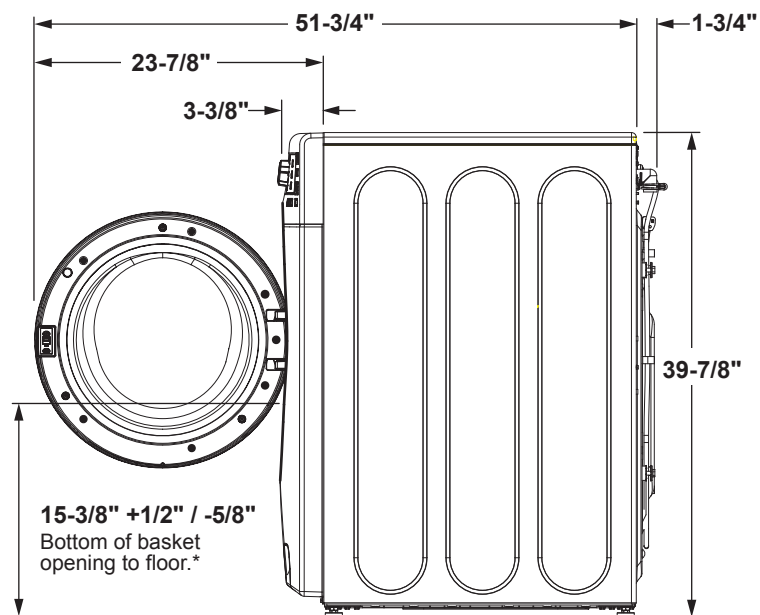

*With leveling leg adjust.

Above illustration intended for dimensional reference only. Refer to photograph for actual product appearance.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or
GE Appliances product questions, visit our website at geappliances.com
or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories

Specification Revised 2/16

GFWH1200H

GE Appliances Energy Star® 3.6 DOE IEC Cu. Ft. Capacity Front Load Washer With Stainless Steel Basket

SPECIAL INSTALLATION REQUIREMENTS:

STACKED INSTALLATION:

-Brackets for stacking dryer over washer are not included with the washer.
Order part no. GEFLSTACK or part no. WE25X10018.

ALCOVE OR CLOSET INSTALLATION:

-If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.

-The dryer MUST be exhausted to the outside.

-Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" either side, 3" front and rear

-Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".

-Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

-No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:

-The dryer MUST be exhausted to the outdoors.


-The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

-Minimum clearances to combustible surfaces 0" both sides, 3" rear.

**FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES,
PLEASE CALL 1-800-GE-CARES.**


STACKED DIMENSIONS (IN INCHES)

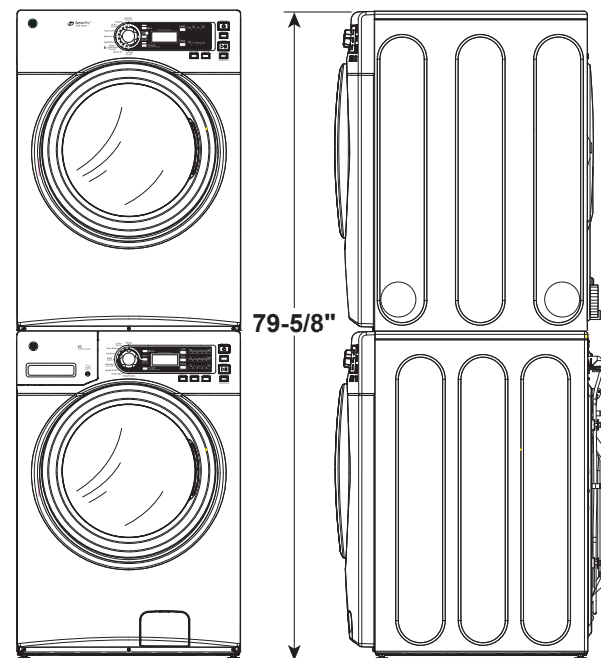

PEDESTAL DIMENSIONS (IN INCHES)

SBSD137HWW - WHITE

This optional 13" pedestal raises the door opening and height of the washer or dryer. Feet on 13" pedestal allow it to adjust to 13-3/8" height.

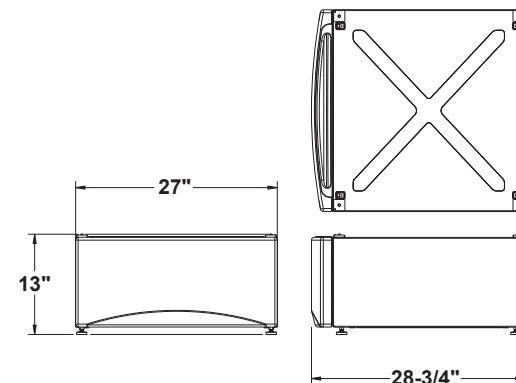

Above illustrations intended for dimensional reference only. Refer to photography for actual product appearance.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or
GE Appliances product questions, visit our website at geappliances.com
or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories

Specification Revised 2/16

GEF1200H

*GE Appliances Energy Star® 3.6 DOE IEC Cu. Ft. Capacity
Front Load Washer With Stainless Steel Basket*

FEATURES AND BENEFITS

Internal water heater – Boosts water temperatures and helps achieve sanitization

NSF® Sanitize Cycle – Feel comfort knowing clothes are sanitized and 99.9% of bacteria has been removed thanks to an internal water heater that boosts the water temperature


Speed Wash – Provides a quick wash for lightly soiled items that are needed in a hurry

1100 RPM spin speed – Fast speeds remove more water during the spin cycle to minimize drying time

Vibration Control – Adjusts spin patterns for each floor type for a smoother wash without walking or shaking

ENERGY STAR® qualified and CEE Tier I – Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings

Model GFWH1200HWW – White

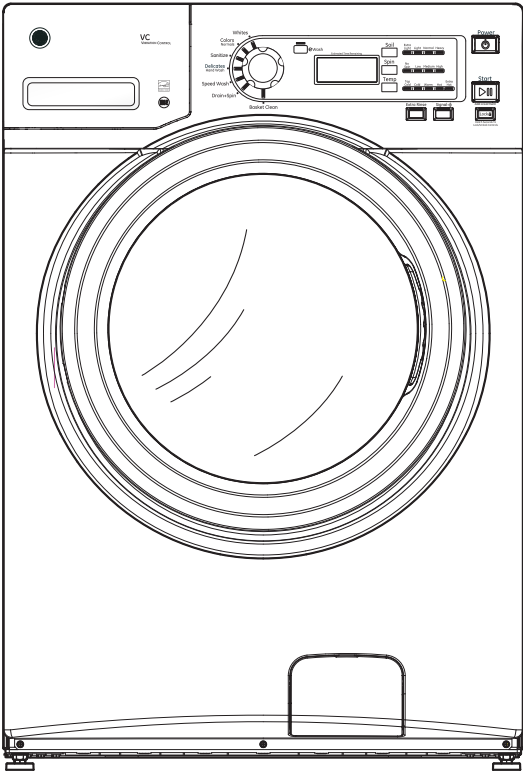

MODIFIED ENERGY FACTOR (MEF)	3.25
WATER FACTOR (WF)	2.9

